

Nearburg Producing

Morris-Boyd 26, Well No. 1H
Eddy County, New Mexico
Quote No. 041511128

RECEIVED

APR 18 2011

30-015-38962

Aim
Directional Services, LLC

NMOOD ARTESIA

SITE DETAILS


Morris-Boyd 26 #1H
Site Centre Northing: 591138.50
Easting: 464547.90
Ground Level: 3456.00
Positional Uncertainty: 0.00
Convergence: -0.13

FIELD DETAILS

Eddy County, New Mexico
Geodetic System: US State Plane Coordinate System 1983
Ellipsoid: GRS 1980
Zone: New Mexico, Eastern Zone
Magnetic Model: WMM_2010
System Datum: Mean Sea Level
Local North: Grid North

ANNOTATIONS

No.	TVD	MD	Annotation
1	2183.00	2183.00	KOP, Build 10.00°/100'
2	2755.96	3082.99	Hold 90.00°, 0.08° Azimuth
3	2756.00	7227.74	PBHL - Lateral



Azimuths to Grid North
True North: 0.13°
Magnetic North: 8.24°



Magnetic Field
Strength: 48784nT
Dip Angle: 60.38°
Date: 04/15/2011
Model: WMM_2010

TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
PBHL - Lateral	2756.00	4717.70	6.60	595856.20	464554.50	32°38'16.103N	104°34'57.989W	Point

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	2183.00	0.00	0.00	2183.00	0.00	0.00	0.00	0.00	0.00	
2	3082.99	90.00	0.08	2755.96	572.95	0.80	10.00	0.08	572.95	
3	7227.75	90.00	0.08	2756.00	4717.70	6.60	0.00	0.00	4717.70	PBHL - Lateral

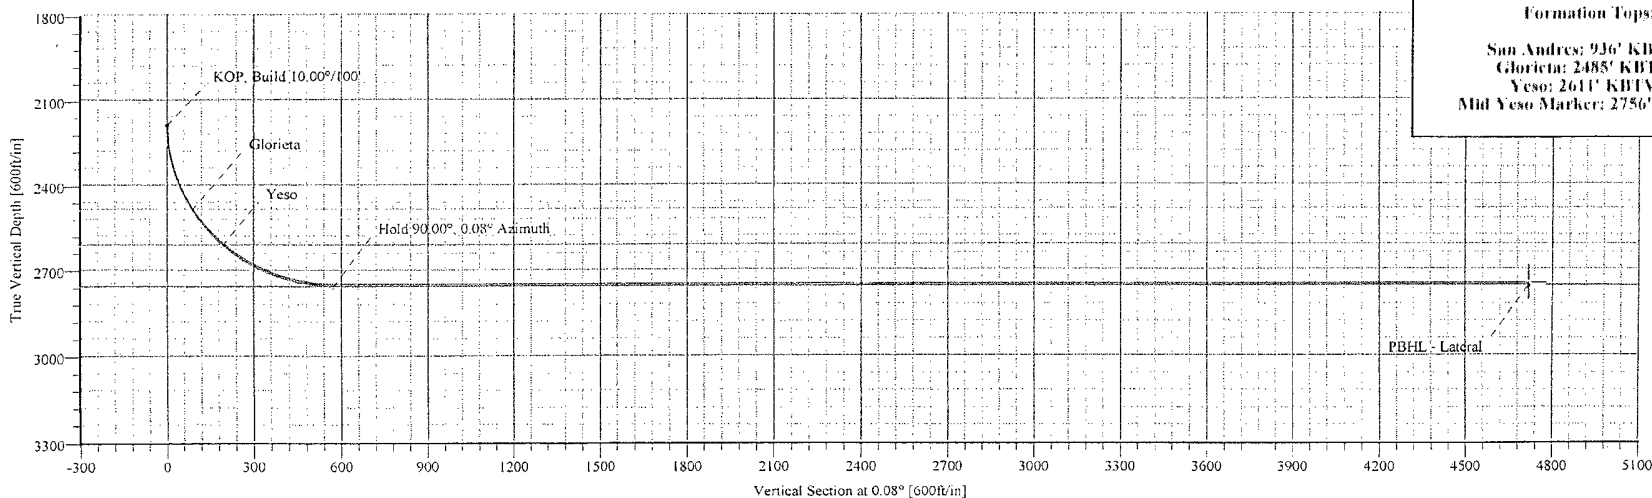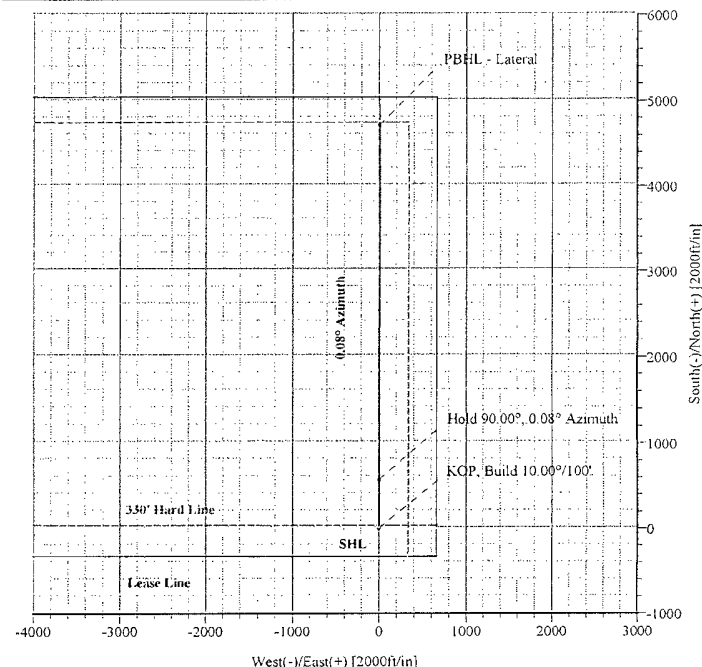

Formation Tops:

San Andres: 936' KBTVD
Glorieta: 2485' KBTVD
Yeso: 2611' KBTVD
Mid Yeso Marker: 2756' KBTVD

Aim Directional Services

Planning Report - Geographic

Company: Nearburg Producing Company		Date: 04/15/2011	Time: 10:54:20	Page: 1						
Field: Eddy County, New Mexico		Co-ordinate(NE) Reference: Well: #1H, Grid North								
Site: Morris-Boyd 26 #1H		Vertical (TVD) Reference: SITE 3456.0								
Well: #1H		Section (VS) Reference: Well (0.00N,0.00E,0.08Azi)								
Wellpath: Lateral 1r0		Plan:								
Field: Eddy County, New Mexico										
Map System: US State Plane Coordinate System 1983		Map Zone: New Mexico, Eastern Zone								
Geo Datum: GRS 1980		Coordinate System: Well Centre								
Sys Datum: Mean Sea Level		Geomagnetic Model: WMM_2010								
Site: Morris-Boyd 26 #1H										
Site Position:	From: Map	Northing: 591138.50 ft	Latitude: 32 37 29.420 N							
Position Uncertainty:	0.00 ft	Easting: 464547.90 ft	Longitude: 104 34 57.937 W							
Ground Level:	3456.00 ft		North Reference: Grid							
			Grid Convergence: -0.13 deg							
Well: #1H Slot Name:										
Well Position:	+N/-S 0.00 ft	Northing: 591138.50 ft	Latitude: 32 37 29.420 N							
	+E/-W 0.00 ft	Easting: 464547.90 ft	Longitude: 104 34 57.937 W							
Position Uncertainty:	0.00 ft									
Wellpath: Lateral 1r0										
Current Datum:	SITE	Height 3456.00 ft	Drilled From:	Surface						
Magnetic Data:	04/15/2011		Tie-on Depth:	0.00 ft						
Field Strength:	48784 aT		Above System Datum:	Mean Sea Level						
Vertical Section:	Depth From (TVD)		Declination:	8.11 deg						
	ft	+N/-S ft	Mag Dip Angle:	60.38 deg						
	0.00	0.00	+E/-W ft	Direction deg						
				0.08						
Plan: Lateral 1r0 Date Composed: 04/15/2011										
Principal: Yes Version: 1										
Tied-to: User Defined										
Plan Section Information										
MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg	Target
2183.00	0.00	0.00	2183.00	0.00	0.00	0.00	0.00	0.00	0.00	
3082.99	90.00	0.08	2755.96	572.95	0.80	10.00	10.00	0.01	0.08	
7227.75	90.00	0.08	2756.00	4717.70	6.60	0.00	0.00	0.00	0.00	PBHL - Lateral
Section 1 : Start DLS 10.00 TFO 0.08										
MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
2183.00	0.00	0.00	2183.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2200.00	1.70	0.08	2200.00	0.25	0.00	0.25	10.00	10.00	0.00	0.00
2250.00	6.70	0.08	2249.85	3.91	0.01	3.91	10.00	10.00	0.00	0.00
2300.00	11.70	0.08	2299.19	11.90	0.02	11.90	10.00	10.00	0.00	0.00
2350.00	16.70	0.08	2347.65	24.17	0.03	24.17	10.00	10.00	0.00	0.00
2400.00	21.70	0.08	2394.85	40.60	0.06	40.60	10.00	10.00	0.00	0.00
2450.00	26.70	0.08	2440.44	61.09	0.09	61.09	10.00	10.00	0.00	0.00
2500.00	31.70	0.08	2484.07	85.48	0.12	85.48	10.00	10.00	0.00	0.00
2501.09	31.81	0.08	2485.00	86.05	0.12	86.05	10.00	10.00	0.00	0.00
2550.00	36.70	0.08	2525.41	113.57	0.16	113.57	10.00	10.00	0.00	0.00
2600.00	41.70	0.08	2564.15	145.17	0.20	145.17	10.00	10.00	0.00	0.00
2650.00	46.70	0.08	2599.98	180.01	0.25	180.01	10.00	10.00	0.00	0.00
2666.31	48.33	0.08	2611.00	192.04	0.27	192.04	10.00	10.00	0.00	0.00
2700.00	51.70	0.08	2632.64	217.85	0.30	217.85	10.00	10.00	0.00	0.00
2750.00	56.70	0.08	2661.88	258.39	0.36	258.39	10.00	10.00	0.00	0.00
2800.00	61.70	0.08	2687.48	301.32	0.42	301.33	10.00	10.00	0.00	0.00
2850.00	66.70	0.08	2709.23	346.33	0.48	346.33	10.00	10.00	0.00	0.00
2900.00	71.70	0.08	2726.98	393.05	0.55	393.05	10.00	10.00	0.00	0.00
2950.00	76.70	0.08	2740.59	441.15	0.62	441.15	10.00	10.00	0.00	0.00
3000.00	81.70	0.08	2749.96	490.25	0.69	490.25	10.00	10.00	0.00	0.00
3050.00	86.70	0.08	2755.01	539.98	0.76	539.98	10.00	10.00	0.00	0.00

Aim Directional Services

Planning Report - Geographic

Company: Nearburg Producing Company
 Field: Eddy County, New Mexico
 Site: Morris-Boyd 26 #1H
 Well: #1H
 Wellpath: Lateral 1r0

Date: 04/15/2011 Time: 10:54:20
 Co-ordinate(NE) Reference: Well: #1H, Grid North
 Vertical (TVD) Reference: SITE 3456.0
 Section (VS) Reference: Well (0.00N,0.00E,0.08Azi)
 Plan: Lateral 1r0

Page: 2

Section 1 : Start DLS 10.00 TFO 0.08

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
3082.99	90.00	0.08	2755.96	572.95	0.80	572.95	10.00	10.00	0.00	0.00

Section 2 : Start Hold

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg
3100.00	90.00	0.08	2755.96	589.96	0.83	589.96	0.00	0.00	0.00	0.00
3200.00	90.00	0.08	2755.96	689.96	0.97	689.96	0.00	0.00	0.00	0.00
3300.00	90.00	0.08	2755.96	789.96	1.11	789.96	0.00	0.00	0.00	0.00
3400.00	90.00	0.08	2755.96	889.96	1.25	889.96	0.00	0.00	0.00	0.00
3500.00	90.00	0.08	2755.96	989.96	1.38	989.96	0.00	0.00	0.00	0.00
3600.00	90.00	0.08	2755.96	1089.96	1.52	1089.96	0.00	0.00	0.00	0.00
3700.00	90.00	0.08	2755.96	1189.96	1.66	1189.96	0.00	0.00	0.00	0.00
3800.00	90.00	0.08	2755.97	1289.96	1.80	1289.96	0.00	0.00	0.00	0.00
3900.00	90.00	0.08	2755.97	1389.96	1.94	1389.96	0.00	0.00	0.00	0.00
4000.00	90.00	0.08	2755.97	1489.96	2.08	1489.96	0.00	0.00	0.00	0.00
4100.00	90.00	0.08	2755.97	1589.96	2.22	1589.96	0.00	0.00	0.00	0.00
4200.00	90.00	0.08	2755.97	1689.96	2.36	1689.96	0.00	0.00	0.00	0.00
4300.00	90.00	0.08	2755.97	1789.96	2.50	1789.96	0.00	0.00	0.00	0.00
4400.00	90.00	0.08	2755.97	1889.96	2.64	1889.96	0.00	0.00	0.00	0.00
4500.00	90.00	0.08	2755.97	1989.96	2.78	1989.96	0.00	0.00	0.00	0.00
4600.00	90.00	0.08	2755.97	2089.96	2.92	2089.96	0.00	0.00	0.00	0.00
4700.00	90.00	0.08	2755.97	2189.96	3.06	2189.96	0.00	0.00	0.00	0.00
4800.00	90.00	0.08	2755.98	2289.96	3.20	2289.96	0.00	0.00	0.00	0.00
4900.00	90.00	0.08	2755.98	2389.96	3.34	2389.96	0.00	0.00	0.00	0.00
5000.00	90.00	0.08	2755.98	2489.96	3.48	2489.96	0.00	0.00	0.00	0.00
5100.00	90.00	0.08	2755.98	2589.96	3.62	2589.96	0.00	0.00	0.00	0.00
5200.00	90.00	0.08	2755.98	2689.96	3.76	2689.96	0.00	0.00	0.00	0.00
5300.00	90.00	0.08	2755.98	2789.96	3.90	2789.96	0.00	0.00	0.00	0.00
5400.00	90.00	0.08	2755.98	2889.95	4.04	2889.96	0.00	0.00	0.00	0.00
5500.00	90.00	0.08	2755.98	2989.95	4.18	2989.96	0.00	0.00	0.00	0.00
5600.00	90.00	0.08	2755.98	3089.95	4.32	3089.96	0.00	0.00	0.00	0.00
5700.00	90.00	0.08	2755.98	3189.95	4.46	3189.96	0.00	0.00	0.00	0.00
5800.00	90.00	0.08	2755.99	3289.95	4.60	3289.96	0.00	0.00	0.00	0.00
5900.00	90.00	0.08	2755.99	3389.95	4.74	3389.96	0.00	0.00	0.00	0.00
6000.00	90.00	0.08	2755.99	3489.95	4.88	3489.96	0.00	0.00	0.00	0.00
6100.00	90.00	0.08	2755.99	3589.95	5.02	3589.96	0.00	0.00	0.00	0.00
6200.00	90.00	0.08	2755.99	3689.95	5.16	3689.96	0.00	0.00	0.00	0.00
6300.00	90.00	0.08	2755.99	3789.95	5.30	3789.96	0.00	0.00	0.00	0.00
6400.00	90.00	0.08	2755.99	3889.95	5.44	3889.96	0.00	0.00	0.00	0.00
6500.00	90.00	0.08	2755.99	3989.95	5.58	3989.96	0.00	0.00	0.00	0.00
6600.00	90.00	0.08	2755.99	4089.95	5.72	4089.96	0.00	0.00	0.00	0.00
6700.00	90.00	0.08	2755.99	4189.95	5.86	4189.96	0.00	0.00	0.00	0.00
6800.00	90.00	0.08	2756.00	4289.95	6.00	4289.96	0.00	0.00	0.00	0.00
6900.00	90.00	0.08	2756.00	4389.95	6.14	4389.96	0.00	0.00	0.00	0.00
7000.00	90.00	0.08	2756.00	4489.95	6.28	4489.96	0.00	0.00	0.00	0.00
7100.00	90.00	0.08	2756.00	4589.95	6.42	4589.96	0.00	0.00	0.00	0.00
7200.00	90.00	0.08	2756.00	4689.95	6.56	4689.96	0.00	0.00	0.00	0.00
7227.75	90.00	0.08	2756.00	4717.70	6.60	4717.70	0.00	0.00	0.00	0.00

Survey

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	Map Northing ft	Map Easting ft	<--- Latitude ---> Deg Min Sec			<--- Longitude ---> Deg Min Sec		
2183.00	0.00	0.00	2183.00	0.00	0.00	591138.50	464547.90	32	37	29.420 N	104	34	57.937 W
2200.00	1.70	0.08	2200.00	0.25	0.00	591138.75	464547.90	32	37	29.422 N	104	34	57.937 W
2250.00	6.70	0.08	2249.85	3.91	0.01	591142.41	464547.91	32	37	29.459 N	104	34	57.937 W
2300.00	11.70	0.08	2299.19	11.90	0.02	591150.40	464547.92	32	37	29.538 N	104	34	57.937 W
2350.00	16.70	0.08	2347.65	24.17	0.03	591162.67	464547.93	32	37	29.659 N	104	34	57.937 W
2400.00	21.70	0.08	2394.85	40.60	0.06	591179.10	464547.96	32	37	29.822 N	104	34	57.937 W
2450.00	26.70	0.08	2440.44	61.09	0.09	591199.59	464547.99	32	37	30.024 N	104	34	57.938 W
2500.00	31.70	0.08	2484.07	85.48	0.12	591223.98	464548.02	32	37	30.266 N	104	34	57.938 W

Aim Directional Services

Planning Report - Geographic

Company: Nearburg Producing Company
Field: Eddy County, New Mexico
Site: Morris-Boyd 26 #1H
Well: #1H
Wellpath: Lateral 1r0

Date: 04/15/2011 Time: 10:54:20
Co-ordinate(NE) Reference: Well: #1H, Grid North
Vertical (TVD) Reference: SITE 3456.0
Section (VS) Reference: Well (0.00N,0.00E,0.08Azi)
Plan: Lateral 1r0

Page: 3

Survey

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	Map Northing ft	Map Easting ft	<--- Latitude ---> Deg Min Sec			<--- Longitude ---> Deg Min Sec		
2501.09	31.81	0.08	2485.00	86.05	0.12	591224.55	464548.02	32	37	30.271 N	104	34	57.938 W
2550.00	36.70	0.08	2525.41	113.57	0.16	591252.07	464548.06	32	37	30.544 N	104	34	57.938 W
2600.00	41.70	0.08	2564.15	145.17	0.20	591283.67	464548.10	32	37	30.856 N	104	34	57.939 W
2650.00	46.70	0.08	2599.98	180.01	0.25	591318.51	464548.15	32	37	31.201 N	104	34	57.939 W
2666.31	48.33	0.08	2611.00	192.04	0.27	591330.54	464548.17	32	37	31.320 N	104	34	57.939 W
2700.00	51.70	0.08	2632.64	217.85	0.30	591356.35	464548.20	32	37	31.576 N	104	34	57.939 W
2750.00	56.70	0.08	2661.88	258.39	0.36	591396.89	464548.26	32	37	31.977 N	104	34	57.940 W
2800.00	61.70	0.08	2687.48	301.32	0.42	591439.82	464548.32	32	37	32.402 N	104	34	57.940 W
2850.00	66.70	0.08	2709.23	346.33	0.48	591484.83	464548.38	32	37	32.847 N	104	34	57.941 W
2900.00	71.70	0.08	2726.98	393.05	0.55	591531.55	464548.45	32	37	33.309 N	104	34	57.941 W
2950.00	76.70	0.08	2740.59	441.15	0.62	591579.65	464548.52	32	37	33.785 N	104	34	57.942 W
3000.00	81.70	0.08	2749.96	490.25	0.69	591628.75	464548.59	32	37	34.271 N	104	34	57.942 W
3050.00	86.70	0.08	2755.01	539.98	0.76	591678.48	464548.66	32	37	34.763 N	104	34	57.943 W
3082.99	90.00	0.08	2755.96	572.95	0.80	591711.45	464548.70	32	37	35.089 N	104	34	57.943 W
3100.00	90.00	0.08	2755.96	589.96	0.83	591728.46	464548.73	32	37	35.258 N	104	34	57.943 W
3200.00	90.00	0.08	2755.96	689.96	0.97	591828.46	464548.87	32	37	36.247 N	104	34	57.945 W
3300.00	90.00	0.08	2755.96	789.96	1.11	591928.46	464549.01	32	37	37.237 N	104	34	57.946 W
3400.00	90.00	0.08	2755.96	889.96	1.25	592028.46	464549.15	32	37	38.226 N	104	34	57.947 W
3500.00	90.00	0.08	2755.96	989.96	1.38	592128.46	464549.28	32	37	39.216 N	104	34	57.948 W
3600.00	90.00	0.08	2755.96	1089.96	1.52	592228.46	464549.42	32	37	40.205 N	104	34	57.949 W
3700.00	90.00	0.08	2755.96	1189.96	1.66	592328.46	464549.56	32	37	41.195 N	104	34	57.950 W
3800.00	90.00	0.08	2755.97	1289.96	1.80	592428.46	464549.70	32	37	42.184 N	104	34	57.951 W
3900.00	90.00	0.08	2755.97	1389.96	1.94	592528.46	464549.84	32	37	43.174 N	104	34	57.952 W
4000.00	90.00	0.08	2755.97	1489.96	2.08	592628.46	464549.98	32	37	44.164 N	104	34	57.953 W
4100.00	90.00	0.08	2755.97	1589.96	2.22	592728.46	464550.12	32	37	45.153 N	104	34	57.955 W
4200.00	90.00	0.08	2755.97	1689.96	2.36	592828.46	464550.26	32	37	46.143 N	104	34	57.956 W
4300.00	90.00	0.08	2755.97	1789.96	2.50	592928.46	464550.40	32	37	47.132 N	104	34	57.957 W
4400.00	90.00	0.08	2755.97	1889.96	2.64	593028.46	464550.54	32	37	48.122 N	104	34	57.958 W
4500.00	90.00	0.08	2755.97	1989.96	2.78	593128.46	464550.68	32	37	49.111 N	104	34	57.959 W
4600.00	90.00	0.08	2755.97	2089.96	2.92	593228.46	464550.82	32	37	50.101 N	104	34	57.960 W
4700.00	90.00	0.08	2755.97	2189.96	3.06	593328.46	464550.96	32	37	51.090 N	104	34	57.961 W
4800.00	90.00	0.08	2755.98	2289.96	3.20	593428.46	464551.10	32	37	52.080 N	104	34	57.962 W
4900.00	90.00	0.08	2755.98	2389.96	3.34	593528.46	464551.24	32	37	53.069 N	104	34	57.963 W
5000.00	90.00	0.08	2755.98	2489.96	3.48	593628.46	464551.38	32	37	54.059 N	104	34	57.965 W
5100.00	90.00	0.08	2755.98	2589.96	3.62	593728.46	464551.52	32	37	55.048 N	104	34	57.966 W
5200.00	90.00	0.08	2755.98	2689.96	3.76	593828.46	464551.66	32	37	56.038 N	104	34	57.967 W
5300.00	90.00	0.08	2755.98	2789.96	3.90	593928.46	464551.80	32	37	57.027 N	104	34	57.968 W
5400.00	90.00	0.08	2755.98	2889.95	4.04	594028.45	464551.94	32	37	58.017 N	104	34	57.969 W
5500.00	90.00	0.08	2755.98	2989.95	4.18	594128.45	464552.08	32	37	59.007 N	104	34	57.970 W
5600.00	90.00	0.08	2755.98	3089.95	4.32	594228.45	464552.22	32	37	59.996 N	104	34	57.971 W
5700.00	90.00	0.08	2755.98	3189.95	4.46	594328.45	464552.36	32	38	0.986 N	104	34	57.972 W
5800.00	90.00	0.08	2755.99	3289.95	4.60	594428.45	464552.50	32	38	-1.975 N	104	34	57.973 W
5900.00	90.00	0.08	2755.99	3389.95	4.74	594528.45	464552.64	32	38	2.965 N	104	34	57.975 W
6000.00	90.00	0.08	2755.99	3489.95	4.88	594628.45	464552.78	32	38	3.954 N	104	34	57.976 W
6100.00	90.00	0.08	2755.99	3589.95	5.02	594728.45	464552.92	32	38	4.944 N	104	34	57.977 W
6200.00	90.00	0.08	2755.99	3689.95	5.16	594828.45	464553.06	32	38	5.933 N	104	34	57.978 W
6300.00	90.00	0.08	2755.99	3789.95	5.30	594928.45	464553.20	32	38	6.923 N	104	34	57.979 W
6400.00	90.00	0.08	2755.99	3889.95	5.44	595028.45	464553.34	32	38	7.912 N	104	34	57.980 W
6500.00	90.00	0.08	2755.99	3989.95	5.58	595128.45	464553.48	32	38	8.902 N	104	34	57.981 W
6600.00	90.00	0.08	2755.99	4089.95	5.72	595228.45	464553.62	32	38	9.891 N	104	34	57.982 W
6700.00	90.00	0.08	2755.99	4189.95	5.86	595328.45	464553.76	32	38	10.881 N	104	34	57.983 W
6800.00	90.00	0.08	2756.00	4289.95	6.00	595428.45	464553.90	32	38	11.870 N	104	34	57.985 W

Aim Directional Services

Planning Report - Geographic

Company: Nearburg Producing Company
 Field: Eddy County, New Mexico
 Site: Morris-Boyd 26 #1H
 Well: #1H
 Wellpath: Lateral 1r0

Date: 04/15/2011 Time: 10:54:20
 Co-ordinate(NE) Reference: Well: #1H, Grid North
 Vertical (TVD) Reference: SITE 3456.0
 Section (VS) Reference: Well (0.00N,0.00E,0.08Azi)
 Plan: Lateral 1r0

Page: 4

Survey

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	Map Northing ft	Map Easting ft	<--- Latitude ---> Deg Min Sec			<--- Longitude ---> Deg Min Sec		
6900.00	90.00	0.08	2756.00	4389.95	6.14	595528.45	464554.04	32	38	12.860 N	104	34	57.986 W
7000.00	90.00	0.08	2756.00	4489.95	6.28	595628.45	464554.18	32	38	13.850 N	104	34	57.987 W
7100.00	90.00	0.08	2756.00	4589.95	6.42	595728.45	464554.32	32	38	14.839 N	104	34	57.988 W
7200.00	90.00	0.08	2756.00	4689.95	6.56	595828.45	464554.46	32	38	15.829 N	104	34	57.989 W
7227.75	90.00	0.08	2756.00	4717.70	6.60	595856.20	464554.50	32	38	16.103 N	104	34	57.989 W

Targets

Name	Description Dip.	Dir.	TVD ft	+N/-S ft	+E/-W ft	Map Northing ft	Map Easting ft	<--- Latitude ---> Deg Min Sec			<--- Longitude ---> Deg Min Sec		
PBHL - Lateral			2756.00	4717.70	6.60	595856.20	464554.50	32	38	16.103 N	104	34	57.989 W

Formations

MD ft	TVD ft	Formations	Lithology	Dip Angle deg	Dip Direction deg
	0.00	San Andres		0.00	0.00
2501.09	2485.00	Glorieta		0.00	0.00
2666.31	2611.00	Yeso		0.00	0.00
7200.00	2756.00	Mid Yeso Mkr		0.00	0.00

Annotation

MD ft	TVD ft	
2183.00	2183.00	KOP, Build 10.00°/100'
3082.99	2755.96	Hold 90.00°, 0.08° Azimuth
7227.74	2756.00	PBHL - Lateral