Southland Royalty
"A" No. 4
TRIPLE COMPLETION
Elev. 3479 D.F.

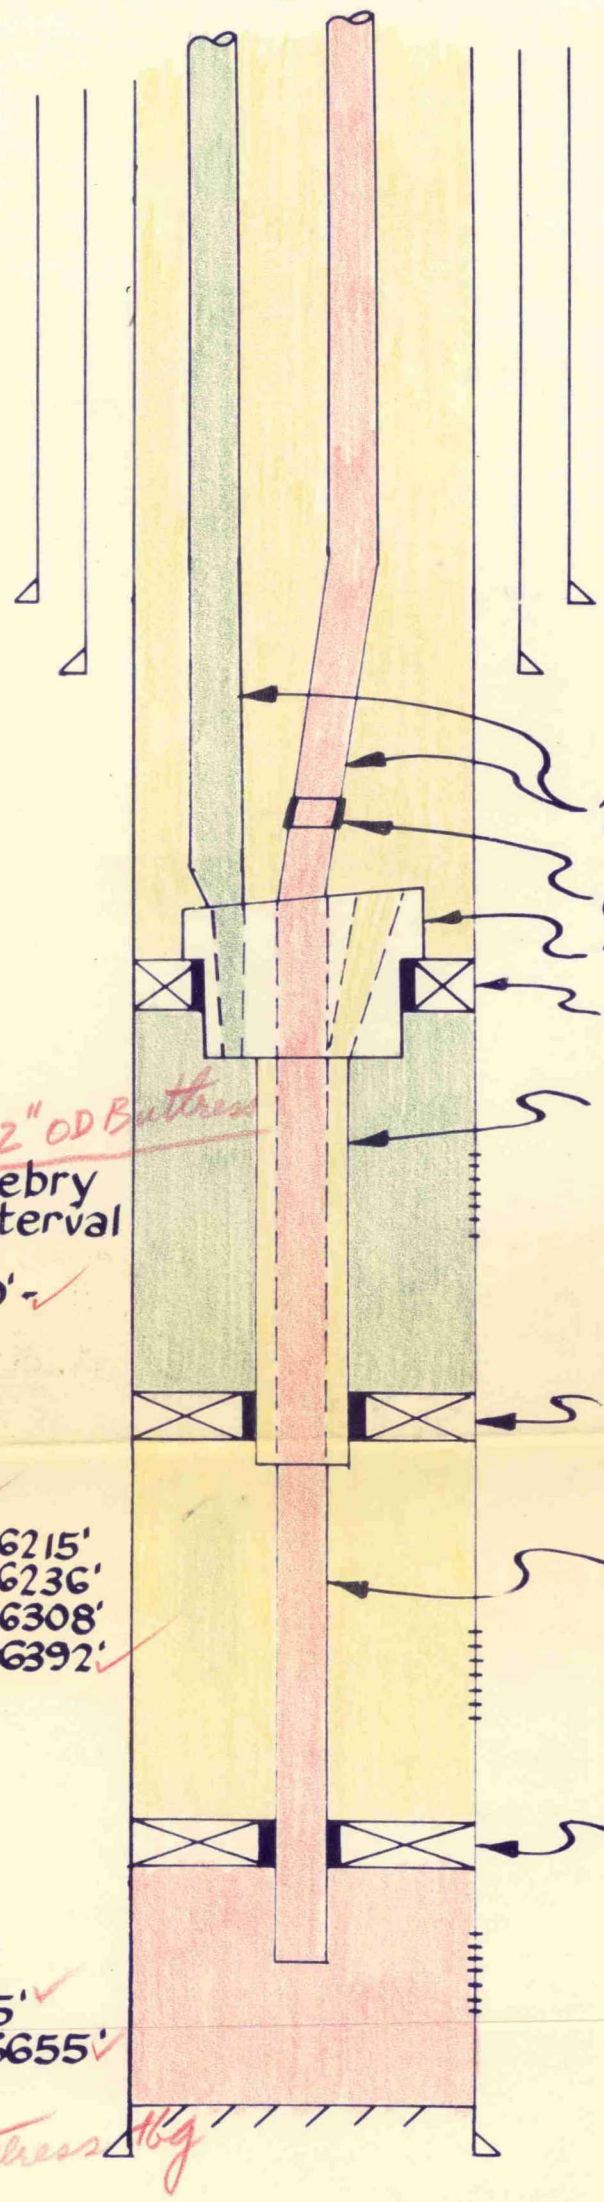

13 3/8" CSA 305' w/ 300 sx. Circulated

8 5/8" CSA 2905 w/ 100 sx neat cmt. and 375 sx containing 8% gel top cmt 1750' (temp survey)

2" OD buttress (ID 1.67) w/ special clearance couplings set at about 5685'

Garrett sleeve closed

Triple Flow Tube

Baker model "FA" Packer set at about 5685'

Upper Zone
Blinebry (Oil) 2" OD Buttress
Proposed Blinebry perforated interval to be selected between 5800'-6000'

2 7/8" OD Hydril FJ (ID 2.44") set at about 5685' to 6050'

Baker model "F" Packer set at about 6050'

Middle Zone
Tubb (Gas)
Top Perfs. 6176'-6215'
6224'-6236'
6272'-6308'
6365'-6392'

1 1/2" Norris IJ (ID 1.531") set at about 5685' to 6600'

Baker model "D" Packer set at about 6500'

Lower Zone
Drinkard (Oil)
Top Perfs 6595'
Bottom Perfs. 6655'
PBTD 6670'
T.D. 6750'
2" OD Buttress

5 1/2" Oil string set at 6748'
Top cmt 4570' (temp survey) w/ 180 sx 4% gel and 45 sxs signalite

39 MCF

Attachment II

figure 2