

RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

DEC - 2 2011

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK Farmington Field Office
Bureau of Land Management

1a. Type of Work DRILL	BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS		5. Lease Number NMSF-079520 Unit Reporting Number N/M/M 78411A
1b. Type of Well GAS			6. If Indian, All. or Tribe
2. Operator BURLINGTON RESOURCES Oil & Gas Company, LP			7. Unit Agreement Name San Juan 28-5 Unit
3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499 (505) 326-9700			8. Farm or Lease Name RCVD FEB 2 '12 OIL CONS. DIV. DIST. 3
4. Location of Well Surface: Unit I (NESE), 2184' FSL & 462' FEL BHL : Unit L (NWSW), 2565' FSL & 370' FWL Surface: Latitude: 36.63100° N (NAD83) Longitude: 107.35715° W BHL : Latitude: 36.63204° N (NAD83) Longitude: 107.35431° W	10. Field, Pool, Wildcat Blanco MV 11. Sec., Twn, Rge, Mer. (NMPM) Surf: Sec. 28, T28N, R5W BHL: Sec. 27, T28N, R5W API # 30-039- 31101		
14. Distance in Miles from Nearest Town 32 miles - Blanco	12. County Rio Arriba	13. State NM	
15. Distance from Proposed Location to Nearest Property or Lease Line 370'			
16. Acres in Lease 1156.470	17. Acres Assigned to Well 320.00 acres - S/2		
18. Distance from Proposed Location to Nearest Well, Drlg, Compl, or Applied for on this Lease 1905' - SJ 28-5 Unit 44 - MV/DK			
19. Proposed Depth 5983'	20. Rotary or Cable Tools Rotary		
21. Elevations (DF, FT, GR, Etc.) 6735' GL	22. Approx. Date Work will Start		
23. Proposed Casing and Cementing Program See Operations Plan attached			
24. Authorized by: <u>Arleen Kellywood</u> Arleen Kellywood (Staff Regulatory Tec)	Date <u>11/22/11</u>		

Hold C104

for Directional Survey
and "As Drilled" plat

PERMIT NO. _____ APPROVAL DATE _____
APPROVED BY DJ Montano TITLE AFM DATE 1/31/12

Archaeological Report attached A gas recovery unit may or may not be used on this location.
Threatened and Endangered Species Report attached
NOTE: This format is issued in lieu of U.S. BLM Form 3160-3
Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or presentations as to any matter within its jurisdiction.

Example Master Plan Type 3 Bond Numbers NMB-000015 and NMB-000089

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS".

NMOCD

FEB 09 2012

This action is subject to technical and
procedural review pursuant to 43 CFR 3165.3
and appeal pursuant to 43 CFR 3165.4

NOTIFY AZTEC OCD 24 HRS.
PRIOR TO CASING & CEMENT

2nd STAKING

PROJECT PROPOSAL - New Drill / Sidetrack

San Juan Business Unit

SAN JUAN 28-5 UNIT 44C

DEVELOPMENT

Lease:		AFE #: WAN.CDR.9067				AFE \$:	
Field Name: SAN JUAN 28-5 UNIT		Rig: Aztec Rig 673		State: NM	County: RIO ARRIBA		API #:
Geologist:		Phone:		Geophysicist:		Phone:	
Geoscientist:		Phone:		Prod. Engineer:		Phone:	
Res. Engineer:		Phone:		Proj. Field Lead:		Phone:	
Primary Objective (Zones):							
Zone	Zone Name						
RON	BLANCO MESAVERDE (PRORATED GAS)						
Location: Surface							
Latitude: 36.630991		Longitude: -107.356549		X:	Y:	Section: 28	Range: 005W
Footage X: 462 FEL		Footage Y: 2184 FSL		Elevation: 6735 (FT)		Township: 028N	
Tolerance:							
Location: Bottom Hole							
Latitude: 36.632031		Longitude: -107.353709		X:	Y:	Section: 27	Range: 005W
Footage X: 370 FWL		Footage Y: 2565 FSL		Elevation: (FT)		Township: 028N	
Tolerance:							
Location Type: Restricted		Start Date (Est.): 1/1/2013		Completion Date:		Date In Operation:	
Formation Data: Assume KB = 6750 Units = FT							
Formation Call & Casing Points	Depth (TVD in Ft)	SS (Ft)	MD (Ft)	Depletion (Yes/No)	BHP (PSIG)	BHT	Remarks
Surface Casing	200	6550		☐			12-1/4 hole. 200' 9 5/8" 32.3 ppf, H-40, STC casing. Cement with 115 cuft. Circulate cement to surface.
NACIMIENTO	1643	5107		☐			
OJO ALAMO	2908	3842		☐			
KIRTLAND	3084	3666		☐			
FRUITLAND	3189	3561		☐			Possible Gas
PICTURED CLIFFS	3600	3150		☐	1172		
LEWIS	3701	3049		☐			
Intermediate Casing	3851	2899		☐		122	8 3/4" Hole. 7", 20 ppf, J-55, STC Casing. Cement with 789 cuft. Circulate cement to surface.
CHACRA	4553	2197		☐			Est. Top Perf - 4555 (2195)
UPPER CLIFF HOUSE	5306	1444		☐			Gas
MASSIVE CLIFF HOUSE	5377	1373		☐	671		Gas
MENEFEE	5430	1320		☐			
POINT LOOKOUT	5743	1007		☐		162	
Total Depth	5983	767		☐		167	6-1/4" hole, 4-1/2" 10.5/11.6 ppf, J-55, STC/LTC casing. Cement w/ 417 cuft. Circulate cement a minimum of 100' inside the previous casing string.
Reference Wells:							
Reference Type	Well Name		Comments				
Production	SAN JUAN 28-5 44						

PROJECT PROPOSAL - New Drill / Sidetrack

San Juan Business Unit

SAN JUAN 28-5 UNIT 44C

DEVELOPMENT

Logging Program:			
Intermediate Logs:	☐ Log only if show	☐ GR/ILD	☐ Triple Combo

TD Logs:	☐ Triple Combo	☐ Dipmeter	☐ RFT	☐ Sonic	☐ VSP	☐ TDT	☒ Other
GR/CBLog + Est bottom perf ~100' above TD.							

Additional Information:					
Log Type	Stage	From (Ft)	To (Ft)	Tool Type/Name	Remarks

ConocoPhillips or its affiliates

Planning Report

Database:	EDM Central Planning	Local Co-ordinate Reference:	Well SJ 28-5 #44C
Company:	ConocoPhillips SJB	TVD Reference:	RKB @ 6750.0ft (Original Well Elev)
Project:	San Juan Basin - New Mexico Central Wells	MD Reference:	RKB @ 6750.0ft (Original Well Elev)
Site:	San Juan 28 Wells	North Reference:	True
Well:	SJ 28-5 #44C	Survey Calculation Method:	Minimum Curvature
Wellbore:	SJ 28-5 #44C		
Design:	Plan #1		

Project:	San Juan Basin - New Mexico Central Wells, New Mexico, Directional "S"		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico Central 3002		Using geodetic scale factor

Site:	San Juan 28 Wells, Township 28		
Site Position:		Northing:	2,045,688.53 ft
From:	Lat/Long	Easting:	147,261.04 ft
Position Uncertainty:	3.5 ft	Slot Radius:	6-1/8"
		Latitude:	36° 36' 58.001 N
		Longitude:	107° 27' 6.935 W
		Grid Convergence:	-0.72 °

Well:	SJ 28-5 #44C, MV/DK S Curve - Short		
Well Position	+N/-S	0.0 ft	Northing:
	+E/-W	0.0 ft	Easting:
Position Uncertainty	3.0 ft	Wellhead Elevation:	ft
		Latitude:	36° 37' 51.568 N
		Longitude:	107° 21' 23.561 W
		Ground Level:	6,735.0 ft

Wellbore:	SJ 28-5 #44C		
Magnetics	Model Name	Sample Date	Declination
	BGGM2011	7/26/2011	9.70
			63.45
			50,692

Design:	Plan #1		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth:
			0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(ft)	(ft)	(ft)
	0.0	0.0	0.0
			65.40

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(ft)	(ft)	Rate	Rate	Rate	(°)	
(ft)			(ft)			(°/100ft)	(°/100ft)	(°/100ft)		
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
650.0	0.00	0.00	650.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,742.3	21.85	65.40	1,716.1	85.6	187.1	2.00	2.00	0.00	65.40	
3,276.8	21.85	65.40	3,140.3	323.3	706.3	0.00	0.00	0.00	0.00	
4,005.0	0.00	0.00	3,851.0	380.4	831.0	3.00	-3.00	0.00	180.00	SJ 28-5 #44C ICP
6,137.0	0.00	0.00	5,983.0	380.4	831.0	0.00	0.00	0.00	0.00	SJ 28-5 #44C PCP

ConocoPhillips or its affiliates

Planning Report

Database:	EDM Central Planning	Local Co-ordinate Reference:	Well SJ 28-5 #44C
Company:	ConocoPhillips SJB	TVD Reference:	RKB @ 6750.0ft (Original Well Elev)
Project:	San Juan Basin - New Mexico Central Wells	MD Reference:	RKB @ 6750.0ft (Original Well Elev)
Site:	San Juan 28 Wells	North Reference:	True
Well:	SJ 28-5 #44C	Survey Calculation Method:	Minimum Curvature
Wellbore:	SJ 28-5 #44C		
Design:	Plan #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	N-S (ft)	E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00	
230.0	0.00	0.00	230.0	0.0	0.0	0.0	0.00	0.00	0.00	
Surface										
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00	
650.0	0.00	0.00	650.0	0.0	0.0	0.0	0.00	0.00	0.00	
700.0	1.00	65.40	700.0	0.2	0.4	0.4	2.00	2.00	0.00	
800.0	3.00	65.40	799.9	1.6	3.6	3.9	2.00	2.00	0.00	
900.0	5.00	65.40	899.7	4.5	9.9	10.9	2.00	2.00	0.00	
1,000.0	7.00	65.40	999.1	8.9	19.4	21.4	2.00	2.00	0.00	
1,100.0	9.00	65.40	1,098.2	14.7	32.1	35.3	2.00	2.00	0.00	
1,200.0	11.00	65.40	1,196.6	21.9	47.9	52.6	2.00	2.00	0.00	
1,300.0	13.00	65.40	1,294.4	30.6	66.8	73.4	2.00	2.00	0.00	
1,400.0	15.00	65.40	1,391.5	40.6	88.8	97.6	2.00	2.00	0.00	
1,500.0	17.00	65.40	1,487.6	52.1	113.8	125.2	2.00	2.00	0.00	
1,600.0	19.00	65.40	1,582.7	65.0	141.9	156.1	2.00	2.00	0.00	
1,664.0	20.28	65.40	1,643.0	73.9	161.5	177.6	2.00	2.00	0.00	
Nacimiento										
1,700.0	21.00	65.40	1,676.6	79.2	173.0	190.3	2.00	2.00	0.00	
1,742.3	21.85	65.40	1,716.1	85.6	187.1	205.7	2.00	2.00	0.00	
1,800.0	21.85	65.40	1,769.6	94.6	206.6	227.2	0.00	0.00	0.00	
1,900.0	21.85	65.40	1,862.4	110.1	240.4	264.4	0.00	0.00	0.00	
2,000.0	21.85	65.40	1,955.2	125.5	274.3	301.6	0.00	0.00	0.00	
2,100.0	21.85	65.40	2,048.0	141.0	308.1	338.8	0.00	0.00	0.00	
2,200.0	21.85	65.40	2,140.9	156.5	341.9	376.1	0.00	0.00	0.00	
2,300.0	21.85	65.40	2,233.7	172.0	375.8	413.3	0.00	0.00	0.00	
2,400.0	21.85	65.40	2,326.5	187.5	409.6	450.5	0.00	0.00	0.00	
2,500.0	21.85	65.40	2,419.3	203.0	443.4	487.7	0.00	0.00	0.00	
2,600.0	21.85	65.40	2,512.1	218.5	477.3	524.9	0.00	0.00	0.00	
2,700.0	21.85	65.40	2,604.9	234.0	511.1	562.1	0.00	0.00	0.00	
2,800.0	21.85	65.40	2,697.8	249.5	544.9	599.3	0.00	0.00	0.00	
2,900.0	21.85	65.40	2,790.6	265.0	578.8	636.5	0.00	0.00	0.00	
3,000.0	21.85	65.40	2,883.4	280.4	612.6	673.8	0.00	0.00	0.00	
3,026.5	21.85	65.40	2,908.0	284.5	621.6	683.6	0.00	0.00	0.00	
Ojo Alamo										
3,100.0	21.85	65.40	2,976.2	295.9	646.4	711.0	0.00	0.00	0.00	
3,200.0	21.85	65.40	3,069.0	311.4	680.3	748.2	0.00	0.00	0.00	
3,216.1	21.85	65.40	3,084.0	313.9	685.7	754.2	0.00	0.00	0.00	
Kirtland										
3,276.8	21.85	65.40	3,140.3	323.3	706.3	776.7	0.00	0.00	0.00	
3,300.0	21.15	65.40	3,161.9	326.9	714.0	785.3	3.00	-3.00	0.00	
3,329.0	20.28	65.40	3,189.0	331.1	723.3	795.5	3.00	-3.00	0.00	
Fruitland										
3,400.0	18.15	65.40	3,256.1	340.8	744.6	818.9	3.00	-3.00	0.00	
3,500.0	15.15	65.40	3,351.9	352.8	770.6	847.5	3.00	-3.00	0.00	
3,600.0	12.15	65.40	3,449.0	362.6	792.1	871.1	3.00	-3.00	0.00	
3,700.0	9.15	65.40	3,547.3	370.3	808.9	889.6	3.00	-3.00	0.00	
3,753.3	7.55	65.40	3,600.0	373.5	815.9	897.3	3.00	-3.00	0.00	
PC										

ConocoPhillips or its affiliates

Planning Report

Database:	EDM Central Planning	Local/Co-ordinate Reference:	Well SJ 28-5 #44C
Company:	ConocoPhillips SJB	TVD Reference:	RKB @ 6750.0ft (Original Well Elev)
Project:	San Juan Basin - New Mexico Central Wells	MD Reference:	RKB @ 6750.0ft (Original Well Elev)
Site:	San Juan 28 Wells	North Reference:	True
Well:	SJ 28-5 #44C	Survey Calculation Method:	Minimum Curvature
Wellbore:	SJ 28-5 #44C		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	N-S (ft)	E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
3,800.0	6.15	65.40	3,646.4	375.8	821.0	902.9	3.00	-3.00	0.00
3,854.8	4.50	65.40	3,701.0	377.9	825.6	908.0	3.00	-3.00	0.00
Lewis									
3,900.0	3.15	65.40	3,746.1	379.2	828.4	911.0	3.00	-3.00	0.00
4,000.0	0.15	65.40	3,846.0	380.4	831.0	913.9	3.00	-3.00	0.00
4,005.0	0.00	0.00	3,851.0	380.4	831.0	913.9	3.00	-3.00	-1,309.36
Intermediate - SJ 28-5 #44C ICP									
4,100.0	0.00	0.00	3,946.0	380.4	831.0	913.9	0.00	0.00	0.00
4,200.0	0.00	0.00	4,046.0	380.4	831.0	913.9	0.00	0.00	0.00
4,300.0	0.00	0.00	4,146.0	380.4	831.0	913.9	0.00	0.00	0.00
4,400.0	0.00	0.00	4,246.0	380.4	831.0	913.9	0.00	0.00	0.00
4,500.0	0.00	0.00	4,346.0	380.4	831.0	913.9	0.00	0.00	0.00
4,600.0	0.00	0.00	4,446.0	380.4	831.0	913.9	0.00	0.00	0.00
4,700.0	0.00	0.00	4,546.0	380.4	831.0	913.9	0.00	0.00	0.00
4,707.0	0.00	0.00	4,553.0	380.4	831.0	913.9	0.00	0.00	0.00
Chacra									
4,800.0	0.00	0.00	4,646.0	380.4	831.0	913.9	0.00	0.00	0.00
4,900.0	0.00	0.00	4,746.0	380.4	831.0	913.9	0.00	0.00	0.00
5,000.0	0.00	0.00	4,846.0	380.4	831.0	913.9	0.00	0.00	0.00
5,100.0	0.00	0.00	4,946.0	380.4	831.0	913.9	0.00	0.00	0.00
5,200.0	0.00	0.00	5,046.0	380.4	831.0	913.9	0.00	0.00	0.00
5,300.0	0.00	0.00	5,146.0	380.4	831.0	913.9	0.00	0.00	0.00
5,400.0	0.00	0.00	5,246.0	380.4	831.0	913.9	0.00	0.00	0.00
5,460.0	0.00	0.00	5,306.0	380.4	831.0	913.9	0.00	0.00	0.00
Upper Cliff House									
5,500.0	0.00	0.00	5,346.0	380.4	831.0	913.9	0.00	0.00	0.00
5,531.0	0.00	0.00	5,377.0	380.4	831.0	913.9	0.00	0.00	0.00
Massive Cliff House									
5,584.0	0.00	0.00	5,430.0	380.4	831.0	913.9	0.00	0.00	0.00
Menefee									
5,600.0	0.00	0.00	5,446.0	380.4	831.0	913.9	0.00	0.00	0.00
5,700.0	0.00	0.00	5,546.0	380.4	831.0	913.9	0.00	0.00	0.00
5,800.0	0.00	0.00	5,646.0	380.4	831.0	913.9	0.00	0.00	0.00
5,897.0	0.00	0.00	5,743.0	380.4	831.0	913.9	0.00	0.00	0.00
Point Lookout									
5,900.0	0.00	0.00	5,746.0	380.4	831.0	913.9	0.00	0.00	0.00
6,000.0	0.00	0.00	5,846.0	380.4	831.0	913.9	0.00	0.00	0.00
6,100.0	0.00	0.00	5,946.0	380.4	831.0	913.9	0.00	0.00	0.00
6,137.0	0.00	0.00	5,983.0	380.4	831.0	913.9	0.00	0.00	0.00
Production - SJ 28-5 #44C PCP									

ConocoPhillips or its affiliates

Planning Report

Database:	EDM Central Planning	Local Co-ordinate Reference:	Well SJ 28-5 #44C
Company:	ConocoPhillips SJBU	TVD Reference:	RKB @ 6750.0ft (Original Well Elev)
Project:	San Juan Basin - New Mexico Central Wells	MD Reference:	RKB @ 6750.0ft (Original Well Elev)
Site:	San Juan 28 Wells	North Reference:	True
Well:	SJ 28-5 #44C	Survey Calculation Method:	Minimum Curvature
Wellbore:	SJ 28-5 #44C		
Design:	Plan #1		

Targets									
Target Name	hit/miss target	Dip/Angle	Dip Dir.	TVD	N/S	E/W	Northing	Easting	Latitude
Shape		(°)	(°)	(ft)	(ft)	(ft)	(ft)	(ft)	Longitude
SJ 28-5 #44C PCP		0.00	0 00	5,983.0	380.4	831 0	2,051,139.86	176,152.25	36° 37' 55.329 N
- plan hits target center									107° 21' 13.366 W
- Point									
SJ 28-5 #44C ICP		0.00	0.00	3,851.0	380.4	831.0	2,051,139.86	176,152.22	36° 37' 55.329 N
- plan hits target center									107° 21' 13.367 W
- Point									

Casing Points				
Measured Depth	Vertical Depth	Name	Casing Diameter	Hole Diameter
(ft)	(ft)		(in)	(in)
230.0	230.0	Surface	9-5/8	12-1/4
4,005.0	3,851.0	Intermediate	7	8-3/4
6,137.0	5,983.0	Production	4-1/2	6-1/4

Formations				
Measured Depth	Vertical Depth	Name	Lithology	Dip Direction
(ft)	(ft)			(°)
5,460.0	5,306.0	Upper Cliff House		0.00
3,026.5	2,908.0	Ojo Alamo		0 00
4,707.0	4,553.0	Chacra		0.00
5,897.0	5,743.0	Point Lookout		0.00
3,854.8	3,701.0	Lewis		0.00
3,216.1	3,084.0	Kirtland		0.00
3,329.0	3,189.0	Fruitland		0 00
3,753.3	3,600.0	PC		0.00
5,531.0	5,377.0	Massive Cliff House		0.00
5,584.0	5,430.0	Menefee		0.00
1,664.0	1,643.0	Nacimiento		0.00

REFERENCE INFORMATION


RKB @ 6750.0ft (Original Well Elev)
Ground Elevation 6735.0
Reference Lat: 36° 37' 51.568 N
Reference Long: 107° 21' 23.561 W

Project: San Juan Basin - New Mexico Central V
Site: San Juan 28 Wells
Well: SJ 28-5 #44C
Wellbore: SJ 28-5 #44C
Design: Plan #1





SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	650.0	0.00	0.00	650.0	0.0	0.0	0.00	0.00	0.0	
3	1742.3	21.85	65.40	1716.1	85.6	187.1	2.00	65.40	205.7	
4	3276.8	21.85	65.40	3140.3	323.3	706.3	0.00	0.00	776.7	
5	4005.0	0.00	0.00	3851.0	380.4	831.0	3.00	180.00	913.9	SJ 28-5 #44C ICP
6	6137.0	0.00	0.00	5983.0	380.4	831.0	0.00	0.00	913.9	SJ 28-5 #44C PCP

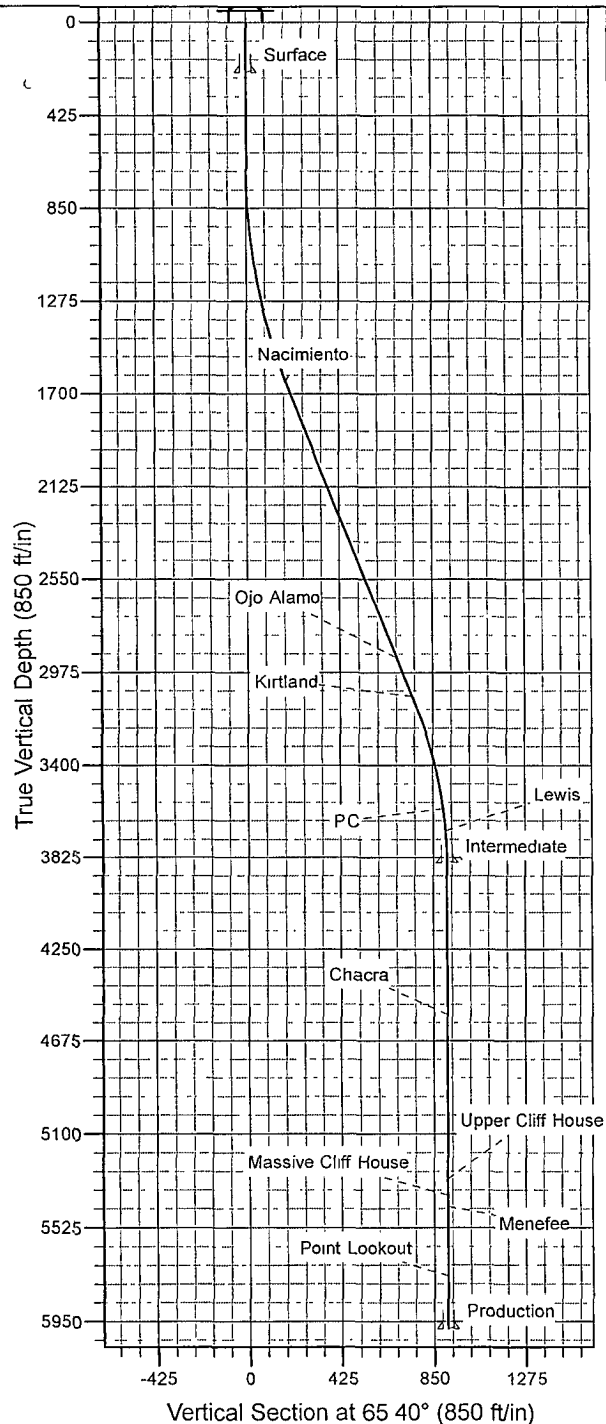

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
1643.0	1664.0	Nacimiento
2908.0	3026.5	Ojo Alamo
3084.0	3216.1	Kirtland
3189.0	3329.0	Fruitland
3600.0	3753.3	PC
3701.0	3854.8	Lewis
4553.0	4707.0	Chacra
5306.0	5460.0	Upper Cliff House
5377.0	5531.0	Massive Cliff House
5430.0	5584.0	Menefee
5743.0	5897.0	Point Lookout

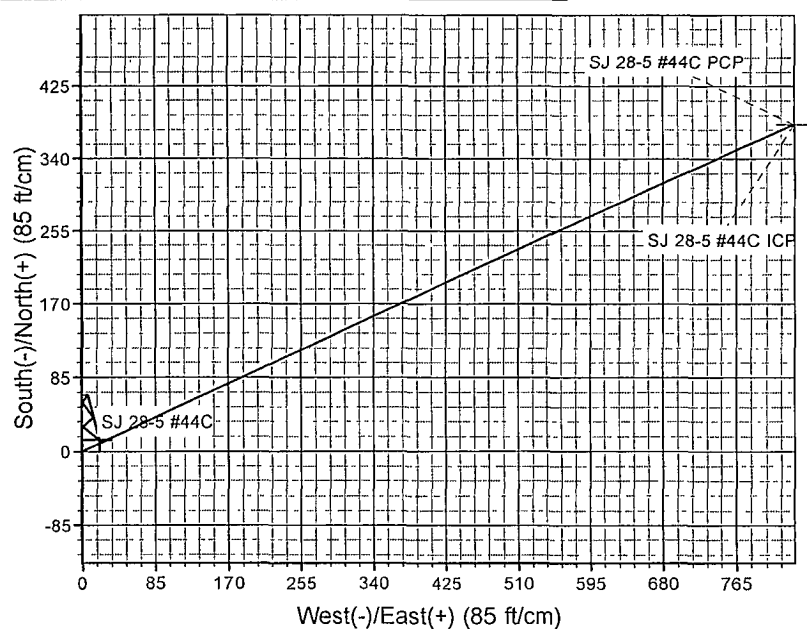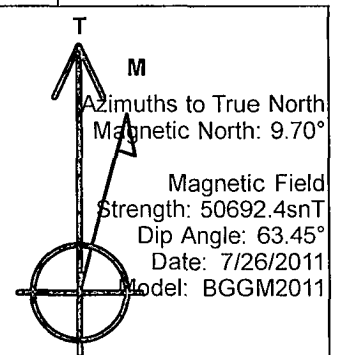

BURLINGTON RESOURCES OIL & GAS COMPANY LP

SAN JUAN 28-5 UNIT #44C

2184' FSL & 462' FEL

LOCATED IN THE NE/4 SE/4 OF SECTION 28,

T28N, R5W, N.M.P.M.,

RIO ARriba COUNTY, NEW MEXICO

DIRECTIONS

- 1) FROM THE POST OFFICE IN BLANCO, TRAVEL EASTERLY ON HWY 64 FOR 27.2 MILES.
- 2) TURN RIGHT (GENERAL AMERICAN) GO PAST OLD SCHOOL HOUSE, AND TRAVEL 1.1 MILES TO "Y-INT".
- 3) STAY LEFT & GO 1.7 MILES TO "Y-INT".
- 4) STAY RIGHT AND GO 1.9 MILES WHERE ACCESS IS FLAGGED ON LEFT SIDE.

WELL FLAG LOCATED AT LAT. 36.63100° N, LONG. 107.35715° W (NAD 83).

