

## DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS

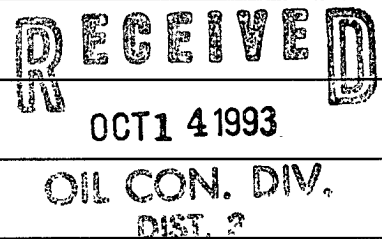
MB-5

NORTHWESTERN NEW MEXICO

(Submit 3 Copies to OCD Aztec Office)

Operator: BLACKWOOD & NICHOLS CO. Location: Unit G, Sec. 22, Twp 31N, Rng 7W.Name of Well/Wells or Pipeline Served NEBU 406, 55Elevation 6350 Completion Date 8-13-93 Total Depth 440' Land Type\* Surface: F Mineral: SF-079003Casing, Sizes, Types & Depths 8-5/8" SCH 40 P.V.C. - 100', 7-7/8" Open HoleIf Casing is cemented, show amounts & types used 20 sks Portland Zia I-II - 90# ea.If Cement or Bentonite Plugs have been placed, show depths & amounts used N/A

Depths &amp; thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. DryDepths gas encountered: N/AType & amount of coke breeze used: Asbury Flo-Coke 5,400#.Depths anodes placed: 135' - 405' (15)Depths vent pipes placed: TD to 4' above ground levelVent pipe perforations: Bottom - 340'Remarks: Ground bed is located 345° from North, 185' from #406 wellhead.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

\*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.

If Federal or Indian, add Lease Number.


Signed by: James K. AllenTitle: Operations EngineerDate: 10/12/93

# BLACKWOOD & NICHOLS CATHODIC GROUND BED DRILLERS REPORT

WP# MB-5 WELL# NEBU#406 L#55

S 22 T 3 / M R 7

[illegible]

DRILLER 

INSPECTOR Joe Matlock

# BLACKWOOD & NICHOLS CATHODIC GROUND 'BED DRILLERS REPORT'

P# MB-5 WELL# N.E.B.U. #406 1/2 #45-

C S 22 T 31 R

[illegible]

RILLER

INSPECTOR