

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.
5. LEASE DESIGNATION AND SERIAL NO.

NOO-C-14-20-3664
6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

Navajo Allotted
7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Navajo Allotted 26
9. WELL NO.

1
10. FIELD AND POOL, OR WILDCAT

Wildcat
11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

SEC. 26, T21N, R7W
12. COUNTY OR PARISH 13. STATE

Sandoval N. Mex.

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐
2. NAME OF OPERATOR
Filon Exploration Corporation
3. ADDRESS OF OPERATOR c/o Minerals Management Inc.
501 Airport Dr., Suite 105, Farmington, New Mex. 87401
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface
1700' FWL - 600' FSL, SEC. 26, T21N, R7W
14. PERMIT NO. 15. ELEVATIONS (Show whether DF, RT, CR, etc.)
6696 KB

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐ FULL OR ALTER CASING ☐
FRACTURE TREAT ☐ MULTIPLE COMPLETE ☐
SHOOT OR ACIDIZE ☐ ABANDON* ☐
REPAIR WELL ☐ CHANGE PLANS ☐
(Other) ☐


SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐ REPAIRING WELL ☐
FRACTURE TREATMENT ☐ ALTERING CASING ☐
SHOOTING OR ACIDIZING ☐ ABANDONMENT* ☐
(Other) Surface Casing ☒

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spud 15" hole at 4:00 P.M. 4/15/76. Drill to 175'. Run 151' of 10 3/4" OD 40.50#, K-55, ST&C casing. Casing landed at 164' KB. Cement with 200 sx Class "B" with 2% CaCl. Plug down at 12:00 midnight, 4/15/76. Circulated cement to surface.

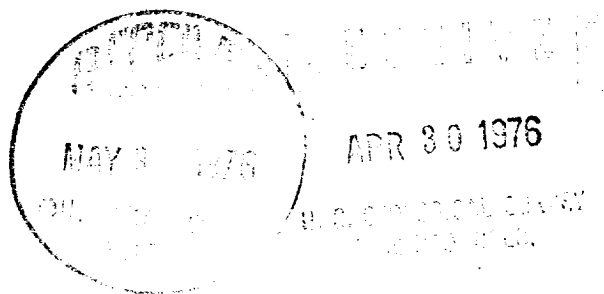

18. I hereby certify that the foregoing is true and correct

SIGNED

Donald B. Bamer

TITLE

Drilling Manager

Minerals Management Inc

DATE 4-29-76

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY: