

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on reverse side)

Form approved
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

N00-C-14-20-3523

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

Navajo Allotment

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Andale

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

MC

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Section 12 T21N R8W

12. COUNTY OR PARISH

San Juan

13. STATE

N.M.

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

North American Exploration Co., a Tesoro Petroleum Corporation

3. ADDRESS OF OPERATOR

408 First State Bank Bldg., Abilene, Texas

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*

See also space 17 below.)

At surface

1825' PSL - 850' FWL Section 12, T21N R8W

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

6558' GL, 6571' KB

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other) ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☒

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) ☐

REPAIRING WELL ☐


ALTERING CASING ☐

ABANDONMENT* ☐

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Drilled 12 1/4" surface hole to 260' KB, ran 6 joints 8 5/8" OD 23 1/2 surface casing set at 252 KB, cemented with 170 sacks Dowell Class A regular cement plus 2% calcium chloride. Plug down 7:30 AM 4 Sep 71, cement circulated. WOC 12 hours, pressure test to 700 psig., no pressure drop in 30 minutes. Drilled out from surface casing 7:30 PM 4 Sep 71. Cement weight 16 #/gal., mixing temp. 70°F, estimated bottom hole temp. 70°F. Estimated compressive strength at test 1500 psi., at drill out 2400 psi.

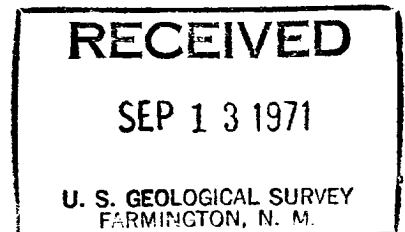

18. I hereby certify that the foregoing is true and correct

SIGNED

Gordon H. Gray
Gordon H. Gray

TITLE

Project Engineer

DATE

9 Sep 71

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement, or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

U.S. GOVERNMENT PRINTING OFFICE: 1963-O-685229

847-485

