Spill Calculation Sheet

Date & Time Of Spill >>>>>>>

Spill Location >>>>>>>>>>>>>

Porosity Factors

Caliche	0.03%	**Sand**	0.20%
Clay	0.05%	**Gravel**	0.25%
Clay \ Sand	0.15%	**Unknown**	0.25%

(Use 1.0 If No Porosity - Total Fluid)

Depth Factors (inches)

Light Mist	0.000008	**1/2**	0.041667	**7**	0.583333	**15**	1.250000
Medium Mist	0.000080	**3/4**	0.062500	**8**	0.666666	**16**	1.333333
Heavy Mist	0.000830	**1**	0.083333	**9**	0.750000	**17**	1.416667
Skim	0.002604	**2**	0.166666	**10**	0.833333	**18**	1.500000
1/12	0.006944	**3**	0.250000	**11**	0.916666	**19**	1.583333
1/16	0.005208	**4**	0.333333	**12**	1.000000	**20**	1.666667
1/8	0.010416	**5**	0.416666	**13**	1.08333		
1/4	0.020803	**6**	0.500000	**14**	1.16667		

(NOTE: For spills greater than on foot of depth use 12 inches as your depth, then multiply by the number feet of actual depth.)

Spill Calculations

Square Feet		Depth		Porosity		Volume	
	X		X		=	0	pooled fluid
0	X	0	X		=	0	pooled fluid
0	X	0	X		=	0	pooled fluid
0	X	0	X		=	0	pooled fluid
0	X	0	X		=	0	pooled fluid
0	X	0	X		=	0	pooled fluid
0	X	0	X		=	0	pooled fluid
0	X	0	X		=	0	pooled fluid
0	X	0	X		=	0	pooled fluid
0	X	0	X		=	0	pooled fluid
352	X	0.333333	X	0.03	=	0.62684697	porosity calc.
600	X	0.333333	X	0.03	=	1.06848915	porosity calc.
0	X	0	X	0	=	0	porosity calc.
0	X	0	X	0	=	0	porosity calc.
0	X	0	X	0	=	0	porosity calc.

Total Spill	1.695336126
Recovered	0
Total Less Recovered	1.695336126
H2O %	50
Total H2O	0.847668063
Total Oil	0.847668063

Water %

Tests	H2O %
Test #1	50
Test #2	50
Test #3	50
Test #4	50
Test #5	50
Total	250
Avg.	50

Site Characterization and Remediation Workplan
A-7-8 Pipeline Release
nAPP2601343850
32.4948084, -103.1582952
E-10-21S-37E

Introduction

Standard Safety and Supply (Standard) on behalf of ET Gathering & Processing, LLC. (ET) is pleased to submit this Site Characterization and Remediation Workplan. Based on the Notification of Release the spill was discovered on January 6, 2026, and was attributed to pipeline failure. There was an approximate net loss of one (1) barrel (bbls) of crude oil and one (1) MCF of natural gas. Attachment B: Figure 1 depicts the Site with respect to the nearest town and Figure 2 depicts the topographic features in the area.

Site Characterization

Based on a site characterization desktop review the area is within a Low Karst area. Furthermore, there are no receptors [significant watercourse, lakebed, playa, sinkhole, an occupied residence, school, hospital, institution, church, freshwater spring for domestic or stock watering purposes, other fresh water well/spring, municipal water boundary, wetland, subsurface mine, and/or an unstable area] within the specified distance set forth in the New Mexico Administrative Code 19.15.29.12. A groundwater determination bore (CP-02104) was drilled within a ½ mile radius of the site to a depth of fifty-five (55) feet below ground surface (bgs). The well was left open for 72hrs then gauged to determine the presence or absence of groundwater. No groundwater was encountered during the measurement event therefore the following closure criteria will be used.

	NMAC Closure Criteria Remediation and Reclamation				
depths in feet (ft)	Benzene	BTEX	TPH (GRO-DRO)	TPH (GRO-DRO-MRO)	Chloride
0-4 (ft)	10 mg/kg	50 mg/kg	---*	100 mg/kg	600 mg/kg
>4ft	10 mg/kg	50 mg/kg	1,000 mg/kg	2,500 mg/kg	10,000 mg/kg
	* value must not exceed TPH (GRP-DRO-MRO) value				

The documentation used to characterize the site can be found in the report under Attachment C: Site Characterization.

Initial Assessment

Between January 10 and January 14, 2026 Standard performed an initial assessment to characterize impacts. Nine (9) horizontal sample points (H-1 to H-9) were collected at surface (0) depth. Twenty-two (22) vertical samples points (V-1 to V-23) were collected from surface (0) to forty (forty) ft bgs in one (1) ft intervals utilizing an air rotary rig. Standard was unable to collect one sample (V-19) due to the air rotary rig experiencing mechanical failure on January 14, 2026. Soil samples were placed into lab provided containers, onto ice then transported to Cardinal in Hobbs, New Mexico, for the analysis of benzene, toluene, ethylbenzene, and xylenes (BTEX 8021B), Total Petroleum Hydrocarbons (TPH 8015M) and chloride (4500-Cl-B). Proper chain-of-custody was followed during the collection and delivery of the samples to the laboratory. Analytical results indicated that vertical and horizontal delineation was achieved.

The delineation data can be found in this report under Attachment A: Table 1 Delineation Assessment Analytical Data Table and the lab report and chain of custody can be found under Attachment E: Laboratory Analytical Method Documentation with Chain-of-Custody

The delineation sample locations are located under Attachment B: Figure 3 Delineation Assessment Map while photographs of the impacted area are under Attachment D: Photographic Log.

Proposed Remedial Action Activities

Based on the assessment performed Standard proposes the following:

- Excavate the areas of V-1 and V-3 to two (2) ft bgs
- Excavate the areas of V-2 to seven (7) ft bgs
- Excavate the areas of V-16 to four (4) ft bgs

There are approximately four hundred and eighty-four (484) cubic yards of impacted material that will be excavated and transported off to the closest approved disposal facility. The Proposed Excavation Map is located under Attachment B: Figure 4 Proposed Excavation Map

Closing

If you have any questions regarding the Site Characterization and Remediation Workplan for [nAPP2601343850] – A-7-8 Pipeline Release, please contact us at the following:

Address: 2524 Trunk St, Odessa TX 79761
Contact: 254-266-5456

Attachments

- Attachment A: Analytical Data Tables
    1. Table 1: Delineation Assessment Analytical Data Table
- Attachment B: Figures
    1. Site Location Map
    2. Topographic Map
    3. Delineation Assessment Map
    4. Proposed Excavation Map
- Attachment C: Site Characterization
    1. OCD Well map and Karst Potential
    2. OSE POD
    3. Well Log
    4. Open Environment Wetlands
    5. Wetlands Inventory
    6. National Flood Hazard Layer
- Attachment D: Photographic Documentation
- Attachment E: Laboratory Analytical Method Documentation with Chain-of-Custody

ATTACHEMENT A: ANALYTICAL DATA TABLES

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-1	0	1/14/2026	**5,760**	**16,450**	**4,440**	**10,600**	**15,040**	**1,410**	**30.0**	**173**	**112**	**222**	**536**
	1	1/14/2026	**1,520**	**723.5**	**234**	**437**	**671**	**52.5**	**1.61**	**10.8**	**10.2**	**22.6**	**45.2**
	2	1/14/2026	**112**	**29.0**	**10.9**	**18.1**	**29.0**	<10.0	<0.050	**0.272**	**0.439**	**1.13**	**1.84**
	3	1/14/2026	**32.0**	**11.0**	<10.0	**11.0**	**11.0**	<10.0	<0.050	<0.050	**0.094**	**0.172**	<0.300
	4	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**112**	**26.9**	<10.0	**26.9**	**26.9**	<10.0	<0.050	**0.096**	**0.119**	**0.307**	**0.521**
	15	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-2	4	1/10/2026	**3,160**	**20,830**	**7,710**	**11,800**	**19,510**	**1,320**	**68.6**	**240**	**113**	**229.0**	**651**
	5	1/10/2026	**384**	**1,495**	**368**	**965**	**1,333**	**162**	**3.01**	**18.4**	**14.4**	**32.0**	**67.8**
	10	1/10/2026	**64.0**	**84.6**	<10.0	**70.9**	**70.9**	**13.7**	**0.053**	**0.167**	**0.092**	**0.234**	**0.547**
	15	1/11/2026	**48.0**	**12.2**	<10.0	**12.2**	**12.2**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**176**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-3	0-0.5	1/13/2026	**432**	**1,533**	**76.0**	**1,230**	**1,306**	**227**	**0.062**	**0.463**	**0.651**	**1.94**	**3.12**
	1	1/13/2026	**160**	**113.3**	**28.6**	**72.0**	**101**	**12.7**	**0.303**	**0.462**	**0.403**	**1.61**	**2.78**
	2	1/13/2026	**144**	**12.1**	**12.1**	<10.0	**12.1**	<10.0	**0.050**	**0.134**	**0.201**	**0.608**	**0.993**
	3	1/13/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/13/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-4	4	1/10/2026	**208**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/10/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/10/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**144**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**144**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-5	4	1/10/2026	**64.0**	**41.8**	<10.0	**41.8**	**41.8**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/10/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/10/2026	**128**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**320**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**448**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-6	4	1/12/2026	**128**	**17.7**	<10.0	**17.7**	**17.7**	<10.0	<0.050	**0.063**	**0.068**	**0.253**	**0.385**
	5	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**32.0**	**57.7**	<10.0	**42.6**	**42.6**	**15.1**	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**16.0**	**28.9**	<10.0	**18.9**	**18.9**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-7	1-2	1/12/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/12/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/12/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-8	0-0.5	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	<16.0	**10.4**	<10.0	**10.4**	**10.4**	<10.0	<0.050	<0.050	**0.059**	**0.192**	<0.300
	4	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-9	1	1/12/2026	**128**	**77.7**	**21.1**	**46.6**	**67.7**	<10.0	<0.050	**0.201**	**0.336**	**1.16**	**1.70**
	2	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/12/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**144**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-10	0-0.5	1/13/2026	<16.0	**13.6**	<10.0	**13.6**	**13.6**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	<16.0	**28.7**	<10.0	**28.7**	**28.7**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-11	3	1/10/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/10/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/10/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/10/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-12	3	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	**0.120**	**0.259**	**0.075**	<0.150	**0.555**
V-13	0	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**32.0**	**13.8**	<10.0	**13.8**	**13.8**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	**32.0**	**16.2**	<10.0	**16.2**	**16.2**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-14	0-0.5	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-15	0-0.5	1/13/2026	**32.0**	**22.1**	<10.0	**22.1**	**22.1**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	**64.0**	**36.6**	<10.0	**36.6**	**36.6**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	**16.0**	**20.0**	<10.0	**20.0**	**20.0**	<10.0	<0.050	<0.050	**0.107**	**0.327**	**0.434**
	4	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-16	3	1/14/2026	**1,470**	**12,333**	**3,920**	**7,460**	**11,380**	**953**	**28.0**	**154**	**100**	**213**	**495**
	4	1/14/2026	**464**	**127**	**19.5**	**97.1**	**116.6**	**10.4**	<0.050	**0.382**	**0.606**	**1.68**	**2.66**
	5	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-17	0-0.5	1/13/2026	**32.0**	**12.4**	<10.0	**12.4**	**12.4**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**224**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**272**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	**128**	**59.5**	<10.0	**36.3**	**36.3**	**23.2**	<0.050	<0.050	<0.050	<0.150	<0.300
	34	1/13/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-18	0-0.5	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**16.0**	**22.6**	<10.0	**22.6**	**22.6**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-20	0	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**176**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-21	0	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**144**	**59.5**	<10.0	**36.3**	**36.3**	**23.2**	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-22	0	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-23	0	1/14/2026	**192**	**29.5**	<10.0	**11.7**	**11.7**	**17.8**	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**544**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	**416**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**256**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	**0.051**	<0.050	<0.150	<0.300
	25	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300


Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
H-1	0-0.5'	1/10/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-2	0-0.5'	1/10/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-3	0-0.5'	1/10/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-4	0-0.5'	1/10/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-5	0-0.5'	1/10/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-6	0-0.5'	1/10/2026	**64.0**	**32.2**	<10.0	<10.0	<10.0	**32.2**	<0.050	<0.050	<0.050	<0.150	<0.300
H-7	0-0.5'	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-8	0-0.5'	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-9	0-0.5'	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Notes

1. mg/kg - milligram per kilogram
2. TPH - Total Petroleum Hydrocarbons
3. (CS) - Confirmation Sample
4. (SW) - Sidewall Sample
5. * Indicates Value must be equal to or less than Total BTEX
6.** Indicates that total value must be equal to or less than total TPH
7.*** Indicates that total value must be equal to or less than GRO+DRO total
8.**** Indicates that Total value must be equal or less than total TPH
9. H = Horizontal Sample
10. V= Vertical Sample
11. Remediation Limits
12. Reclamation Limits (0-4ft below ground surface)

ATTACHMENT B: FIGURES

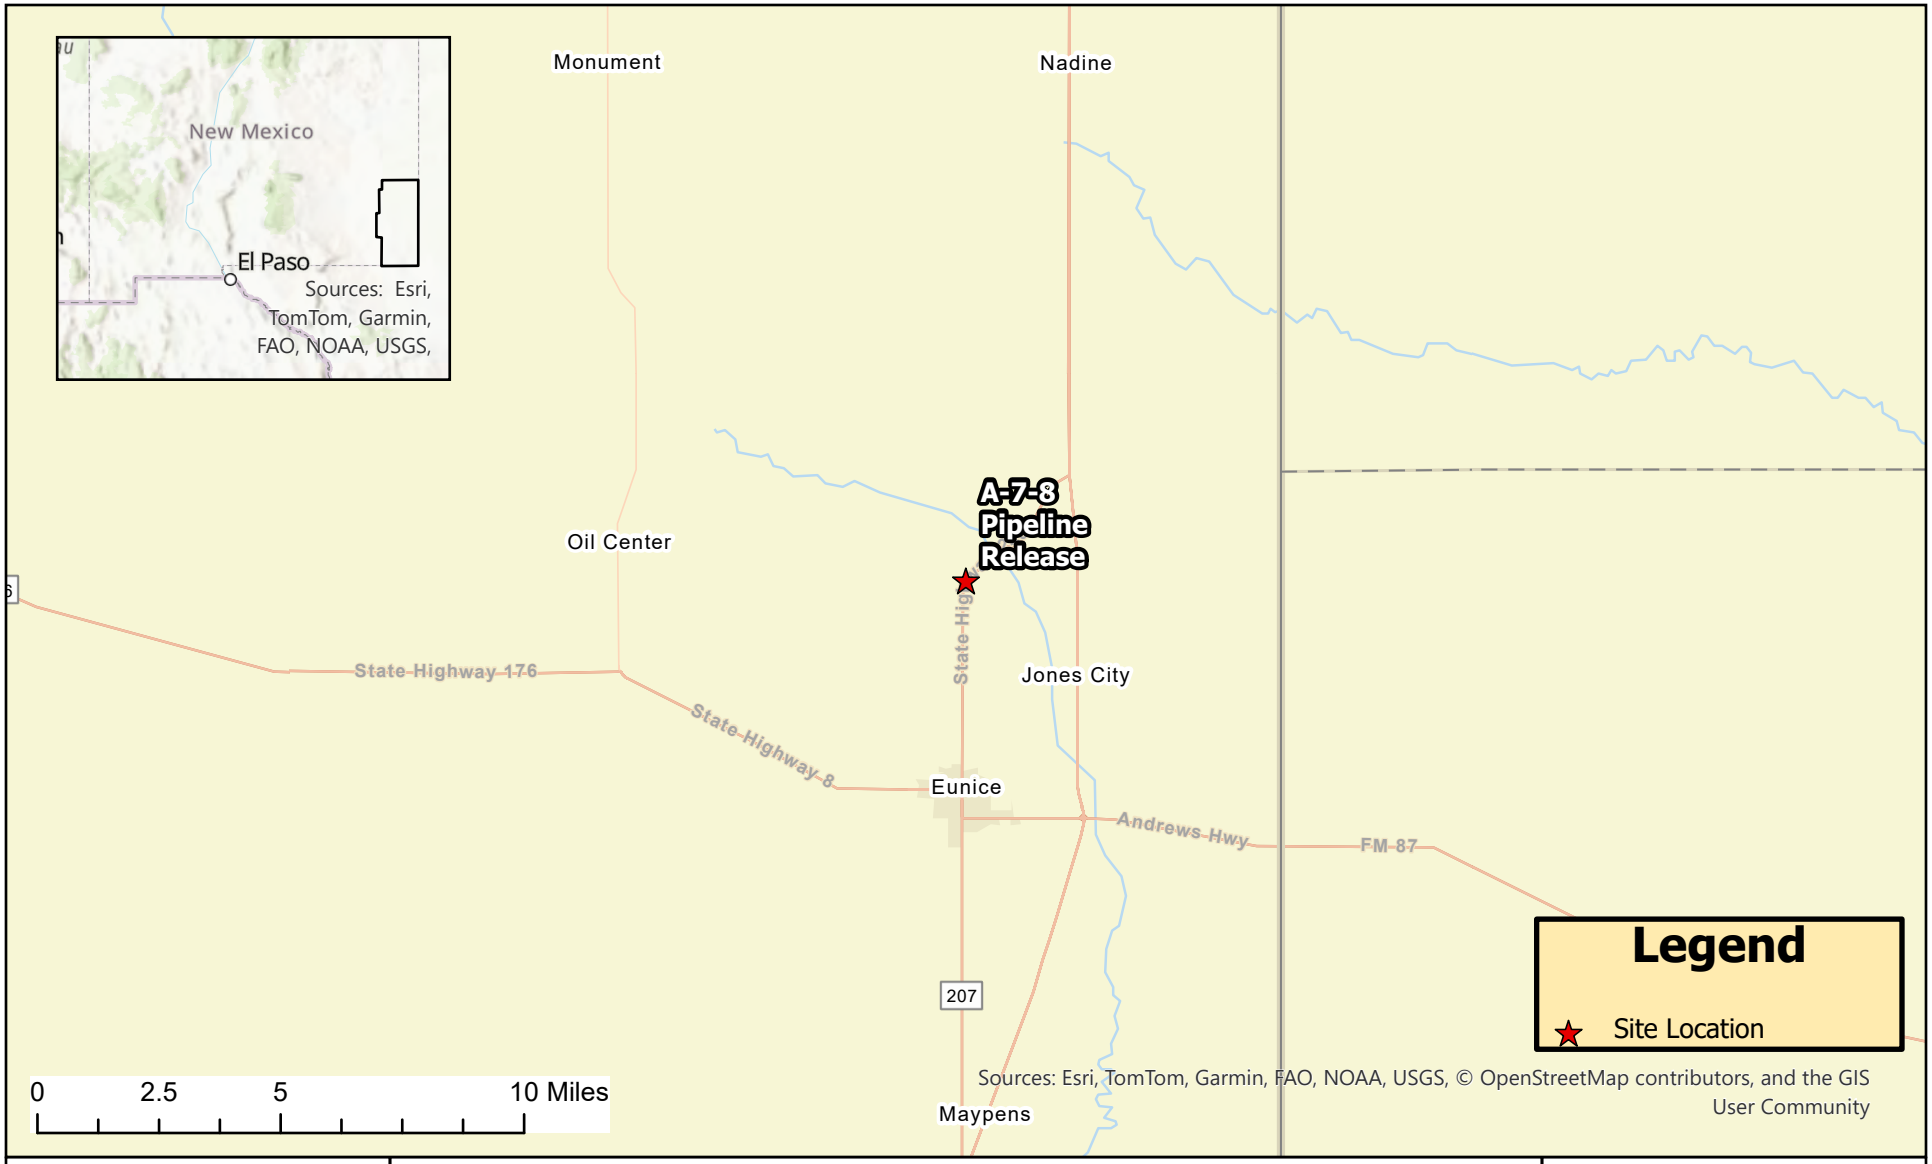

STANDARD SAFETY & SUPPLY


A-7-8 PIPELINE RELEASE
ET GATHERING & PROCESSING, LLC

Figure 1. (Site Location Map)
Release Date: 01/06/2026
Lea County, New Mexico

01/19/2026

Coordinates: 32.4948084,-103.1582952

N

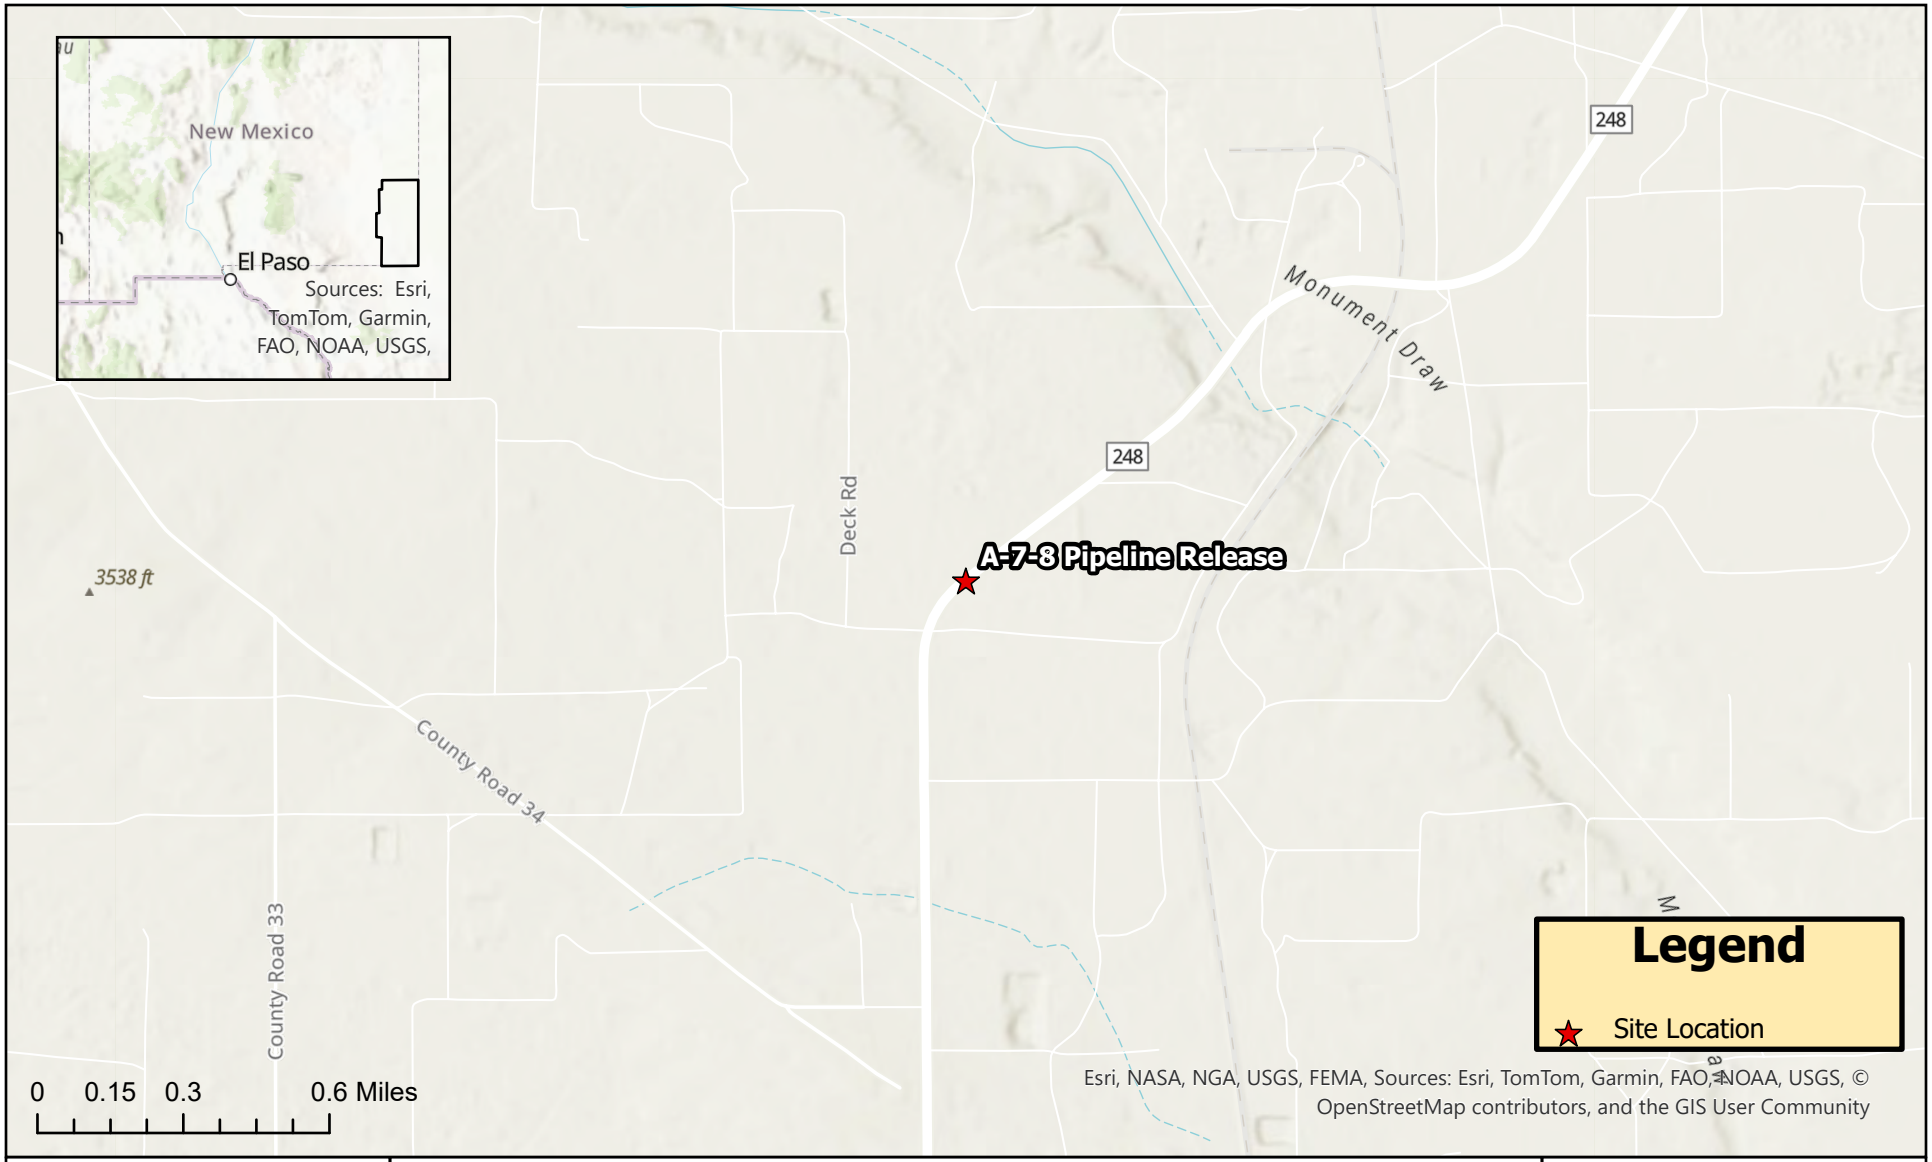


A-7-8 PIPELINE RELEASE
ET GATHERING & PROCESSING, LLC

Figure 2. (Topographic Map)
Release Date: 01/06/2026
Lea County, New Mexico

01/19/2026

Coordinates: 32.4948084,-103.1582952

N

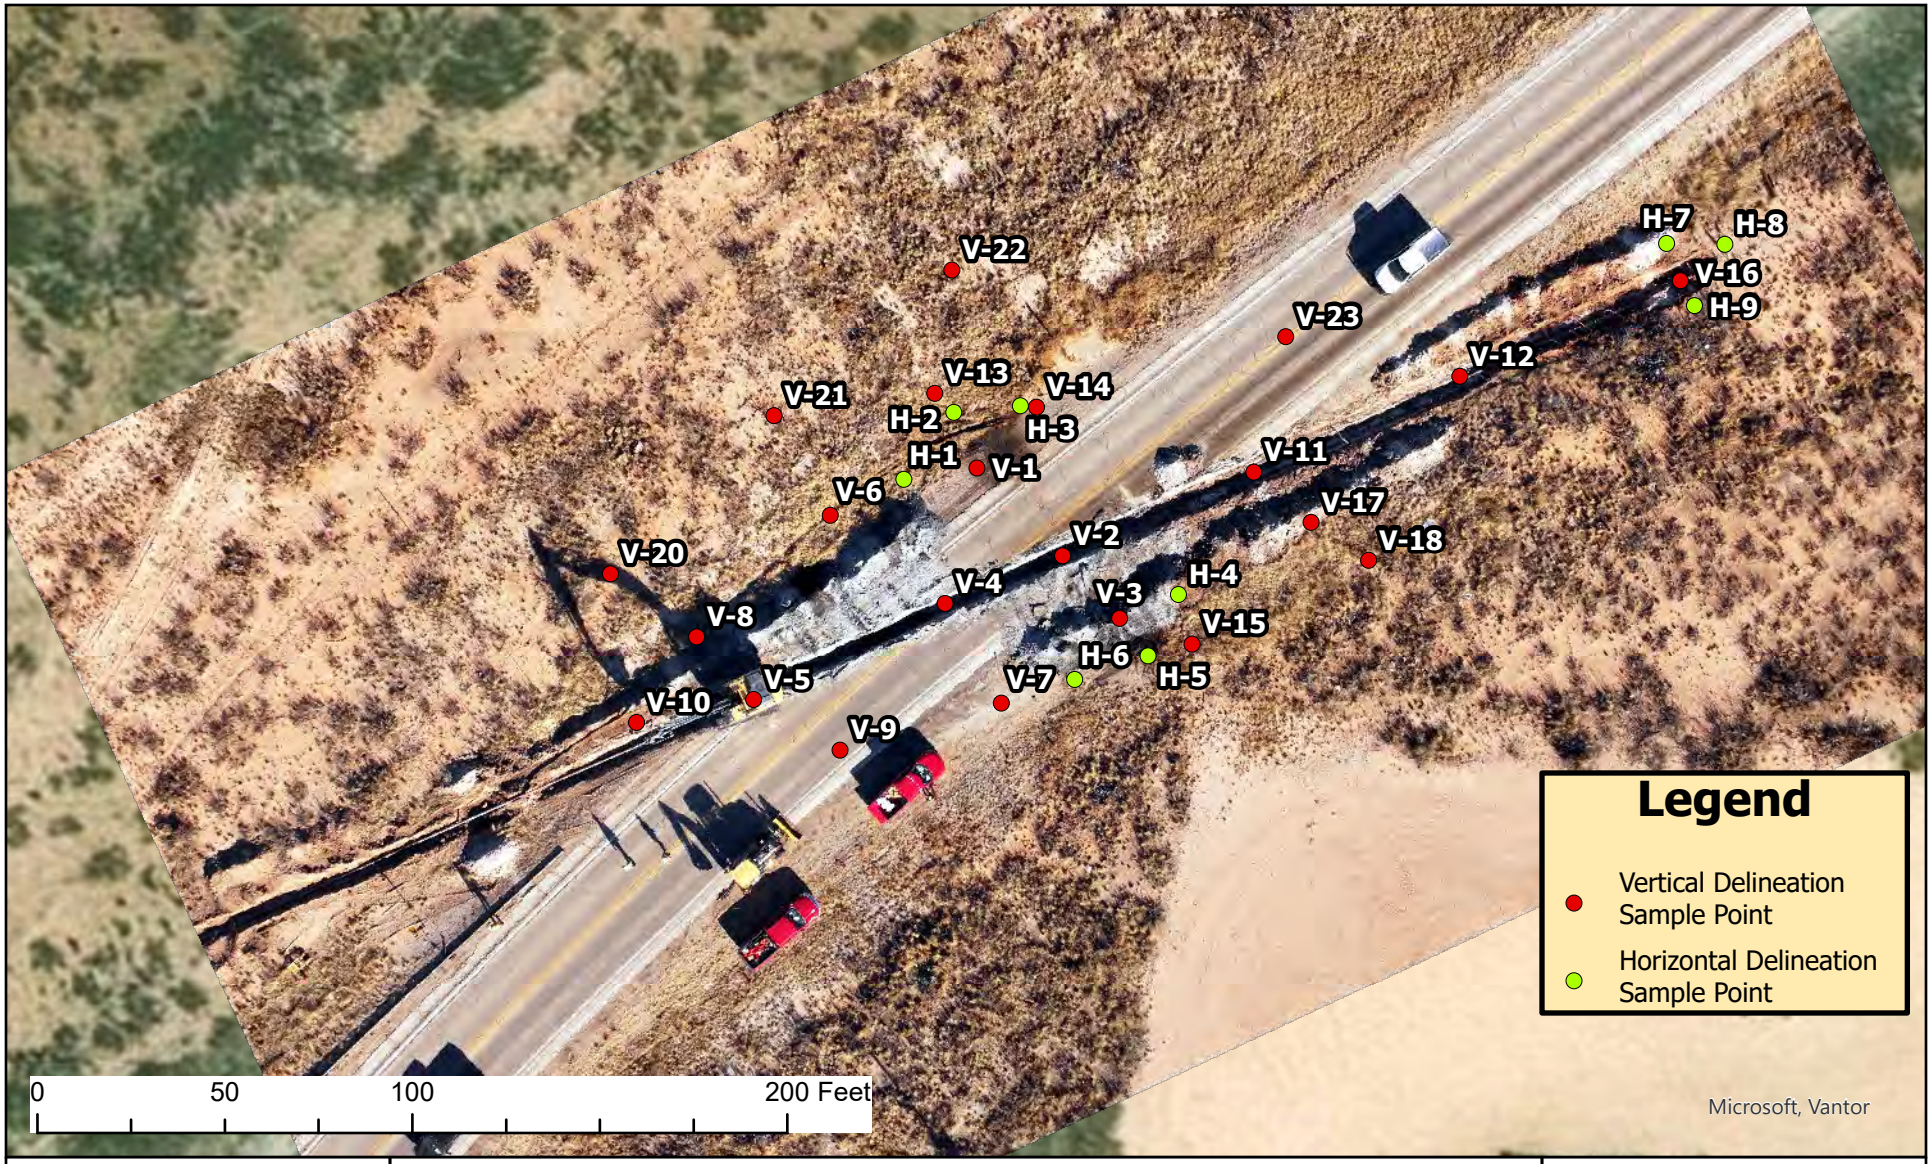


A-7-8 PIPELINE RELEASE
ET GATHERING & PROCESSING, LLC

Figure 3. (Delineation Map)
Release Date: 01/06/2026
Lea County, New Mexico

01/19/2026

Coordinates: 32.4948084,-103.1582952

N

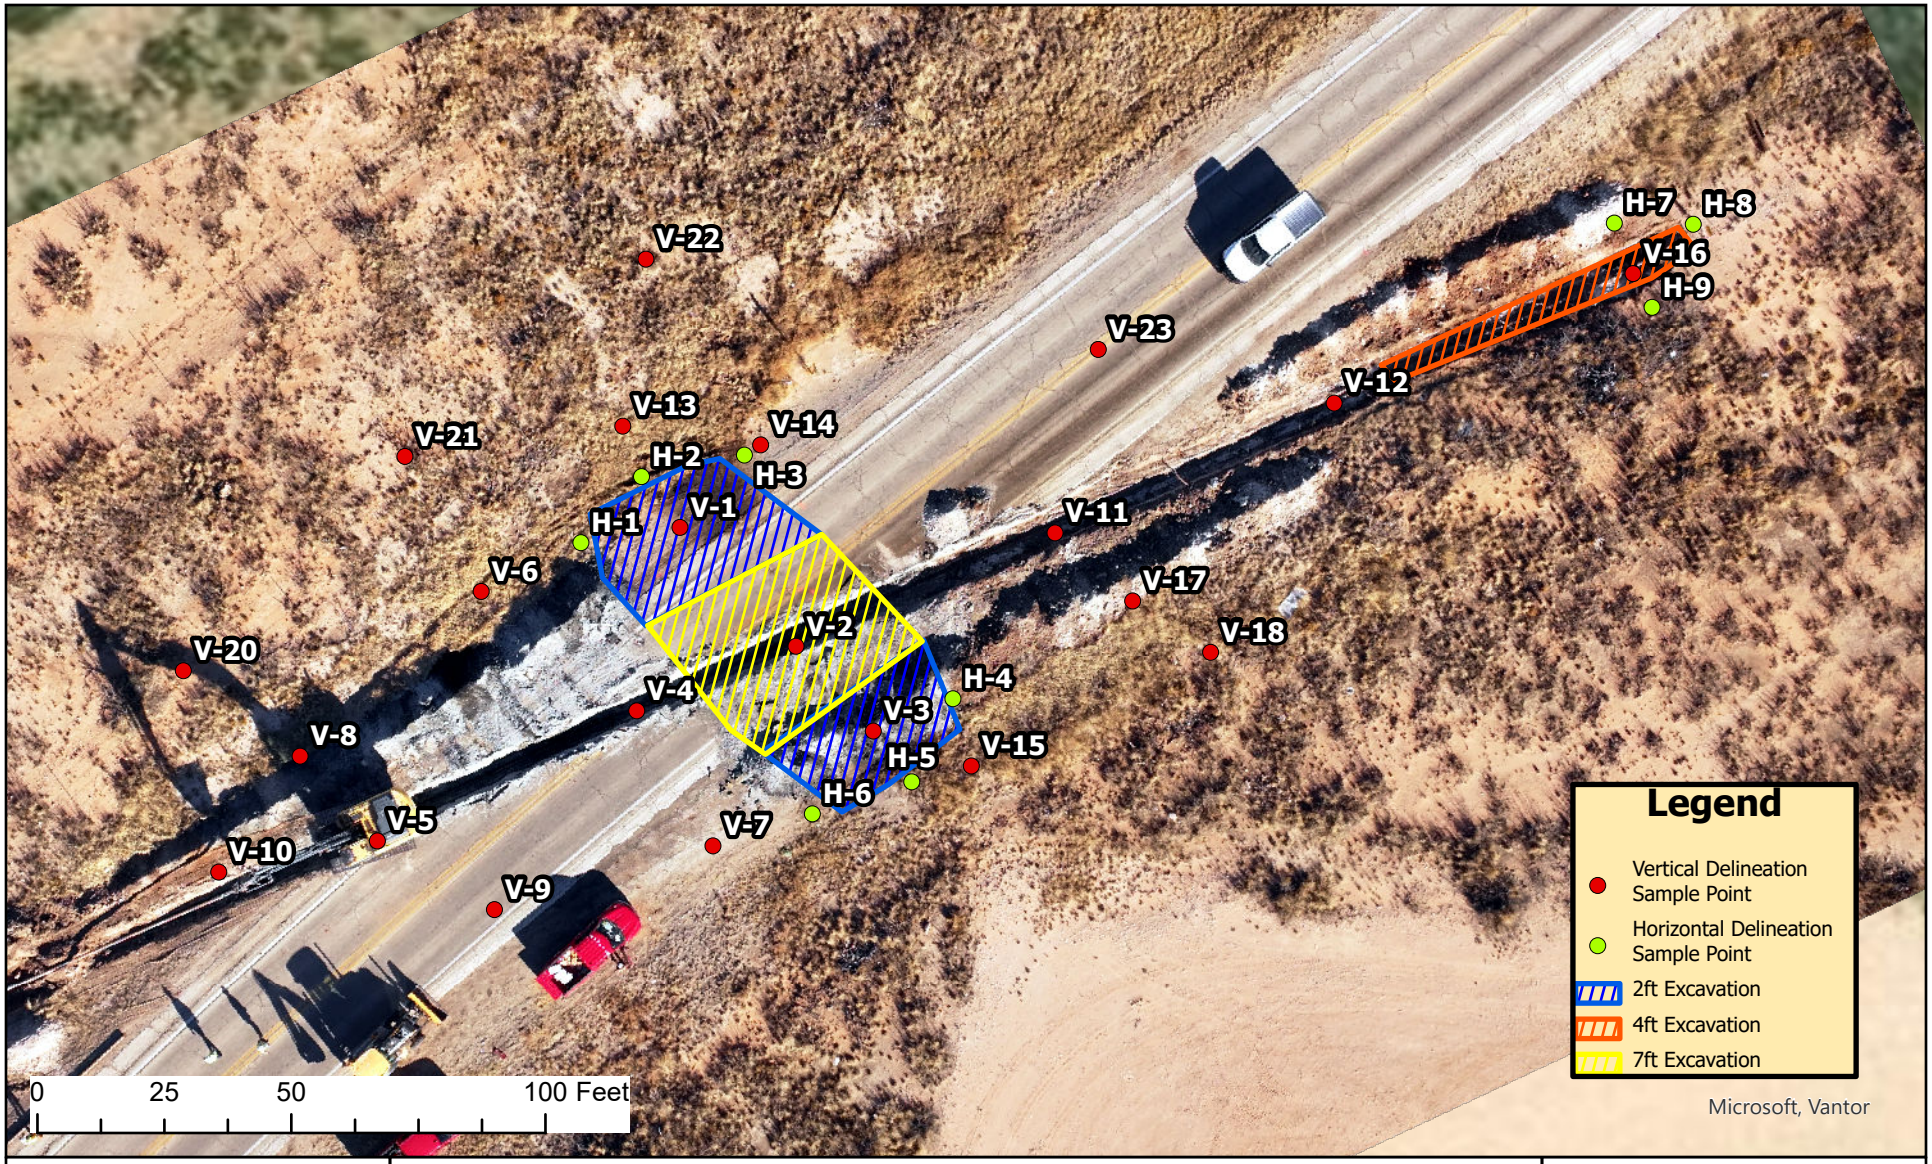

STANDARD SAFETY & SUPPLY

A-7-8 PIPELINE RELEASE
ET GATHERING & PROCESSING, LLC

Figure 4. (Proposed Excavation Map)
Release Date: 01/06/2026
Lea County, New Mexico

01/20/2026

Coordinates: 32.4948084,-103.1582952


N

Proposed Excavation Map

Energy Transfer
Line A-7-8 Pipeline Release
Lea County, New Mexico
32.4948363369, -103.158303725

Area of Yellow: 1,025 sqft x 7ft ~ 266 CY
Area of Blue: 1,238 sqft x 2ft ~ 92 CY
Area of Orange: 300 sqft x 4ft ~ 45 CY
Total Excavated Volume: 403 CY
Total Excavated Volume w/20% Fluff ~ 484 CY

sqft - square feet
CY - Cubic Yard

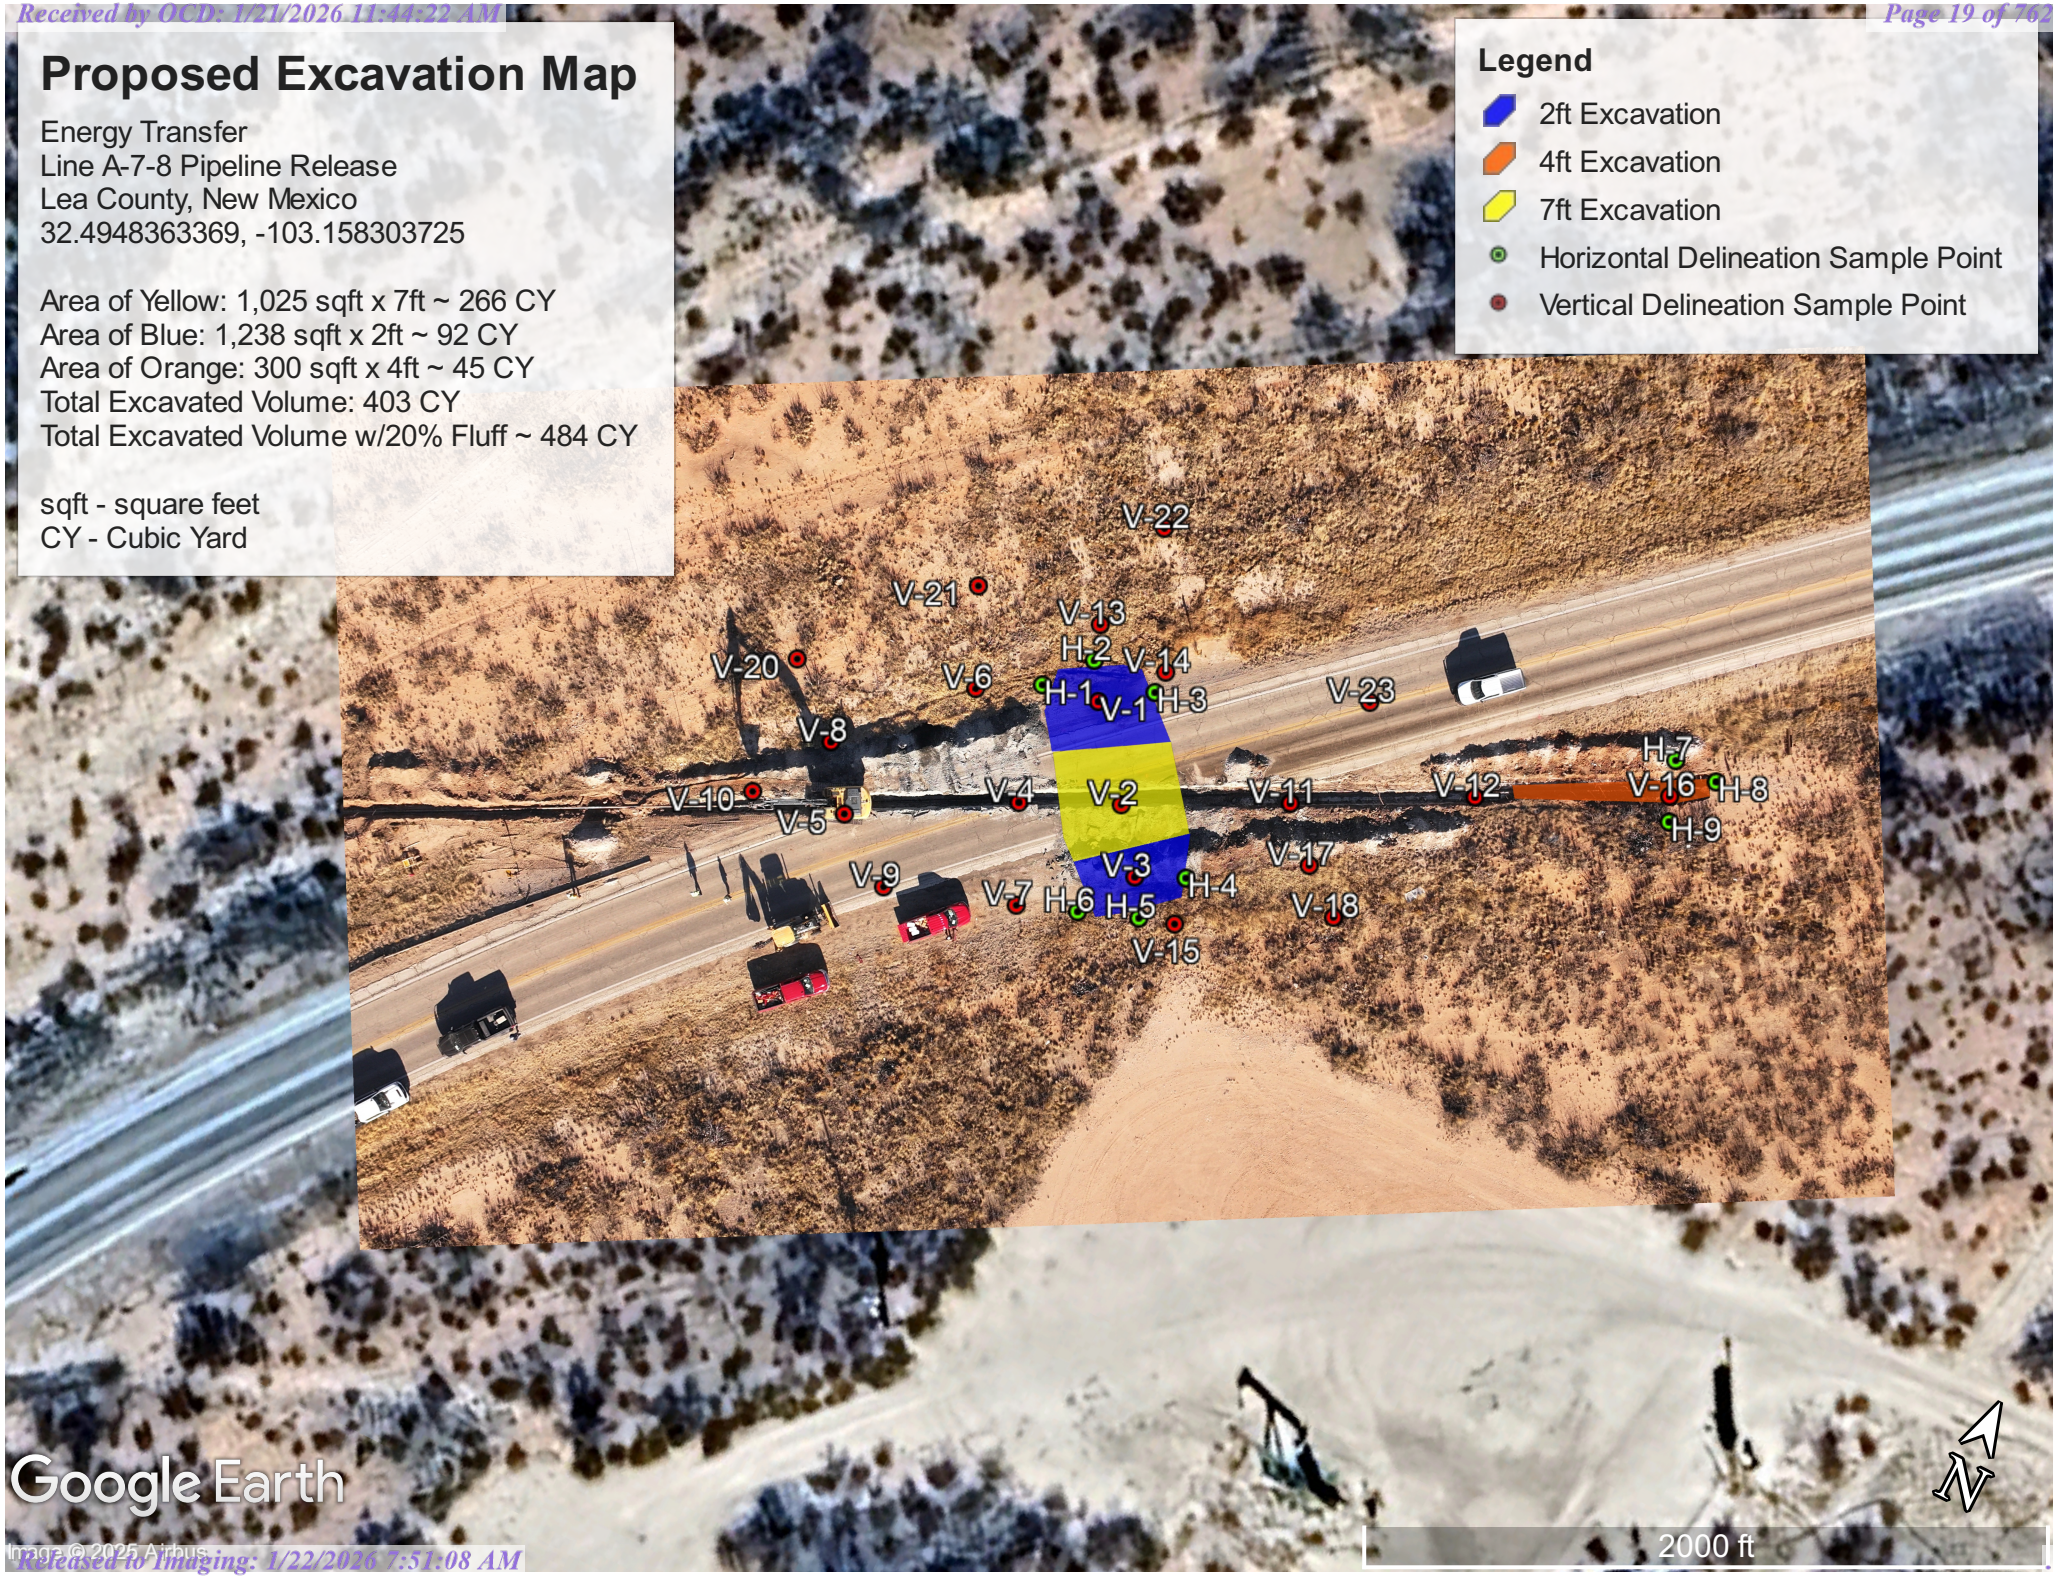

ATTACHMENT C: SITE CHARACTERIZATION

OCD Well Locations



1/9/2026, 2:21:29 PM

Wells - Large Scale

- Oil, Plugged
- Oil, Active
- Oil, Cancelled

Karst Occurrence Potential

- Low

- PLSS Second Division
- PLSS First Division

1:2,257

0 0.02 0.04 0.09 mi

0 0.04 0.07 0.15 km

BLM, OCD, New Mexico Tech, Microsoft, Vantor, OCD, BLM

New Mexico Oil Conservation Division

Received by OCD: 1/21/2026 11:44:22 AM

- POD Locations
- Open Data
- NMWRRS
- Real Time Measurements
- Acequias
- Plant List
- MRGCD Data Viewer
- Water Data
- Drought
- Aquifer Test Index
- RGIS

Released to Imaging: 1/22/2026 7:51:08 AM

Find address or place

Length 3.204 miles
Area 0.81629 square miles

State Highway 248
Dock Rd
County Road 34
248
18

Vantor | clitzpatrick, mhoe@ucc.on.ca | ESRI, US Census | Esri, Esri Canada, Statistics Canada, Canada Post | Esri Community Maps Contributors, New Mexico State University, Texas Parks & Wildl... Powered by Esri

WELL RECORD & LOG

OFFICE OF THE STATE ENGINEER

www.ose.state.nm.us

1. GENERAL AND WELL LOCATION

OSE POD NO. (WELL NO.)	WELL TAG ID NO.	OSE FILE NO(S).
Pod 1		CP-02104

WELL OWNER NAME(S)	PHONE (OPTIONAL)
ET-S Permian Holdings Co. LP	(432) 238-2142

WELL OWNER MAILING ADDRESS	CITY	STATE	ZIP
303 Veterans Airpark Lane, Suite 5000	Midland	TX	79705

WELL LOCATION (FROM GPS)		DEGREES	MINUTES	SECONDS	
	LATITUDE	32	29	36.6	N
	LONGITUDE	103	09	41.2	W

* ACCURACY REQUIRED: ONE TENTH OF A SECOND
* DATUM REQUIRED: WGS 84

DESCRIPTION RELATING WELL LOCATION TO STREET ADDRESS AND COMMON LANDMARKS – PLSS (SECTION, TOWNSHJIP, RANGE) WHERE AVAILABLE

S9 T21s R37e

2. DRILLING & CASING INFORMATION

LICENSE NO.	NAME OF LICENSED DRILLER	NAME OF WELL DRILLING COMPANY
WD-1862	James Hawley	H&R Enterprises, LLC

DRILLING STARTED	DRILLING ENDED	DEPTH OF COMPLETED WELL (FT)	BORE HOLE DEPTH (FT)	DEPTH WATER FIRST ENCOUNTERED (FT)
1-12-26	1-12-26	55'	55'	N/A

COMPLETED WELL IS: ☐ ARTESIAN *add Centralizer info below ☑ DRY HOLE ☐ SHALLOW (UNCONFINED)

STATIC WATER LEVEL IN COMPLETED WELL (FT): N/A

DATE STATIC MEASURED: 1-20-26

DRILLING FLUID: ☑ AIR ☐ MUD ADDITIVES – SPECIFY:

DRILLING METHOD: ☑ ROTARY ☐ HAMMER ☐ CABLE TOOL ☐ OTHER – SPECIFY:

CHECK HERE IF PITLESS ADAPTER IS INSTALLED ☐

DEPTH (feet bgl) FROM	DEPTH (feet bgl) TO	BORE HOLE DIAM (inches)	CASING MATERIAL AND/OR GRADE (include each casing string, and note sections of screen)	CASING CONNECTION TYPE (add coupling diameter)	CASING INSIDE DIAM. (inches)	CASING WALL THICKNESS (inches)	SLOT SIZE (inches)
0'	55'	6'	No casing left in hole				

3. ANNULAR MATERIAL

DEPTH (feet bgl) FROM	DEPTH (feet bgl) TO	BORE HOLE DIAM. (inches)	LIST ANNULAR SEAL MATERIAL AND GRAVEL PACK SIZE-RANGE BY INTERVAL *(if using Centralizers for Artesian wells- indicate the spacing below)	AMOUNT (cubic feet)	METHOD OF PLACEMENT
			N/A		

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 09/22/2022)

FILE NO.	POD NO.	TRN NO.
LOCATION	WELL TAG ID NO.	PAGE 1 OF 2

4. HYDROGEOLOGIC LOG OF WELL

DEPTH (feet bgl) FROM	DEPTH (feet bgl) TO	THICKNESS (feet)	COLOR AND TYPE OF MATERIAL ENCOUNTERED - INCLUDE WATER-BEARING CAVITIES OR FRACTURE ZONES **(attach supplemental sheets to fully describe all units)**	WATER BEARING? (YES / NO)	ESTIMATED YIELD FOR WATER-BEARING ZONES (gpm)
0'	5'	5'	Caliche	Y ✓ N	
5'	15'	10'	Sand	Y ✓ N	
15'	30'	15'	Sandy Caliche	Y ✓ N	
30'	55'	25'	Sand	Y ✓ N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	

METHOD USED TO ESTIMATE YIELD OF WATER-BEARING STRATA:

☐ PUMP ☐ AIR LIFT ☐ BAILER ☑ OTHER – SPECIFY: DTGW Bore

TOTAL ESTIMATED WELL YIELD (gpm): 0.00

5. TEST; RIG SUPERVISION

WELL TEST — TEST RESULTS - ATTACH A COPY OF DATA COLLECTED DURING WELL TESTING, INCLUDING DISCHARGE METHOD, START TIME, END TIME, AND A TABLE SHOWING DISCHARGE AND DRAWDOWN OVER THE TESTING PERIOD.

MISCELLANEOUS INFORMATION: Depth to groundwater bore was gauged for water on 1-20-26 at the ETC A-7-8 Remediation site. DTGW bore was dry. Temporary well casing was removed, bore hole was backfilled with drill cuttings to 10' BGS. Hydrated Bentonite Hole Plug was poured from 10' BGS to surface.

PRINT NAME(S) OF DRILL RIG SUPERVISOR(S) THAT PROVIDED ONSITE SUPERVISION OF WELL CONSTRUCTION OTHER THAN LICENSEE:

Nathan Smelcer

6. SIGNATURE

THE UNDERSIGNED HEREBY CERTIFIES THAT, TO THE BEST OF HIS OR HER KNOWLEDGE AND BELIEF, THE FOREGOING IS A TRUE AND CORRECT RECORD OF THE ABOVE DESCRIBED HOLE AND THAT HE OR SHE WILL FILE THIS WELL RECORD WITH THE STATE ENGINEER AND THE PERMIT HOLDER WITHIN 30 DAYS AFTER COMPLETION OF WELL DRILLING:

James Hawley — 1-20-26

SIGNATURE OF DRILLER / PRINT SIGNEE NAME — DATE

FOR OSE INTERNAL USE — WR-20 WELL RECORD & LOG (Version 09/22/2022)

FILE NO.	POD NO.	TRN NO.
LOCATION	WELL TAG ID NO.	PAGE 2 OF 2

PLUGGING RECORD

NOTE: A Well Plugging Plan of Operations shall be approved by the State Engineer prior to plugging - 19.27.4 NMAC

I. GENERAL / WELL OWNERSHIP:

State Engineer Well Number: CP-02104 Pod 1

Well owner: ET-S Permian Holdings Co. LP Phone No.:

Mailing address: 303 Veterans Airpark Lane, Suite 5000

City: Midland State: TX Zip code: 79705

II. WELL PLUGGING INFORMATION:

1) Name of well drilling company that plugged well: H&R Enterprises, LLC

2) New Mexico Well Driller License No.: WD-1862 Expiration Date: 6/16/27

3) Well plugging activities were supervised by the following well driller(s)/rig supervisor(s):
Nathan Smelcer

4) Date well plugging began: 1-20-26 Date well plugging concluded: 1-20-26

5) GPS Well Location: Latitude: 32 deg, 29 min, 36.6 sec
Longitude: 103 deg, 09 min, 41.2 sec, WGS 84

6) Depth of well confirmed at initiation of plugging as: 55 ft below ground level (bgl),
by the following manner: well sounder

7) Static water level measured at initiation of plugging: Dry ft bgl

8) Date well plugging plan of operations was approved by the State Engineer: 1/15/26

9) Were all plugging activities consistent with an approved plugging plan? Yes If not, please describe differences between the approved plugging plan and the well as it was plugged (attach additional pages as needed):

10) Log of Plugging Activities - Label vertical scale with depths, and indicate separate plugging intervals with horizontal lines as necessary to illustrate material or methodology changes. Attach additional pages if necessary.

For each interval plugged, describe within the following columns:

Depth (ft bgl)	Plugging Material Used (include any additives used)	Volume of Material Placed (gallons)	Theoretical Volume of Borehole/ Casing (gallons)	Placement Method (tremie pipe, other)	Comments ("casing perforated first", "open annular space also plugged", etc.)
	0' - 10' Hydrated Bentonite	Approx. 15 gallons	15 gallons	Pour	
	10' - 55' Drill Cuttings	Approx. 67 gallons	67 gallons	Pour	

MULTIPLY		BY		AND OBTAIN
cubic feet	x	7.4805	=	gallons
cubic yards	x	201.97	=	gallons

III. SIGNATURE:

I, James Hawley, say that I am familiar with the rules of the Office of the State Engineer pertaining to the plugging of wells and that each and all of the statements in this Plugging Record and attachments are true to the best of my knowledge and belief.

Signature of Well Driller — Date: 1/20/26

Version: September 8, 2009
Page 2 of 2

Help Using this Tool

Legend | Basemap | Query

Legend

All Layers On/Off

All Layer Transparency

NM Wetlands Mapping and Classification

NM Wetlands Mapping and Classification

Mapping Status

Riparian Habitat

Hydrogeomorphic Mapping (HGM) Linears

- Riverine

Hydrogeomorphic Mapping (HGM) Polygons

- Depressional
- Flats
- Lacustrine Fringe
- Riverine
- Slope

Landscape Position and Water Body (LLWW) Linears

- Lentic (LE)
- Lotic RIver (LR)
- Lotic Stream (LS)
- Pond (PD)
- River (RV)
- Stream (ST)
- Terrene (TE)


Landscape Position and Water Body (LLWW) Polygons

- Lentic (LE)
- Lake (LK)
- Lotic River (LR)
- Lotic Stream (LS)
- Pond (PD)
- River (RV)
- Stream (ST)
- Terrene (TE)

Landform (LLWW)

- Basin
- Flat
- Floodplain

1:9,028

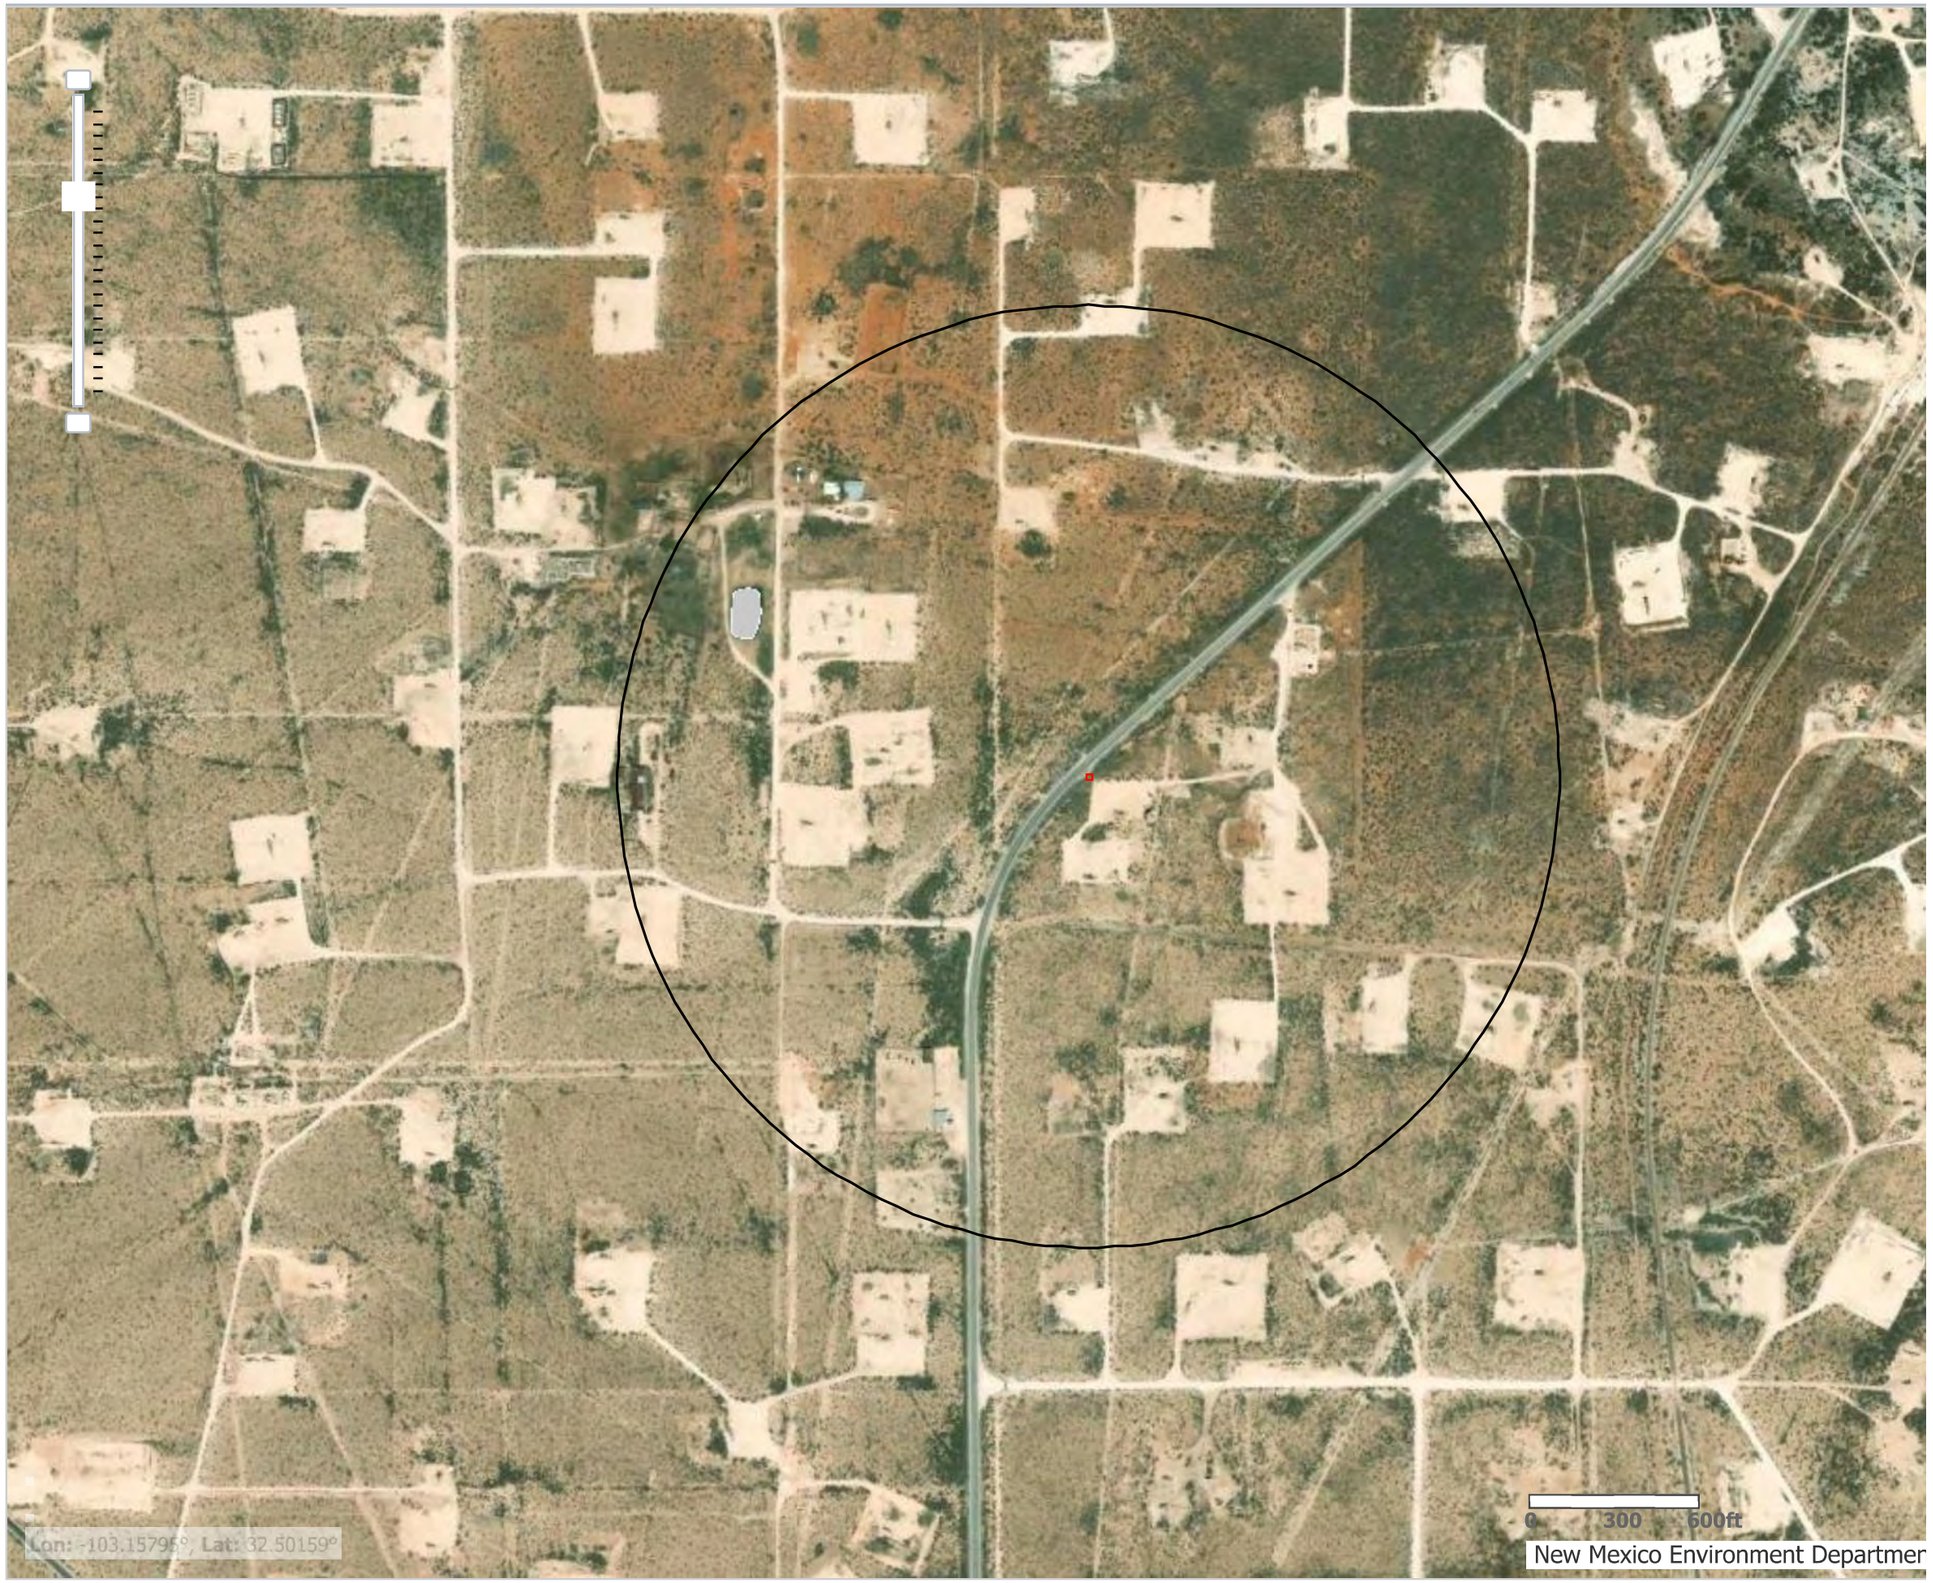

Received by OCD: 1/21/2026 11:44:22 AM

National Flood Hazard Layer FIRMette

FEMA

103°9'49"W 32°29'56"N



103°9'11"W 32°29'26"N

0 250 500 1,000 1,500 2,000 Feet

1:6,000

Basemap Imagery Source: USGS National Map 2023

Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

SPECIAL FLOOD HAZARD AREAS
- Without Base Flood Elevation (BFE) *Zone A, V, A99*
- With BFE or Depth *Zone AE, AO, AH, VE, AR*
- Regulatory Floodway

OTHER AREAS OF FLOOD HAZARD
- 0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile *Zone X*
- Future Conditions 1% Annual Chance Flood Hazard *Zone X*
- Area with Reduced Flood Risk due to Levee. See Notes. *Zone X*
- Area with Flood Risk due to Levee *Zone D*

OTHER AREAS
- NO SCREEN Area of Minimal Flood Hazard *Zone X*
- Effective LOMRs
- Area of Undetermined Flood Hazard *Zone D*

GENERAL STRUCTURES
- Channel, Culvert, or Storm Sewer
- Levee, Dike, or Floodwall

OTHER FEATURES
- 20.2 Cross Sections with 1% Annual Chance
- 17.5 Water Surface Elevation
- Coastal Transect
- Base Flood Elevation Line (BFE)
- Limit of Study
- Jurisdiction Boundary
- Coastal Transect Baseline
- Profile Baseline
- Hydrographic Feature

MAP PANELS
- Digital Data Available
- No Digital Data Available
- Unmapped

N

The pin displayed on the map is an approximate point selected by the user and does not represent an authoritative property location.

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on 1/9/2026 at 9:18 PM and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.


This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.

Released to Imaging: 1/22/2026 7:51:08 AM

Received by OCD: 1/21/2026 11:44:22 AM

U.S. Fish and Wildlife Service
National Wetlands Inventory

Highway Release Line A-7-8

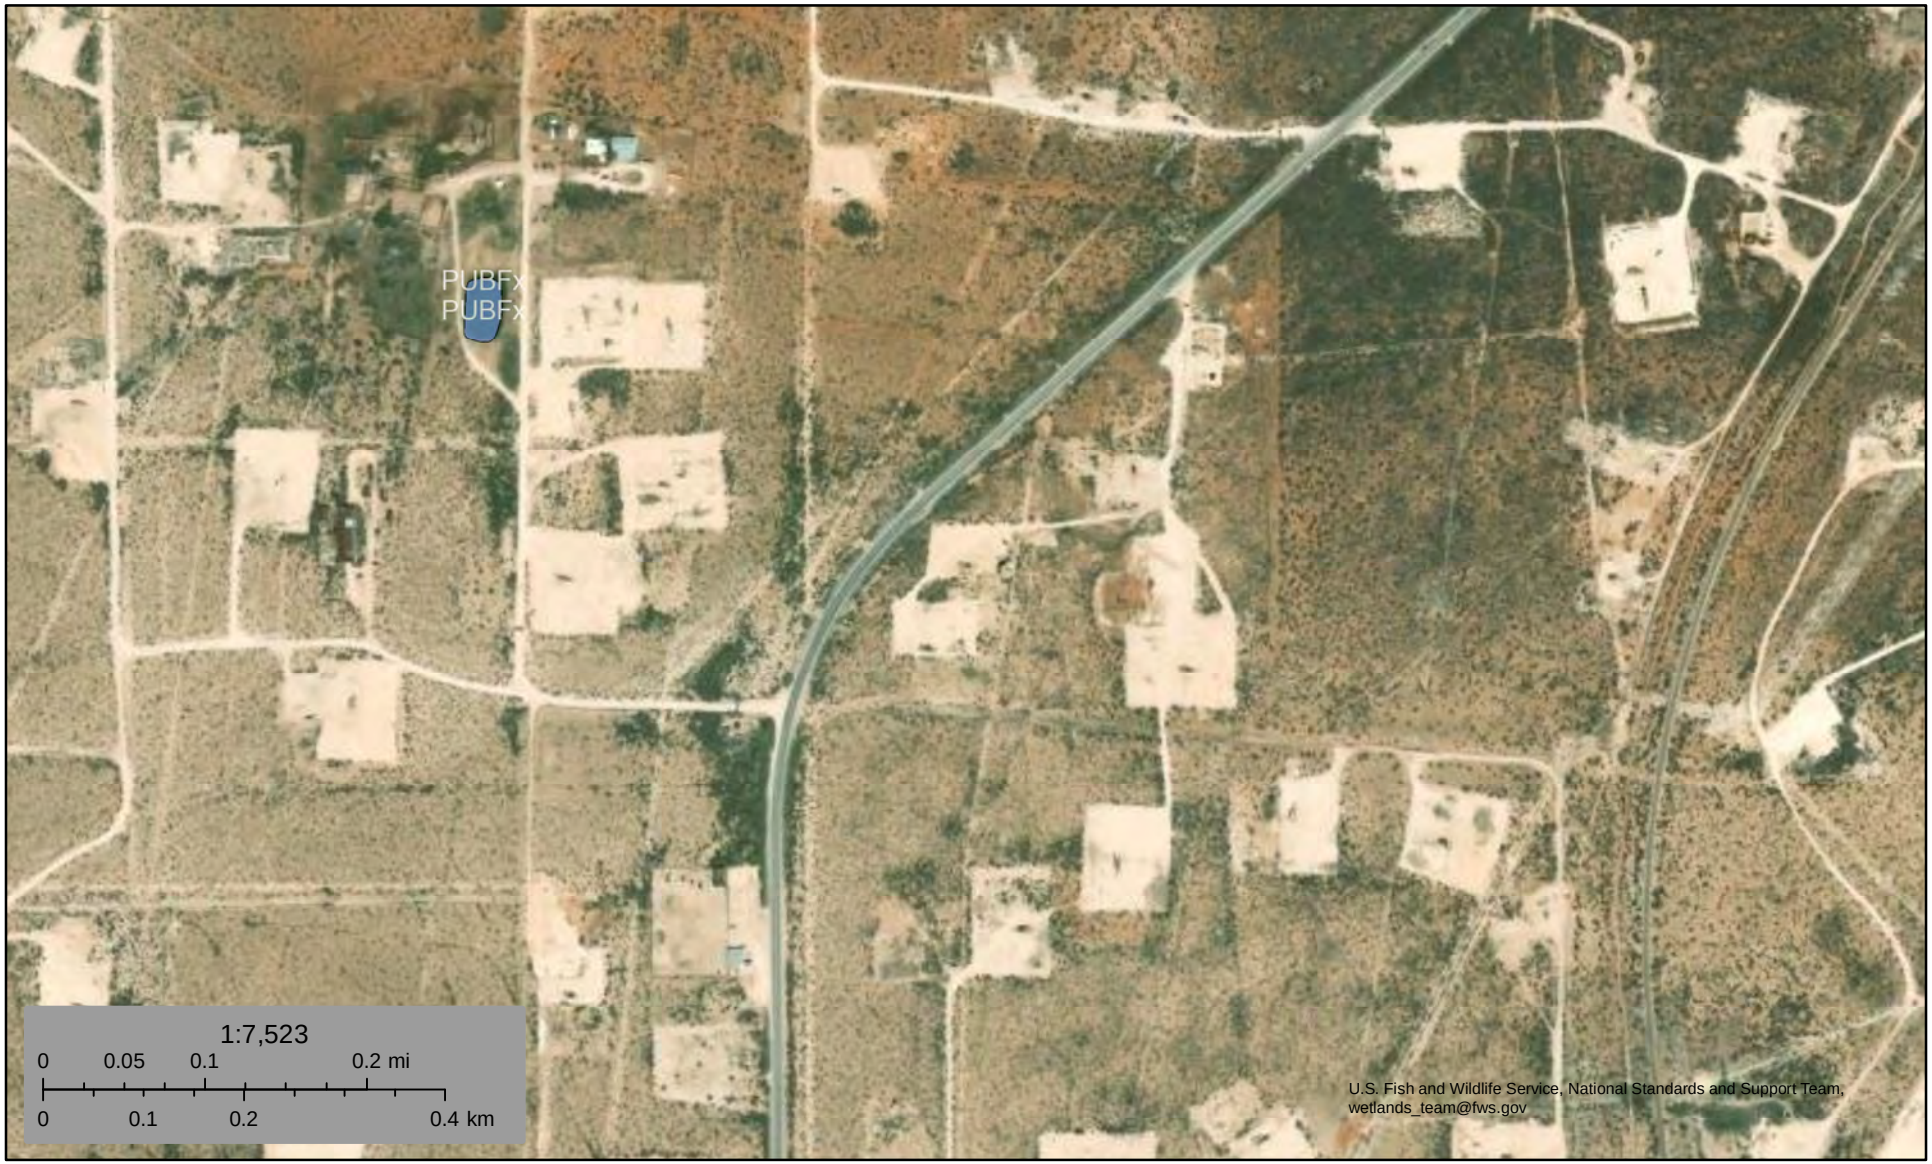

January 9, 2026

Wetlands

- Estuarine and Marine Deepwater
- Estuarine and Marine Wetland
- Freshwater Emergent Wetland
- Freshwater Forested/Shrub Wetland
- Freshwater Pond
- Lake
- Other
- Riverine

This map is for general reference only. The US Fish and Wildlife Service is not responsible for the accuracy or currentness of the base data shown on this map. All wetlands related data should be used in accordance with the layer metadata found on the Wetlands Mapper web site.

National Wetlands Inventory (NWI)
This page was produced by the NWI mapper

Released to Imaging: 1/22/2026 7:51:08 AM

ATTACHMENT D: PHOTOGRAPHIC DOCUMENTATION

Before Photo



Aerial Imagery of Area of Concern



Area of Concern

Before Photo



Area of Concern



Area of Concern

Before Photo




Area of Concern




Area of Concern

Before Photo

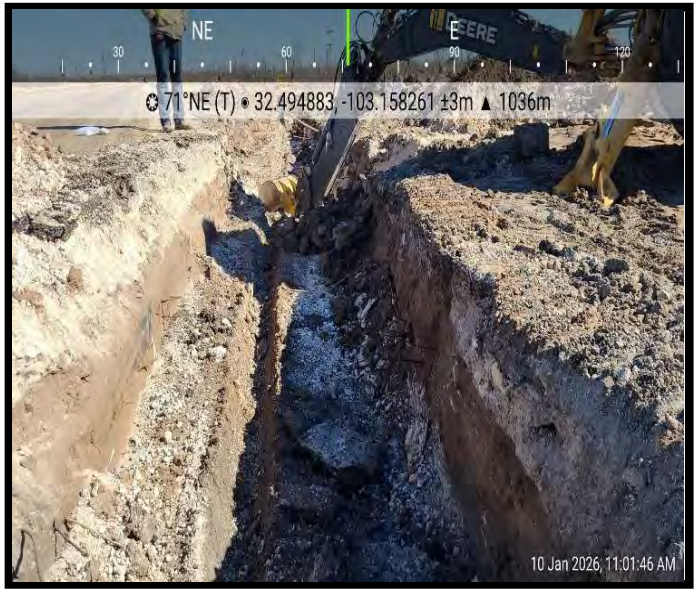

Area of Concern

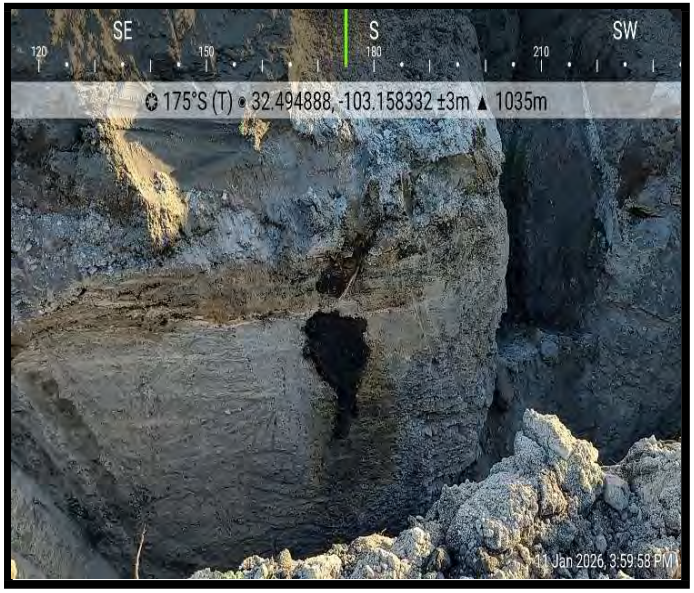

Area of Concern

ATTACHMENT E: LABORATORY ANALYTICAL METHOD WITH CHAIN-OF-CUSTODY

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 14, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/13/26 12:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 4 (H260194-01)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**68.6**	2.00	01/14/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	**240**	2.00	01/14/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	**113**	2.00	01/14/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	**229**	6.00	01/14/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	**651**	12.0	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**3160**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF S-06

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**7710**	100	01/13/2026	ND	208	104	200	0.576	
DRO >C10-C28*	**11800**	100	01/13/2026	ND	193	96.6	200	3.22	
EXT DRO >C28-C36	**1320**	100	01/13/2026	ND					

Surrogate: 1-Chlorooctane *453 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *182 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 5 (H260194-02)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**3.01**	0.500	01/14/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	**18.4**	0.500	01/14/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	**14.4**	0.500	01/14/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	**32.0**	1.50	01/14/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	**67.8**	3.00	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**384**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**368**	10.0	01/14/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	**965**	10.0	01/14/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	**162**	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *108 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *114 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 10 (H260194-07)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.053**	0.050	01/14/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	**0.167**	0.050	01/14/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	**0.092**	0.050	01/14/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	**0.234**	0.150	01/14/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	**0.547**	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	**70.9**	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	**13.7**	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/11/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 15 (H260194-12)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *102 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	**12.2**	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 20 (H260194-17)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 25 (H260194-22)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *102 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**176**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *88.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 30 (H260194-27)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *84.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 35 (H260194-32)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *109 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 40 (H260194-37)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 4 (H260194-38)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**208**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *95.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *98.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 5 (H260194-39)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *98.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 10 (H260194-44)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *103 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *84.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 15 (H260194-49)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *97.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 20 (H260194-54)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *105 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *93.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 25 (H260194-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *99.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *104 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 30 (H260194-64)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *93.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 35 (H260194-69)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *103 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *97.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 40 (H260194-74)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-5 4 (H260194-75)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *106 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	**41.8**	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *91.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-5 5 (H260194-76)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *105 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-5 10 (H260194-81)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *106 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**128**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *91.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-5 15 (H260194-86)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *106 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *91.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-06	The recovery of this surrogate is outside control limits due to sample dilution required from high analyte concentration and/or matrix interference's.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 60 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K-all

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°C
Total Containers:	243	Corrected Temperature:	3.6°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-2	4	1/10/2026		S	Grab	1	x	x	x	
2	V-2	5	1/10/2026		S	Grab	1	x	x	x	
3	V-2	6	1/10/2026		S	Grab	1	x	x	x	Hold
4	V-2	7	1/10/2026		S	Grab	1	x	x	x	Hold
5	V-2	8	1/10/2026		S	Grab	1	x	x	x	Hold
	V-2	9	1/10/2026		S	Grab	1	x	x	x	Hold
	V-2	10	1/10/2026		S	Grab	1	x	x	x	
	V-2	11	1/11/2026		S	Grab	1	x	x	x	Hold
	V-2	12	1/11/2026		S	Grab	1	x	x	x	Hold
	V-2	13	1/11/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James	Kenny Ken	1/13/26 1:00	2 Leon	Tamara Wilder	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 61 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c	
Total Containers:	243	Corrected Temperature:	3.6c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-2	14	1/11/2026		S	Grab	1		x	x	x	Kow
12	V-2	15	1/11/2026		S	Grab	1		x	x	x	
13	V-2	16	1/11/2026		S	Grab	1		x	x	x	Kow
14	V-2	17	1/11/2026		S	Grab	1		x	x	x	Kow
15	V-2	18	1/11/2026		S	Grab	1		x	x	x	Kow
16	V-2	19	1/11/2026		S	Grab	1		x	x	x	Kow
17	V-2	20	1/12/2026		S	Grab	1		x	x	x	
18	V-2	21	1/12/2026		S	Grab	1		x	x	x	Kow
19	V-2	22	1/12/2026		S	Grab	1		x	x	x	Kow
20	V-2	23	1/12/2026		S	Grab	1		x	x	x	Kow

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 62 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5c	
Total Containers:	243	Corrected Temperature:	3.6c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-2	24	1/12/2026		S	Grab	1	x	x	x	Hold
22	V-2	25	1/12/2026		S	Grab	1	x	x	x	
23	V-2	26	1/12/2026		S	Grab	1	x	x	x	Hold
24	V-2	27	1/12/2026		S	Grab	1	x	x	x	Hold
25	V-2	28	1/12/2026		S	Grab	1	x	x	x	Hold
	V-2	29	1/12/2026		S	Grab	1	x	x	x	Hold
	V-2	30	1/12/2026		S	Grab	1	x	x	x	
	V-2	31	1/12/2026		S	Grab	1	x	x	x	Hold
	V-2	32	1/12/2026		S	Grab	1	x	x	x	Hold
	V-2	33	1/12/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2		1-13-26 1500
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 63 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HN: HNO_3; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-2	34	1/12/2026		S	Grab	1	x	x	x	Hold
32	V-2	35	1/12/2026		S	Grab	1	x	x	x	
33	V-2	36	1/12/2026		S	Grab	1	x	x	x	Hold
34	V-2	37	1/12/2026		S	Grab	1	x	x	x	Hold
35	V-2	38	1/12/2026		S	Grab	1	x	x	x	Hold
36	V-2	39	1/12/2026		S	Grab	1	x	x	x	Hold
37	V-2	40	1/12/2026		S	Grab	1	x	x	x	
38	V-4	4	1/10/2026		S	Grab	1	x	x	x	
39	V-4	5	1/10/2026		S	Grab	1	x	x	x	
40	V-4	6	1/10/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James	Kenny Han	1/13/26 11:00	2 Ke	Tamara Latham	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 5 of 25

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°C
Total Containers:	243	Corrected Temperature:	3.6°C

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-4	7	1/10/2026		S	Grab	1	x	x	x	Hold
42	V-4	8	1/10/2026		S	Grab	1	x	x	x	Hold
43	V-4	9	1/10/2026		S	Grab	1	x	x	x	Hold
44	V-4	10	1/10/2026		S	Grab	1	x	x	x	
45	V-4	11	1/11/2026		S	Grab	1	x	x	x	Hold
46	V-4	12	1/11/2026		S	Grab	1	x	x	x	Hold
47	V-4	13	1/11/2026		S	Grab	1	x	x	x	Hold
48	V-4	14	1/11/2026		S	Grab	1	x	x	x	Hold
49	V-4	15	1/12/2026		S	Grab	1	x	x	x	
50	V-4	16	1/12/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2	Tamara Wallace	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 6 of 25

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°c
Total Containers:	243	Corrected Temperature:	3.6°c

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-4	17	1/12/2026		S	Grab	1	x	x	x	Hold
52	V-4	18	1/12/2026		S	Grab	1	x	x	x	Hold
53	V-4	19	1/12/2026		S	Grab	1	x	x	x	Hold
54	V-4	20	1/12/2026		S	Grab	1	x	x	x	
55	V-4	21	1/12/2026		S	Grab	1	x	x	x	Hold
56	V-4	22	1/12/2026		S	Grab	1	x	x	x	Hold
57	V-4	23	1/12/2026		S	Grab	1	x	x	x	Hold
58	V-4	24	1/12/2026		S	Grab	1	x	x	x	Hold
59	V-4	25	1/12/2026		S	Grab	1	x	x	x	
60	V-4	26	1/12/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2		1-13-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:34:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#146
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-4	27	1/12/2026		S	Grab	1	x	x	x	Hold
62	V-4	28	1/12/2026		S	Grab	1	x	x	x	Hold
63	V-4	29	1/12/2026		S	Grab	1	x	x	x	Hold
64	V-4	30	1/12/2026		S	Grab	1	x	x	x	
65	V-4	31	1/12/2026		S	Grab	1	x	x	x	Hold
66	V-4	32	1/12/2026		S	Grab	1	x	x	x	Hold
67	V-4	33	1/12/2026		S	Grab	1	x	x	x	Hold
68	V-4	34	1/12/2026		S	Grab	1	x	x	x	Hold
69	V-4	35	1/12/2026		S	Grab	1	x	x	x	
70	V-4	36	1/12/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00am	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:34:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H2601924

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 8 of 25

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

#78- NO sample.
SRodriguez
1-13-26

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-4	37	1/12/2026		S	Grab	1	x	x	x	Hold
72	V-4	38	1/12/2026		S	Grab	1	x	x	x	Hold
73	V-4	39	1/12/2026		S	Grab	1	x	x	x	Hold
74	V-4	40	1/12/2026		S	Grab	1	x	x	x	
75	V-5	4	1/10/2026		S	Grab	1	x	x	x	~~Hold~~ ICH 1/13/26
76	V-5	5	1/10/2026		S	Grab	1	x	x	x	
77	V-5	6	1/10/2026		S	Grab	1	x	x	x	Hold
78	~~V-5~~	~~7~~	~~1/10/2026~~		~~S~~	~~Grab~~	~~1~~	~~x~~	~~x~~	~~x~~	NO SAMPLE! Hold
79	V-5	8	1/10/2026		S	Grab	1	x	x	x	Hold
80	V-5	9	1/10/2026		S	Grab	1	x	x	x	Hold

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2	Tamara Maddox	1-13-26 1200
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 9 of 25

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c	
Total Containers:	243	Corrected Temperature:	3.6c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-5	10	1/10/2026		S	Grab	1		x	x	x	
82	V-5	11	1/12/2026		S	Grab	1		x	x	x	H&W
83	V-5	12	1/12/2026		S	Grab	1		x	x	x	↓
84	V-5	13	1/12/2026		S	Grab	1		x	x	x	↓
85	V-5	14	1/12/2026		S	Grab	1		x	x	x	↓
86	V-5	15	1/12/2026		S	Grab	1		x	x	x	↓
87	V-5	16	1/12/2026		S	Grab	1		x	x	x	H&W
88	V-5	17	1/12/2026		S	Grab	1		x	x	x	↓
89	V-5	18	1/12/2026		S	Grab	1		x	x	x	↓
90	V-5	19	1/12/2026		S	Grab	1		x	x	x	↓

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time		Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		Tamara Maldonado	1-13-26 1200
3				4			
5				6			

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 14, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/13/26 12:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 20 (H260195-01)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *107 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**320**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *84.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 25 (H260195-06)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**448**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *99.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 30 (H260195-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *107 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *97.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 35 (H260195-16)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *111 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *115 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 40 (H260195-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *99.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 4 (H260195-22)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	**0.063**	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	**0.068**	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	**0.253**	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	**0.385**	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**128**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	**17.7**	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 5 (H260195-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 10 (H260195-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 15 (H260195-33)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 20 (H260195-38)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	**42.6**	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	**15.1**	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *100 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 25 (H260195-43)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 30 (H260195-48)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	**18.9**	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 35 (H260195-53)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *107 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 40 (H260195-58)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *112 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *115 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 1-2 (H260195-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *95.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 3 (H260195-60)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 4 (H260195-61)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 5 (H260195-62)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 10 (H260195-67)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *104 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 15 (H260195-73)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *88.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 20 (H260195-78)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *94.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 25 (H260195-83)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *78.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *79.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 30 (H260195-88)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *77.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 94 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

04024011 - acd

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
V-5	20	1/12/2026		S	Grab	1	x	x	x	
V-5	21	1/12/2026		S	Grab	1	x	x	x	HOLD
V-5	22	1/12/2026		S	Grab	1	x	x	x	
V-5	23	1/12/2026		S	Grab	1	x	x	x	
V-5	24	1/12/2026		S	Grab	1	x	x	x	
V-5	25	1/12/2026		S	Grab	1	x	x	x	
V-5	26	1/12/2026		S	Grab	1	x	x	x	HOLD
V-5	27	1/12/2026		S	Grab	1	x	x	x	
V-5	28	1/12/2026		S	Grab	1	x	x	x	
V-5	29	1/12/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:54:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 11 of 25

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°C	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°C	
Total Containers:	243	Corrected Temperature:	3.6°C	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-5	30	1/12/2026		S	Grab	1	x	x	x	
12	V-5	31	1/12/2026		S	Grab	1	x	x	x	Hold
13	V-5	32	1/12/2026		S	Grab	1	x	x	x	
14	V-5	33	1/12/2026		S	Grab	1	x	x	x	
15	V-5	34	1/12/2026		S	Grab	1	x	x	x	
16	V-5	35	1/12/2026		S	Grab	1	x	x	x	
17	V-5	36	1/12/2026		S	Grab	1	x	x	x	Hold
18	V-5	37	1/12/2026		S	Grab	1	x	x	x	
19	V-5	38	1/12/2026		S	Grab	1	x	x	x	
20	V-5	39	1/12/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:40	2	Tamara Whitaker	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 12 of 25

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°	
Total Containers:	243	Corrected Temperature:	3.6°	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-5	40	1/12/2026		S	Grab	1		x	x	x	
22	V-6	4	1/12/2026		S	Grab	1		x	x	x	
23	V-6	5	1/12/2026		S	Grab	1		x	x	x	
24	V-6	6	1/12/2026		S	Grab	1		x	x	x	Hold
25	V-6	7	1/12/2026		S	Grab	1		x	x	x	"
26	V-6	8	1/12/2026		S	Grab	1		x	x	x	"
27	V-6	9	1/12/2026		S	Grab	1		x	x	x	"
28	V-6	10	1/12/2026		S	Grab	1		x	x	x	
29	V-6	11	1/12/2026		S	Grab	1		x	x	x	Hold
30	V-6	12	1/12/2026		S	Grab	1		x	x	x	"

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°	
Total Containers:	243	Corrected Temperature:	3.6°	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-6	13	1/12/2026		S	Grab	1		x	x	x	Hold
32	V-6	14	1/12/2026		S	Grab	1		x	x	x	↓
33	V-6	15	1/12/2026		S	Grab	1		x	x	x	
34	V-6	16	1/12/2026		S	Grab	1		x	x	x	Hold
35	V-6	17	1/12/2026		S	Grab	1		x	x	x	↓
36	V-6	18	1/12/2026		S	Grab	1		x	x	x	
37	V-6	19	1/12/2026		S	Grab	1		x	x	x	↓
38	V-6	20	1/12/2026		S	Grab	1		x	x	x	
39	V-6	21	1/12/2026		S	Grab	1		x	x	x	Hold
40	V-6	22	1/12/2026		S	Grab	1		x	x	x	↓

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 1120	2		1-13-26 1300
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°c
Total Containers:	243	Corrected Temperature:	3.6°c

Parameters — 1/13/26

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-6	23	1/12/2026		S	Grab	1	x	x	x	Hold
42	V-6	24	1/12/2026		S	Grab	1	x	x	x	↓
43	V-6	25	1/12/2026		S	Grab	1	x	x	x	
44	V-6	26	1/12/2026		S	Grab	1	x	x	x	Hold
45	V-6	27	1/12/2026		S	Grab	1	x	x	x	↓
46	V-6	28	1/12/2026		S	Grab	1	x	x	x	↓
47	V-6	29	1/12/2026		S	Grab	1	x	x	x	↓
48	V-6	30	1/12/2026		S	Grab	1	x	x	x	
49	V-6	31	1/12/2026		S	Grab	1	x	x	x	Hold
50	V-6	32	1/12/2026		S	Grab	1	x	x	x	↓

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		1-13-26 1200
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°C	
Total Containers:	243	Corrected Temperature:	3.6°C	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
S1	V-6	33	1/12/2026		S	Grab	1	x	x	x	H2O
S2	V-6	34	1/12/2026		S	Grab	1	x	x	x	↓
S3	V-6	35	1/12/2026		S	Grab	1	x	x	x	
S4	V-6	36	1/12/2026		S	Grab	1	x	x	x	H2O
S5	V-6	37	1/12/2026		S	Grab	1	x	x	x	↓
S6	V-6	38	1/12/2026		S	Grab	1	x	x	x	
S7	V-6	39	1/12/2026		S	Grab	1	x	x	x	↓
S8	V-6	40	1/12/2026		S	Grab	1	x	x	x	
S9	V-7	1-2	1/12/2026		S	Grab	1	x	x	x	
S10	V-7	3	1/12/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2	Tamara Whitaker	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°C
Total Containers:	243	Corrected Temperature:	3.6°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-7	4	1/12/2026		S	Grab	1	x	x	x	
62	V-7	5	1/12/2026		S	Grab	1	x	x	x	
63	V-7	6	1/12/2026		S	Grab	1	x	x	x	Hold
64	V-7	7	1/12/2026		S	Grab	1	x	x	x	↓
65	V-7	8	1/12/2026		S	Grab	1	x	x	x	↓
4	V-7	9	1/12/2026		S	Grab	1	x	x	x	↓
5	V-7	10	1/12/2026		S	Grab	1	x	x	x	
6	V-7	11	1/12/2026		S	Grab	1	x	x	x	Hold
7	V-7	12	1/12/2026		S	Grab	1	x	x	x	↓
8	V-7	13	1/12/2026		S	Grab	1	x	x	x	↓

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:40	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°C	
Total Containers:	243	Corrected Temperature:	3.6°C	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

ANALYSIS REQUEST

Parameters: BTEX 8012B; TPH 8015M (GRO-DRO-MRO); Chloride 4500 or EPA 300

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-7	13	1/12/2026		S	Grab	1		x	x	x	Hold DUP To: 1/13/26
72	V-7	14	1/12/2026		S	Grab	1		x	x	x	
73	V-7	15	1/12/2026		S	Grab	1		x	x	x	
74	V-7	16	1/12/2026		S	Grab	1		x	x	x	Hold
75	V-7	17	1/12/2026		S	Grab	1		x	x	x	
76	V-7	18	1/12/2026		S	Grab	1		x	x	x	
77	V-7	19	1/12/2026		S	Grab	1		x	x	x	
78	V-7	20	1/12/2026		S	Grab	1		x	x	x	
79	V-7	21	1/12/2026		S	Grab	1		x	x	x	Hold
80	V-7	22	1/12/2026		S	Grab	1		x	x	x	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		1-13-26 1200
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H26019S

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c	
Total Containers:	243	Corrected Temperature:	3.6c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-7	23	1/12/2026		S	Grab	1		x	x	x	Hold
82	V-7	24	1/12/2026		S	Grab	1		x	x	x	↓
83	V-7	25	1/12/2026		S	Grab	1		x	x	x	
84	V-7	26	1/12/2026		S	Grab	1		x	x	x	Hold
85	V-7	27	1/12/2026		S	Grab	1		x	x	x	↓
86	V-7	28	1/12/2026		S	Grab	1		x	x	x	
87	V-7	29	1/12/2026		S	Grab	1		x	x	x	↓
88	V-7	30	1/12/2026		S	Grab	1		x	x	x	
89	V-7	31	1/12/2026		S	Grab	1		x	x	x	Hold
90	V-7	32	1/12/2026		S	Grab	1		x	x	x	↓

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2	Tamara Wilder	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 14, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/13/26 12:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 35 (H260196-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 40 (H260196-08)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *76.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 1 (H260196-09)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	**0.201**	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	**0.336**	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	**1.16**	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	**1.70**	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *85.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**128**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**21.1**	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	**46.6**	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 2 (H260196-10)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 3 (H260196-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 4 (H260196-12)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 5 (H260196-13)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *92.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 10 (H260196-18)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *91.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 15 (H260196-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 20 (H260196-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *104 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 25 (H260196-33)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *97.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 30 (H260196-38)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *112 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 35 (H260196-43)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 40 (H260196-48)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 11 3 (H260196-49)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *90.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 11 4 (H260196-50)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *88.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 11 5 (H260196-51)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *68.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 11 10 (H260196-56)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *79.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 1 (H260196-58)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *62.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *62.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 2 (H260196-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *55.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *55.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 3 (H260196-60)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *71.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *71.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 4 (H260196-61)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *75.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 5 (H260196-62)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *68.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 6 (H260196-63)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	**32.2**	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *79.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *81.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QR-04	The RPD for the BS/BSD was outside of historical limits.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 129 of 762

Page 27 of 33

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K - all

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°c
Total Containers:	243	Corrected Temperature:	3.6°c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-7	33	1/12/2026		S	Grab	1	x	x	x	HSW
2	V-7	34	1/12/2026		S	Grab	1	x	x	x	↓
3	V-7	35	1/12/2026		S	Grab	1	x	x	x	
4	V-7	36	1/12/2026		S	Grab	1	x	x	x	HSW
5	V-7	37	1/12/2026		S	Grab	1	x	x	x	↓
	V-7	38	1/12/2026		S	Grab	1	x	x	x	
	V-7	39	1/12/2026		S	Grab	1	x	x	x	
	V-7	40	1/12/2026		S	Grab	1	x	x	x	
	V-9	1	1/12/2026		S	Grab	1	x	x	x	
	V-9	2	1/12/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2	Tamara Hobbs	1-13-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 130 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-9	3	1/12/2026		S	Grab	1	x	x	x	
12	V-9	4	1/12/2026		S	Grab	1	x	x	x	
13	V-9	5	1/12/2026		S	Grab	1	x	x	x	
14	V-9	6	1/12/2026		S	Grab	1	x	x	x	Hold
15	V-9	7	1/12/2026		S	Grab	1	x	x	x	"
16	V-9	8	1/12/2026		S	Grab	1	x	x	x	"
17	V-9	9	1/12/2026		S	Grab	1	x	x	x	"
18	V-9	10	1/12/2026		S	Grab	1	x	x	x	"
19	V-9	11	1/12/2026		S	Grab	1	x	x	x	Hold
20	V-9	12	1/12/2026		S	Grab	1	x	x	x	"

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2	Tamara Latham	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 131 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
V-9	13	1/12/2026		S	Grab	1		x	x	x	H&W
V-9	14	1/12/2026		S	Grab	1		x	x	x	"
V-9	15	1/12/2026		S	Grab	1		x	x	x	
V-9	16	1/12/2026		S	Grab	1		x	x	x	H&W
V-9	17	1/12/2026		S	Grab	1		x	x	x	"
V-9	18	1/12/2026		S	Grab	1		x	x	x	
V-9	19	1/12/2026		S	Grab	1		x	x	x	
V-9	20	1/12/2026		S	Grab	1		x	x	x	H&W
V-9	21	1/12/2026		S	Grab	1		x	x	x	"
V-9	22	1/12/2026		S	Grab	1		x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2		1-13-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°C	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°C	
Total Containers:	243	Corrected Temperature:	3.6°C	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-9	23	1/12/2026		S	Grab	1		x	x	x	Hold
32	V-9	24	1/12/2026		S	Grab	1		x	x	x	"
33	V-9	25	1/12/2026		S	Grab	1		x	x	x	.
34	V-9	26	1/12/2026		S	Grab	1		x	x	x	Hold
35	V-9	27	1/12/2026		S	Grab	1		x	x	x	"
	V-9	28	1/12/2026		S	Grab	1		x	x	x	"
	V-9	29	1/12/2026		S	Grab	1		x	x	x	"
	V-9	30	1/12/2026		S	Grab	1		x	x	x	.
	V-9	31	1/12/2026		S	Grab	1		x	x	x	Hold
	V-9	32	1/12/2026		S	Grab	1		x	x	x	"

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		1-13-26 1200
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 23 of 25

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-9	33	1/12/2026		S	Grab	1	x	x	x	Hold
42	V-9	34	1/12/2026		S	Grab	1	x	x	x	↓
43	V-9	35	1/12/2026		S	Grab	1	x	x	x	
44	V-9	36	1/12/2026		S	Grab	1	x	x	x	Hold
45	V-9	37	1/12/2026		S	Grab	1	x	x	x	↓
46	V-9	38	1/12/2026		S	Grab	1	x	x	x	
47	V-9	39	1/12/2026		S	Grab	1	x	x	x	
48	V-9	40	1/12/2026		S	Grab	1	x	x	x	
49	V-11	3	1/10/2026		S	Grab	1	x	x	x	
50	V-11	4	1/10/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2		1-13-26 12
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 134 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-11	5	1/10/2026		S	Grab	1	x	x	x	
52	V-11	6	1/10/2026		S	Grab	1	x	x	x	Hold
53	V-11	7	1/10/2026		S	Grab	1	x	x	x	↓
54	V-11	8	1/10/2026		S	Grab	1	x	x	x	
55	V-11	9	1/10/2026		S	Grab	1	x	x	x	
	V-11	10	1/10/2026		S	Grab	1	x	x	x	
	V-11	11	1/10/2026		S	Grab	1	x	x	x	Hold
	H-1		1/10/2026		S	Grab	1	x	x	x	
	H-2		1/10/2026		S	Grab	1	x	x	x	
	H-3		1/10/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 1100	2		1-13-26 12
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	H-4		1/10/2026		S	Grab	1	x	x	x	
62	H-5		1/10/2026		S	Grab	1	x	x	x	
63	H-6		1/10/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 15, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/14/26 13:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 0-0.5 (H260218-01)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	**13.6**	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 1 (H260218-02)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	**28.7**	10.0	01/15/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *118 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 2 (H260218-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 3 (H260218-04)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *87.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 4 (H260218-05)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *90.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 5 (H260218-06)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 10 (H260218-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *94.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 15 (H260218-16)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 20 (H260218-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	QR-03
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	QR-03
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	QR-03
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *90.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 25 (H260218-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *102 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 30 (H260218-31)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 0-0.5' (H260218-32)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *112 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *81.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 1 (H260218-33)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *104 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *89.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 2 (H260218-34)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *84.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *80.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 3 (H260218-35)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	**0.059**	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	**0.192**	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	**10.4**	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *80.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *77.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 4 (H260218-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *84.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *79.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 5 (H260218-37)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	QR-03
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *75.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *71.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 10 (H260218-42)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *71.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *67.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 15 (H260218-47)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *106 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *72.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 20 (H260218-52)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *71.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 25 (H260218-57)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *72.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 30 (H260218-62)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *83.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *77.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 35 (H260218-67)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 40 (H260218-72)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 0-0.5' (H260218-73)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *82.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *75.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 1 (H260218-74)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *83.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *78.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 2 (H260218-75)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *89.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 3 (H260218-76)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *81.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 4 (H260218-77)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *80.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *74.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 5 (H260218-78)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 10 (H260218-83)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *82.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *80.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 15 (H260218-88)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *83.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *81.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QR-03	The RPD value for the sample duplicate or MS/MSD was outside of QC acceptance limits due to matrix interference. QC batch accepted based on LCS and/or LCSD recovery and/or RPD values.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

H24008818

STANDARD SAFETY & SUPPLY

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsn
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

04024401 K - A21

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.4	
Total Containers:		Corrected Temperature:	1.5	

ANALYSIS REQUEST

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-10	0-0.5	1/13/2026		S	Grab	1		X	X	X	
2	V-10	1	1/13/2026		S	Grab	1		X	X	X	
3	V-10	2	1/13/2026		S	Grab	1		X	X	X	
4	V-10	3	1/13/2026		S	Grab	1		X	X	X	
5	V-10	4	1/13/2026		S	Grab	1		X	X	X	
6	V-10	5	1/13/2026		S	Grab	1		X	X	X	
7	V-10	6	1/13/2026		S	Grab	1		X	X	X	H&W
8	V-10	7	1/13/2026		S	Grab	1		X	X	X	
9	V-10	8	1/13/2026		S	Grab	1		X	X	X	
10	V-10	9	1/13/2026		S	Grab	1		X	X	X	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time		Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26 8:00	2			1 14 2026 1300
3				4			
5				6			

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 171 of 762

H240218

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 2 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-10	10	1/13/2026		S	Grab	1	X	X	X	
12	V-10	11	1/13/2026		S	Grab	1	X	X	X	Hold
13	V-10	12	1/13/2026		S	Grab	1	X	X	X	↓
14	V-10	13	1/13/2026		S	Grab	1	X	X	X	
15	V-10	14	1/13/2026		S	Grab	1	X	X	X	
16	V-10	15	1/13/2026		S	Grab	1	X	X	X	
17	V-10	16	1/13/2026		S	Grab	1	X	X	X	Hold
18	V-10	17	1/13/2026		S	Grab	1	X	X	X	
19	V-10	18	1/13/2026		S	Grab	1	X	X	X	↓
20	V-10	19	1/13/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26
			4		1350
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 172 of 762

Page 37 of 43

H200518

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 3 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-10	20	1/13/2026		S	Grab	1	X	X	X	
22	V-10	21	1/13/2026		S	Grab	1	X	X	X	H2O
23	V-10	22	1/13/2026		S	Grab	1	X	X	X	↓
24	V-10	23	1/13/2026		S	Grab	1	X	X	X	
25	V-10	24	1/13/2026		S	Grab	1	X	X	X	
26	V-10	25	1/13/2026		S	Grab	1	X	X	X	
27	V-10	26	1/13/2026		S	Grab	1	X	X	X	H2O
28	V-10	27	1/13/2026		S	Grab	1	X	X	X	
29	V-10	28	1/13/2026		S	Grab	1	X	X	X	
30	V-10	29	1/13/2026		S	Grab	1	X	X	X	↓

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	[signature]	[signature]	1/14/26 8:00
2	[signature]	[signature]	1:14:26 1320
3			
4			
5			
6			

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 173 of 762

H200218

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 4 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsor
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-10	30	1/13/2026		S	Grab	1	X	X	X	
32	V-8	0-0.5	1/13/2026		S	Grab	1	X	X	X	
33	V-8	1	1/13/2026		S	Grab	1	X	X	X	
34	V-8	2	1/13/2026		S	Grab	1	X	X	X	
35	V-8	3	1/13/2026		S	Grab	1	X	X	X	
36	V-8	4	1/13/2026		S	Grab	1	X	X	X	
37	V-8	5	1/13/2026		S	Grab	1	X	X	X	
38	V-8	6	1/13/2026		S	Grab	1	X	X	X	
39	V-8	7	1/13/2026		S	Grab	1	X	X	X	Hold
40	V-8	8	1/13/2026		S	Grab	1	X	X	X	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26 8:00
2			
3			
4			
5			
6			

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			
2		Chasity	1-14-26 1300
4			
6			

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 174 of 762

1/14/2026

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 5 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsun
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-8	9	1/13/2026		S	Grab	1		X	X	X	HOLD
42	V-8	10	1/13/2026		S	Grab	1		X	X	X	
43	V-8	11	1/13/2026		S	Grab	1		X	X	X	HOLD
44	V-8	12	1/13/2026		S	Grab	1		X	X	X	
45	V-8	13	1/13/2026		S	Grab	1		X	X	X	
46	V-8	14	1/13/2026		S	Grab	1		X	X	X	
47	V-8	15	1/13/2026		S	Grab	1		X	X	X	
48	V-8	16	1/13/2026		S	Grab	1		X	X	X	
49	V-8	17	1/13/2026		S	Grab	1		X	X	X	HOLD
50	V-8	18	1/13/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1-13-26
			4		1300
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 175 of 762

H260218

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 6 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6°
Total Containers:		Corrected Temperature:	1.7°

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-8	19	1/13/2026		S	Grab	1		X	X	X	H&W
52	V-8	20	1/13/2026		S	Grab	1		X	X	X	
53	V-8	21	1/13/2026		S	Grab	1		X	X	X	H&W
54	V-8	22	1/13/2026		S	Grab	1		X	X	X	↓
55	V-8	23	1/13/2026		S	Grab	1		X	X	X	
56	V-8	24	1/13/2026		S	Grab	1		X	X	X	
57	V-8	25	1/13/2026		S	Grab	1		X	X	X	
58	V-8	26	1/13/2026		S	Grab	1		X	X	X	H&W
59	V-8	27	1/13/2026		S	Grab	1		X	X	X	
60	V-8	28	1/13/2026		S	Grab	1		X	X	X	↓

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26
			4		1300
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 176 of 762

H200218

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 7 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enerson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

ANALYSIS REQUEST

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
01	V-8	29	1/13/2026		S	Grab	1		X	X	X	Hold
02	V-8	30	1/13/2026		S	Grab	1		X	X	X	
03	V-8	31	1/13/2026		S	Grab	1		X	X	X	Hold
04	V-8	32	1/13/2026		S	Grab	1		X	X	X	
05	V-8	33	1/13/2026		S	Grab	1		X	X	X	
06	V-8	34	1/13/2026		S	Grab	1		X	X	X	
07	V-8	35	1/13/2026		S	Grab	1		X	X	X	Run
08	V-8	36	1/13/2026		S	Grab	1		X	X	X	Hold
09	V-8	37	1/13/2026		S	Grab	1		X	X	X	
10	V-8	38	1/13/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26
			4		1300
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 177 of 762

1-14-26 8:00

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 8 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enersh
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-8	39	1/13/2026		S	Grab	1	X	X	X	Hold
72	V-8	40	1/13/2026		S	Grab	1	X	X	X	
73	V-14	0-0.5	1/13/2026		S	Grab	1	X	X	X	
74	V-14	1	1/13/2026		S	Grab	1	X	X	X	
75	V-14	2	1/13/2026		S	Grab	1	X	X	X	
76	V-14	3	1/13/2026		S	Grab	1	X	X	X	
77	V-14	4	1/13/2026		S	Grab	1	X	X	X	
78	V-14	5	1/13/2026		S	Grab	1	X	X	X	
79	V-14	6	1/13/2026		S	Grab	1	X	X	X	
80	V-14	7	1/13/2026		S	Grab	1	X	X	X	Hold

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26 8:00
2			
3			
4			
5			
6			

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			
2			1.14.26
4			1300
6			

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 178 of 762

H260218

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 9 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-14	8	1/13/2026		S	Grab	1		X	X	X	H&W
82	V-14	9	1/13/2026		S	Grab	1		X	X	X	↓
83	V-14	10	1/13/2026		S	Grab	1		X	X	X	
84	V-14	11	1/13/2026		S	Grab	1		X	X	X	H&W
85	V-14	12	1/13/2026		S	Grab	1		X	X	X	↓
86	V-14	13	1/13/2026		S	Grab	1		X	X	X	
87	V-14	14	1/13/2026		S	Grab	1		X	X	X	
88	V-14	15	1/13/2026		S	Grab	1		X	X	X	
89	V-14	16	1/13/2026		S	Grab	1		X	X	X	
90	V-14	17	1/13/2026		S	Grab	1		X	X	X	H&W

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26
			4		1305
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 15, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/14/26 13:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 20 (H260219-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *77.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *72.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 25 (H260219-08)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *90.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 30 (H260219-13)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 35 (H260219-18)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *76.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *81.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 40 (H260219-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *69.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *59.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 0-0.5 (H260219-24)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.062**	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	**0.463**	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	**0.651**	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	**1.94**	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	**3.12**	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**432**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**76.0**	10.0	01/15/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**1230**	10.0	01/15/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	**227**	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *80.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 1 (H260219-25)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.303**	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	**0.462**	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	**0.403**	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	**1.61**	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	**2.78**	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *84.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**28.6**	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**72.0**	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	**12.7**	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *73.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *67.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 2 (H260219-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.050**	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	**0.134**	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	**0.201**	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	**0.608**	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	**0.993**	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**12.1**	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *77.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *67.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 3 (H260219-27)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *74.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *64.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 4 (H260219-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *77.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *73.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *63.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 5 (H260219-29)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *76.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *73.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *62.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 20 (H260219-34)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *80.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 25 (H260219-39)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *76.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *81.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *68.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 30 (H260219-44)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *80.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *68.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 35 (H260219-49)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *79.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 40 (H260219-54)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *77.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *65.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 0-0.5 (H260219-55)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**22.1**	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *66.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *57.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 1 (H260219-56)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *64.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 2 (H260219-57)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**36.6**	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *66.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *57.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 3 (H260219-58)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	**0.107**	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	**0.327**	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	**0.434**	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *102 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**20.0**	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *63.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 4 (H260219-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *65.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 5 (H260219-60)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *62.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *52.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 10 (H260219-65)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *100 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *64.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 15 (H260219-70)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *63.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 20 (H260219-75)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *90.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 25 (H260219-80)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *87.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 30 (H260219-85)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *93.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 35 (H260219-90)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *93.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QR-03	The RPD value for the sample duplicate or MS/MSD was outside of QC acceptance limits due to matrix interference. QC batch accepted based on LCS and/or LCSD recovery and/or RPD values.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 209 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 1

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.4°	
Total Containers:		Corrected Temperature:	1.5°	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-14	18	1/13/2026		S	Grab	1		X	X	X	H&W
2	V-14	19	1/13/2026		S	Grab	1		X	X	X	"
3	V-14	20	1/13/2026		S	Grab	1		X	X	X	
4	V-14	21	1/13/2026		S	Grab	1		X	X	X	H&W
5	V-14	22	1/13/2026		S	Grab	1		X	X	X	
6	V-14	23	1/13/2026		S	Grab	1		X	X	X	
7	V-14	24	1/13/2026		S	Grab	1		X	X	X	
8	V-14	25	1/13/2026		S	Grab	1		X	X	X	
9	V-14	26	1/13/2026		S	Grab	1		X	X	X	H&W
10	V-14	27	1/13/2026		S	Grab	1		X	X	X	"

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2	SRodriguez	1-14-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 210 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

040240K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-14	28	1/13/2026		S	Grab	1		X	X	X	H&W
12	V-14	29	1/13/2026		S	Grab	1		X	X	X	↓
13	V-14	30	1/13/2026		S	Grab	1		X	X	X	
14	V-14	31	1/13/2026		S	Grab	1		X	X	X	H&W
15	V-14	32	1/13/2026		S	Grab	1		X	X	X	↓
16	V-14	33	1/13/2026		S	Grab	1		X	X	X	
17	V-14	34	1/13/2026		S	Grab	1		X	X	X	↓
18	V-14	35	1/13/2026		S	Grab	1		X	X	X	
19	V-14	36	1/13/2026		S	Grab	1		X	X	X	H&W
20	V-14	37	1/13/2026		S	Grab	1		X	X	X	↓

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2	S Rodriguez	1.14.26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 211 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 12 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsen
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

040240 1K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6c	
Total Containers:		Corrected Temperature:	1.7c	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-14	38	1/13/2026		S	Grab	1	X	X	X	H&W
22	V-14	39	1/13/2026		S	Grab	1	X	X	X	
23	V-14	40	1/13/2026		S	Grab	1	X	X	X	
24	V-3	0-0.5	1/13/2026		S	Grab	1	X	X	X	
25	V-3	1	1/13/2026		S	Grab	1	X	X	X	
26	V-3	2	1/13/2026		S	Grab	1	X	X	X	
27	V-3	3	1/13/2026		S	Grab	1	X	X	X	
28	V-3	4	1/13/2026		S	Grab	1	X	X	X	
29	V-3	5	1/13/2026		S	Grab	1	X	X	X	
30	V-3	6	1/13/2026		S	Grab	1	X	X	X	H&W

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2		1-14-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 212 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260219

Dean Enerson

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	~~Dean Energy~~ ICH 1/14/26
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

04024011K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6c	
Total Containers:		Corrected Temperature:	1.7c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-3	17	1/13/2026		S	Grab	1		X	X	X	H&W
32	V-3	18	1/13/2026		S	Grab	1		X	X	X	↓
33	V-3	19	1/13/2026		S	Grab	1		X	X	X	
34	V-3	20	1/13/2026		S	Grab	1		X	X	X	
35	V-3	21	1/13/2026		S	Grab	1		X	X	X	H&W
36	V-3	22	1/13/2026		S	Grab	1		X	X	X	↓
37	V-3	23	1/13/2026		S	Grab	1		X	X	X	
38	V-3	24	1/13/2026		S	Grab	1		X	X	X	
39	V-3	25	1/13/2026		S	Grab	1		X	X	X	
40	V-3	26	1/13/2026		S	Grab	1		X	X	X	H&W

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:20	2		1.14.26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 4

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsun Energy Transfer
Company Name:	Standard Safety & Supply	Company Name:	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6°
Total Containers:		Corrected Temperature:	1.7°

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-3	27	1/13/2026		S	Grab	1		X	X	X	H&W
42	V-3	28	1/13/2026		S	Grab	1		X	X	X	↓
43	V-3	29	1/13/2026		S	Grab	1		X	X	X	
44	V-3	30	1/13/2026		S	Grab	1		X	X	X	
45	V-3	31	1/13/2026		S	Grab	1		X	X	X	H&W
46	V-3	32	1/13/2026		S	Grab	1		X	X	X	↓
47	V-3	33	1/13/2026		S	Grab	1		X	X	X	
48	V-3	34	1/13/2026		S	Grab	1		X	X	X	
49	V-3	35	1/13/2026		S	Grab	1		X	X	X	
50	V-3	36	1/13/2026		S	Grab	1		X	X	X	H&W

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26 1300
			4		
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 1 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enerson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

04024011L

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.6c	
Total Containers:		Corrected Temperature:	1.7c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
S1	V-3	37	1/13/2026		S	Grab	1		X	X	X	H2O
S2	V-3	38	1/13/2026		S	Grab	1		X	X	X	"
S3	V-3	39	1/13/2026		S	Grab	1		X	X	X	
S4	V-3	40	1/13/2026		S	Grab	1		X	X	X	
S5	V-15	0-0.5	1/13/2026		S	Grab	1		X	X	X	
S6	V-15	1	1/13/2026		S	Grab	1		X	X	X	
S7	V-15	2	1/13/2026		S	Grab	1		X	X	X	
S8	V-15	3	1/13/2026		S	Grab	1		X	X	X	
S9	V-15	4	1/13/2026		S	Grab	1		X	X	X	
S10	V-15	5	1/13/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26	2		1.14.26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 215 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 1

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsen Energy Transfer
Company Name:	Standard Safety & Supply	Company Name:	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.1c	
Total Containers:		Corrected Temperature:	1.2c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-15	6	1/13/2026		S	Grab	1	X	X	X	H&W
62	V-15	7	1/13/2026		S	Grab	1	X	X	X	↓
63	V-15	8	1/13/2026		S	Grab	1	X	X	X	
64	V-15	9	1/13/2026		S	Grab	1	X	X	X	
65	V-15	10	1/13/2026		S	Grab	1	X	X	X	H&W
66	V-15	11	1/13/2026		S	Grab	1	X	X	X	↓
67	V-15	12	1/13/2026		S	Grab	1	X	X	X	
68	V-15	13	1/13/2026		S	Grab	1	X	X	X	
69	V-15	14	1/13/2026		S	Grab	1	X	X	X	
70	V-15	15	1/13/2026		S	Grab	1	X	X	X	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26	2		1.14.26 1300
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 2

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsen
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.4	
Total Containers:		Corrected Temperature:	1.5	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-15	16	1/13/2026		S	Grab	1	X	X	X	H&W
72	V-15	17	1/13/2026		S	Grab	1	X	X	X	↓
73	V-15	18	1/13/2026		S	Grab	1	X	X	X	
74	V-15	19	1/13/2026		S	Grab	1	X	X	X	
75	V-15	20	1/13/2026		S	Grab	1	X	X	X	
76	V-15	21	1/13/2026		S	Grab	1	X	X	X	H&W
77	V-15	22	1/13/2026		S	Grab	1	X	X	X	↓
78	V-15	23	1/13/2026		S	Grab	1	X	X	X	
79	V-15	24	1/13/2026		S	Grab	1	X	X	X	
80	V-15	25	1/13/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2	Rodriguez	1-14-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 8

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsun
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.4	
Total Containers:		Corrected Temperature:	1.5	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
S1	V-15	26	1/13/2026		S	Grab	1	X	X	X	Hold
S2	V-15	27	1/13/2026		S	Grab	1	X	X	X	↓
S3	V-15	28	1/13/2026		S	Grab	1	X	X	X	
S4	V-15	29	1/13/2026		S	Grab	1	X	X	X	
S5	V-15	30	1/13/2026		S	Grab	1	X	X	X	
S6	V-15	31	1/13/2026		S	Grab	1	X	X	X	Hold
S7	V-15	32	1/13/2026		S	Grab	1	X	X	X	↓
S8	V-15	33	1/13/2026		S	Grab	1	X	X	X	
S9	V-15	34	1/13/2026		S	Grab	1	X	X	X	
S10	V-15	35	1/13/2026		S	Grab	1	X	X	X	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26 8:00	2		1.14.26 1300
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 15, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/14/26 13:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 40 (H260220-05)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *100 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *92.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 0-0.5' (H260220-06)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	**12.4**	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *87.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 1 (H260220-07)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *87.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 2 (H260220-08)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *89.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 3 (H260220-09)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/15/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *89.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 4 (H260220-10)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/15/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *89.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 5 (H260220-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/15/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *83.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 10 (H260220-16)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/15/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *94.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 15 (H260220-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	QM-07
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *123 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *93.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 20 (H260220-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *113 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**224**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *93.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 25 (H260220-31)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**272**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *95.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 30 (H260220-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *112 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**128**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	**36.3**	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	**23.2**	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *94.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 34 (H260220-40)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *94.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QM-07	The spike recovery was outside acceptance limits for the MS and/or MSD. The batch was accepted based on acceptable LCS recovery.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

STANDARD SAFETY & SUPPLY

Chain of Custody

H260220

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 1

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K - all

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6°c	
Total Containers:		Corrected Temperature:	1.7°c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-15	36	1/13/2026		S	Grab	1	X	X	X	H2O
2	V-15	37	1/13/2026		S	Grab	1	X	X	X	
3	V-15	38	1/13/2026		S	Grab	1	X	X	X	
4	V-15	39	1/13/2026		S	Grab	1	X	X	X	
5	V-15	40	1/13/2026		S	Grab	1	X	X	X	
6	V-17	0-0.5	1/13/2026		S	Grab	1	X	X	X	
7	V-17	1	1/13/2026		S	Grab	1	X	X	X	
8	V-17	2	1/13/2026		S	Grab	1	X	X	X	
9	V-17	3	1/13/2026		S	Grab	1	X	X	X	
10	V-17	4	1/13/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2		1-14-26 130
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260220

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 2 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enexus Energy Transfer
Company Name:	Standard Safety & Supply	Company Name:	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6°	
Total Containers:		Corrected Temperature:	1.7°	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-17	5	1/13/2026		S	Grab	1		X	X	X	
12	V-17	6	1/13/2026		S	Grab	1		X	X	X	H2O
13	V-17	7	1/13/2026		S	Grab	1		X	X	X	
14	V-17	8	1/13/2026		S	Grab	1		X	X	X	
15	V-17	9	1/13/2026		S	Grab	1		X	X	X	
16	V-17	10	1/13/2026		S	Grab	1		X	X	X	
17	V-17	11	1/13/2026		S	Grab	1		X	X	X	H2O
18	V-17	12	1/13/2026		S	Grab	1		X	X	X	
19	V-17	13	1/13/2026		S	Grab	1		X	X	X	
20	V-17	14	1/13/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2		1-14-26 130
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 235 of 762

CARDINAL Laboratories

101 East Marland, Hobbs, NM 88240
(575) 393-2326 FAX (575) 393-2476

CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

C-26029-GL-21300171

Company Name:	Standard Safety & Supply
Project Manager:	Ethan Sessums
Address:	2425 Trunk St
City:	Odessa State: TX Zip: 79761
Phone #:	254-266-5456 Fax #:
Project #:	Project Owner: Energy Transfer
Project Name:	ATS Highway line
Project Location:	Lea Co, NM
Sampler Name:	Connor Whitman

BILL TO

P.O. #:	
Company:	Energy Transfer
Attn:	Dawn Emerson
Address:	
City:	
State:	Zip:
Phone #:	
Fax #:	

ANALYSIS REQUEST

FOR LAB USE ONLY Lab I.D.	Sample I.D.		(G)RAB OR (C)OMP.	# CONTAINERS	MATRIX: GROUNDWATER	WASTEWATER	SOIL	OIL	SLUDGE	OTHER:	PRESERV.: ACID/BASE:	ICE / COOL	OTHER:	SAMPLING: DATE	TIME	BTEX 8021B	TPH 8015M	Chloride 4500 Cl-B	Hold
H260220												✓							
21	V-17	15	G	1			X					X		1/13/26					
22		16																	X
23		17																	X
24		18																	X
25		19																	X
26		20																	X
27		21																	X
28		22																	X
29		23																	X
30		24																	X

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising whether based in contract or tort, shall be limited to the amount paid by the client for the analyses. All claims including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within 30 days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequental damages, including without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise.

Relinquished By: CW	Date: 1/14/26 Time: 8:00	Received By:	
Relinquished By:	Date: 1-14-26 Time: 1300	Received By: Tamara Oldaker	
Delivered By: (Circle One) Sampler - UPS - Bus - Other:	Observed Temp. °C 1.6 Corrected Temp. °C 1.7	Sample Condition Cool: Yes / No Intact: Yes / No	CHECKED BY: (Initials)

Verbal Result: ☐ Yes ☐ No Add'l Phone #:
All Results are emailed. Please provide Email address:

REMARKS: 0402401K

Turnaround Time: Standard ☐ Rush ☑

Thermometer ID #140 Correction Factor +0.3°C 24 +0.1c

Bacteria (only) Sample Condition: Cool ☐ Yes ☐ No Intact ☐ Yes ☐ No Observed Temp. °C Corrected Temp. °C

1/14/26

FORM-006 R 3.0 02/12/23

† Cardinal cannot accept verbal changes. Please email changes to celey.keene@cardinallabsnm.com

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 236 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260220

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 2 of 2

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enron Energy Transfer
Company Name:	Standard Safety & Supply	Company Name:	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.6°c	
Total Containers:		Corrected Temperature:	1.7°c	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-17	25	1/13/2026		S	Grab	1		X	X	X	
32	V-17	26	1/13/2026		S	Grab	1		X	X	X	H&W
33	V-17	27	1/13/2026		S	Grab	1		X	X	X	↓
34	V-17	28	1/13/2026		S	Grab	1		X	X	X	
35	V-17	29	1/13/2026		S	Grab	1		X	X	X	
36	V-17	30	1/13/2026		S	Grab	1		X	X	X	H&W
37	V-17	31	1/13/2026		S	Grab	1		X	X	X	↓
38	V-17	32	1/13/2026		S	Grab	1		X	X	X	
39	V-17	33	1/13/2026		S	Grab	1		X	X	X	
40	V-17	34	1/13/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2		1-14-26 13
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 15, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/14/26 13:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 10 (H260223-04)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	432	108	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	186	93.0	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	216	108	200	7.99	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *71.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 15 (H260223-09)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	432	108	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	186	93.0	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	216	108	200	7.99	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *79.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *77.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QM-07	The spike recovery was outside acceptance limits for the MS and/or MSD. The batch was accepted based on acceptable LCS recovery.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 241 of 762

H260223

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

CIS-040340IK

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

ANALYSIS REQUEST

Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1 V-3	7	1/13/2026		S	Grab	1		X	X	X	Hold
2 V-3	8	1/13/2026		S	Grab	1		X	X	X	Hold
3 V-3	9	1/13/2026		S	Grab	1		X	X	X	Hold
4 V-3	10	1/13/2026		S	Grab	1		X	X	X	
5 V-3	11	1/13/2026		S	Grab	1		X	X	X	Hold
6 V-3	12	1/13/2026		S	Grab	1		X	X	X	Hold
7 V-3	13	1/13/2026		S	Grab	1		X	X	X	Hold
8 V-3	14	1/13/2026		S	Grab	1		X	X	X	Hold
9 V-3	15	1/13/2026		S	Grab	1		X	X	X	
10 V-3	16	1/13/2026		S	Grab	1		X	X	X	Hold

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
Connor Whitman	Kenny Han	1/14/2026 8:00	2. Kenny Han	Apaua	1-14-26
			4		1300
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 16, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/15/26 11:40.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 0 (H260251-01)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**30.0**	5.00	01/15/2026	ND	1.84	92.2	2.00	2.96	QM-07, QR-03
Toluene*	**173**	5.00	01/15/2026	ND	1.91	95.5	2.00	2.53	QM-07
Ethylbenzene*	**112**	5.00	01/15/2026	ND	1.93	96.3	2.00	2.49	QM-07
Total Xylenes*	**222**	15.0	01/15/2026	ND	5.72	95.3	6.00	2.56	QM-07
Total BTEX	**536**	30.0	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**5760**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF S-06

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**4440**	50.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**10600**	50.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	**1410**	50.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *451 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *197 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 1 (H260251-02)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**1.61**	1.00	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	**10.8**	1.00	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	**10.2**	1.00	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	**22.6**	3.00	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	**45.2**	6.00	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**1520**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**234**	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**437**	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	**52.5**	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *111 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *113 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 2 (H260251-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	**0.272**	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	**0.439**	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	**1.13**	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	**1.84**	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *105 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**10.9**	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**18.1**	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 3 (H260251-04)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	**0.094**	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	**0.172**	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**11.0**	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 4 (H260251-05)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 5 (H260251-06)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 10 (H260251-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	**0.096**	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	**0.119**	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	**0.307**	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	**0.521**	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *100 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**26.9**	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *99.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 15 (H260251-16)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 20 (H260251-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 25 (H260251-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 30 (H260251-31)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 35 (H260251-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *107 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *104 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 40 (H260251-41)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	QM-07
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	QM-07, QR-03
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	QM-07
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	QM-07
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *109 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 0 (H260251-42)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *113 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *98.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 1 (H260251-43)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *95.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 2 (H260251-44)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *113 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 3 (H260251-45)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *62.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *64.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 4 (H260251-46)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *125 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *86.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 5 (H260251-47)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *122 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 10 (H260251-52)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *86.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 15 (H260251-57)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *93.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *98.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 20 (H260251-62)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *96.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 25 (H260251-67)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *82.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 30 (H260251-72)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *82.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *82.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 35 (H260251-77)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *96.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 40 (H260251-82)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *98.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 0 (H260251-83)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *122 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 1 (H260251-84)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *114 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *83.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 2 (H260251-85)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *124 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *89.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 3 (H260251-86)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *122 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	**13.8**	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *74.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 4 (H260251-87)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/16/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	**16.2**	10.0	01/16/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/16/2026	ND					

Surrogate: 1-Chlorooctane *86.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 5 (H260251-88)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/16/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/16/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/16/2026	ND					

Surrogate: 1-Chlorooctane *96.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-06	The recovery of this surrogate is outside control limits due to sample dilution required from high analyte concentration and/or matrix interference's.
S-05	The surrogate recovery is outside of lab established statistical control limits but still within method limits. Data is not adversely affected.
QR-03	The RPD value for the sample duplicate or MS/MSD was outside of QC acceptance limits due to matrix interference. QC batch accepted based on LCS and/or LCSD recovery and/or RPD values.
QM-07	The spike recovery was outside acceptance limits for the MS and/or MSD. The batch was accepted based on acceptable LCS recovery.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 276 of 762

Received by OCD: 1/21/2026 11:44:22 AM

STANDARD SAFETY & SUPPLY

Project Manager:	Ethan Sessums
Company Name:	Standard Safety & Supply
Address:	2425 Trunk St.
City, State ZIP:	Odessa, Texas, 79761
Phone:	254-266-5456
Project Name:	A78 Highway Line
Project Number:	
Project Location:	Lea County, New Mexico
Sampler's Name:	Connor Whitman
PO #:	C-26029-GL-21300171

SAMPLE RECEIPT		
Temp Blank:	Yes (No)	
Samples Received Intact:	(Yes) No	Thermometer ID:
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:
Sample Custody Seals:	Yes (No) N/A	Temperature Readi
Total Containers:		Corrected Tempera

	Sample Identification	Depth	Date Sampled
1	V-1	0	1/14/2026
2	V-1	1	1/14/2026
3	V-1	2	1/14/2026
4	V-1	3	1/14/2026
5	V-1	4	1/14/2026
6	V-1	5	1/14/2026
7	V-1	6	1/14/2026
8	V-1	7	1/14/2026
9	V-1	8	1/14/2026
10	V-1	9	1/14/2026

	Relinquished by: (Signature)	Received by
1		
3		
5		

Disclaimer: This document and any files transmitted with it are c

nt	BTEX 8012B	TPH 8015M (GRO-DRO-MRO	Chloride 4500 or EPA 300	
	X	X	X	
	X	X	X	Hold
	X	X	X	Hold
	X	X	X	Hold
	X	X	X	Hold
	X	X	X	
1	X	X	X	Hold
1	X	X	X	Hold
1	X	X	X	Hold
1	X	X	X	Hold

H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: N
Zn Acetate
NaOH+Asc

	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Dat
	-15-26 1140	2		
		4		
		6		

ly for the use of the individual or entity to whom they are addressed

dy H260251

Main Office: 2524 Trunk Street, Odessa Texas
Contact: (432) 653-0393
https://standardtx.com/

Page

Dean Ericcson
Energy Transfer

tandardtx.com

Work Order Comments

0402401K-RE

ANALYSIS REQUEST

Preservat

None: NO
Cool: Cool
HCL: HC
H_2S0_4: H_2

Released to Imaging: 1/22/2026 7:51:08 AM

Received by OCD: 1/21/2026 11:44:22 AM

STANDARD SAFETY & SUPPLY

Project Manager:	Ethan Sessu
Company Name:	Standard Sa
Address:	2425 Trunk S
City, State ZIP:	Odessa, Tex
Phone:	254-266-545
Project Name:	A
Project Number:	
Project Location:	Lea Co
Sampler's Name:	Co
PO #:	C-26

SAMPLE RECEIPT	Tem
Samples Received Intact:	Yes
Cooler Custody Seals:	Yes
Sample Custody Seals:	Yes
Total Containers:	

Sample Identification	
21	V-1
22	V-1
23	V-1
24	V-1
25	V-1
26	V-1
27	V-1
28	V-1
29	V-1
30	V-1

Relinquished by: (Signature)

1

3

5

Disclaimer: This document and any

H210251

https://standardsx.com/

CarlsbadOffice@standardsx.com

D4024015

#140
+0.1c
-8.2c
-5.1c

1-1536 1140

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Project Manager:	Ethan Sessums
Company Name:	Standard Safety & Supply
Address:	2425 Trunk St.
City, State ZIP:	Odessa, Texas, 79761
Phone:	254-266-5456
Project Name:	A78 Highway Line
Project Number:	
Project Location:	Lea County, New Mexic
Sampler's Name:	Connor Whitman
PO #:	C-26029-GL-21300171

SAMPLE RECEIPT	Temp Blank:	Yes
Samples Received Intact:	Yes No	Therm
Cooler Custody Seals:	Yes No N/A	Correc
Sample Custody Seals:	Yes No N/A	Tempe
Total Containers:		Correc

Sample Identification		Depth	D San
41	V-1	40	1/14
42	V-22	0	1/14
43	V-22	1	1/14
44	V-22	2	1/14
45	V-22	3	1/14
46	V-22	4	1/14
47	V-22	5	1/14
48	V-22	6	1/14
49	V-22	7	1/14
50	V-22	8	1/14

Relinquished by: (Signature)	R
1	
3	
5	

Disclaimer: This document and any files transmitted

79761 City, State ZIP:

Email: CarlsbadOffice@standardtx.com

ighway Line	Turn Around		
	☐ Routine ☑ Rush	Pres. Code	
ty, New Mexico	Due Date: 24h		
or Whitman	TAT may vary based on lab start time.		
-GL-21300171			
lank: Yes No	Wet Ice: Yes No		
No	Thermometer ID:	#140	
N/A	Correction Factor:	+0.1°C	
N/A	Temperature Reading:	-3.2°C	
	Corrected Temperature:	-3.1°C	

ANALYSIS REQUEST

Parameters

Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300
9	1/14/2026		S	Grab	1	X	X	X
10	1/14/2026		S	Grab	1	X	X	X
11	1/14/2026		S	Grab	1	X	X	X
12	1/14/2026		S	Grab	1	X	X	X
13	1/14/2026		S	Grab	1	X	X	X
14	1/14/2026		S	Grab	1	X	X	X
15	1/14/2026		S	Grab	1	X	X	X
16	1/14/2026		S	Grab	1	X	X	X
17	1/14/2026		S	Grab	1	X	X	X
18	1/14/2026		S	Grab	1	X	X	X

Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received
Tamara Latchford	1-15-26 1140	2	
		4	
		6	

es transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Chain of Custody H260251

Main Office

	Bill to: (if different)	Dean Ericcson
& Supply	Company Name:	Energy Transfer
	Address:	
	City, State ZIP:	

044

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Received by OCD: 1/21/2026 11:44:22 AM

STANDARD SAFETY & SUPPLY

Chain o

Project Manager:	Ethan Sessums	Bill to: (if dif	
Company Name:	Standard Safety & Supply	Company N	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State	
Phone:	254-266-5456	Email:	CarlsbadC
Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT	Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:		#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:		+0.1
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:		-3.2
Total Containers:		Corrected Temperature:		-3.1

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Gr Co
81	V-22	39	1/14/2026		S	Gr
82	V-22	40	1/14/2026		S	Gr
83	V-13	0	1/14/2026		S	Gr
84	V-13	1	1/14/2026		S	Gr
85	V-13	2	1/14/2026		S	Gr
86	V-13	3	1/14/2026		S	Gr
87	V-13	4	1/14/2026		S	Gr
88	V-13	5	1/14/2026		S	Gr
89	V-13	6	1/14/2026		S	Gr
90	V-13	7	1/14/2026		S	Gr

Relinquished by: (Signature)	Received by: (Signature)
1	
3	
5	

Disclaimer: This document and any files transmitted with it are confidential and intende

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 16, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/15/26 11:40.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 10 (H260252-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *84.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 15 (H260252-08)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *85.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 20 (H260252-13)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *73.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 25 (H260252-18)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *90.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 30 (H260252-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 35 (H260252-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *84.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *96.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 40 (H260252-33)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 0 (H260252-34)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *84.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *94.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 1 (H260252-35)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *99.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 2 (H260252-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *98.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 3 (H260252-37)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *67.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *66.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 4 (H260252-38)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *85.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *88.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 5 (H260252-39)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *73.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 10 (H260252-44)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *91.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 15 (H260252-49)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *85.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *89.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 20 (H260252-54)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *89.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 25 (H260252-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *86.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 30 (H260252-64)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *84.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *82.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 35 (H260252-69)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *82.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *79.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 40 (H260252-74)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *77.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 0 (H260252-75)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *88.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 1 (H260252-76)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 2 (H260252-77)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 3 (H260252-78)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *70.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 4 (H260252-79)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *98.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 5 (H260252-80)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 10 (H260252-85)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 15 (H260252-90)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**176**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-05	The surrogate recovery is outside of lab established statistical control limits but still within method limits. Data is not adversely affected.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 315 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H26052

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Parameters

ANALYSIS REQUEST

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-13	8	1/14/2026		S	Grab	1	X	X	X	Hold
2	V-13	9	1/14/2026		S	Grab	1	X	X	X	Hold
3	V-13	10	1/14/2026		S	Grab	1	X	X	X	
4	V-13	11	1/14/2026		S	Grab	1	X	X	X	Hold
5	V-13	12	1/14/2026		S	Grab	1	X	X	X	Hold
6	V-13	13	1/14/2026		S	Grab	1	X	X	X	Hold
7	V-13	14	1/14/2026		S	Grab	1	X	X	X	Hold
8	V-13	15	1/14/2026		S	Grab	1	X	X	X	
9	V-13	16	1/14/2026		S	Grab	1	X	X	X	Hold
10	V-13	17	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Maldonado	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 316 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 3

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

04024017

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-13	18	1/14/2026		S	Grab	1	X	X	X	Hold
12	V-13	19	1/14/2026		S	Grab	1	X	X	X	Hold
13	V-13	20	1/14/2026		S	Grab	1	X	X	X	
14	V-13	21	1/14/2026		S	Grab	1	X	X	X	Hold
15	V-13	22	1/14/2026		S	Grab	1	X	X	X	Hold
16	V-13	23	1/14/2026		S	Grab	1	X	X	X	Hold
17	V-13	24	1/14/2026		S	Grab	1	X	X	X	Hold
18	V-13	25	1/14/2026		S	Grab	1	X	X	X	
19	V-13	26	1/14/2026		S	Grab	1	X	X	X	Hold
20	V-13	27	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Maldonado	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 317 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 8 of 30 12

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K - all

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-13	28	1/14/2026		S	Grab	1	X	X	X	Hold
22	V-13	29	1/14/2026		S	Grab	1	X	X	X	Hold
23	V-13	30	1/14/2026		S	Grab	1	X	X	X	
24	V-13	31	1/14/2026		S	Grab	1	X	X	X	Hold
25	V-13	32	1/14/2026		S	Grab	1	X	X	X	Hold
26	V-13	33	1/14/2026		S	Grab	1	X	X	X	Hold
27	V-13	34	1/14/2026		S	Grab	1	X	X	X	Hold
28	V-13	35	1/14/2026		S	Grab	1	X	X	X	
29	V-13	36	1/14/2026		S	Grab	1	X	X	X	Hold
30	V-13	37	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Wedgeworth	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 318 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 1 of 2

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.3°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Parameters — 1/15/26

ANALYSIS REQUEST

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-13	38	1/14/2026		S	Grab	1	X	X	X	Hold
32	V-13	39	1/14/2026		S	Grab	1	X	X	X	Hold
33	V-13	40	1/14/2026		S	Grab	1	X	X	X	
34	V-21	0	1/14/2026		S	Grab	1	X	X	X	
35	V-21	1	1/14/2026		S	Grab	1	X	X	X	
36	V-21	2	1/14/2026		S	Grab	1	X	X	X	
37	V-21	3	1/14/2026		S	Grab	1	X	X	X	
38	V-21	4	1/14/2026		S	Grab	1	X	X	X	
39	V-21	5	1/14/2026		S	Grab	1	X	X	X	
40	V-21	6	1/14/2026		S	Grab	1	X	X	X	Hold

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Holdaway	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 319 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H202752

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

04024011

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-21	7	1/14/2026		S	Grab	1	X	X	X	Hold
42	V-21	8	1/14/2026		S	Grab	1	X	X	X	Hold
43	V-21	9	1/14/2026		S	Grab	1	X	X	X	Hold
44	V-21	10	1/14/2026		S	Grab	1	X	X	X	
45	V-21	11	1/14/2026		S	Grab	1	X	X	X	Hold
46	V-21	12	1/14/2026		S	Grab	1	X	X	X	Hold
47	V-21	13	1/14/2026		S	Grab	1	X	X	X	Hold
48	V-21	14	1/14/2026		S	Grab	1	X	X	X	Hold
49	V-21	15	1/14/2026		S	Grab	1	X	X	X	
50	V-21	16	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Wilder	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 320 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 15 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°	
Total Containers:		Corrected Temperature:	-3.1°	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-21	17	1/14/2026		S	Grab	1	X	X	X	Hold
52	V-21	18	1/14/2026		S	Grab	1	X	X	X	Hold
53	V-21	19	1/14/2026		S	Grab	1	X	X	X	Hold
54	V-21	20	1/14/2026		S	Grab	1	X	X	X	
55	V-21	21	1/14/2026		S	Grab	1	X	X	X	Hold
56	V-21	22	1/14/2026		S	Grab	1	X	X	X	Hold
57	V-21	23	1/14/2026		S	Grab	1	X	X	X	Hold
58	V-21	24	1/14/2026		S	Grab	1	X	X	X	Hold
59	V-21	25	1/14/2026		S	Grab	1	X	X	X	
60	V-21	26	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Whitaker	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 321 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 16 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT	Temp Blank: Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c
Total Containers:		Corrected Temperature:	-3.1c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-21	27	1/14/2026		S	Grab	1	X	X	X	Hold
62	V-21	28	1/14/2026		S	Grab	1	X	X	X	Hold
63	V-21	29	1/14/2026		S	Grab	1	X	X	X	Hold
64	V-21	30	1/14/2026		S	Grab	1	X	X	X	
65	V-21	31	1/14/2026		S	Grab	1	X	X	X	Hold
66	V-21	32	1/14/2026		S	Grab	1	X	X	X	Hold
67	V-21	33	1/14/2026		S	Grab	1	X	X	X	Hold
68	V-21	34	1/14/2026		S	Grab	1	X	X	X	Hold
69	V-21	35	1/14/2026		S	Grab	1	X	X	X	
70	V-21	36	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Latchford	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 322 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 17 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments
0402401K

Project Name:	A79 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman		TAT may vary based on lab start time.
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Preservative Codes
None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-21	37	1/14/2026		S	Grab	1	X	X	X	Hold
72	V-21	38	1/14/2026		S	Grab	1	X	X	X	Hold
73	V-21	39	1/14/2026		S	Grab	1	X	X	X	Hold
74	V-21	40	1/14/2026		S	Grab	1	X	X	X	
75	V-20	0	1/14/2026		S	Grab	1	X	X	X	
76	V-20	1	1/14/2026		S	Grab	1	X	X	X	
77	V-20	2	1/14/2026		S	Grab	1	X	X	X	
78	V-20	3	1/14/2026		S	Grab	1	X	X	X	
79	V-20	4	1/14/2026		S	Grab	1	X	X	X	
80	V-20	5	1/14/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Mitchell	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 323 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman		TAT may vary based on lab start time.
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-20	6	1/14/2026		S	Grab	1	X	X	X	Hold
82	V-20	7	1/14/2026		S	Grab	1	X	X	X	Hold
83	V-20	8	1/14/2026		S	Grab	1	X	X	X	Hold
84	V-20	9	1/14/2026		S	Grab	1	X	X	X	Hold
85	V-20	10	1/14/2026		S	Grab	1	X	X	X	
86	V-20	11	1/14/2026		S	Grab	1	X	X	X	Hold
87	V-20	12	1/14/2026		S	Grab	1	X	X	X	Hold
88	V-20	13	1/14/2026		S	Grab	1	X	X	X	Hold
89	V-20	14	1/14/2026		S	Grab	1	X	X	X	Hold
90	V-20	15	1/14/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Jennara Alcala	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 16, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/15/26 11:40.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 20 (H260253-05)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 25 (H260253-10)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 30 (H260253-15)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *98.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 35 (H260253-20)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *91.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 40 (H260253-25)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *95.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 0 (H260253-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	**11.7**	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	**17.8**	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 1 (H260253-27)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 2 (H260253-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *95.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 3 (H260253-29)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**544**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *95.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *89.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 4 (H260253-30)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *95.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**416**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 5 (H260253-31)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *95.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**256**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 10 (H260253-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 15 (H260253-41)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *127 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *94.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 20 (H260253-46)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	**0.051**	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *114 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *83.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 25 (H260253-51)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *71.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *72.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 30 (H260253-56)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *123 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *75.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 35 (H260253-61)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *81.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 40 (H260253-66)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 0 (H260253-67)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *124 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 1 (H260253-68)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *107 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *75.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 2 (H260253-69)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *80.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 3 (H260253-70)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *85.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 4 (H260253-71)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *85.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *89.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 5 (H260253-72)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	**22.6**	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *88.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 10 (H260253-77)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *126 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *76.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *78.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 15 (H260253-82)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *123 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *77.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *78.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 20 (H260253-87)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *86.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-05	The surrogate recovery is outside of lab established statistical control limits but still within method limits. Data is not adversely affected.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 353 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 19 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitmen	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c
Total Containers:		Corrected Temperature:	-3.1c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-20	16	1/14/2026		S	Grab	1	X	X	X	Hold
2	V-20	17	1/14/2026		S	Grab	1	X	X	X	Hold
3	V-20	18	1/14/2026		S	Grab	1	X	X	X	Hold
4	V-20	19	1/14/2026		S	Grab	1	X	X	X	Hold
5	V-20	20	1/14/2026		S	Grab	1	X	X	X	
6	V-20	21	1/14/2026		S	Grab	1	X	X	X	Hold
7	V-20	22	1/14/2026		S	Grab	1	X	X	X	Hold
8	V-20	23	1/14/2026		S	Grab	1	X	X	X	Hold
9	V-20	24	1/14/2026		S	Grab	1	X	X	X	Hold
10	V-20	25	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Nevara Ulloa	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 354 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments 20

0402401K-ael

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°c
Total Containers:		Corrected Temperature:	-3.1°c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-20	26	1/14/2026		S	Grab	1		X	X	X	Hold
12	V-20	27	1/14/2026		S	Grab	1		X	X	X	Hold
13	V-20	28	1/14/2026		S	Grab	1		X	X	X	Hold
14	V-20	29	1/14/2026		S	Grab	1		X	X	X	Hold
15	V-20	30	1/14/2026		S	Grab	1		X	X	X	
16	V-20	31	1/14/2026		S	Grab	1		X	X	X	Hold
17	V-20	32	1/14/2026		S	Grab	1		X	X	X	Hold
18	V-20	33	1/14/2026		S	Grab	1		X	X	X	Hold
19	V-20	34	1/14/2026		S	Grab	1		X	X	X	Hold
20	V-20	35	1/14/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 355 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 2 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments 21

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-20	36	1/14/2026		S	Grab	1		X	X	X	Hold
22	V-20	37	1/14/2026		S	Grab	1		X	X	X	Hold
23	V-20	38	1/14/2026		S	Grab	1		X	X	X	Hold
24	V-20	39	1/14/2026		S	Grab	1		X	X	X	Hold
25	V-20	40	1/14/2026		S	Grab	1		X	X	X	
26	V-23	0	1/14/2026		S	Grab	1		X	X	X	
27	V-23	1	1/14/2026		S	Grab	1		X	X	X	
28	V-23	2	1/14/2026		S	Grab	1		X	X	X	
29	V-23	3	1/14/2026		S	Grab	1		X	X	X	
30	V-23	4	1/14/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Latchford	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 356 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 1 of 10

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments 22

0402401K

Project Name:	A78 Highway Line	Turn Around	Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-23	5	1/14/2026		S	Grab	1	X	X	X	
32	V-23	6	1/14/2026		S	Grab	1	X	X	X	Hold
33	V-23	7	1/14/2026		S	Grab	1	X	X	X	Hold
34	V-23	8	1/14/2026		S	Grab	1	X	X	X	Hold
35	V-23	9	1/14/2026		S	Grab	1	X	X	X	Hold
36	V-23	10	1/14/2026		S	Grab	1	X	X	X	
37	V-23	11	1/14/2026		S	Grab	1	X	X	X	Hold
38	V-23	12	1/14/2026		S	Grab	1	X	X	X	Hold
39	V-23	13	1/14/2026		S	Grab	1	X	X	X	Hold
40	V-23	14	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Whitman	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 357 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 23 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments
0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes
None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-23	15	1/14/2026		S	Grab	1		X	X	X	
42	V-23	16	1/14/2026		S	Grab	1		X	X	X	Hold
43	V-23	17	1/14/2026		S	Grab	1		X	X	X	Hold
44	V-23	18	1/14/2026		S	Grab	1		X	X	X	Hold
45	V-23	19	1/14/2026		S	Grab	1		X	X	X	Hold
46	V-23	20	1/14/2026		S	Grab	1		X	X	X	
47	V-23	21	1/14/2026		S	Grab	1		X	X	X	Hold
48	V-23	22	1/14/2026		S	Grab	1		X	X	X	Hold
49	V-23	23	1/14/2026		S	Grab	1		X	X	X	Hold
50	V-23	24	1/14/2026		S	Grab	1		X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Wilder	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 24 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments
0402401K

Project Name:	A75 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes
None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-23	25	1/14/2026		S	Grab	1	X	X	X	
52	V-23	26	1/14/2026		S	Grab	1	X	X	X	Hold
53	V-23	27	1/14/2026		S	Grab	1	X	X	X	Hold
54	V-23	28	1/14/2026		S	Grab	1	X	X	X	Hold
55	V-23	29	1/14/2026		S	Grab	1	X	X	X	Hold
56	V-23	30	1/14/2026		S	Grab	1	X	X	X	
57	V-23	31	1/14/2026		S	Grab	1	X	X	X	Hold
58	V-23	32	1/14/2026		S	Grab	1	X	X	X	Hold
59	V-23	33	1/14/2026		S	Grab	1	X	X	X	Hold
60	V-23	34	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Wallace	1-15-26 1140	4		
3			6		
5					

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 359 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 25 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments 25

0402401K

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c
Total Containers:		Corrected Temperature:	-3.1c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Comp	# of Cont	BTEX 8021B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-23	35	1/14/2026		S	Grab	1	X	X	X	
62	V-23	36	1/14/2026		S	Grab	1	X	X	X	Hold
63	V-23	37	1/14/2026		S	Grab	1	X	X	X	Hold
64	V-23	38	1/14/2026		S	Grab	1	X	X	X	Hold
65	V-23	39	1/14/2026		S	Grab	1	X	X	X	Hold
66	V-23	40	1/14/2026		S	Grab	1	X	X	X	
67	V-18	0	1/14/2026		S	Grab	1	X	X	X	
68	V-18	1	1/14/2026		S	Grab	1	X	X	X	
69	V-18	2	1/14/2026		S	Grab	1	X	X	X	
70	V-18	3	1/14/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Valdez	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 360 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c
Total Containers:		Corrected Temperature:	-3.1c

ANALYSIS REQUEST

Preservative Codes

None: NO DI Water: H_2O
Cool: Cool MeOH: Me
HCL: HC HNO_3: HN
H_2S0_4: H_2 NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 6012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-18	4	1/14/2026		S	Grab	1		X	X	X	
72	V-18	5	1/14/2026		S	Grab	1		X	X	X	
73	V-18	6	1/14/2026		S	Grab	1		X	X	X	Hold
74	V-18	7	1/14/2026		S	Grab	1		X	X	X	Hold
75	V-18	8	1/14/2026		S	Grab	1		X	X	X	Hold
76	V-18	9	1/14/2026		S	Grab	1		X	X	X	Hold
77	V-18	10	1/14/2026		S	Grab	1		X	X	X	
78	V-18	11	1/14/2026		S	Grab	1		X	X	X	Hold
79	V-18	12	1/14/2026		S	Grab	1		X	X	X	Hold
80	V-18	13	1/14/2026		S	Grab	1		X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Oldaker	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 361 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 29 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments
04024014

Project Name:	A76 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Comp	# of Cont	BTEX 8021B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-18	14	1/14/2026		S	Grab	1	X	X	X	Hold
82	V-18	15	1/14/2026		S	Grab	1	X	X	X	
83	V-18	16	1/14/2026		S	Grab	1	X	X	X	Hold
84	V-18	17	1/14/2026		S	Grab	1	X	X	X	Hold
85	V-18	18	1/14/2026		S	Grab	1	X	X	X	Hold
86	V-18	19	1/14/2026		S	Grab	1	X	X	X	Hold
87	V-18	20	1/14/2026		S	Grab	1	X	X	X	
88	V-18	21	1/14/2026		S	Grab	1	X	X	X	Hold
89	V-18	22	1/14/2026		S	Grab	1	X	X	X	Hold
90	V-18	23	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Rodriguez	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 16, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/15/26 11:40.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 25 (H260254-02)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *125 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *93.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 30 (H260254-07)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *91.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 35 (H260254-12)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *91.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 40 (H260254-17)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *89.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 12 3 (H260254-18)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 12 4 (H260254-19)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.120**	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	**0.259**	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	**0.075**	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	**0.555**	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 16 3 (H260254-20)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**28.0**	5.00	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	**154**	5.00	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	**100**	5.00	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	**213**	15.0	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	**495**	30.0	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**1470**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF S-06

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**3920**	50.0	01/16/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	**7460**	50.0	01/16/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	**953**	50.0	01/16/2026	ND					

Surrogate: 1-Chlorooctane *451 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *186 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 16 4 (H260254-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	**0.382**	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	**0.606**	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	**1.68**	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	**2.66**	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**464**	16.0	01/16/2026	ND	448	112	400	3.64	QM-07

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**19.5**	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	**97.1**	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	**10.4**	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 16 5 (H260254-22)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	<0.050	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	448	112	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 7 0-0.5' (H260254-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	<0.050	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	448	112	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 8 0-0.5' (H260254-24)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	<0.050	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *99.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 9 0-0.5' (H260254-25)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	<0.050	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	448	112	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *108 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-06	The recovery of this surrogate is outside control limits due to sample dilution required from high analyte concentration and/or matrix interference's.
QM-07	The spike recovery was outside acceptance limits for the MS and/or MSD. The batch was accepted based on acceptable LCS recovery.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

STANDARD SAFETY & SUPPLY

Chain of Custody

H260254

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 28 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitmen		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Comp	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-18	24	1/14/2026		S	Grab	1		X	X	X	Hold
2	V-18	25	1/14/2026		S	Grab	1		X	X	X	
3	V-18	26	1/14/2026		S	Grab	1		X	X	X	Hold
4	V-18	27	1/14/2026		S	Grab	1		X	X	X	Hold
5	V-18	28	1/14/2026		S	Grab	1		X	X	X	Hold
6	V-18	29	1/14/2026		S	Grab	1		X	X	X	Hold
7	V-18	30	1/14/2026		S	Grab	1		X	X	X	
8	V-18	31	1/14/2026		S	Grab	1		X	X	X	Hold
9	V-18	32	1/14/2026		S	Grab	1		X	X	X	Hold
10	V-18	33	1/14/2026		S	Grab	1		X	X	X	Hold

Analysis Request

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2SO_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Wilbanks	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260254

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 29 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments: 29

0402401K

Project Name:	479 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico		TAT may vary based on lab start time.
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT	Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:		#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:		+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:		-3.2c
Total Containers:		Corrected Temperature:		-3.1c

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Comp	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-18	34	1/14/2026		S	Grab	1	X	X	X	Hold
12	V-18	35	1/14/2026		S	Grab	1	X	X	X	
13	V-18	36	1/14/2026		S	Grab	1	X	X	X	Hold
14	V-18	37	1/14/2026		S	Grab	1	X	X	X	Hold
15	V-18	38	1/14/2026		S	Grab	1	X	X	X	Hold
16	V-18	39	1/14/2026		S	Grab	1	X	X	X	Hold
17	V-18	40	1/14/2026		S	Grab	1	X	X	X	Hold
18	V-12	3	1/14/2026		S	Grab	1	X	X	X	
19	V-12	4	1/14/2026		S	Grab	1	X	X	X	
20	V-16	3	1/14/2026		S	Grab	1	X	X	X	

Pres. Code / Parameters

ANALYSIS REQUEST

Preservative Codes

None: NO DI Water: H_2O
Cool: Cool MeOH: Me
HCL: HC HNO_3: HN
H_2SO_4: H_2 NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Wadsworth	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 378 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260254

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 30 of 30

Project Manager:	Ethan Sessums	Bill to (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com
Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitmen		
PO #:	C-26029-GL-21300171		

Work Order Comments: 04024014

SAMPLE RECEIPT

Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

ANALYSIS REQUEST

Preservative Codes
None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2SO_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Comp	# of Cont	Pres. Code	BTEX 8021B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-16	4	1/14/2026		S	Grab	1		X	X	X	
22	V-16	5	1/14/2026		S	Grab	1		X	X	X	
23	H-7	0-0.5	1/14/2026		S	Grab	1		X	X	X	
24	H-8	0-0.5	1/14/2026		S	Grab	1		X	X	X	
25	H-9	0-0.5	1/14/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
	Tamara Valdez	1-15-26 1140	2		
			4		
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Site Characterization and Remediation Workplan
A-7-8 Pipeline Release
nAPP2601343850
32.4948084, -103.1582952
E-10-21S-37E

Introduction

Standard Safety and Supply (Standard) on behalf of ET Gathering & Processing, LLC. (ET) is pleased to submit this Site Characterization and Remediation Workplan. Based on the Notification of Release the spill was discovered on January 6, 2026, and was attributed to pipeline failure. There was an approximate net loss of one (1) barrel (bbls) of crude oil and one (1) MCF of natural gas. Attachment B: Figure 1 depicts the Site with respect to the nearest town and Figure 2 depicts the topographic features in the area.

Site Characterization

Based on a site characterization desktop review the area is within a Low Karst area. Furthermore, there are no receptors [significant watercourse, lakebed, playa, sinkhole, an occupied residence, school, hospital, institution, church, freshwater spring for domestic or stock watering purposes, other fresh water well/spring, municipal water boundary, wetland, subsurface mine, and/or an unstable area] within the specified distance set forth in the New Mexico Administrative Code 19.15.29.12. A groundwater determination bore (CP-02104) was drilled within a ½ mile radius of the site to a depth of fifty-five (55) feet below ground surface (bgs). The well was left open for 72hrs then gauged to determine the presence or absence of groundwater. No groundwater was encountered during the measurement event therefore the following closure criteria will be used.

	NMAC Closure Criteria Remediation and Reclamation				
depths in feet (ft)	Benzene	BTEX	TPH (GRO-DRO)	TPH (GRO-DRO-MRO)	Chloride
0-4 (ft)	10 mg/kg	50 mg/kg	---*	100 mg/kg	600 mg/kg
>4ft	10 mg/kg	50 mg/kg	1,000 mg/kg	2,500 mg/kg	10,000 mg/kg
	* value must not exceed TPH (GRP-DRO-MRO) value				

The documentation used to characterize the site can be found in the report under Attachment C: Site Characterization.

Initial Assessment

Between January 10 and January 14, 2026 Standard performed an initial assessment to characterize impacts. Nine (9) horizontal sample points (H-1 to H-9) were collected at surface (0) depth. Twenty-two (22) vertical samples points (V-1 to V-23) were collected from surface (0) to forty (forty) ft bgs in one (1) ft intervals utilizing an air rotary rig. Standard was unable to collect one sample (V-19) due to the air rotary rig experiencing mechanical failure on January 14, 2026. Soil samples were placed into lab provided containers, onto ice then transported to Cardinal in Hobbs, New Mexico, for the analysis of benzene, toluene, ethylbenzene, and xylenes (BTEX 8021B), Total Petroleum Hydrocarbons (TPH 8015M) and chloride (4500-Cl-B). Proper chain-of-custody was followed during the collection and delivery of the samples to the laboratory. Analytical results indicated that vertical and horizontal delineation was achieved.

The delineation data can be found in this report under Attachment A: Table 1 Delineation Assessment Analytical Data Table and the lab report and chain of custody can be found under Attachment E: Laboratory Analytical Method Documentation with Chain-of-Custody

The delineation sample locations are located under Attachment B: Figure 3 Delineation Assessment Map while photographs of the impacted area are under Attachment D: Photographic Log.

Proposed Remedial Action Activities

Based on the assessment performed Standard proposes the following:

- Excavate the areas of V-1 and V-3 to two (2) ft bgs
- Excavate the areas of V-2 to seven (7) ft bgs
- Excavate the areas of V-16 to four (4) ft bgs

There are approximately four hundred and eighty-four (484) cubic yards of impacted material that will be excavated and transported off to the closest approved disposal facility. The Proposed Excavation Map is located under Attachment B: Figure 4 Proposed Excavation Map

Closing

If you have any questions regarding the Site Characterization and Remediation Workplan for [nAPP2601343850] – A-7-8 Pipeline Release, please contact us at the following:

Address: 2524 Trunk St, Odessa TX 79761
Contact: 254-266-5456

Attachments

- Attachment A: Analytical Data Tables
    1. Table 1: Delineation Assessment Analytical Data Table
- Attachment B: Figures
    1. Site Location Map
    2. Topographic Map
    3. Delineation Assessment Map
    4. Proposed Excavation Map
- Attachment C: Site Characterization
    1. OCD Well map and Karst Potential
    2. OSE POD
    3. Well Log
    4. Open Environment Wetlands
    5. Wetlands Inventory
    6. National Flood Hazard Layer
- Attachment D: Photographic Documentation
- Attachment E: Laboratory Analytical Method Documentation with Chain-of-Custody

ATTACHEMENT A: ANALYTICAL DATA TABLES

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-1	0	1/14/2026	**5,760**	**16,450**	**4,440**	**10,600**	**15,040**	**1,410**	**30.0**	**173**	**112**	**222**	**536**
	1	1/14/2026	**1,520**	**723.5**	**234**	**437**	**671**	**52.5**	**1.61**	**10.8**	**10.2**	**22.6**	**45.2**
	2	1/14/2026	**112**	**29.0**	**10.9**	**18.1**	**29.0**	<10.0	<0.050	**0.272**	**0.439**	**1.13**	**1.84**
	3	1/14/2026	**32.0**	**11.0**	<10.0	**11.0**	**11.0**	<10.0	<0.050	<0.050	**0.094**	**0.172**	<0.300
	4	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**112**	**26.9**	<10.0	**26.9**	**26.9**	<10.0	<0.050	**0.096**	**0.119**	**0.307**	**0.521**
	15	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-2	4	1/10/2026	**3,160**	**20,830**	**7,710**	**11,800**	**19,510**	**1,320**	**68.6**	**240**	**113**	**229.0**	**651**
	5	1/10/2026	**384**	**1,495**	**368**	**965**	**1,333**	**162**	**3.01**	**18.4**	**14.4**	**32.0**	**67.8**
	10	1/10/2026	**64.0**	**84.6**	<10.0	**70.9**	**70.9**	**13.7**	**0.053**	**0.167**	**0.092**	**0.234**	**0.547**
	15	1/11/2026	**48.0**	**12.2**	<10.0	**12.2**	**12.2**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**176**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-3	0-0.5	1/13/2026	**432**	**1,533**	**76.0**	**1,230**	**1,306**	**227**	**0.062**	**0.463**	**0.651**	**1.94**	**3.12**
	1	1/13/2026	**160**	**113.3**	**28.6**	**72.0**	**101**	**12.7**	**0.303**	**0.462**	**0.403**	**1.61**	**2.78**
	2	1/13/2026	**144**	**12.1**	**12.1**	<10.0	**12.1**	<10.0	**0.050**	**0.134**	**0.201**	**0.608**	**0.993**
	3	1/13/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/13/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-4	4	1/10/2026	**208**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/10/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/10/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**144**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**144**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-5	4	1/10/2026	**64.0**	**41.8**	<10.0	**41.8**	**41.8**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/10/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/10/2026	**128**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**320**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**448**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-6	4	1/12/2026	**128**	**17.7**	<10.0	**17.7**	**17.7**	<10.0	<0.050	**0.063**	**0.068**	**0.253**	**0.385**
	5	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**32.0**	**57.7**	<10.0	**42.6**	**42.6**	**15.1**	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**16.0**	**28.9**	<10.0	**18.9**	**18.9**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-7	1-2	1/12/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/12/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/12/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/12/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-8	0-0.5	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	<16.0	**10.4**	<10.0	**10.4**	**10.4**	<10.0	<0.050	<0.050	**0.059**	**0.192**	<0.300
	4	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-9	1	1/12/2026	**128**	**77.7**	**21.1**	**46.6**	**67.7**	<10.0	<0.050	**0.201**	**0.336**	**1.16**	**1.70**
	2	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/12/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/12/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/12/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/12/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/12/2026	**144**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/12/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/12/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/12/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/12/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-10	0-0.5	1/13/2026	<16.0	**13.6**	<10.0	**13.6**	**13.6**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	<16.0	**28.7**	<10.0	**28.7**	**28.7**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-11	3	1/10/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/10/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/10/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/10/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-12	3	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	**0.120**	**0.259**	**0.075**	<0.150	**0.555**
V-13	0	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**32.0**	**13.8**	<10.0	**13.8**	**13.8**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	**32.0**	**16.2**	<10.0	**16.2**	**16.2**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-14	0-0.5	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-15	0-0.5	1/13/2026	**32.0**	**22.1**	<10.0	**22.1**	**22.1**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	**64.0**	**36.6**	<10.0	**36.6**	**36.6**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	**16.0**	**20.0**	<10.0	**20.0**	**20.0**	<10.0	<0.050	<0.050	**0.107**	**0.327**	**0.434**
	4	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/13/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-16	3	1/14/2026	**1,470**	**12,333**	**3,920**	**7,460**	**11,380**	**953**	**28.0**	**154**	**100**	**213**	**495**
	4	1/14/2026	**464**	**127**	**19.5**	**97.1**	**116.6**	**10.4**	<0.050	**0.382**	**0.606**	**1.68**	**2.66**
	5	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-17	0-0.5	1/13/2026	**32.0**	**12.4**	<10.0	**12.4**	**12.4**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/13/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/13/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/13/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/13/2026	**224**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/13/2026	**272**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/13/2026	**128**	**59.5**	<10.0	**36.3**	**36.3**	**23.2**	<0.050	<0.050	<0.050	<0.150	<0.300
	34	1/13/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-18	0-0.5	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**16.0**	**22.6**	<10.0	**22.6**	**22.6**	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-20	0	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**176**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-21	0	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**192**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**144**	**59.5**	<10.0	**36.3**	**36.3**	**23.2**	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
V-22	0	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**80.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**160**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	25	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
V-23	0	1/14/2026	**192**	**29.5**	<10.0	**11.7**	**11.7**	**17.8**	<0.050	<0.050	<0.050	<0.150	<0.300
	1	1/14/2026	**112**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	2	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	3	1/14/2026	**544**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	4	1/14/2026	**416**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	5	1/14/2026	**256**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	10	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	15	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	20	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	**0.051**	<0.050	<0.150	<0.300
	25	1/14/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	30	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	35	1/14/2026	**64.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
	40	1/14/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300


Table 1: Delineation Assessment Analytical Data Table
Energy Transfer
A78 Highway Line
Lea County, New Mexico

STANDARD SAFETY & SUPPLY			Chloride	TPH Total (C6-C35)	GRO (C6-C12)	DRO (C12-C28)	GRO+DRO (C6-C28)	MRO (C28-C35)	Benzene	Toluene	Ethylbenzene	Xylenes	BTEX
Remediation and Reclamation Limits (GW 51-100ft)			10,000 mg/Kg	2,500 mg/Kg	---***	---***	1,000 mg/Kg	---****	10 mg/Kg	---*	---*	---*	50 mg/Kg
Reclamation Limits (0-4ft)			600 mg/Kg	100 mg/Kg	---**	---**	---**	---**	10 mg/Kg	---*	---*	---*	50 mg/Kg
Sample ID	Depth (ft)	Date											
H-1	0-0.5'	1/10/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-2	0-0.5'	1/10/2026	**32.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-3	0-0.5'	1/10/2026	**96.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-4	0-0.5'	1/10/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-5	0-0.5'	1/10/2026	**16.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-6	0-0.5'	1/10/2026	**64.0**	**32.2**	<10.0	<10.0	<10.0	**32.2**	<0.050	<0.050	<0.050	<0.150	<0.300
H-7	0-0.5'	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-8	0-0.5'	1/14/2026	<16.0	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300
H-9	0-0.5'	1/14/2026	**48.0**	<10.0	<10.0	<10.0	<10.0	<10.0	<0.050	<0.050	<0.050	<0.150	<0.300

Notes

1. mg/kg - milligram per kilogram
2. TPH - Total Petroleum Hydrocarbons
3. (CS) - Confirmation Sample
4. (SW) - Sidewall Sample
5. * Indicates Value must be equal to or less than Total BTEX
6.** Indicates that total value must be equal to or less than total TPH
7.*** Indicates that total value must be equal to or less than GRO+DRO total
8.**** Indicates that Total value must be equal or less than total TPH
9. H = Horizontal Sample
10. V= Vertical Sample
11. Remediation Limits
12. Reclamation Limits (0-4ft below ground surface)

ATTACHMENT B: FIGURES

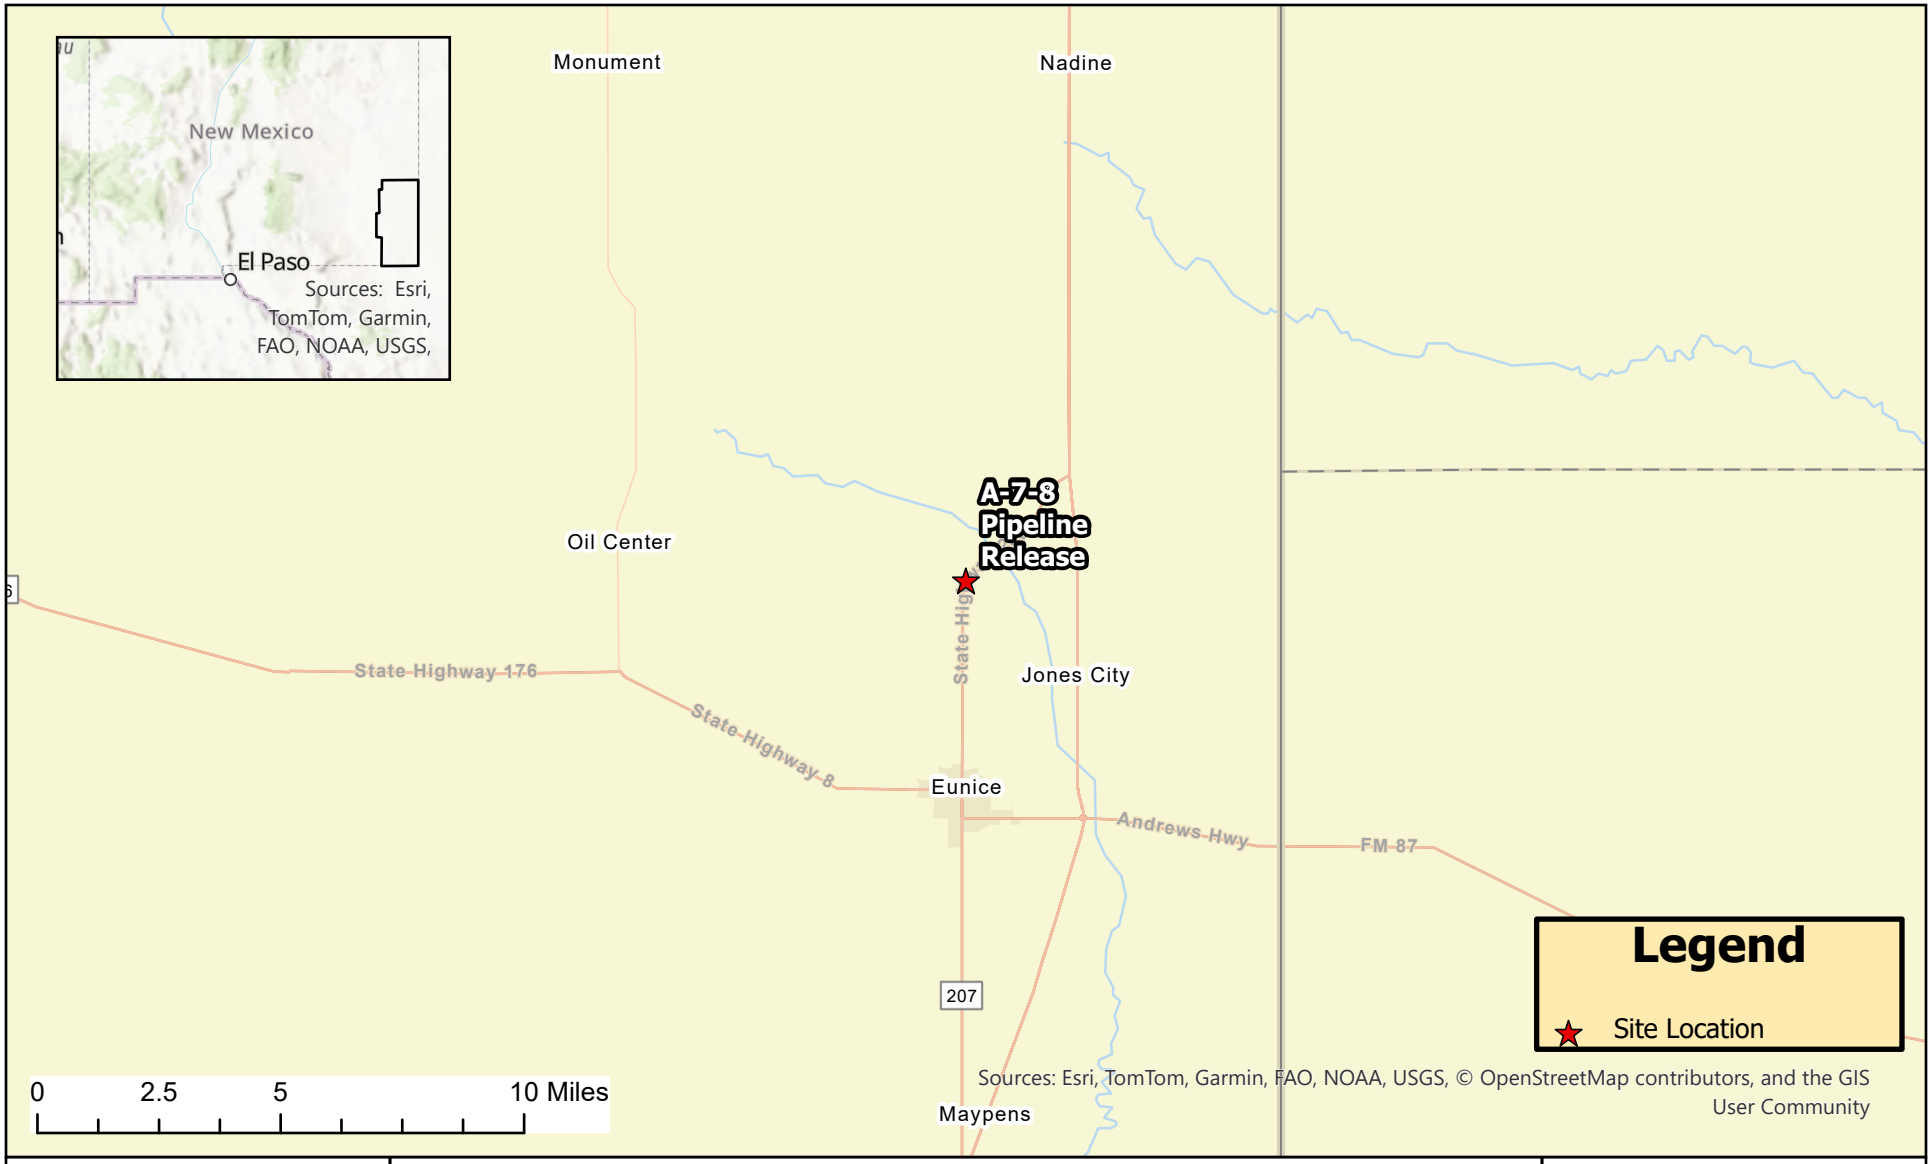

STANDARD SAFETY & SUPPLY


A-7-8 PIPELINE RELEASE
ET GATHERING & PROCESSING, LLC

Figure 1. (Site Location Map)
Release Date: 01/06/2026
Lea County, New Mexico

01/19/2026

Coordinates: 32.4948084,-103.1582952

N

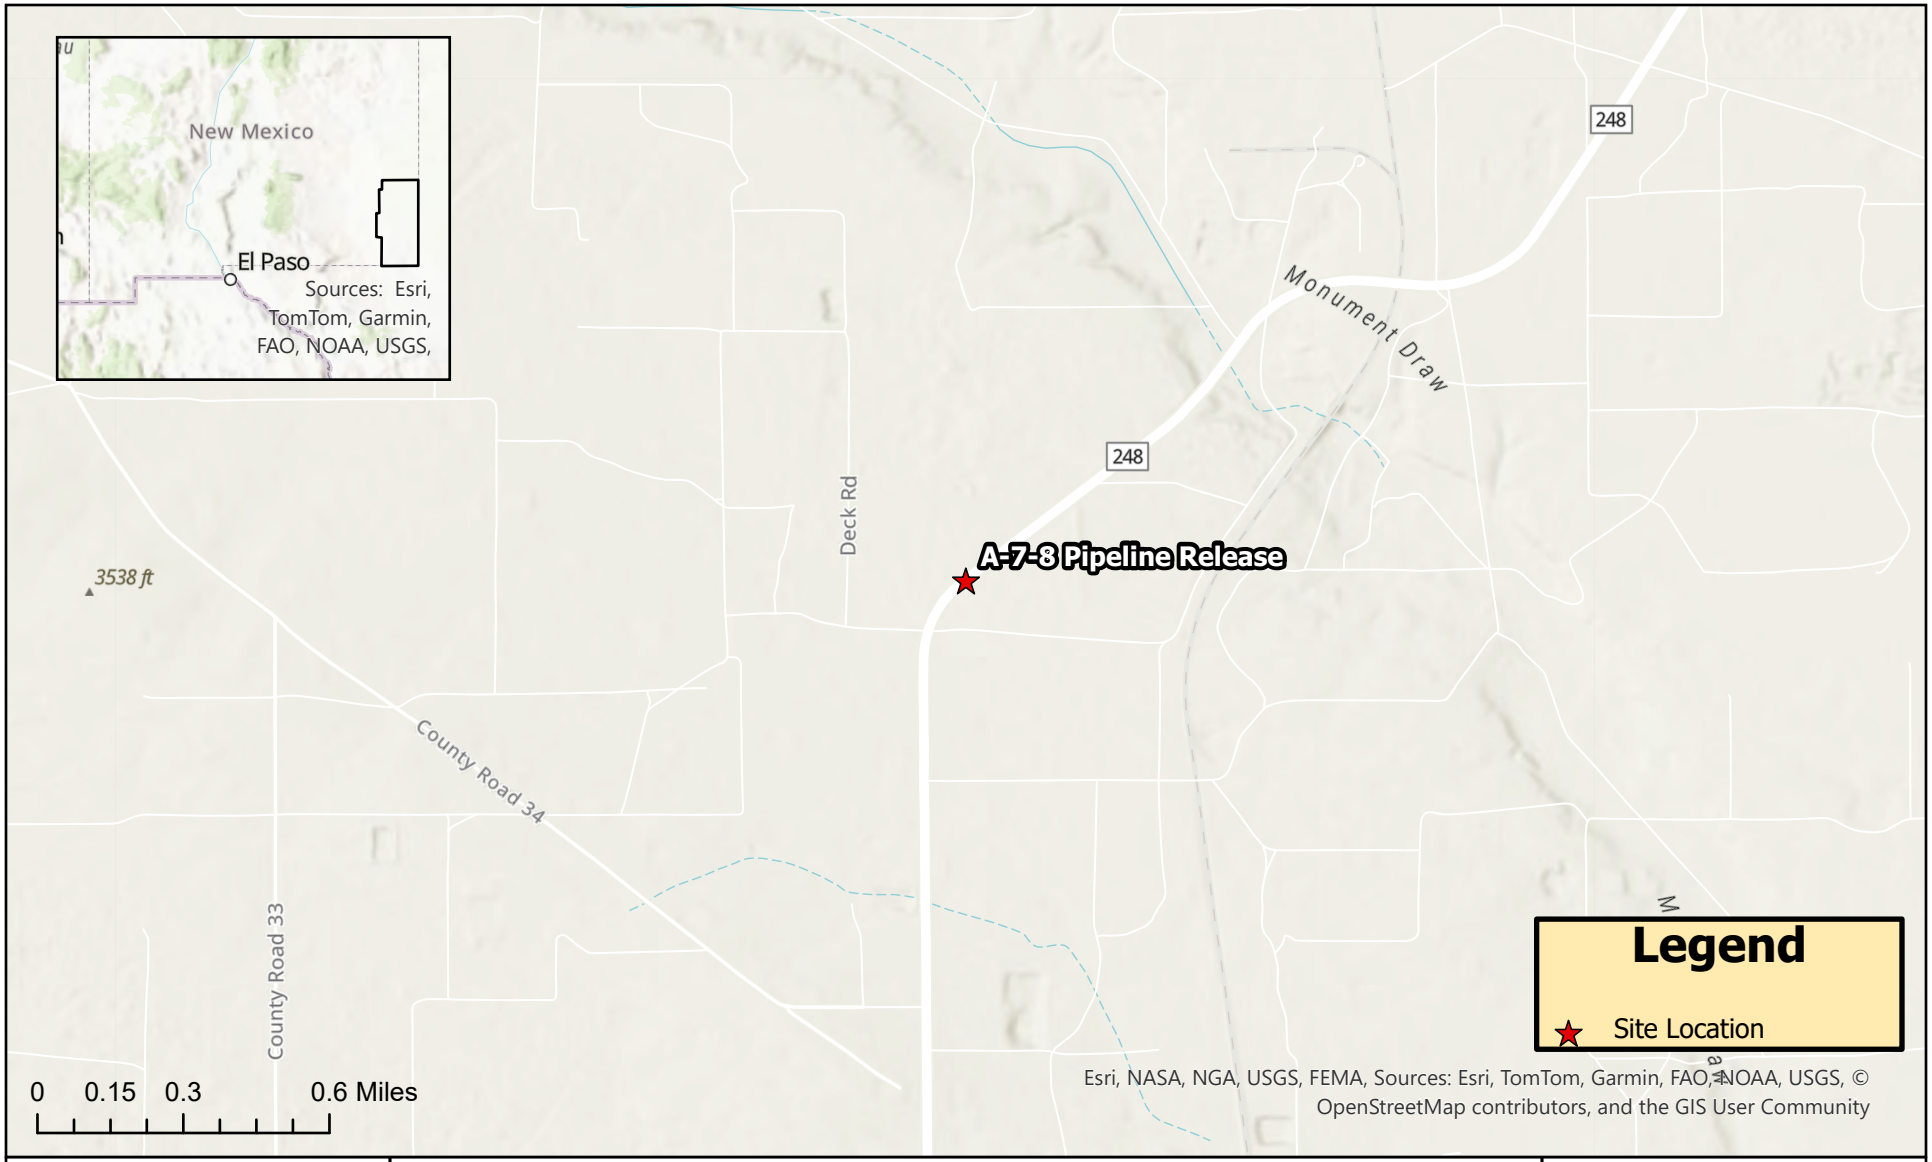


A-7-8 PIPELINE RELEASE
ET GATHERING & PROCESSING, LLC

N

Figure 2. (Topographic Map)
Release Date: 01/06/2026
Lea County, New Mexico

01/19/2026

Coordinates: 32.4948084,-103.1582952

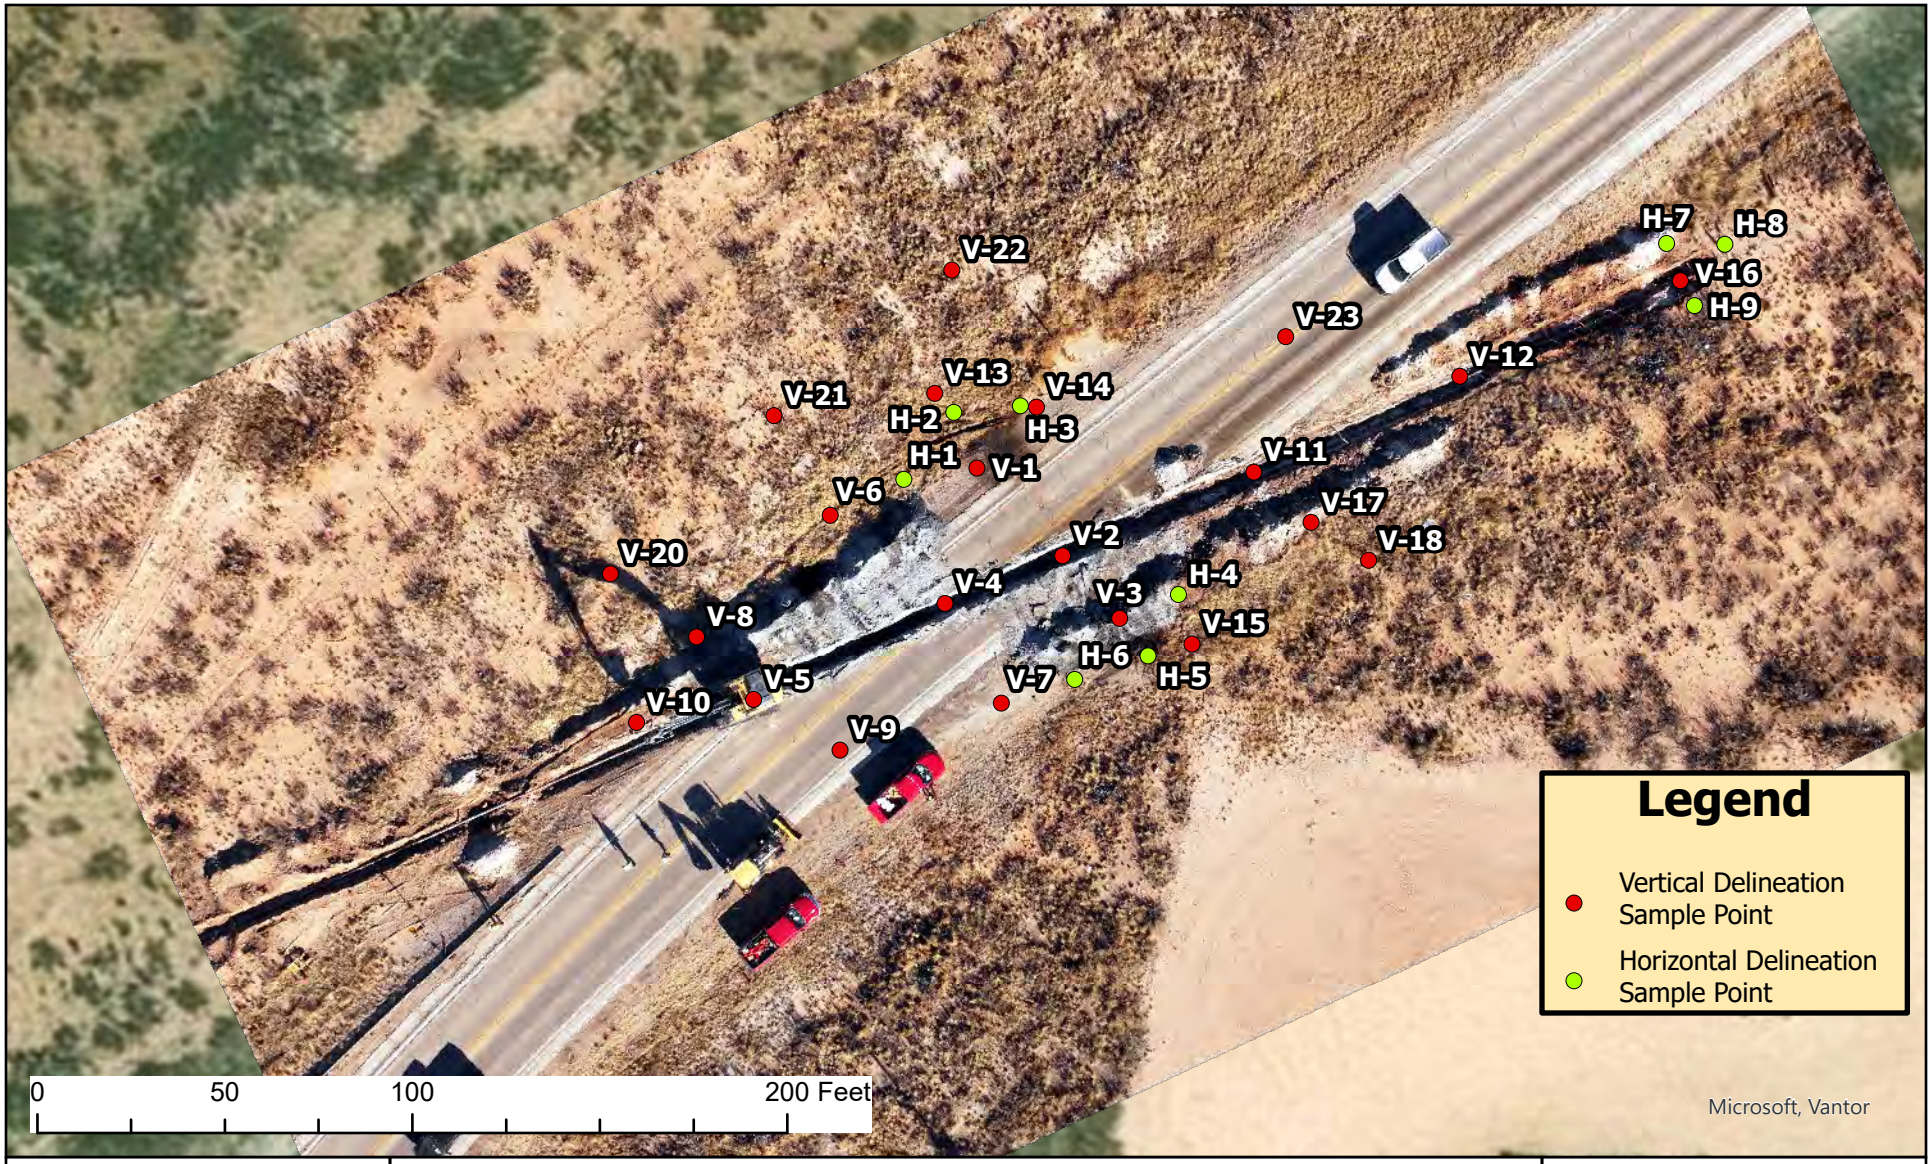

STANDARD SAFETY & SUPPLY


A-7-8 PIPELINE RELEASE
ET GATHERING & PROCESSING, LLC

Figure 3. (Delineation Map)
Release Date: 01/06/2026
Lea County, New Mexico

01/19/2026

Coordinates: 32.4948084,-103.1582952

N

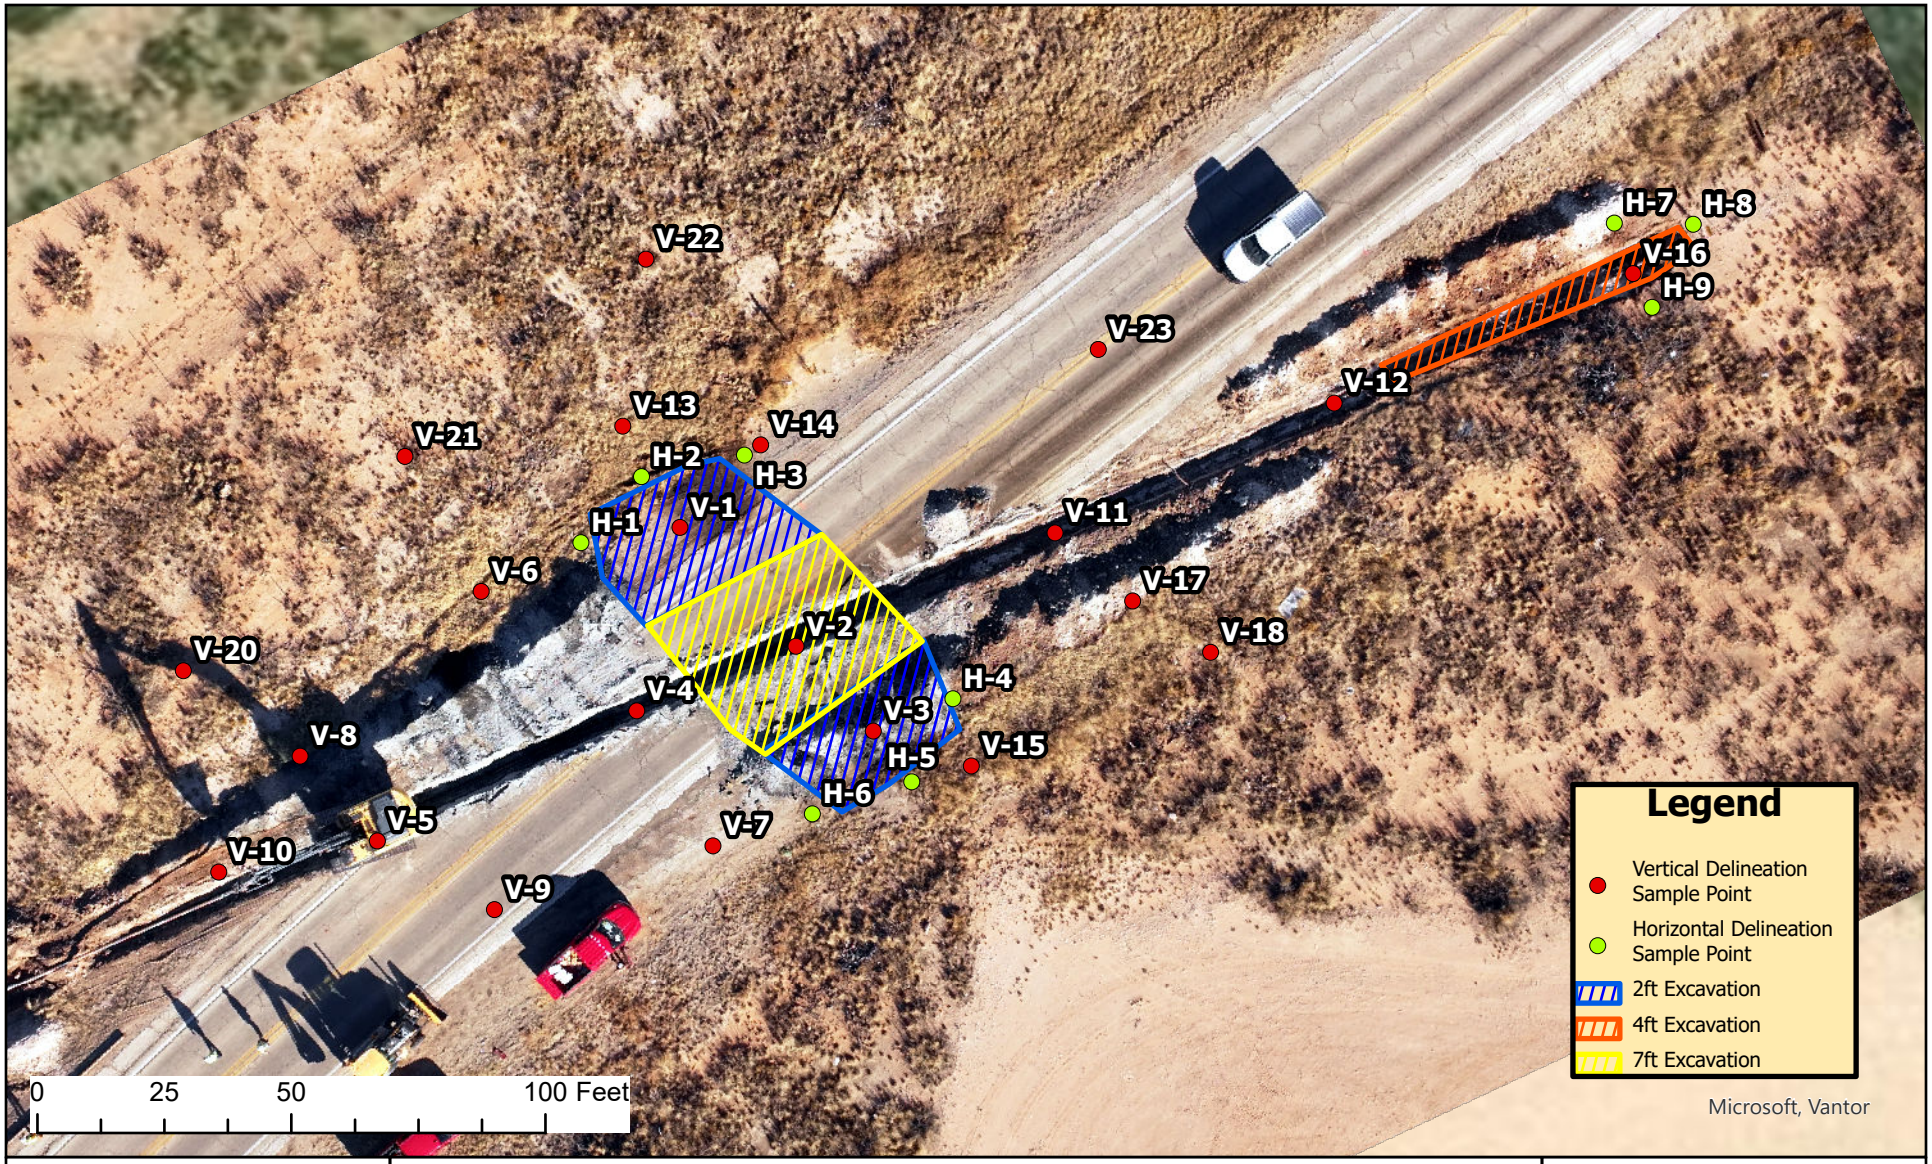

A-7-8 PIPELINE RELEASE
ET GATHERING & PROCESSING, LLC

Figure 4. (Proposed Excavation Map)
Release Date: 01/06/2026
Lea County, New Mexico

01/20/2026

Coordinates: 32.4948084,-103.1582952


N

Proposed Excavation Map

Energy Transfer
Line A-7-8 Pipeline Release
Lea County, New Mexico
32.4948363369, -103.158303725

Area of Yellow: 1,025 sqft x 7ft ~ 266 CY
Area of Blue: 1,238 sqft x 2ft ~ 92 CY
Area of Orange: 300 sqft x 4ft ~ 45 CY
Total Excavated Volume: 403 CY
Total Excavated Volume w/20% Fluff ~ 484 CY

sqft - square feet
CY - Cubic Yard

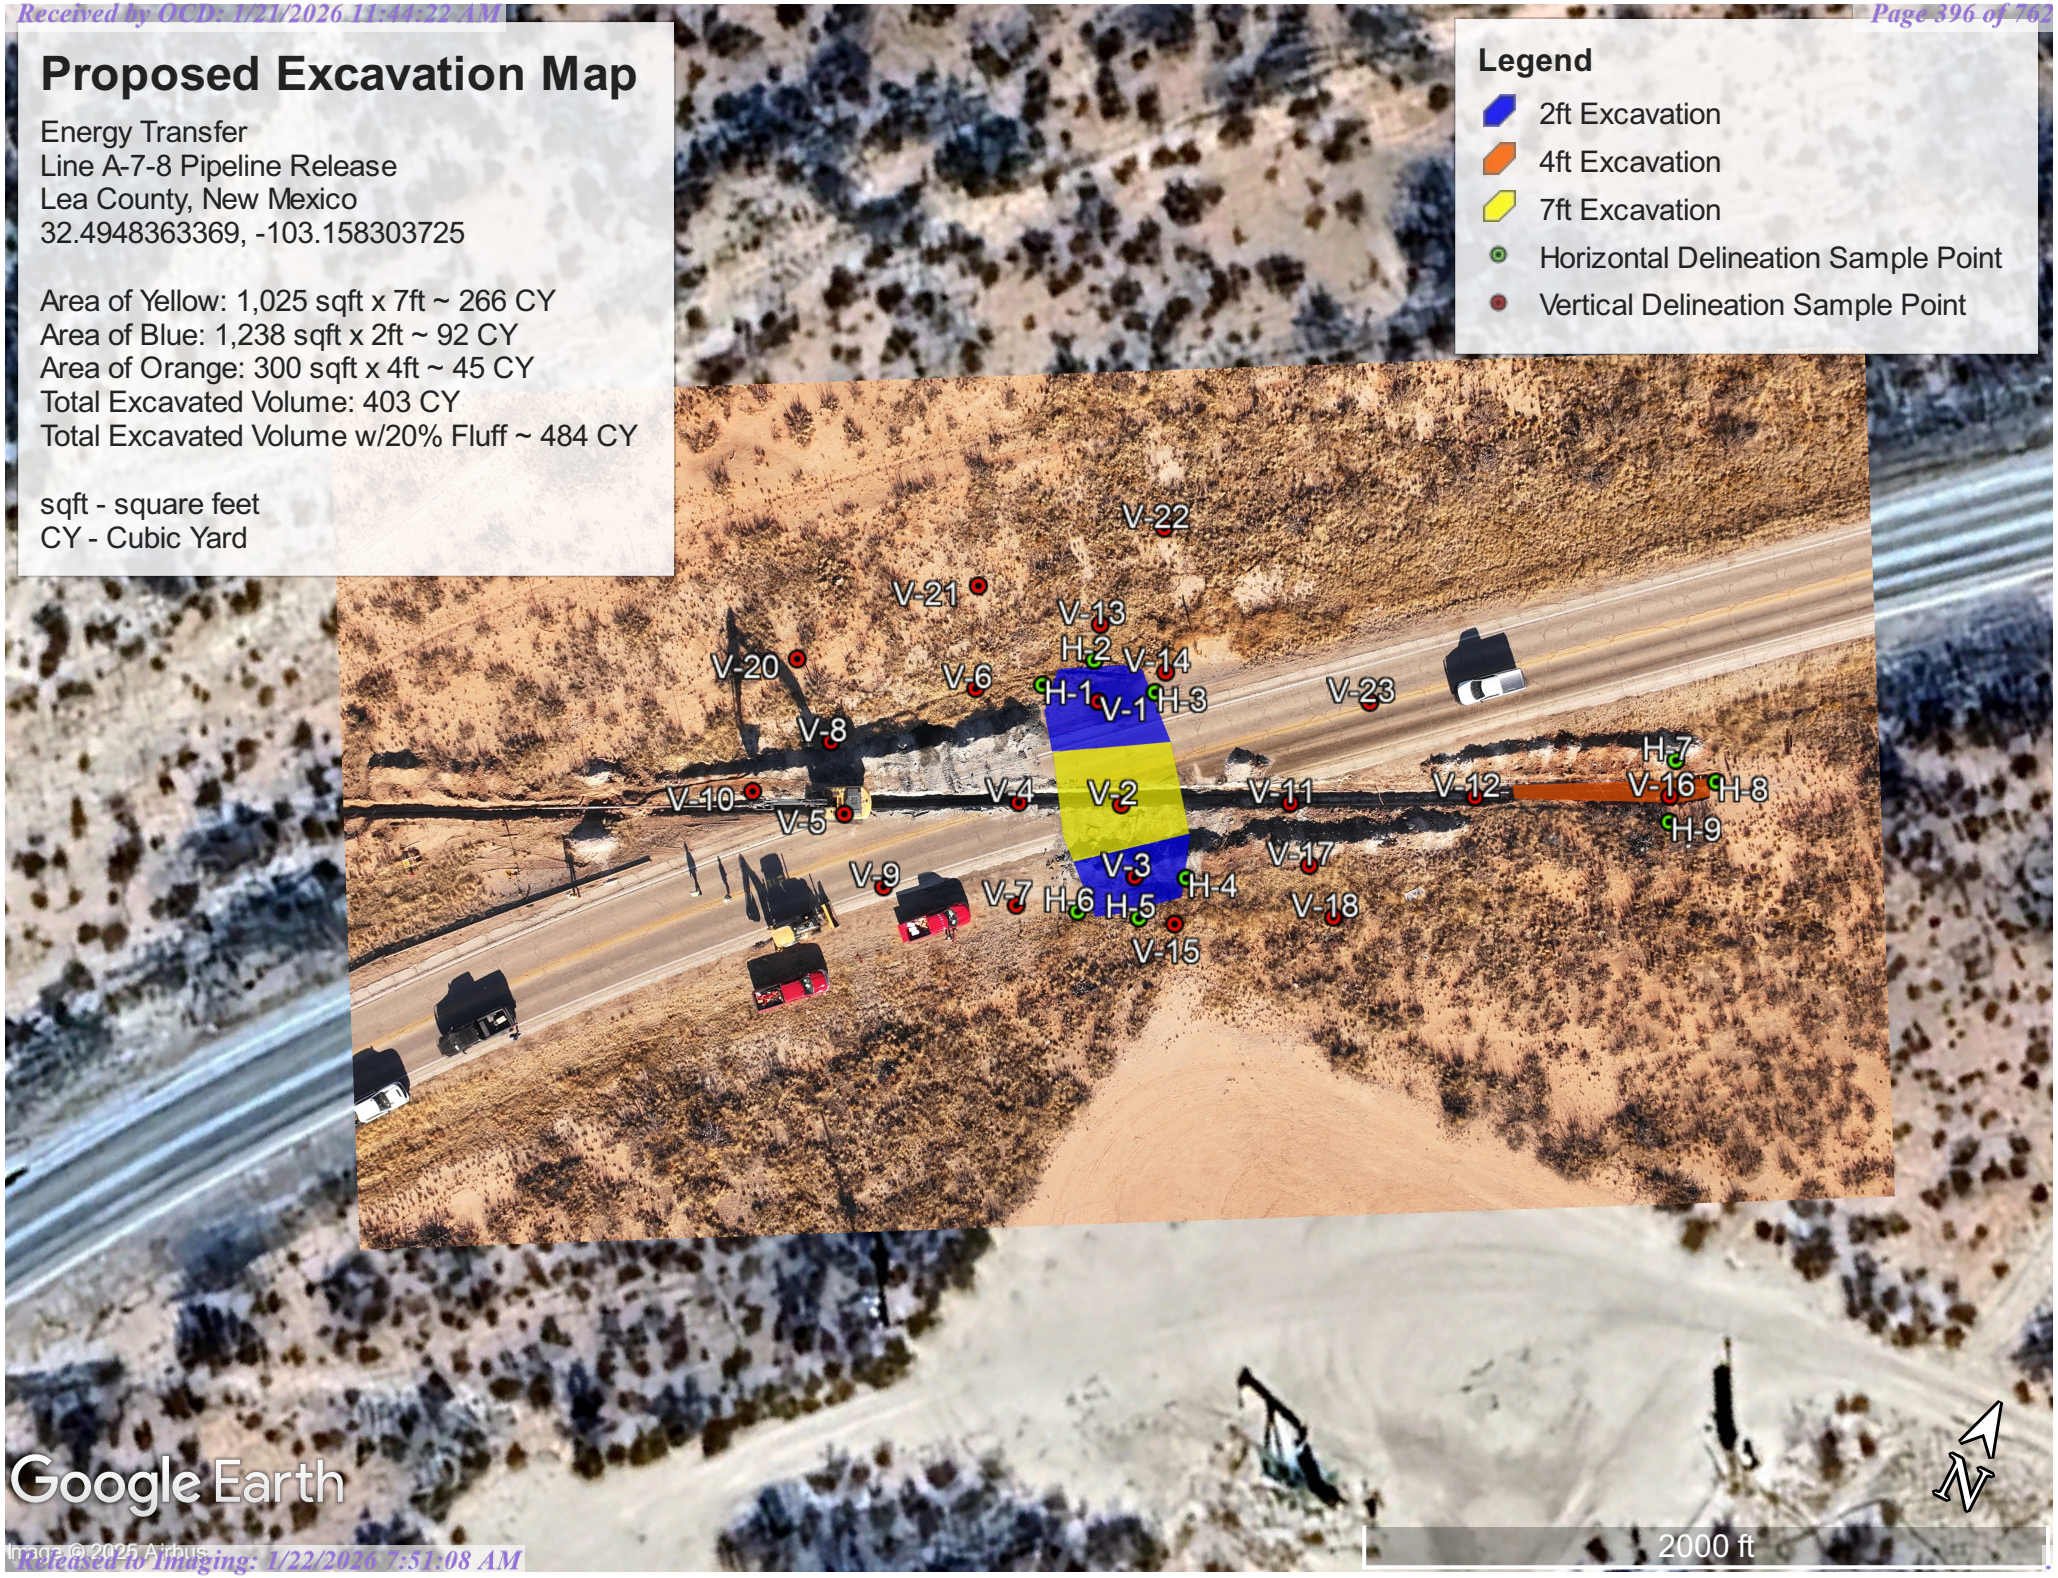

ATTACHMENT C: SITE CHARACTERIZATION

OCD Well Locations



1/9/2026, 2:21:29 PM

1:2,257

Wells - Large Scale

- Oil, Plugged
- Oil, Active
- Oil, Cancelled

Karst Occurrence Potential

- Low

- PLSS Second Division
- PLSS First Division

0 0.02 0.04 0.09 mi


0 0.04 0.07 0.15 km

BLM, OCD, New Mexico Tech, Microsoft, Vantor, OCD, BLM

New Mexico Oil Conservation Division

Received by OCD: 1/21/2026 11:44:22 AM



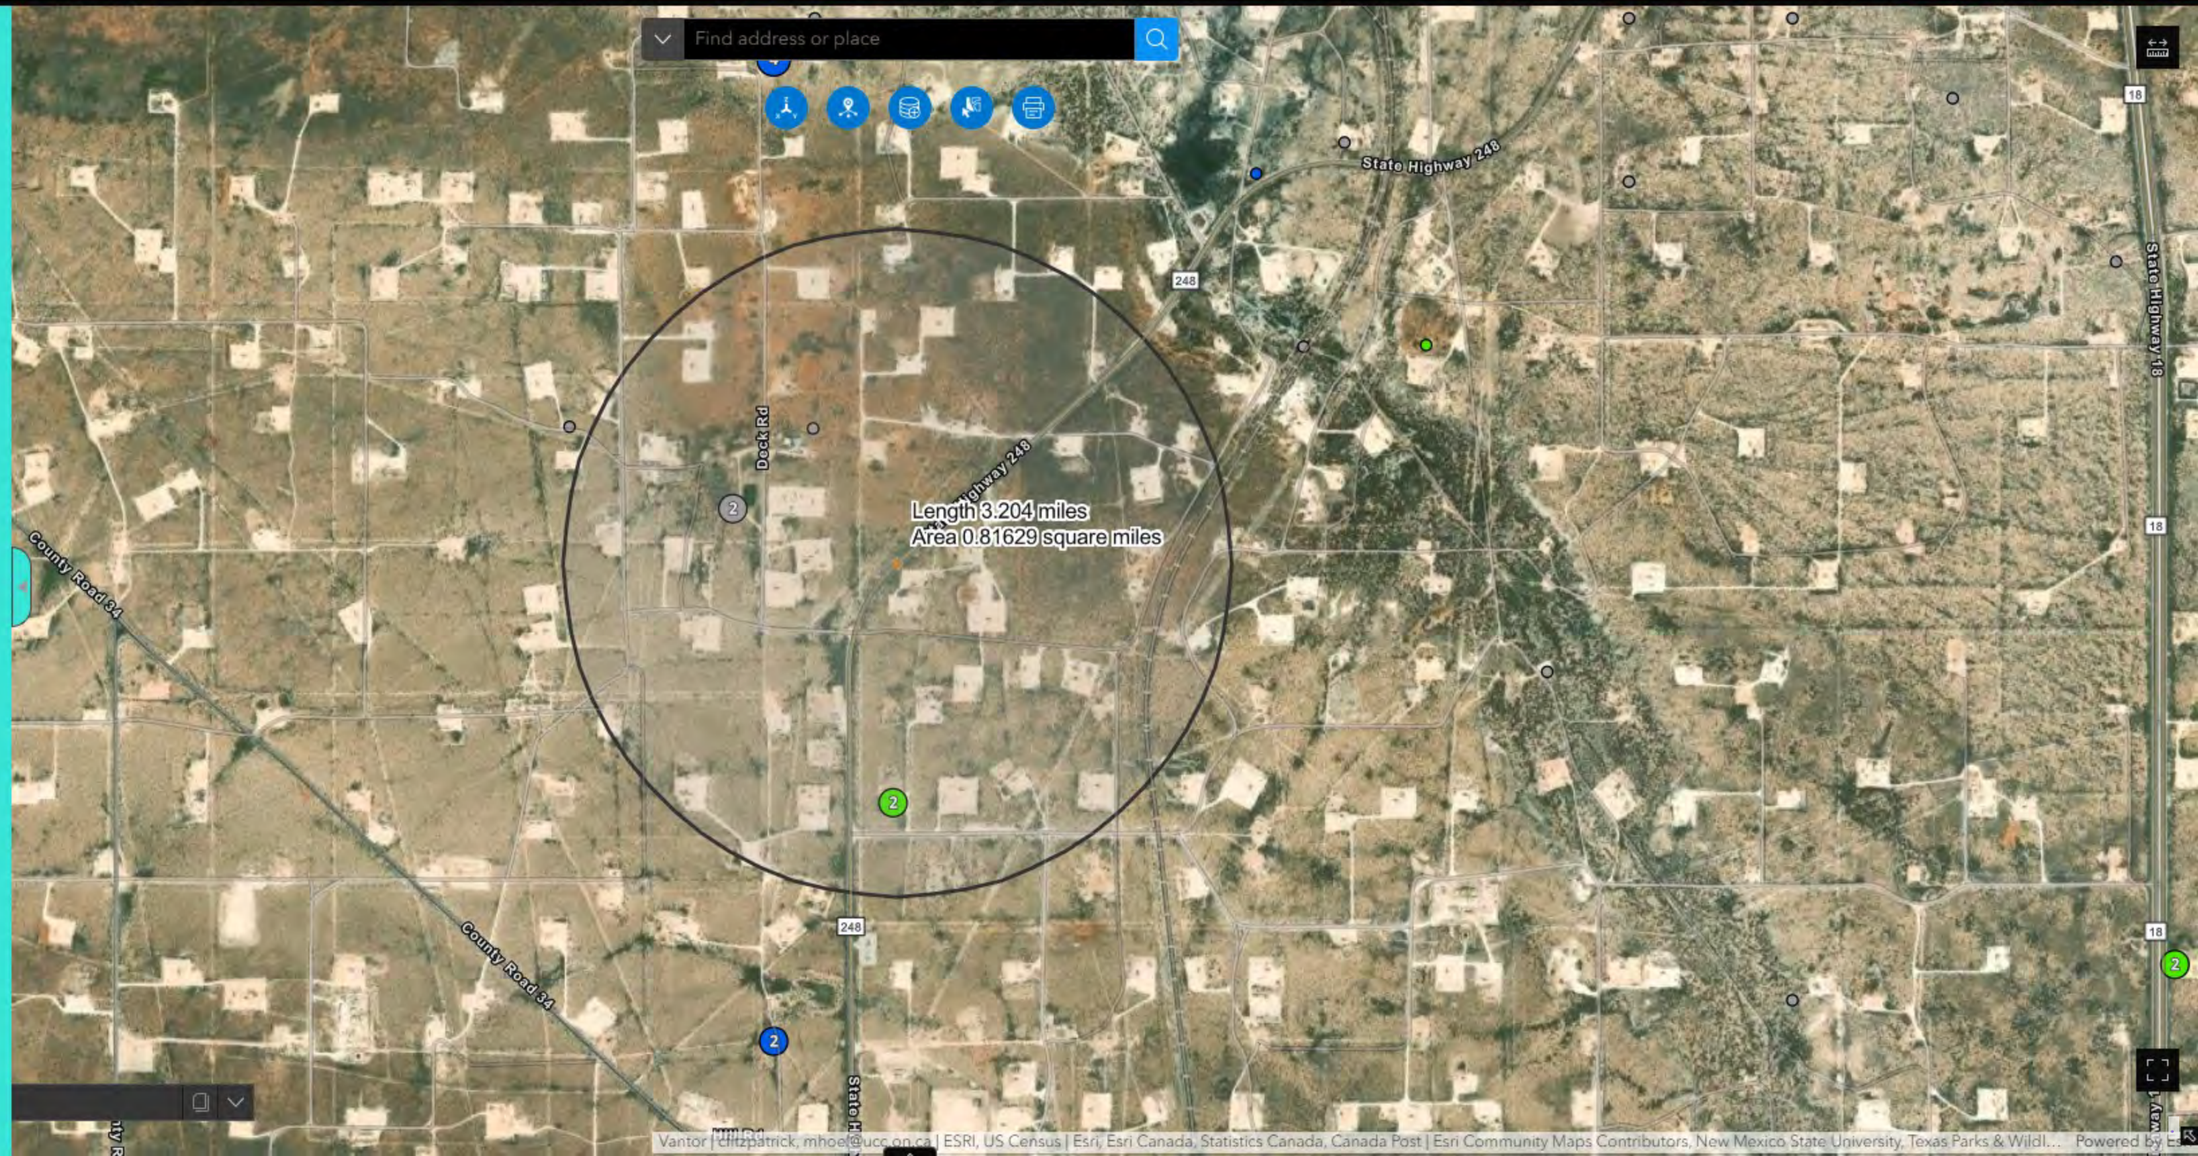

Released to Imaging: 1/22/2026 7:51:08 AM

WELL RECORD & LOG

OFFICE OF THE STATE ENGINEER

www.ose.state.nm.us

1. GENERAL AND WELL LOCATION

OSE POD NO. (WELL NO.)	WELL TAG ID NO.	OSE FILE NO(S).
Pod 1		CP-02104

WELL OWNER NAME(S)	PHONE (OPTIONAL)
ET-S Permian Holdings Co. LP	(432) 238-2142

WELL OWNER MAILING ADDRESS	CITY	STATE	ZIP
303 Veterans Airpark Lane, Suite 5000	Midland	TX	79705

WELL LOCATION (FROM GPS)		DEGREES	MINUTES	SECONDS	
	LATITUDE	32	29	36.6	N
	LONGITUDE	103	09	41.2	W

* ACCURACY REQUIRED: ONE TENTH OF A SECOND
* DATUM REQUIRED: WGS 84

DESCRIPTION RELATING WELL LOCATION TO STREET ADDRESS AND COMMON LANDMARKS – PLSS (SECTION, TOWNSHJIP, RANGE) WHERE AVAILABLE

S9 T21s R37e

2. DRILLING & CASING INFORMATION

LICENSE NO.	NAME OF LICENSED DRILLER	NAME OF WELL DRILLING COMPANY
WD-1862	James Hawley	H&R Enterprises, LLC

DRILLING STARTED	DRILLING ENDED	DEPTH OF COMPLETED WELL (FT)	BORE HOLE DEPTH (FT)	DEPTH WATER FIRST ENCOUNTERED (FT)
1-12-26	1-12-26	55'	55'	N/A

COMPLETED WELL IS: ☐ ARTESIAN *add Centralizer info below ☑ DRY HOLE ☐ SHALLOW (UNCONFINED)

STATIC WATER LEVEL IN COMPLETED WELL (FT): N/A

DATE STATIC MEASURED: 1-20-26

DRILLING FLUID: ☑ AIR ☐ MUD ADDITIVES – SPECIFY:

DRILLING METHOD: ☑ ROTARY ☐ HAMMER ☐ CABLE TOOL ☐ OTHER – SPECIFY:

CHECK HERE IF PITLESS ADAPTER IS INSTALLED ☐

DEPTH (feet bgl) FROM	DEPTH (feet bgl) TO	BORE HOLE DIAM (inches)	CASING MATERIAL AND/OR GRADE (include each casing string, and note sections of screen)	CASING CONNECTION TYPE (add coupling diameter)	CASING INSIDE DIAM. (inches)	CASING WALL THICKNESS (inches)	SLOT SIZE (inches)
0'	55'	6'	No casing left in hole				

3. ANNULAR MATERIAL

DEPTH (feet bgl) FROM	DEPTH (feet bgl) TO	BORE HOLE DIAM. (inches)	LIST ANNULAR SEAL MATERIAL AND GRAVEL PACK SIZE-RANGE BY INTERVAL *(if using Centralizers for Artesian wells- indicate the spacing below)	AMOUNT (cubic feet)	METHOD OF PLACEMENT
			N/A		

FOR OSE INTERNAL USE

WR-20 WELL RECORD & LOG (Version 09/22/2022)

FILE NO.	POD NO.	TRN NO.
LOCATION	WELL TAG ID NO.	PAGE 1 OF 2

4. HYDROGEOLOGIC LOG OF WELL

DEPTH (feet bgl) FROM	DEPTH (feet bgl) TO	THICKNESS (feet)	COLOR AND TYPE OF MATERIAL ENCOUNTERED - INCLUDE WATER-BEARING CAVITIES OR FRACTURE ZONES **(attach supplemental sheets to fully describe all units)**	WATER BEARING? (YES / NO)	ESTIMATED YIELD FOR WATER-BEARING ZONES (gpm)
0'	5'	5'	Caliche	Y ✓ N	
5'	15'	10'	Sand	Y ✓ N	
15'	30'	15'	Sandy Caliche	Y ✓ N	
30'	55'	25'	Sand	Y ✓ N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	
				Y N	

METHOD USED TO ESTIMATE YIELD OF WATER-BEARING STRATA:

☐ PUMP ☐ AIR LIFT ☐ BAILER ☑ OTHER – SPECIFY: DTGW Bore

TOTAL ESTIMATED WELL YIELD (gpm): 0.00

5. TEST; RIG SUPERVISION

WELL TEST — TEST RESULTS - ATTACH A COPY OF DATA COLLECTED DURING WELL TESTING, INCLUDING DISCHARGE METHOD, START TIME, END TIME, AND A TABLE SHOWING DISCHARGE AND DRAWDOWN OVER THE TESTING PERIOD.

MISCELLANEOUS INFORMATION: Depth to groundwater bore was gauged for water on 1-20-26 at the ETC A-7-8 Remediation site. DTGW bore was dry. Temporary well casing was removed, bore hole was backfilled with drill cuttings to 10' BGS. Hydrated Bentonite Hole Plug was poured from 10' BGS to surface.

PRINT NAME(S) OF DRILL RIG SUPERVISOR(S) THAT PROVIDED ONSITE SUPERVISION OF WELL CONSTRUCTION OTHER THAN LICENSEE:

Nathan Smelcer

6. SIGNATURE

THE UNDERSIGNED HEREBY CERTIFIES THAT, TO THE BEST OF HIS OR HER KNOWLEDGE AND BELIEF, THE FOREGOING IS A TRUE AND CORRECT RECORD OF THE ABOVE DESCRIBED HOLE AND THAT HE OR SHE WILL FILE THIS WELL RECORD WITH THE STATE ENGINEER AND THE PERMIT HOLDER WITHIN 30 DAYS AFTER COMPLETION OF WELL DRILLING:

James Hawley — 1-20-26

SIGNATURE OF DRILLER / PRINT SIGNEE NAME — DATE

FOR OSE INTERNAL USE — WR-20 WELL RECORD & LOG (Version 09/22/2022)

FILE NO.	POD NO.	TRN NO.
LOCATION	WELL TAG ID NO.	PAGE 2 OF 2

PLUGGING RECORD

NOTE: A Well Plugging Plan of Operations shall be approved by the State Engineer prior to plugging - 19.27.4 NMAC

I. GENERAL / WELL OWNERSHIP:

State Engineer Well Number: CP-02104 Pod 1

Well owner: ET-S Permian Holdings Co. LP Phone No.:

Mailing address: 303 Veterans Airpark Lane, Suite 5000

City: Midland State: TX Zip code: 79705

II. WELL PLUGGING INFORMATION:

1) Name of well drilling company that plugged well: H&R Enterprises, LLC

2) New Mexico Well Driller License No.: WD-1862 Expiration Date: 6/16/27

3) Well plugging activities were supervised by the following well driller(s)/rig supervisor(s):
Nathan Smelcer

4) Date well plugging began: 1-20-26 Date well plugging concluded: 1-20-26

5) GPS Well Location: Latitude: 32 deg, 29 min, 36.6 sec
Longitude: 103 deg, 09 min, 41.2 sec, WGS 84

6) Depth of well confirmed at initiation of plugging as: 55 ft below ground level (bgl),
by the following manner: well sounder

7) Static water level measured at initiation of plugging: Dry ft bgl

8) Date well plugging plan of operations was approved by the State Engineer: 1/15/26

9) Were all plugging activities consistent with an approved plugging plan? Yes If not, please describe differences between the approved plugging plan and the well as it was plugged (attach additional pages as needed):

10) Log of Plugging Activities - Label vertical scale with depths, and indicate separate plugging intervals with horizontal lines as necessary to illustrate material or methodology changes. Attach additional pages if necessary.

For each interval plugged, describe within the following columns:

Depth (ft bgl)	Plugging Material Used (include any additives used)	Volume of Material Placed (gallons)	Theoretical Volume of Borehole/ Casing (gallons)	Placement Method (tremie pipe, other)	Comments ("casing perforated first", "open annular space also plugged", etc.)
	0' - 10' Hydrated Bentonite	Approx. 15 gallons	15 gallons	Pour	
	10' - 55' Drill Cuttings	Approx. 67 gallons	67 gallons	Pour	

MULTIPLY		BY		AND OBTAIN
cubic feet	x	7.4805	=	gallons
cubic yards	x	201.97	=	gallons

III. SIGNATURE:

I, James Hawley, say that I am familiar with the rules of the Office of the State Engineer pertaining to the plugging of wells and that each and all of the statements in this Plugging Record and attachments are true to the best of my knowledge and belief.

Signature of Well Driller — Date: 1/20/26

Version: September 8, 2009
Page 2 of 2

Help Using this Tool

Legend | Basemap | Query

Legend

All Layers On/Off

All Layer Transparency

NM Wetlands Mapping and Classification

NM Wetlands Mapping and Classification

Mapping Status

Riparian Habitat

Hydrogeomorphic Mapping (HGM) Linears

- Riverine

Hydrogeomorphic Mapping (HGM) Polygons

- Depressional
- Flats
- Lacustrine Fringe
- Riverine
- Slope

Landscape Position and Water Body (LLWW) Linears

- Lentic (LE)
- Lotic RIver (LR)
- Lotic Stream (LS)
- Pond (PD)
- River (RV)
- Stream (ST)
- Terrene (TE)


Landscape Position and Water Body (LLWW) Polygons

- Lentic (LE)
- Lake (LK)
- Lotic River (LR)
- Lotic Stream (LS)
- Pond (PD)
- River (RV)
- Stream (ST)
- Terrene (TE)

Landform (LLWW)

- Basin
- Flat
- Floodplain

1:9,028

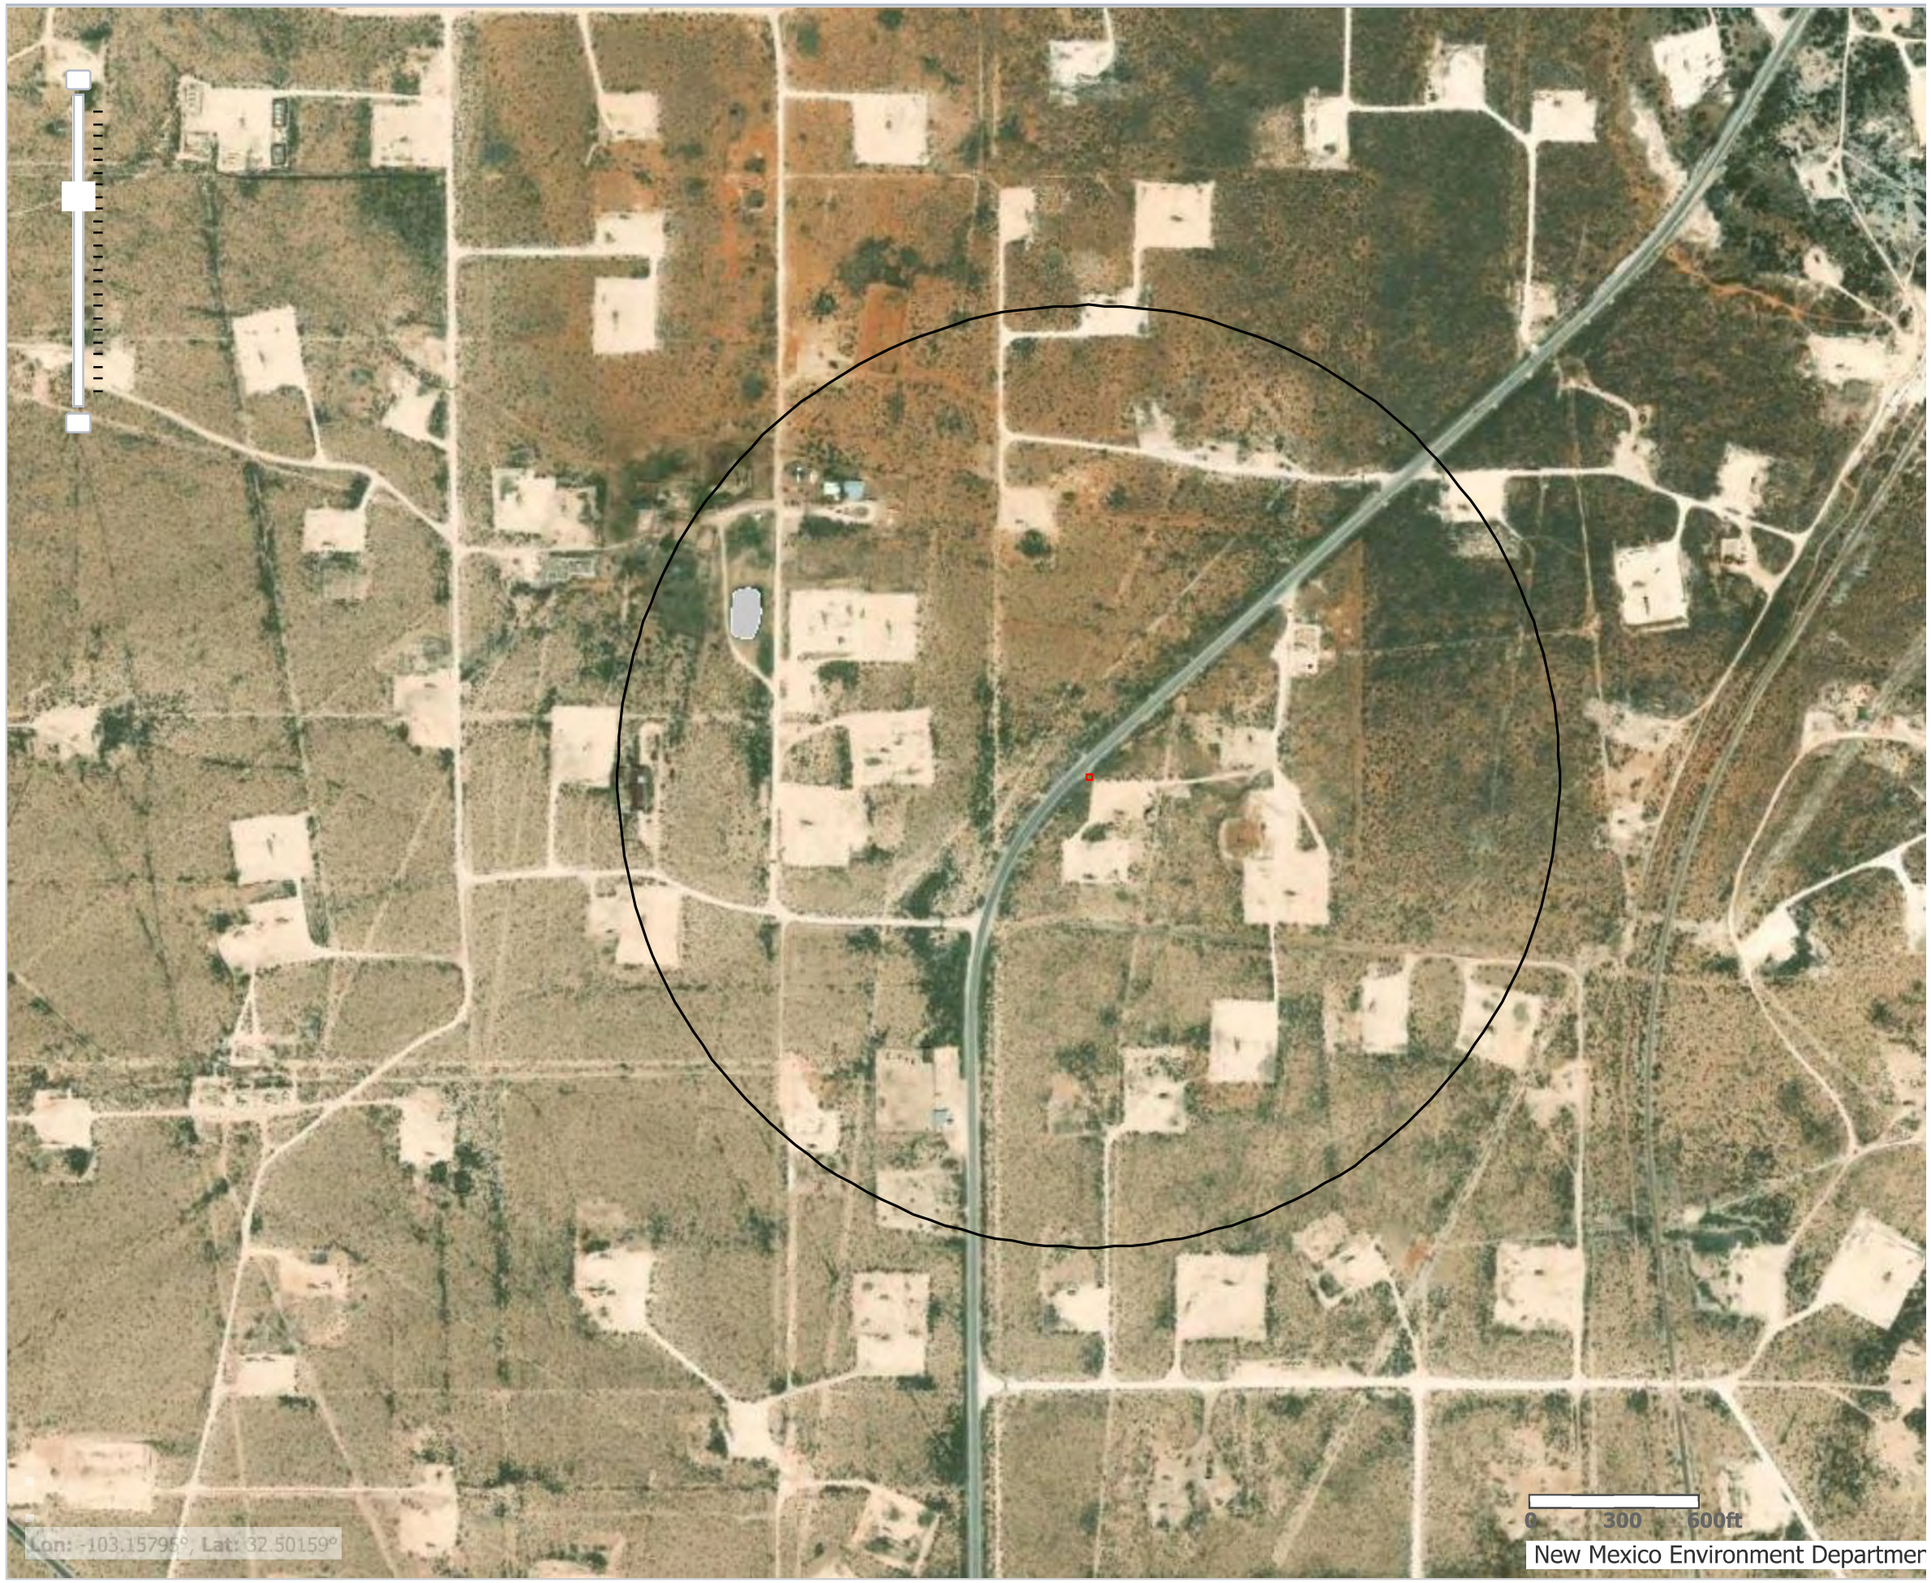

Received by OCD: 1/21/2026 11:44:22 AM

National Flood Hazard Layer FIRMette

FEMA

103°9'49"W 32°29'56"N



103°9'11"W 32°29'26"N

0 250 500 1,000 1,500 2,000 Feet

1:6,000

Basemap Imagery Source: USGS National Map 2023

Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

SPECIAL FLOOD HAZARD AREAS
- Without Base Flood Elevation (BFE) *Zone A, V, A99*
- With BFE or Depth *Zone AE, AO, AH, VE, AR*
- Regulatory Floodway

OTHER AREAS OF FLOOD HAZARD
- 0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile *Zone X*
- Future Conditions 1% Annual Chance Flood Hazard *Zone X*
- Area with Reduced Flood Risk due to Levee. See Notes. *Zone X*
- Area with Flood Risk due to Levee *Zone D*

OTHER AREAS
- NO SCREEN Area of Minimal Flood Hazard *Zone X*
- Effective LOMRs
- Area of Undetermined Flood Hazard *Zone D*

GENERAL STRUCTURES
- Channel, Culvert, or Storm Sewer
- Levee, Dike, or Floodwall

OTHER FEATURES
- 20.2 Cross Sections with 1% Annual Chance
- 17.5 Water Surface Elevation
- Coastal Transect
- Base Flood Elevation Line (BFE)
- Limit of Study
- Jurisdiction Boundary
- Coastal Transect Baseline
- Profile Baseline
- Hydrographic Feature

MAP PANELS
- Digital Data Available
- No Digital Data Available
- Unmapped

N

The pin displayed on the map is an approximate point selected by the user and does not represent an authoritative property location.

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on 1/9/2026 at 9:18 PM and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.


This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.

Released to Imaging: 1/22/2026 7:51:08 AM

Received by OCD: 1/21/2026 11:44:22 AM

U.S. Fish and Wildlife Service
National Wetlands Inventory

Highway Release Line A-7-8

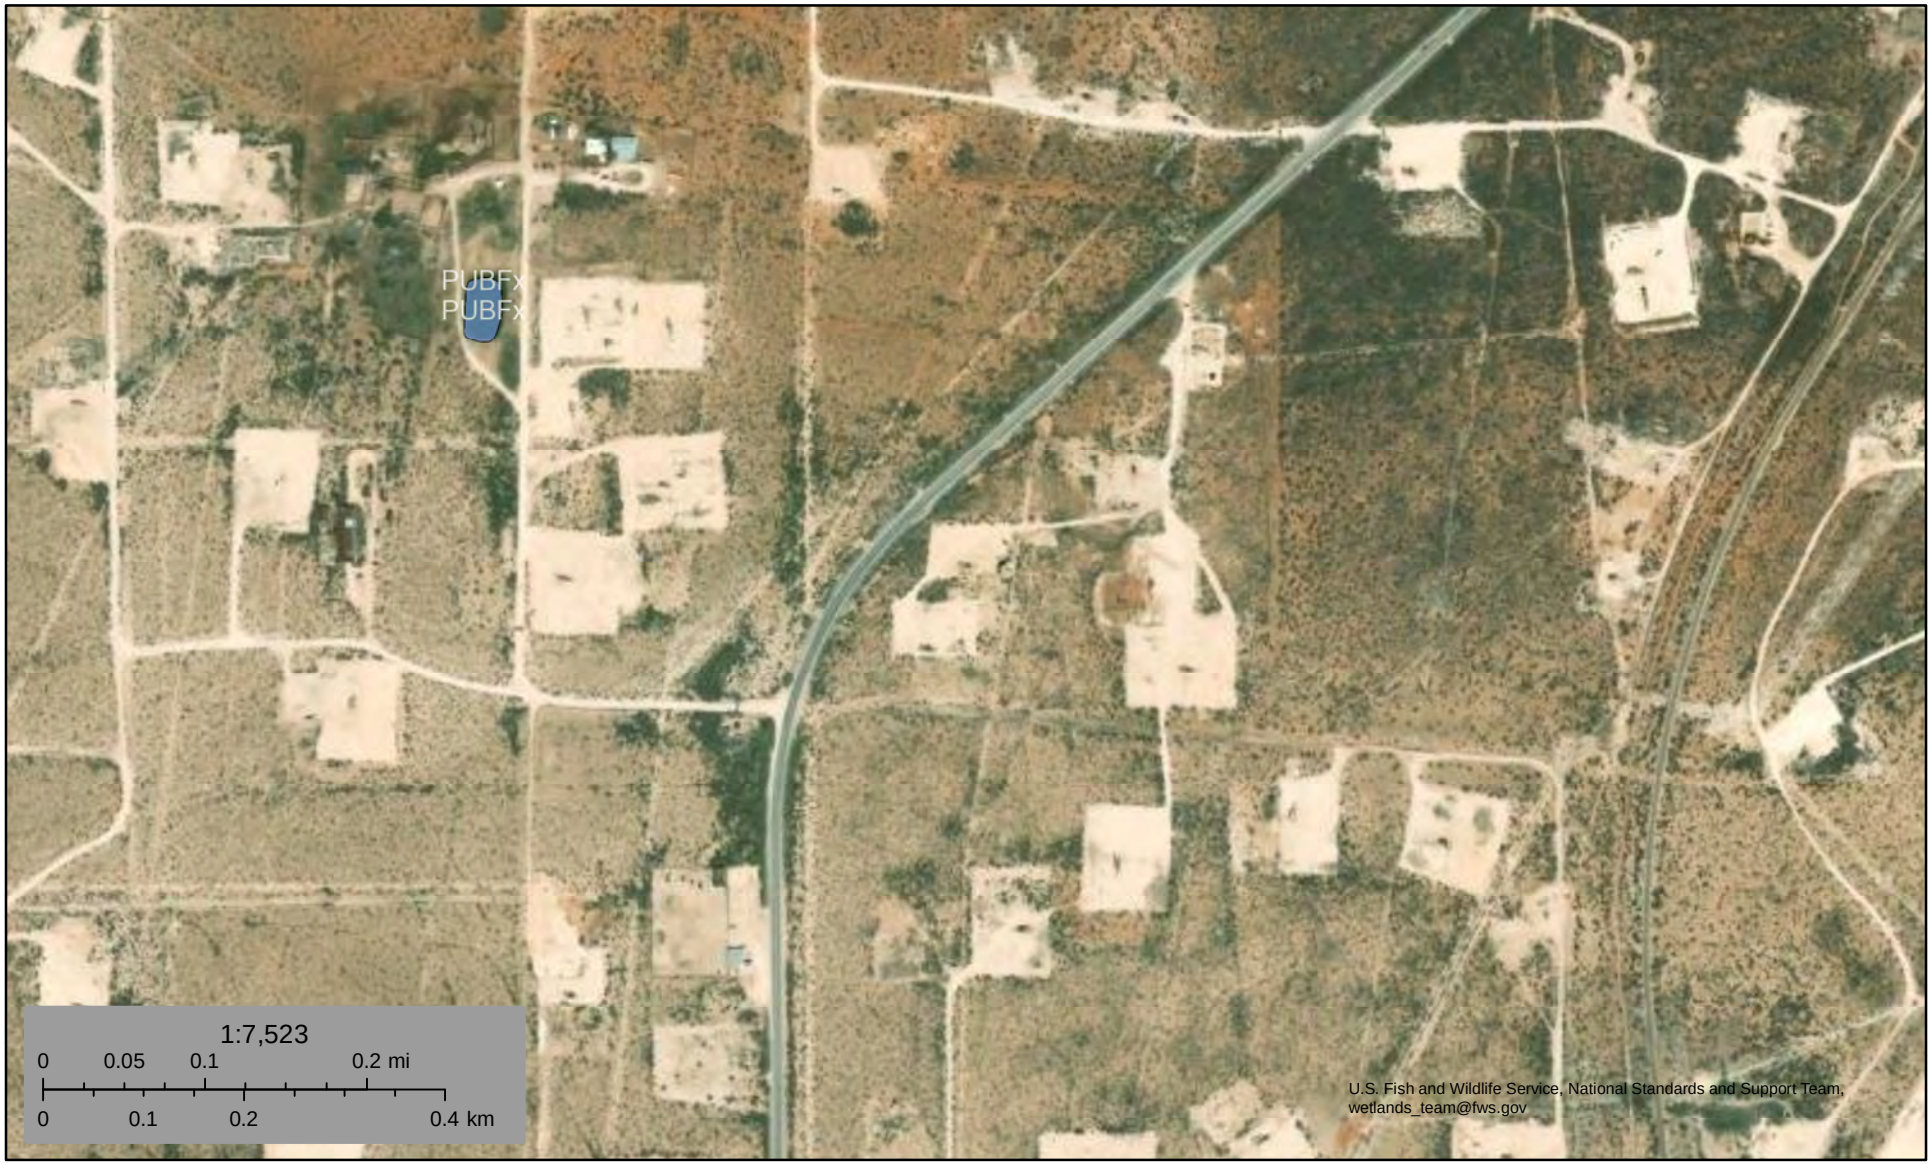

January 9, 2026

Wetlands

- Estuarine and Marine Deepwater
- Estuarine and Marine Wetland
- Freshwater Emergent Wetland
- Freshwater Forested/Shrub Wetland
- Freshwater Pond
- Lake
- Other
- Riverine

This map is for general reference only. The US Fish and Wildlife Service is not responsible for the accuracy or currentness of the base data shown on this map. All wetlands related data should be used in accordance with the layer metadata found on the Wetlands Mapper web site.

Released to Imaging: 1/22/2026 7:51:08 AM

ATTACHMENT D: PHOTOGRAPHIC DOCUMENTATION

Before Photo



Aerial Imagery of Area of Concern



Area of Concern

Before Photo



Area of Concern



Area of Concern

Before Photo




Area of Concern




Area of Concern

Before Photo

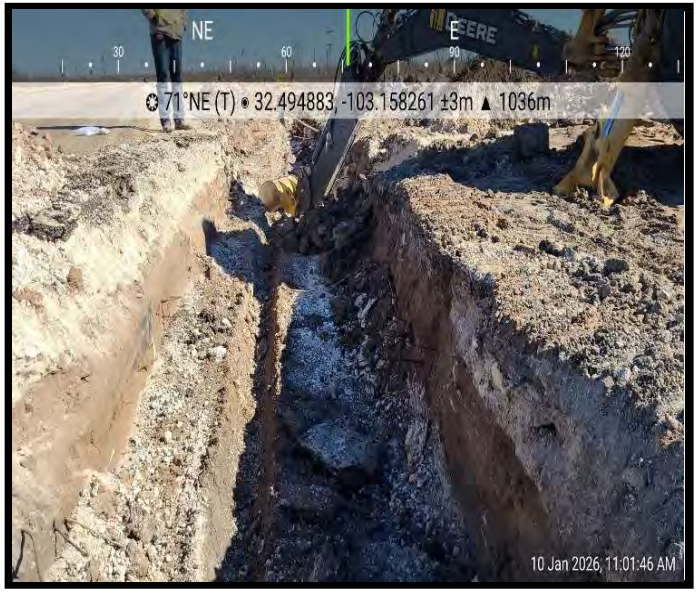

Area of Concern

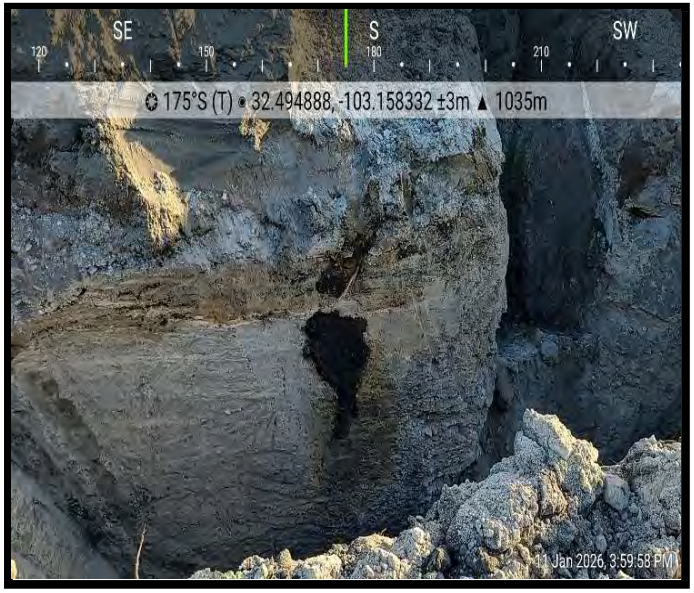

Area of Concern

ATTACHMENT E: LABORATORY ANALYTICAL METHOD WITH CHAIN-OF-CUSTODY

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 14, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/13/26 12:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 4 (H260194-01)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**68.6**	2.00	01/14/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	**240**	2.00	01/14/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	**113**	2.00	01/14/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	**229**	6.00	01/14/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	**651**	12.0	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**3160**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF S-06

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**7710**	100	01/13/2026	ND	208	104	200	0.576	
DRO >C10-C28*	**11800**	100	01/13/2026	ND	193	96.6	200	3.22	
EXT DRO >C28-C36	**1320**	100	01/13/2026	ND					

Surrogate: 1-Chlorooctane *453 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *182 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 5 (H260194-02)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**3.01**	0.500	01/14/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	**18.4**	0.500	01/14/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	**14.4**	0.500	01/14/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	**32.0**	1.50	01/14/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	**67.8**	3.00	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**384**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**368**	10.0	01/14/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	**965**	10.0	01/14/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	**162**	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *108 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *114 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 10 (H260194-07)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.053**	0.050	01/14/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	**0.167**	0.050	01/14/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	**0.092**	0.050	01/14/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	**0.234**	0.150	01/14/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	**0.547**	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	**70.9**	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	**13.7**	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/11/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 15 (H260194-12)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *102 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	**12.2**	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 20 (H260194-17)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 25 (H260194-22)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *102 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**176**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *88.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 30 (H260194-27)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *84.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 35 (H260194-32)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *109 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-2 40 (H260194-37)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 4 (H260194-38)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**208**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *95.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *98.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 5 (H260194-39)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.83	91.3	2.00	5.00	
Toluene*	<0.050	0.050	01/13/2026	ND	1.91	95.5	2.00	4.47	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.8	2.00	3.80	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.73	95.6	6.00	3.73	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/13/2026	ND	480	120	400	14.3	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *98.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 10 (H260194-44)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *103 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *84.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 15 (H260194-49)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *97.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 20 (H260194-54)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *105 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *93.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 25 (H260194-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *99.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *104 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 30 (H260194-64)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *93.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 35 (H260194-69)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *103 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *97.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-4 40 (H260194-74)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-5 4 (H260194-75)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *106 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	**41.8**	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *91.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-5 5 (H260194-76)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *105 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-5 10 (H260194-81)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *106 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**128**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	199	99.6	200	0.686	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	198	99.2	200	0.944	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *91.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V-5 15 (H260194-86)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *106 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/13/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *91.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-06	The recovery of this surrogate is outside control limits due to sample dilution required from high analyte concentration and/or matrix interference's.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 437 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K-all

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°C
Total Containers:	243	Corrected Temperature:	3.6°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
V-2	4	1/10/2026		S	Grab	1	x	x	x	
V-2	5	1/10/2026		S	Grab	1	x	x	x	
V-2	6	1/10/2026		S	Grab	1	x	x	x	Hold
V-2	7	1/10/2026		S	Grab	1	x	x	x	Hold
V-2	8	1/10/2026		S	Grab	1	x	x	x	Hold
V-2	9	1/10/2026		S	Grab	1	x	x	x	Hold
V-2	10	1/10/2026		S	Grab	1	x	x	x	
V-2	11	1/11/2026		S	Grab	1	x	x	x	Hold
V-2	12	1/11/2026		S	Grab	1	x	x	x	Hold
V-2	13	1/11/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James	Lucy Hus	1/13/26 1:00	2 Lucy	Tamara Hitchcock	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 10:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5c	
Total Containers:	243	Corrected Temperature:	3.6c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-2	14	1/11/2026		S	Grab	1		x	x	x	Kelly
12	V-2	15	1/11/2026		S	Grab	1		x	x	x	
13	V-2	16	1/11/2026		S	Grab	1		x	x	x	Kelly
14	V-2	17	1/11/2026		S	Grab	1		x	x	x	Kelly
15	V-2	18	1/11/2026		S	Grab	1		x	x	x	Kelly
16	V-2	19	1/11/2026		S	Grab	1		x	x	x	Kelly
17	V-2	20	1/12/2026		S	Grab	1		x	x	x	
18	V-2	21	1/12/2026		S	Grab	1		x	x	x	Kelly
19	V-2	22	1/12/2026		S	Grab	1		x	x	x	Kelly
20	V-2	23	1/12/2026		S	Grab	1		x	x	x	Kelly

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 439 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
V-2	24	1/12/2026		S	Grab	1		x	x	x	Hold
V-2	25	1/12/2026		S	Grab	1		x	x	x	
V-2	26	1/12/2026		S	Grab	1		x	x	x	Hold
V-2	27	1/12/2026		S	Grab	1		x	x	x	Hold
V-2	28	1/12/2026		S	Grab	1		x	x	x	Hold
V-2	29	1/12/2026		S	Grab	1		x	x	x	Hold
V-2	30	1/12/2026		S	Grab	1		x	x	x	
V-2	31	1/12/2026		S	Grab	1		x	x	x	Hold
V-2	32	1/12/2026		S	Grab	1		x	x	x	Hold
V-2	33	1/12/2026		S	Grab	1		x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2		1-13-26 1500
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 440 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-2	34	1/12/2026		S	Grab	1	x	x	x	Hold
32	V-2	35	1/12/2026		S	Grab	1	x	x	x	
33	V-2	36	1/12/2026		S	Grab	1	x	x	x	Hold
34	V-2	37	1/12/2026		S	Grab	1	x	x	x	Hold
35	V-2	38	1/12/2026		S	Grab	1	x	x	x	Hold
36	V-2	39	1/12/2026		S	Grab	1	x	x	x	Hold
37	V-2	40	1/12/2026		S	Grab	1	x	x	x	
38	V-4	4	1/10/2026		S	Grab	1	x	x	x	
39	V-4	5	1/10/2026		S	Grab	1	x	x	x	
40	V-4	6	1/10/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James	Kenny Han	1/13/26 11:00	2 Ke	Tamara Latham	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 441 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°c
Total Containers:	243	Corrected Temperature:	3.6°c

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-4	7	1/10/2026		S	Grab	1	x	x	x	Hold
42	V-4	8	1/10/2026		S	Grab	1	x	x	x	Hold
43	V-4	9	1/10/2026		S	Grab	1	x	x	x	Hold
44	V-4	10	1/10/2026		S	Grab	1	x	x	x	
45	V-4	11	1/11/2026		S	Grab	1	x	x	x	Hold
46	V-4	12	1/11/2026		S	Grab	1	x	x	x	Hold
47	V-4	13	1/11/2026		S	Grab	1	x	x	x	Hold
48	V-4	14	1/11/2026		S	Grab	1	x	x	x	Hold
49	V-4	15	1/12/2026		S	Grab	1	x	x	x	
50	V-4	16	1/12/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 442 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°c
Total Containers:	243	Corrected Temperature:	3.6°c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-4	17	1/12/2026		S	Grab	1	x	x	x	HOLD
52	V-4	18	1/12/2026		S	Grab	1	x	x	x	HOLD
53	V-4	19	1/12/2026		S	Grab	1	x	x	x	HOLD
54	V-4	20	1/12/2026		S	Grab	1	x	x	x	
55	V-4	21	1/12/2026		S	Grab	1	x	x	x	HOLD
56	V-4	22	1/12/2026		S	Grab	1	x	x	x	HOLD
57	V-4	23	1/12/2026		S	Grab	1	x	x	x	HOLD
58	V-4	24	1/12/2026		S	Grab	1	x	x	x	HOLD
59	V-4	25	1/12/2026		S	Grab	1	x	x	x	
60	V-4	26	1/12/2026		S	Grab	1	x	x	x	HOLD

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2	Tamara Latchford	1-13-26 1500
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:34:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#146
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-4	27	1/12/2026		S	Grab	1	x	x	x	Hold
62	V-4	28	1/12/2026		S	Grab	1	x	x	x	Hold
63	V-4	29	1/12/2026		S	Grab	1	x	x	x	Hold
64	V-4	30	1/12/2026		S	Grab	1	x	x	x	
65	V-4	31	1/12/2026		S	Grab	1	x	x	x	Hold
66	V-4	32	1/12/2026		S	Grab	1	x	x	x	Hold
67	V-4	33	1/12/2026		S	Grab	1	x	x	x	Hold
68	V-4	34	1/12/2026		S	Grab	1	x	x	x	Hold
69	V-4	35	1/12/2026		S	Grab	1	x	x	x	
70	V-4	36	1/12/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00am	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:34:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 444 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

#78- NO sample.
SRodriguez
1-13-26

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-4	37	1/12/2026		S	Grab	1	x	x	x	Hold
72	V-4	38	1/12/2026		S	Grab	1	x	x	x	Hold
73	V-4	39	1/12/2026		S	Grab	1	x	x	x	Hold
74	V-4	40	1/12/2026		S	Grab	1	x	x	x	
75	V-5	4	1/10/2026		S	Grab	1	x	x	x	~~Hold~~ ICH 1/13/26
76	V-5	5	1/10/2026		S	Grab	1	x	x	x	
77	V-5	6	1/10/2026		S	Grab	1	x	x	x	Hold
78	~~V-5~~	~~7~~	~~1/10/2026~~		~~S~~	~~Grab~~	~~1~~	~~x~~	~~x~~	~~x~~	NO SAMPLE! Hold
79	V-5	8	1/10/2026		S	Grab	1	x	x	x	Hold
80	V-5	9	1/10/2026		S	Grab	1	x	x	x	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2	Tamara Wallace	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260194

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 9 of 25

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5c	
Total Containers:	243	Corrected Temperature:	3.6c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-5	10	1/10/2026		S	Grab	1		x	x	x	
82	V-5	11	1/12/2026		S	Grab	1		x	x	x	H&W
83	V-5	12	1/12/2026		S	Grab	1		x	x	x	↓
84	V-5	13	1/12/2026		S	Grab	1		x	x	x	↓
85	V-5	14	1/12/2026		S	Grab	1		x	x	x	↓
86	V-5	15	1/12/2026		S	Grab	1		x	x	x	↓
87	V-5	16	1/12/2026		S	Grab	1		x	x	x	H&W
88	V-5	17	1/12/2026		S	Grab	1		x	x	x	↓
89	V-5	18	1/12/2026		S	Grab	1		x	x	x	↓
90	V-5	19	1/12/2026		S	Grab	1		x	x	x	↓

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time		Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		Tamara Maldonado	1-13-26 1200
3				4			
5				6			

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 14, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/13/26 12:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 20 (H260195-01)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *107 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**320**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *84.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 25 (H260195-06)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**448**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *99.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 30 (H260195-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *107 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *97.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 35 (H260195-16)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *111 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *115 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 5 40 (H260195-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *99.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 4 (H260195-22)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	**0.063**	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	**0.068**	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	**0.253**	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	**0.385**	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**128**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	**17.7**	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 5 (H260195-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 10 (H260195-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 15 (H260195-33)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	2.05	103	2.00	1.06	
Toluene*	<0.050	0.050	01/13/2026	ND	1.81	90.4	2.00	7.21	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.98	98.8	2.00	3.34	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	6.31	105	6.00	3.09	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	432	108	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 20 (H260195-38)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	**42.6**	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	**15.1**	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *100 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 25 (H260195-43)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 30 (H260195-48)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	**18.9**	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 35 (H260195-53)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *107 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 6 40 (H260195-58)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *112 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *115 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 1-2 (H260195-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *95.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 3 (H260195-60)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 4 (H260195-61)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 5 (H260195-62)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 10 (H260195-67)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	192	96.2	200	1.17	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	201	100	200	0.352	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *104 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 15 (H260195-73)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *88.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 20 (H260195-78)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *94.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 25 (H260195-83)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *78.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *79.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 30 (H260195-88)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *77.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 471 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

04024011 - acd

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
V-5	20	1/12/2026		S	Grab	1		x	x	x	
V-5	21	1/12/2026		S	Grab	1		x	x	x	HOLD
V-5	22	1/12/2026		S	Grab	1		x	x	x	
V-5	23	1/12/2026		S	Grab	1		x	x	x	
V-5	24	1/12/2026		S	Grab	1		x	x	x	
V-5	25	1/12/2026		S	Grab	1		x	x	x	
V-5	26	1/12/2026		S	Grab	1		x	x	x	HOLD
V-5	27	1/12/2026		S	Grab	1		x	x	x	
V-5	28	1/12/2026		S	Grab	1		x	x	x	
V-5	29	1/12/2026		S	Grab	1		x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:54:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°C
Total Containers:	243	Corrected Temperature:	3.6°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-5	30	1/12/2026		S	Grab	1	x	x	x	
12	V-5	31	1/12/2026		S	Grab	1	x	x	x	Hold
13	V-5	32	1/12/2026		S	Grab	1	x	x	x	
14	V-5	33	1/12/2026		S	Grab	1	x	x	x	
15	V-5	34	1/12/2026		S	Grab	1	x	x	x	
16	V-5	35	1/12/2026		S	Grab	1	x	x	x	
17	V-5	36	1/12/2026		S	Grab	1	x	x	x	Hold
18	V-5	37	1/12/2026		S	Grab	1	x	x	x	
19	V-5	38	1/12/2026		S	Grab	1	x	x	x	
20	V-5	39	1/12/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:40	2	Tamara Whitaker	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°	
Total Containers:	243	Corrected Temperature:	3.6°	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
V-5	40	1/12/2026		S	Grab	1		x	x	x	
V-6	4	1/12/2026		S	Grab	1		x	x	x	
V-6	5	1/12/2026		S	Grab	1		x	x	x	
V-6	6	1/12/2026		S	Grab	1		x	x	x	Hold
V-6	7	1/12/2026		S	Grab	1		x	x	x	"
V-6	8	1/12/2026		S	Grab	1		x	x	x	"
V-6	9	1/12/2026		S	Grab	1		x	x	x	"
V-6	10	1/12/2026		S	Grab	1		x	x	x	
V-6	11	1/12/2026		S	Grab	1		x	x	x	Hold
V-6	12	1/12/2026		S	Grab	1		x	x	x	"

21 22 23 24 25 26 27 28 29 30 31

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°	
Total Containers:	243	Corrected Temperature:	3.6°	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-6	13	1/12/2026		S	Grab	1		x	x	x	Hold
32	V-6	14	1/12/2026		S	Grab	1		x	x	x	↓
33	V-6	15	1/12/2026		S	Grab	1		x	x	x	
34	V-6	16	1/12/2026		S	Grab	1		x	x	x	Hold
35	V-6	17	1/12/2026		S	Grab	1		x	x	x	↓
36	V-6	18	1/12/2026		S	Grab	1		x	x	x	
37	V-6	19	1/12/2026		S	Grab	1		x	x	x	↓
38	V-6	20	1/12/2026		S	Grab	1		x	x	x	
39	V-6	21	1/12/2026		S	Grab	1		x	x	x	Hold
40	V-6	22	1/12/2026		S	Grab	1		x	x	x	↓

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		1-13-26 1300
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes No N/A	Temperature Reading:	3.5°C
Total Containers:	243	Corrected Temperature:	3.6°C

Parameters — 1/13/26

ANALYSIS REQUEST

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-6	23	1/12/2026		S	Grab	1	x	x	x	Hold
42	V-6	24	1/12/2026		S	Grab	1	x	x	x	↓
43	V-6	25	1/12/2026		S	Grab	1	x	x	x	
44	V-6	26	1/12/2026		S	Grab	1	x	x	x	Hold
45	V-6	27	1/12/2026		S	Grab	1	x	x	x	↓
46	V-6	28	1/12/2026		S	Grab	1	x	x	x	
47	V-6	29	1/12/2026		S	Grab	1	x	x	x	↓
48	V-6	30	1/12/2026		S	Grab	1	x	x	x	
49	V-6	31	1/12/2026		S	Grab	1	x	x	x	Hold
50	V-6	32	1/12/2026		S	Grab	1	x	x	x	↓

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		1-13-26 1200
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°C	
Total Containers:	243	Corrected Temperature:	3.6°C	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
S1	V-6	33	1/12/2026		S	Grab	1		x	x	x	H&W
S2	V-6	34	1/12/2026		S	Grab	1		x	x	x	↓
S3	V-6	35	1/12/2026		S	Grab	1		x	x	x	
S4	V-6	36	1/12/2026		S	Grab	1		x	x	x	H&W
S5	V-6	37	1/12/2026		S	Grab	1		x	x	x	↓
S6	V-6	38	1/12/2026		S	Grab	1		x	x	x	
S7	V-6	39	1/12/2026		S	Grab	1		x	x	x	
S8	V-6	40	1/12/2026		S	Grab	1		x	x	x	
S9	V-7	1-2	1/12/2026		S	Grab	1		x	x	x	
S10	V-7	3	1/12/2026		S	Grab	1		x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2	Tamara Whitaker	1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°C
Total Containers:	243	Corrected Temperature:	3.6°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-7	4	1/12/2026		S	Grab	1	x	x	x	
62	V-7	5	1/12/2026		S	Grab	1	x	x	x	
63	V-7	6	1/12/2026		S	Grab	1	x	x	x	Hold
64	V-7	7	1/12/2026		S	Grab	1	x	x	x	↓
65	V-7	8	1/12/2026		S	Grab	1	x	x	x	↓
4	V-7	9	1/12/2026		S	Grab	1	x	x	x	↓
5	V-7	10	1/12/2026		S	Grab	1	x	x	x	
5	V-7	11	1/12/2026		S	Grab	1	x	x	x	Hold
5	V-7	12	1/12/2026		S	Grab	1	x	x	x	↓
7	V-7	13	1/12/2026		S	Grab	1	x	x	x	↓

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:40	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260195

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°C	
Total Containers:	243	Corrected Temperature:	3.6°C	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-7	13	1/12/2026		S	Grab	1		x	x	x	Hold DUP To: 1/13/26
72	V-7	14	1/12/2026		S	Grab	1		x	x	x	
73	V-7	15	1/12/2026		S	Grab	1		x	x	x	
74	V-7	16	1/12/2026		S	Grab	1		x	x	x	Hold
75	V-7	17	1/12/2026		S	Grab	1		x	x	x	
76	V-7	18	1/12/2026		S	Grab	1		x	x	x	
77	V-7	19	1/12/2026		S	Grab	1		x	x	x	
78	V-7	20	1/12/2026		S	Grab	1		x	x	x	
79	V-7	21	1/12/2026		S	Grab	1		x	x	x	Hold
80	V-7	22	1/12/2026		S	Grab	1		x	x	x	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		1-13-26 1200
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H26019S

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24 hr
Sampler's Name:	Josh James	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c	
Total Containers:	243	Corrected Temperature:	3.6c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-7	23	1/12/2026		S	Grab	1		x	x	x	Hold
82	V-7	24	1/12/2026		S	Grab	1		x	x	x	↓
83	V-7	25	1/12/2026		S	Grab	1		x	x	x	
84	V-7	26	1/12/2026		S	Grab	1		x	x	x	Hold
85	V-7	27	1/12/2026		S	Grab	1		x	x	x	↓
86	V-7	28	1/12/2026		S	Grab	1		x	x	x	
87	V-7	29	1/12/2026		S	Grab	1		x	x	x	↓
88	V-7	30	1/12/2026		S	Grab	1		x	x	x	
89	V-7	31	1/12/2026		S	Grab	1		x	x	x	Hold
90	V-7	32	1/12/2026		S	Grab	1		x	x	x	↓

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time		Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		Tamara Wilder	1-13-26 1200
3				4			
5				6			

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 14, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/13/26 12:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 35 (H260196-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 7 40 (H260196-08)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *76.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 1 (H260196-09)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	**0.201**	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	**0.336**	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	**1.16**	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	**1.70**	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *85.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**128**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**21.1**	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	**46.6**	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 2 (H260196-10)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 3 (H260196-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 4 (H260196-12)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/13/2026	ND	1.84	92.1	2.00	0.689	
Toluene*	<0.050	0.050	01/13/2026	ND	1.82	91.1	2.00	0.361	
Ethylbenzene*	<0.050	0.050	01/13/2026	ND	1.94	96.9	2.00	0.441	
Total Xylenes*	<0.150	0.150	01/13/2026	ND	5.84	97.4	6.00	0.932	
Total BTEX	<0.300	0.300	01/13/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/14/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 5 (H260196-13)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *92.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 10 (H260196-18)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *91.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 15 (H260196-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 20 (H260196-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *104 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 25 (H260196-33)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *97.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 30 (H260196-38)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *112 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 35 (H260196-43)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/12/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 9 40 (H260196-48)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 11 3 (H260196-49)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *90.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 11 4 (H260196-50)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/13/2026	ND	206	103	200	1.73	
DRO >C10-C28*	<10.0	10.0	01/13/2026	ND	205	102	200	1.33	
EXT DRO >C28-C36	<10.0	10.0	01/13/2026	ND					

Surrogate: 1-Chlorooctane *88.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 11 5 (H260196-51)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *68.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 11 10 (H260196-56)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *79.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 1 (H260196-58)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *62.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *62.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 2 (H260196-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *55.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *55.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 3 (H260196-60)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *71.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *71.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 4 (H260196-61)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *75.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 5 (H260196-62)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *68.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/13/2026	Sampling Date:	01/10/2026
Reported:	01/14/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 6 (H260196-63)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.08	104	2.00	2.95	
Toluene*	<0.050	0.050	01/14/2026	ND	1.88	94.2	2.00	0.979	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	1.49	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.65	111	6.00	2.33	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/13/2026	ND	432	108	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	201	101	200	15.0	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	233	117	200	13.9	
EXT DRO >C28-C36	**32.2**	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *79.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *81.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QR-04	The RPD for the BS/BSD was outside of historical limits.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 506 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K - all

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°c
Total Containers:	243	Corrected Temperature:	3.6°c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-7	33	1/12/2026		S	Grab	1	x	x	x	HSW
2	V-7	34	1/12/2026		S	Grab	1	x	x	x	↓
3	V-7	35	1/12/2026		S	Grab	1	x	x	x	
4	V-7	36	1/12/2026		S	Grab	1	x	x	x	HSW
5	V-7	37	1/12/2026		S	Grab	1	x	x	x	↓
	V-7	38	1/12/2026		S	Grab	1	x	x	x	
	V-7	39	1/12/2026		S	Grab	1	x	x	x	
	V-7	40	1/12/2026		S	Grab	1	x	x	x	
	V-9	1	1/12/2026		S	Grab	1	x	x	x	
	V-9	2	1/12/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2	Tamara Hobbs	1-13-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 507 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-9	3	1/12/2026		S	Grab	1	x	x	x	
12	V-9	4	1/12/2026		S	Grab	1	x	x	x	
13	V-9	5	1/12/2026		S	Grab	1	x	x	x	
14	V-9	6	1/12/2026		S	Grab	1	x	x	x	Hold
15	V-9	7	1/12/2026		S	Grab	1	x	x	x	"
16	V-9	8	1/12/2026		S	Grab	1	x	x	x	"
17	V-9	9	1/12/2026		S	Grab	1	x	x	x	"
18	V-9	10	1/12/2026		S	Grab	1	x	x	x	"
19	V-9	11	1/12/2026		S	Grab	1	x	x	x	Hold
20	V-9	12	1/12/2026		S	Grab	1	x	x	x	"

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 508 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
V-9	13	1/12/2026		S	Grab	1		x	x	x	H&W
V-9	14	1/12/2026		S	Grab	1		x	x	x	b
V-9	15	1/12/2026		S	Grab	1		x	x	x	
V-9	16	1/12/2026		S	Grab	1		x	x	x	H&W
V-9	17	1/12/2026		S	Grab	1		x	x	x	
V-9	18	1/12/2026		S	Grab	1		x	x	x	b
V-9	19	1/12/2026		S	Grab	1		x	x	x	
V-9	20	1/12/2026		S	Grab	1		x	x	x	
V-9	21	1/12/2026		S	Grab	1		x	x	x	H&W
V-9	22	1/12/2026		S	Grab	1		x	x	x	b

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 11:00	2		1-13-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 22 of 25

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C	
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5°C	
Total Containers:	243	Corrected Temperature:	3.6°C	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-9	23	1/12/2026		S	Grab	1	x	x	x	Hold
32	V-9	24	1/12/2026		S	Grab	1	x	x	x	"
33	V-9	25	1/12/2026		S	Grab	1	x	x	x	
34	V-9	26	1/12/2026		S	Grab	1	x	x	x	Hold
35	V-9	27	1/12/2026		S	Grab	1	x	x	x	"
	V-9	28	1/12/2026		S	Grab	1	x	x	x	"
	V-9	29	1/12/2026		S	Grab	1	x	x	x	"
	V-9	30	1/12/2026		S	Grab	1	x	x	x	
	V-9	31	1/12/2026		S	Grab	1	x	x	x	Hold
	V-9	32	1/12/2026		S	Grab	1	x	x	x	"

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Josh James		1/13/26 11:00	2		1-13-26 1200
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-9	33	1/12/2026		S	Grab	1	x	x	x	Hold
42	V-9	34	1/12/2026		S	Grab	1	x	x	x	↓
43	V-9	35	1/12/2026		S	Grab	1	x	x	x	
44	V-9	36	1/12/2026		S	Grab	1	x	x	x	Hold
45	V-9	37	1/12/2026		S	Grab	1	x	x	x	↓
46	V-9	38	1/12/2026		S	Grab	1	x	x	x	
47	V-9	39	1/12/2026		S	Grab	1	x	x	x	
48	V-9	40	1/12/2026		S	Grab	1	x	x	x	
49	V-11	3	1/10/2026		S	Grab	1	x	x	x	
50	V-11	4	1/10/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 511 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-11	5	1/10/2026		S	Grab	1	x	x	x	
52	V-11	6	1/10/2026		S	Grab	1	x	x	x	Hold
53	V-11	7	1/10/2026		S	Grab	1	x	x	x	↓
54	V-11	8	1/10/2026		S	Grab	1	x	x	x	
55	V-11	9	1/10/2026		S	Grab	1	x	x	x	
	V-11	10	1/10/2026		S	Grab	1	x	x	x	
	V-11	11	1/10/2026		S	Grab	1	x	x	x	Hold
	H-1		1/10/2026		S	Grab	1	x	x	x	
	H-2		1/10/2026		S	Grab	1	x	x	x	
	H-3		1/10/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26 1100	2		1-13-26 12
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 512 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260196

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24 hr
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Josh James		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	(Yes) No N/A	Temperature Reading:	3.5c
Total Containers:	243	Corrected Temperature:	3.6c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	H-4		1/10/2026		S	Grab	1	x	x	x	
62	H-5		1/10/2026		S	Grab	1	x	x	x	
63	H-6		1/10/2026		S	Grab	1	x	x	x	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1 Josh James		1/13/26	2		1-13-26 1200
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 15, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/14/26 13:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 0-0.5 (H260218-01)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	**13.6**	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 1 (H260218-02)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	**28.7**	10.0	01/15/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *118 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 2 (H260218-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 3 (H260218-04)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *87.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 4 (H260218-05)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *90.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 5 (H260218-06)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 10 (H260218-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *94.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 15 (H260218-16)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.84	91.9	2.00	2.87	
Toluene*	<0.050	0.050	01/14/2026	ND	1.93	96.5	2.00	2.64	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.96	98.1	2.00	2.35	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.82	97.0	6.00	2.31	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 20 (H260218-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	QR-03
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	QR-03
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	QR-03
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *90.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 25 (H260218-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *102 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 10 30 (H260218-31)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 0-0.5' (H260218-32)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *112 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *81.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 1 (H260218-33)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *104 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *89.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 2 (H260218-34)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *84.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *80.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 3 (H260218-35)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	**0.059**	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	**0.192**	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	**10.4**	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *80.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *77.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 4 (H260218-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	176	87.9	200	5.42	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	176	88.1	200	4.87	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *84.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *79.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 5 (H260218-37)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	QR-03
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *75.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *71.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 10 (H260218-42)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *71.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *67.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 15 (H260218-47)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *106 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *72.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 20 (H260218-52)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *71.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 25 (H260218-57)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *78.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *72.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 30 (H260218-62)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *83.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *77.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 35 (H260218-67)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 8 40 (H260218-72)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 0-0.5' (H260218-73)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *82.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *75.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 1 (H260218-74)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *83.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *78.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 2 (H260218-75)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *89.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 3 (H260218-76)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	2.01	101	2.00	0.470	
Toluene*	<0.050	0.050	01/14/2026	ND	2.06	103	2.00	0.411	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	2.09	104	2.00	3.76	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	6.54	109	6.00	5.02	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *110 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *81.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 4 (H260218-77)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *80.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *74.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 5 (H260218-78)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 10 (H260218-83)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *82.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *80.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 15 (H260218-88)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *83.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *81.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QR-03	The RPD value for the sample duplicate or MS/MSD was outside of QC acceptance limits due to matrix interference. QC batch accepted based on LCS and/or LCSD recovery and/or RPD values.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 547 of 762

H24008818

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enron Energy Transfer
Company Name:	Standard Safety & Supply	Company Name:	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

04024081 K - Arn

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.4	
Total Containers:		Corrected Temperature:	1.5	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-10	0-0.5	1/13/2026		S	Grab	1	X	X	X	
2	V-10	1	1/13/2026		S	Grab	1	X	X	X	
3	V-10	2	1/13/2026		S	Grab	1	X	X	X	
4	V-10	3	1/13/2026		S	Grab	1	X	X	X	
5	V-10	4	1/13/2026		S	Grab	1	X	X	X	
6	V-10	5	1/13/2026		S	Grab	1	X	X	X	
7	V-10	6	1/13/2026		S	Grab	1	X	X	X	H2O
8	V-10	7	1/13/2026		S	Grab	1	X	X	X	
9	V-10	8	1/13/2026		S	Grab	1	X	X	X	
10	V-10	9	1/13/2026		S	Grab	1	X	X	X	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26 8:00	2		1.14 3:00
3				4		1300
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 548 of 762

H240218

STANDARD SAFETY & SUPPLY

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 2 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-10	10	1/13/2026		S	Grab	1	X	X	X	
12	V-10	11	1/13/2026		S	Grab	1	X	X	X	Hold
13	V-10	12	1/13/2026		S	Grab	1	X	X	X	↓
14	V-10	13	1/13/2026		S	Grab	1	X	X	X	
15	V-10	14	1/13/2026		S	Grab	1	X	X	X	
16	V-10	15	1/13/2026		S	Grab	1	X	X	X	
17	V-10	16	1/13/2026		S	Grab	1	X	X	X	Hold
18	V-10	17	1/13/2026		S	Grab	1	X	X	X	
19	V-10	18	1/13/2026		S	Grab	1	X	X	X	↓
20	V-10	19	1/13/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26
			4		1350
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 549 of 762

Page 37 of 43

H200518

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 3 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

ANALYSIS REQUEST

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-10	20	1/13/2026		S	Grab	1		X	X	X	
22	V-10	21	1/13/2026		S	Grab	1		X	X	X	H2O
23	V-10	22	1/13/2026		S	Grab	1		X	X	X	↓
24	V-10	23	1/13/2026		S	Grab	1		X	X	X	
25	V-10	24	1/13/2026		S	Grab	1		X	X	X	
26	V-10	25	1/13/2026		S	Grab	1		X	X	X	
27	V-10	26	1/13/2026		S	Grab	1		X	X	X	H2O
28	V-10	27	1/13/2026		S	Grab	1		X	X	X	
29	V-10	28	1/13/2026		S	Grab	1		X	X	X	
30	V-10	29	1/13/2026		S	Grab	1		X	X	X	↓

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
for	[signature]	1/14/26 8:00	2 [signature]	[signature]	1.14.26 1320
			4		
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 550 of 762

H200218

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 4 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsor
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-10	30	1/13/2026		S	Grab	1		X	X	X	
32	V-8	0-0.5	1/13/2026		S	Grab	1		X	X	X	
33	V-8	1	1/13/2026		S	Grab	1		X	X	X	
34	V-8	2	1/13/2026		S	Grab	1		X	X	X	
35	V-8	3	1/13/2026		S	Grab	1		X	X	X	
36	V-8	4	1/13/2026		S	Grab	1		X	X	X	
37	V-8	5	1/13/2026		S	Grab	1		X	X	X	
38	V-8	6	1/13/2026		S	Grab	1		X	X	X	
39	V-8	7	1/13/2026		S	Grab	1		X	X	X	Hold
40	V-8	8	1/13/2026		S	Grab	1		X	X	X	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26 8:00	2		1-14-26
3				4		1300
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 551 of 762

1/14/2026

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 5 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsun
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-8	9	1/13/2026		S	Grab	1	X	X	X	HOLD
42	V-8	10	1/13/2026		S	Grab	1	X	X	X	
43	V-8	11	1/13/2026		S	Grab	1	X	X	X	HOLD
44	V-8	12	1/13/2026		S	Grab	1	X	X	X	
45	V-8	13	1/13/2026		S	Grab	1	X	X	X	
46	V-8	14	1/13/2026		S	Grab	1	X	X	X	
47	V-8	15	1/13/2026		S	Grab	1	X	X	X	
48	V-8	16	1/13/2026		S	Grab	1	X	X	X	
49	V-8	17	1/13/2026		S	Grab	1	X	X	X	HOLD
50	V-8	18	1/13/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1-13-26
			4		1300
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 552 of 762

H260218

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 6 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6°
Total Containers:		Corrected Temperature:	1.7°

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-8	19	1/13/2026		S	Grab	1		X	X	X	H&W
52	V-8	20	1/13/2026		S	Grab	1		X	X	X	
53	V-8	21	1/13/2026		S	Grab	1		X	X	X	H&W
54	V-8	22	1/13/2026		S	Grab	1		X	X	X	↓
55	V-8	23	1/13/2026		S	Grab	1		X	X	X	
56	V-8	24	1/13/2026		S	Grab	1		X	X	X	↓
57	V-8	25	1/13/2026		S	Grab	1		X	X	X	
58	V-8	26	1/13/2026		S	Grab	1		X	X	X	H&W
59	V-8	27	1/13/2026		S	Grab	1		X	X	X	↓
60	V-8	28	1/13/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26
			4		1300
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

H200218

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 7 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enerson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

ANALYSIS REQUEST

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
01	V-8	29	1/13/2026		S	Grab	1	X	X	X	Hold
02	V-8	30	1/13/2026		S	Grab	1	X	X	X	
03	V-8	31	1/13/2026		S	Grab	1	X	X	X	Hold
04	V-8	32	1/13/2026		S	Grab	1	X	X	X	
05	V-8	33	1/13/2026		S	Grab	1	X	X	X	
06	V-8	34	1/13/2026		S	Grab	1	X	X	X	
07	V-8	35	1/13/2026		S	Grab	1	X	X	X	Run
08	V-8	36	1/13/2026		S	Grab	1	X	X	X	Hold
09	V-8	37	1/13/2026		S	Grab	1	X	X	X	
10	V-8	38	1/13/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26
			4		1300
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 554 of 762

1-14-26 8:00

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 8 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enersh
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

ANALYSIS REQUEST

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-8	39	1/13/2026		S	Grab	1	X	X	X	Hold
72	V-8	40	1/13/2026		S	Grab	1	X	X	X	
73	V-14	0-0.5	1/13/2026		S	Grab	1	X	X	X	
74	V-14	1	1/13/2026		S	Grab	1	X	X	X	
75	V-14	2	1/13/2026		S	Grab	1	X	X	X	
76	V-14	3	1/13/2026		S	Grab	1	X	X	X	
77	V-14	4	1/13/2026		S	Grab	1	X	X	X	
78	V-14	5	1/13/2026		S	Grab	1	X	X	X	
79	V-14	6	1/13/2026		S	Grab	1	X	X	X	
80	V-14	7	1/13/2026		S	Grab	1	X	X	X	Hold

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26 8:00
2			
3			
4			
5			
6			

Relinquished by: (Signature)	Received by: (Signature)	Date/Time
2		1.14.26
4		1300
6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 555 of 762

H260218

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 9 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-14	8	1/13/2026		S	Grab	1	X	X	X	H&W
82	V-14	9	1/13/2026		S	Grab	1	X	X	X	↓
83	V-14	10	1/13/2026		S	Grab	1	X	X	X	
84	V-14	11	1/13/2026		S	Grab	1	X	X	X	H&W
85	V-14	12	1/13/2026		S	Grab	1	X	X	X	
86	V-14	13	1/13/2026		S	Grab	1	X	X	X	
87	V-14	14	1/13/2026		S	Grab	1	X	X	X	
88	V-14	15	1/13/2026		S	Grab	1	X	X	X	
89	V-14	16	1/13/2026		S	Grab	1	X	X	X	
90	V-14	17	1/13/2026		S	Grab	1	X	X	X	H&W ↓

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26
			4		1305
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 15, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/14/26 13:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 20 (H260219-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *77.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *72.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 25 (H260219-08)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *90.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 30 (H260219-13)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 35 (H260219-18)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *76.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	192	96.0	200	0.566	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	175	87.3	200	2.86	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *81.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 14 40 (H260219-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *69.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *59.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 0-0.5 (H260219-24)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.062**	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	**0.463**	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	**0.651**	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	**1.94**	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	**3.12**	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**432**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**76.0**	10.0	01/15/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**1230**	10.0	01/15/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	**227**	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *80.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 1 (H260219-25)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.303**	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	**0.462**	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	**0.403**	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	**1.61**	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	**2.78**	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *84.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**28.6**	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**72.0**	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	**12.7**	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *73.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *67.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 2 (H260219-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.050**	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	**0.134**	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	**0.201**	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	**0.608**	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	**0.993**	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *79.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/15/2026	ND	448	112	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**12.1**	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *77.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *67.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 3 (H260219-27)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *74.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *64.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 4 (H260219-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *77.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *73.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *63.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 5 (H260219-29)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/14/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *76.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *73.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *62.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 20 (H260219-34)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *80.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 25 (H260219-39)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *76.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *81.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *68.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 30 (H260219-44)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *80.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *68.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 35 (H260219-49)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *78.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *79.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 40 (H260219-54)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	0.728	
Toluene*	<0.050	0.050	01/15/2026	ND	1.82	91.2	2.00	0.507	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.95	97.5	2.00	0.217	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.81	96.8	6.00	1.00	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *77.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *65.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 0-0.5 (H260219-55)

BTEX 8021B mg/kg **Analyzed By: JH**

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg **Analyzed By: KH**

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg **Analyzed By: MS**

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**22.1**	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *66.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *57.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 1 (H260219-56)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *64.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 2 (H260219-57)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**36.6**	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *66.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *57.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 3 (H260219-58)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	**0.107**	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	**0.327**	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	**0.434**	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *102 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	**20.0**	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *63.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 4 (H260219-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *65.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 5 (H260219-60)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *62.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *52.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 10 (H260219-65)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *100 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *64.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *54.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 15 (H260219-70)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *101 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	202	101	200	6.18	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	178	89.2	200	7.33	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *63.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 20 (H260219-75)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *90.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 25 (H260219-80)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *87.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 30 (H260219-85)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *93.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Shalyn Rodriguez
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 35 (H260219-90)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *93.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QR-03	The RPD value for the sample duplicate or MS/MSD was outside of QC acceptance limits due to matrix interference. QC batch accepted based on LCS and/or LCSD recovery and/or RPD values.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 586 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 1

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.4	
Total Containers:		Corrected Temperature:	1.5	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-14	18	1/13/2026		S	Grab	1	X	X	X	Hold
2	V-14	19	1/13/2026		S	Grab	1	X	X	X	↓
3	V-14	20	1/13/2026		S	Grab	1	X	X	X	
4	V-14	21	1/13/2026		S	Grab	1	X	X	X	Hold
5	V-14	22	1/13/2026		S	Grab	1	X	X	X	↓
6	V-14	23	1/13/2026		S	Grab	1	X	X	X	
7	V-14	24	1/13/2026		S	Grab	1	X	X	X	
8	V-14	25	1/13/2026		S	Grab	1	X	X	X	
9	V-14	26	1/13/2026		S	Grab	1	X	X	X	Hold
10	V-14	27	1/13/2026		S	Grab	1	X	X	X	↓

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2		1-14-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

040240K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-14	28	1/13/2026		S	Grab	1		X	X	X	Hold
12	V-14	29	1/13/2026		S	Grab	1		X	X	X	↓
13	V-14	30	1/13/2026		S	Grab	1		X	X	X	
14	V-14	31	1/13/2026		S	Grab	1		X	X	X	Hold
15	V-14	32	1/13/2026		S	Grab	1		X	X	X	↓
16	V-14	33	1/13/2026		S	Grab	1		X	X	X	
17	V-14	34	1/13/2026		S	Grab	1		X	X	X	↓
18	V-14	35	1/13/2026		S	Grab	1		X	X	X	
19	V-14	36	1/13/2026		S	Grab	1		X	X	X	Hold
20	V-14	37	1/13/2026		S	Grab	1		X	X	X	↓

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2	S Rodriguez	1.14.26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 588 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 12 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsen
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

040240IK

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6c	
Total Containers:		Corrected Temperature:	1.7c	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-14	38	1/13/2026		S	Grab	1	X	X	X	H&W
22	V-14	39	1/13/2026		S	Grab	1	X	X	X	
23	V-14	40	1/13/2026		S	Grab	1	X	X	X	
24	V-3	0-0.5	1/13/2026		S	Grab	1	X	X	X	
25	V-3	1	1/13/2026		S	Grab	1	X	X	X	
26	V-3	2	1/13/2026		S	Grab	1	X	X	X	
27	V-3	3	1/13/2026		S	Grab	1	X	X	X	
28	V-3	4	1/13/2026		S	Grab	1	X	X	X	
29	V-3	5	1/13/2026		S	Grab	1	X	X	X	
30	V-3	6	1/13/2026		S	Grab	1	X	X	X	H&W

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2		1-14-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260219

Dean Enerson

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 13 of

Project Manager:	Ethan Sessums	Bill to: (if different)	~~Dean Energy~~ ICH 1/14/26
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

04024011K

Project Name:	A78 Highway Line	Turn Around	Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6c	
Total Containers:		Corrected Temperature:	1.7c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-3	17	1/13/2026		S	Grab	1		X	X	X	H&W
32	V-3	18	1/13/2026		S	Grab	1		X	X	X	↓
33	V-3	19	1/13/2026		S	Grab	1		X	X	X	
34	V-3	20	1/13/2026		S	Grab	1		X	X	X	
35	V-3	21	1/13/2026		S	Grab	1		X	X	X	H&W
36	V-3	22	1/13/2026		S	Grab	1		X	X	X	↓
37	V-3	23	1/13/2026		S	Grab	1		X	X	X	
38	V-3	24	1/13/2026		S	Grab	1		X	X	X	
39	V-3	25	1/13/2026		S	Grab	1		X	X	X	
40	V-3	26	1/13/2026		S	Grab	1		X	X	X	H&W

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:20	2		1.14.26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 590 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 1

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsun Energy Transfer
Company Name:	Standard Safety & Supply	Company Name:	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6°
Total Containers:		Corrected Temperature:	1.7°

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-3	27	1/13/2026		S	Grab	1		X	X	X	H&W
42	V-3	28	1/13/2026		S	Grab	1		X	X	X	↓
43	V-3	29	1/13/2026		S	Grab	1		X	X	X	
44	V-3	30	1/13/2026		S	Grab	1		X	X	X	
45	V-3	31	1/13/2026		S	Grab	1		X	X	X	H&W
46	V-3	32	1/13/2026		S	Grab	1		X	X	X	↓
47	V-3	33	1/13/2026		S	Grab	1		X	X	X	
48	V-3	34	1/13/2026		S	Grab	1		X	X	X	
49	V-3	35	1/13/2026		S	Grab	1		X	X	X	
50	V-3	36	1/13/2026		S	Grab	1		X	X	X	H&W

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
		1/14/26 8:00	2		1.14.26 1300
			4		
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 1 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enerus
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

04024011L

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.6c	
Total Containers:		Corrected Temperature:	1.7c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
S1	V-3	37	1/13/2026		S	Grab	1		X	X	X	H2O
S2	V-3	38	1/13/2026		S	Grab	1		X	X	X	"
S3	V-3	39	1/13/2026		S	Grab	1		X	X	X	
S4	V-3	40	1/13/2026		S	Grab	1		X	X	X	
S5	V-15	0-0.5	1/13/2026		S	Grab	1		X	X	X	
S6	V-15	1	1/13/2026		S	Grab	1		X	X	X	
S7	V-15	2	1/13/2026		S	Grab	1		X	X	X	
S8	V-15	3	1/13/2026		S	Grab	1		X	X	X	
S9	V-15	4	1/13/2026		S	Grab	1		X	X	X	
S10	V-15	5	1/13/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26	2		1.14.26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 592 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsen Energy Transfer
Company Name:	Standard Safety & Supply	Company Name:	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1-10:	
Total Containers:		Corrected Temperature:	1.7c	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-15	6	1/13/2026		S	Grab	1		X	X	X	HoW
62	V-15	7	1/13/2026		S	Grab	1		X	X	X	↓
63	V-15	8	1/13/2026		S	Grab	1		X	X	X	
64	V-15	9	1/13/2026		S	Grab	1		X	X	X	
65	V-15	10	1/13/2026		S	Grab	1		X	X	X	HoW
66	V-15	11	1/13/2026		S	Grab	1		X	X	X	↓
67	V-15	12	1/13/2026		S	Grab	1		X	X	X	
68	V-15	13	1/13/2026		S	Grab	1		X	X	X	
69	V-15	14	1/13/2026		S	Grab	1		X	X	X	
70	V-15	15	1/13/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26	2		1-14-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 2

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enzsen
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.4	
Total Containers:		Corrected Temperature:	1.5	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-15	16	1/13/2026		S	Grab	1	X	X	X	H&W
72	V-15	17	1/13/2026		S	Grab	1	X	X	X	↓
73	V-15	18	1/13/2026		S	Grab	1	X	X	X	
74	V-15	19	1/13/2026		S	Grab	1	X	X	X	
75	V-15	20	1/13/2026		S	Grab	1	X	X	X	
76	V-15	21	1/13/2026		S	Grab	1	X	X	X	H&W
77	V-15	22	1/13/2026		S	Grab	1	X	X	X	↓
78	V-15	23	1/13/2026		S	Grab	1	X	X	X	
79	V-15	24	1/13/2026		S	Grab	1	X	X	X	
80	V-15	25	1/13/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2		1-14-26 1300
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 594 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260219

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 8

Project Manager:	Ethan Sessums	Bill to: (if different)	Dawn Enzsun
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.4°	
Total Containers:		Corrected Temperature:	1.5°	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
S1	V-15	26	1/13/2026		S	Grab	1	X	X	X	Hold
S2	V-15	27	1/13/2026		S	Grab	1	X	X	X	↓
S3	V-15	28	1/13/2026		S	Grab	1	X	X	X	
S4	V-15	29	1/13/2026		S	Grab	1	X	X	X	
S5	V-15	30	1/13/2026		S	Grab	1	X	X	X	
S6	V-15	31	1/13/2026		S	Grab	1	X	X	X	Hold
S7	V-15	32	1/13/2026		S	Grab	1	X	X	X	↓
S8	V-15	33	1/13/2026		S	Grab	1	X	X	X	
S9	V-15	34	1/13/2026		S	Grab	1	X	X	X	
S10	V-15	35	1/13/2026		S	Grab	1	X	X	X	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26 8:00	2		1.14.26 1300
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 15, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/14/26 13:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 15 40 (H260220-05)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *100 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *92.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 0-0.5' (H260220-06)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	**12.4**	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *87.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 1 (H260220-07)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *87.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 2 (H260220-08)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/14/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/14/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/14/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/14/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/14/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *89.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 3 (H260220-09)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/15/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *91.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *89.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 4 (H260220-10)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/15/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *88.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *89.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 5 (H260220-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/15/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *83.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 10 (H260220-16)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.86	92.8	2.00	3.68	
Toluene*	<0.050	0.050	01/15/2026	ND	1.96	97.8	2.00	3.49	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.98	99.1	2.00	3.70	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.87	97.9	6.00	3.64	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *99.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *94.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 15 (H260220-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	QM-07
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *123 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *93.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 20 (H260220-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *113 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**224**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *93.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 25 (H260220-31)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**272**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *95.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 30 (H260220-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *112 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**128**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/14/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	**36.3**	10.0	01/14/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	**23.2**	10.0	01/14/2026	ND					

Surrogate: 1-Chlorooctane *94.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 17 34 (H260220-40)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/15/2026	ND	416	104	400	7.41	

TPH 8015M mg/kg Analyzed By: MS

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	183	91.5	200	7.29	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	187	93.4	200	7.45	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *94.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QM-07	The spike recovery was outside acceptance limits for the MS and/or MSD. The batch was accepted based on acceptable LCS recovery.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 610 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260220

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 1

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

0402401K - all

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6°c	
Total Containers:		Corrected Temperature:	1.7°c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-15	36	1/13/2026		S	Grab	1	X	X	X	H2O
2	V-15	37	1/13/2026		S	Grab	1	X	X	X	
3	V-15	38	1/13/2026		S	Grab	1	X	X	X	
4	V-15	39	1/13/2026		S	Grab	1	X	X	X	
5	V-15	40	1/13/2026		S	Grab	1	X	X	X	
6	V-17	0-0.5	1/13/2026		S	Grab	1	X	X	X	
7	V-17	1	1/13/2026		S	Grab	1	X	X	X	
8	V-17	2	1/13/2026		S	Grab	1	X	X	X	
9	V-17	3	1/13/2026		S	Grab	1	X	X	X	
10	V-17	4	1/13/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2		1-14-26 130
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 611 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260220

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 2 of

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enexus Energy Transfer
Company Name:	Standard Safety & Supply	Company Name:	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6°	
Total Containers:		Corrected Temperature:	1.7°	

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-17	5	1/13/2026		S	Grab	1	X	X	X	
12	V-17	6	1/13/2026		S	Grab	1	X	X	X	H20 ↓
13	V-17	7	1/13/2026		S	Grab	1	X	X	X	
14	V-17	8	1/13/2026		S	Grab	1	X	X	X	
15	V-17	9	1/13/2026		S	Grab	1	X	X	X	
16	V-17	10	1/13/2026		S	Grab	1	X	X	X	
17	V-17	11	1/13/2026		S	Grab	1	X	X	X	H20 ↓
18	V-17	12	1/13/2026		S	Grab	1	X	X	X	
19	V-17	13	1/13/2026		S	Grab	1	X	X	X	
20	V-17	14	1/13/2026		S	Grab	1	X	X	X	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			1/14/26 8:00	2		1-14-26 130
3				4		
5				6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 612 of 762

CARDINAL Laboratories

101 East Marland, Hobbs, NM 88240
(575) 393-2326 FAX (575) 393-2476

CHAIN-OF-CUSTODY AND ANALYSIS REQUEST

C-26029-GL-2130017)

Company Name:	Standard Safety & Supply
Project Manager:	Ethan Sessums
Address:	2425 Trunk St
City:	Odessa State: TX Zip: 79761
Phone #:	254-266-5456 Fax #:
Project #:	Project Owner: Energy Transfer
Project Name:	ATS Highway line
Project Location:	Lea Co, NM
Sampler Name:	Connor Whitman

BILL TO

P.O. #:	
Company:	Energy Transfer
Attn:	Dawn Emerson
Address:	
City:	
State:	Zip:
Phone #:	
Fax #:	

ANALYSIS REQUEST

FOR LAB USE ONLY Lab I.D.	Sample I.D.		(G)RAB OR (C)OMP.	# CONTAINERS	MATRIX: GROUNDWATER	WASTEWATER	SOIL	OIL	SLUDGE	OTHER :	PRESERV.: ACID/BASE:	ICE / COOL	OTHER :	SAMPLING: DATE	TIME	BTEX 8021B	TPH 8015M	Chloride 4500 Cl-B	Hold
H260220																			
21	V-17	15	G	1			X					X		1/13/26					
22		16																	X
23		17																	X
24		18																	X
25		19																	X
26		20																	
27		21																	X
28		22																	X
29		23																	X
30		24																	X

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising whether based in contract or tort, shall be limited to the amount paid by the client for the analyses. All claims including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within 30 days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequental damages, including without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise.

Relinquished By: CW	Date: 1/14/26 Time: 8:00	Received By:	
Relinquished By:	Date: 1-14-26 Time: 1300	Received By: Tamara Oldaker	
Delivered By: (Circle One) Sampler - UPS - Bus - Other:	Observed Temp. °C 1.6 Corrected Temp. °C 1.7	Sample Condition Cool: Yes / No Intact: Yes / No	CHECKED BY: (Initials)

Verbal Result: ☐ Yes ☐ No Add'l Phone #:
All Results are emailed. Please provide Email address:

REMARKS: 040240 1K

Turnaround Time: Standard ☐ Rush ☑

Thermometer ID #140 Correction Factor +0.3°C 24 +0.1c

Bacteria (only) Sample Condition: Cool ☐ Yes ☐ No Intact ☐ Yes ☐ No Observed Temp. °C Corrected Temp. °C

TB 1/14/26

FORM-006 R 3.0 02/12/25

† Cardinal cannot accept verbal changes. Please email changes to celey.keene@cardinallabsnm.com

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260220

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 2 of 2

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Enron Energy Transfer
Company Name:	Standard Safety & Supply	Company Name:	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1°c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	1.6°c	
Total Containers:		Corrected Temperature:	1.7°c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-17	25	1/13/2026		S	Grab	1		X	X	X	
32	V-17	26	1/13/2026		S	Grab	1		X	X	X	H&W
33	V-17	27	1/13/2026		S	Grab	1		X	X	X	↓
34	V-17	28	1/13/2026		S	Grab	1		X	X	X	
35	V-17	29	1/13/2026		S	Grab	1		X	X	X	
36	V-17	30	1/13/2026		S	Grab	1		X	X	X	H&W
37	V-17	31	1/13/2026		S	Grab	1		X	X	X	↓
38	V-17	32	1/13/2026		S	Grab	1		X	X	X	
39	V-17	33	1/13/2026		S	Grab	1		X	X	X	
40	V-17	34	1/13/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		1/14/26 8:00	2		1-14-26 13
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 15, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/14/26 13:00.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 10 (H260223-04)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/15/2026	ND	432	108	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	186	93.0	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	216	108	200	7.99	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *71.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *69.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/14/2026	Sampling Date:	01/13/2026
Reported:	01/15/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Alyssa Parras
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 3 15 (H260223-09)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	2.06	103	2.00	0.675	
Toluene*	<0.050	0.050	01/15/2026	ND	1.97	98.3	2.00	6.70	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.05	102	2.00	8.11	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.37	106	6.00	8.32	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/15/2026	ND	432	108	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	186	93.0	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	216	108	200	7.99	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *79.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *77.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

QM-07	The spike recovery was outside acceptance limits for the MS and/or MSD. The batch was accepted based on acceptable LCS recovery.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 618 of 762

H260223

Chain of Custody

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	Ethan.Sessums@standardtx.com

Work Order Comments

CIS-040340IK

Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	+0.1	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	1.6	
Total Containers:		Corrected Temperature:	1.7	

ANALYSIS REQUEST

Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1 V-3	7	1/13/2026		S	Grab	1		X	X	X	Hold
2 V-3	8	1/13/2026		S	Grab	1		X	X	X	Hold
3 V-3	9	1/13/2026		S	Grab	1		X	X	X	Hold
4 V-3	10	1/13/2026		S	Grab	1		X	X	X	
5 V-3	11	1/13/2026		S	Grab	1		X	X	X	Hold
6 V-3	12	1/13/2026		S	Grab	1		X	X	X	Hold
7 V-3	13	1/13/2026		S	Grab	1		X	X	X	Hold
8 V-3	14	1/13/2026		S	Grab	1		X	X	X	Hold
9 V-3	15	1/13/2026		S	Grab	1		X	X	X	
10 V-3	16	1/13/2026		S	Grab	1		X	X	X	Hold

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
Connor Whitman	Kenny Han	1/14/2026 8:00	2. Kenny Han	Apaua	1-14-26
			4		1300
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 16, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/15/26 11:40.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 0 (H260251-01)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**30.0**	5.00	01/15/2026	ND	1.84	92.2	2.00	2.96	QM-07, QR-03
Toluene*	**173**	5.00	01/15/2026	ND	1.91	95.5	2.00	2.53	QM-07
Ethylbenzene*	**112**	5.00	01/15/2026	ND	1.93	96.3	2.00	2.49	QM-07
Total Xylenes*	**222**	15.0	01/15/2026	ND	5.72	95.3	6.00	2.56	QM-07
Total BTEX	**536**	30.0	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *109 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**5760**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF S-06

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**4440**	50.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**10600**	50.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	**1410**	50.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *451 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *197 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 1 (H260251-02)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**1.61**	1.00	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	**10.8**	1.00	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	**10.2**	1.00	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	**22.6**	3.00	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	**45.2**	6.00	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *108 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**1520**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**234**	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**437**	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	**52.5**	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *111 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *113 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 2 (H260251-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	**0.272**	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	**0.439**	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	**1.13**	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	**1.84**	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *105 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**10.9**	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**18.1**	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 3 (H260251-04)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	**0.094**	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	**0.172**	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**11.0**	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 4 (H260251-05)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 5 (H260251-06)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 10 (H260251-11)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	**0.096**	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	**0.119**	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	**0.307**	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	**0.521**	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *100 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	**26.9**	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *99.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 15 (H260251-16)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *102 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 20 (H260251-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 25 (H260251-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 30 (H260251-31)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 35 (H260251-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.84	92.2	2.00	2.96	
Toluene*	<0.050	0.050	01/15/2026	ND	1.91	95.5	2.00	2.53	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.93	96.3	2.00	2.49	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.72	95.3	6.00	2.56	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	194	96.8	200	1.69	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	94.8	200	0.447	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *107 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *104 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 1 40 (H260251-41)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	QM-07
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	QM-07, QR-03
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	QM-07
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	QM-07
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *109 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 0 (H260251-42)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *113 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	480	120	400	6.90	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *98.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 1 (H260251-43)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *95.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 2 (H260251-44)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *113 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 3 (H260251-45)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *62.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *64.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 4 (H260251-46)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *125 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *86.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 5 (H260251-47)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *122 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 10 (H260251-52)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *86.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 15 (H260251-57)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *93.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *98.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 20 (H260251-62)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *96.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 25 (H260251-67)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *82.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 30 (H260251-72)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *118 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *82.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *82.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 35 (H260251-77)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *96.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 22 40 (H260251-82)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *98.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 0 (H260251-83)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *122 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 1 (H260251-84)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *114 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *83.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 2 (H260251-85)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *124 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *89.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 3 (H260251-86)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *122 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	**13.8**	10.0	01/15/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *74.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 4 (H260251-87)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/16/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	**16.2**	10.0	01/16/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/16/2026	ND					

Surrogate: 1-Chlorooctane *86.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *87.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 5 (H260251-88)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.89	94.7	2.00	3.36	
Toluene*	<0.050	0.050	01/15/2026	ND	2.00	100	2.00	0.864	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	2.15	108	2.00	0.463	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	6.75	113	6.00	1.68	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/16/2026	ND	190	95.1	200	5.22	
DRO >C10-C28*	<10.0	10.0	01/16/2026	ND	176	88.1	200	10.1	
EXT DRO >C28-C36	<10.0	10.0	01/16/2026	ND					

Surrogate: 1-Chlorooctane *96.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-06	The recovery of this surrogate is outside control limits due to sample dilution required from high analyte concentration and/or matrix interference's.
S-05	The surrogate recovery is outside of lab established statistical control limits but still within method limits. Data is not adversely affected.
QR-03	The RPD value for the sample duplicate or MS/MSD was outside of QC acceptance limits due to matrix interference. QC batch accepted based on LCS and/or LCSD recovery and/or RPD values.
QM-07	The spike recovery was outside acceptance limits for the MS and/or MSD. The batch was accepted based on acceptable LCS recovery.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 653 of 762

Received by OCD: 1/21/2026 11:44:22 AM

STANDARD SAFETY & SUPPLY

Project Manager:	Ethan Sessums
Company Name:	Standard Safety & Supply
Address:	2425 Trunk St.
City, State ZIP:	Odessa, Texas, 79761
Phone:	254-266-5456
Project Name:	A78 Highway Line
Project Number:	
Project Location:	Lea County, New Mexico
Sampler's Name:	Connor Whitman
PO #:	C-26029-GL-21300171

SAMPLE RECEIPT		
Temp Blank:	Yes (No)	
Samples Received Intact:	(Yes) No	Thermometer ID:
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:
Sample Custody Seals:	Yes (No) N/A	Temperature Readi
Total Containers:		Corrected Tempera

	Sample Identification	Depth	Date Sampled	Sa
1	V-1	0	1/14/2026	
2	V-1	1	1/14/2026	
3	V-1	2	1/14/2026	
4	V-1	3	1/14/2026	
5	V-1	4	1/14/2026	
6	V-1	5	1/14/2026	
7	V-1	6	1/14/2026	
8	V-1	7	1/14/2026	
9	V-1	8	1/14/2026	
10	V-1	9	1/14/2026	

Relinquished by: (Signature)	Received by
1	
3	
5	

Disclaimer: This document and any files transmitted with it are c

of nt	BTEX 8012B	TPH 8015M (GRO-DRO-MRO	Chloride 4500 or EPA 300		
	X	X	X		Hold
	X	X	X		Hold
	X	X	X		Hold
	X	X	X		Hold
	X	X	X		
	X	X	X		Hold
	X	X	X		Hold
	X	X	X		Hold
	X	X	X		Hold

H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: N O_3
Zn Acetate OH: Z
NaOH+Asc c Acid

Sam Com

Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Dat
-15-26 1140	2		
	4		
	6		

ly for the use of the individual or entity to whom they are addressed

dy H260251

Main Office: 2524 Trunk Street, Odessa Texas
Contact: (432) 653-0393
https://standardtx.com/
Page

Dean Ericcson
Energy Transfer

tandardtx.com

Work Order Comments
0402401K-RE

ANALYSIS REQUEST

Preservat
None: NO
Cool: Cool
HCL: HC
H_2S0_4: H_2

Released to Imaging: 1/22/2026 7:51:08 AM

Received by OCD: 1/21/2026 11:44:22 AM

STANDARD SAFETY & SUPPLY

Project Manager:	Ethan Sessu
Company Name:	Standard Sa
Address:	2425 Trunk S
City, State ZIP:	Odessa, Tex
Phone:	254-266-545
Project Name:	A
Project Number:	
Project Location:	Lea Co
Sampler's Name:	Co
PO #:	C-26

SAMPLE RECEIPT	Tem
Samples Received Intact:	Yes
Cooler Custody Seals:	Yes
Sample Custody Seals:	Yes
Total Containers:	

Sample Identification	
21	V-1
22	V-1
23	V-1
24	V-1
25	V-1
26	V-1
27	V-1
28	V-1
29	V-1
30	V-1

Relinquished by: (Signature)

1

3

5

Disclaimer: This document and any

H240251

https://standardsx.com/

CarlsbadOffice@standardsx.com

#140
+0.1c
-3.2c
-5.1c

1-15-26 1140

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Project Manager:	Ethan Sessums
Company Name:	Standard Safety & Supply
Address:	2425 Trunk St.
City, State ZIP:	Odessa, Texas, 79761
Phone:	254-266-5456
Project Name:	A78 Highway Line
Project Number:	
Project Location:	Lea County, New Mexic
Sampler's Name:	Connor Whitman
PO #:	C-26029-GL-21300171

SAMPLE RECEIPT	Temp Blank:	Yes
Samples Received Intact:	Yes No	Therm
Cooler Custody Seals:	Yes No N/A	Correc
Sample Custody Seals:	Yes No N/A	Tempe
Total Containers:		Correc

Sample Identification		Depth	D San
41	V-1	40	1/14
42	V-22	0	1/14
43	V-22	1	1/14
44	V-22	2	1/14
45	V-22	3	1/14
46	V-22	4	1/14
47	V-22	5	1/14
48	V-22	6	1/14
49	V-22	7	1/14
50	V-22	8	1/14

Relinquished by: (Signature)	R
1	
3	
5	

Disclaimer: This document and any files transmitted

79761 City, State ZIP:

Email: CarlsbadOffice@standardtx.com

highway Line

Turn Around: ☐ Routine ☑ Rush

ty, New Mexico — Due Date: 24h

or Whitman — TAT may vary based on lab start time.

-GL-21300171

lank:	Yes No	Wet Ice:	Yes No
No	Thermometer ID:		#140
N/A	Correction Factor:		+0.1°C
N/A	Temperature Reading:		-3.2°C
	Corrected Temperature:		-3.1°C

ANALYSIS REQUEST

Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Parameters
9	1/14/2026		S	Grab	1		X	X	X	
10	1/14/2026		S	Grab	1		X	X	X	
11	1/14/2026		S	Grab	1		X	X	X	
12	1/14/2026		S	Grab	1		X	X	X	
13	1/14/2026		S	Grab	1		X	X	X	
14	1/14/2026		S	Grab	1		X	X	X	
15	1/14/2026		S	Grab	1		X	X	X	
16	1/14/2026		S	Grab	1		X	X	X	
17	1/14/2026		S	Grab	1		X	X	X	
18	1/14/2026		S	Grab	1		X	X	X	

Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received
Tamara Latchford	1-15-26 1140	2	
		4	
		6	

es transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Chain of Custody H260251

Main Office

	Bill to: (if different)	Dean Ericcson
& Supply	Company Name:	Energy Transfer
	Address:	
	City, State ZIP:	

044

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 661 of 762

Received by OCD: 1/21/2026 11:44:22 AM

STANDARD SAFETY & SUPPLY

Chain o

Project Manager:	Ethan Sessums	Bill to: (if dif	
Company Name:	Standard Safety & Supply	Company N	
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State	
Phone:	254-266-5456	Email:	CarlsbadC
Project Name:	A78 Highway Line	Turn Around	
Project Number:		☐ Routine ☑ Rush	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT	Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:		#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:		+0.1
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:		-3.2
Total Containers:		Corrected Temperature:		-3.1

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Gr Co
81	V-22	39	1/14/2026		S	Gr
82	V-22	40	1/14/2026		S	Gr
83	V-13	0	1/14/2026		S	Gr
84	V-13	1	1/14/2026		S	Gr
85	V-13	2	1/14/2026		S	Gr
86	V-13	3	1/14/2026		S	Gr
87	V-13	4	1/14/2026		S	Gr
88	V-13	5	1/14/2026		S	Gr
89	V-13	6	1/14/2026		S	Gr
90	V-13	7	1/14/2026		S	Gr

Relinquished by: (Signature)	Received by: (Signature)
1	
3	
5	

Disclaimer: This document and any files transmitted with it are confidential and intende

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 16, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/15/26 11:40.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 10 (H260252-03)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *84.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 15 (H260252-08)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *85.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	400	100	400	7.69	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 20 (H260252-13)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *73.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 25 (H260252-18)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *90.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 30 (H260252-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 35 (H260252-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *84.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *96.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 13 40 (H260252-33)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 0 (H260252-34)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *84.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *94.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 1 (H260252-35)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *99.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 2 (H260252-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *98.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 3 (H260252-37)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/15/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *67.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *66.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 4 (H260252-38)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *85.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *88.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 5 (H260252-39)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *73.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 10 (H260252-44)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.0 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *91.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 15 (H260252-49)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *85.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *89.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 20 (H260252-54)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *89.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 25 (H260252-59)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *83.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**160**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *86.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *84.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 30 (H260252-64)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *81.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**144**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *84.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *82.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 35 (H260252-69)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *82.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *82.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *79.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 21 40 (H260252-74)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.77	88.7	2.00	0.735	
Toluene*	<0.050	0.050	01/16/2026	ND	1.75	87.4	2.00	1.97	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.87	93.4	2.00	1.99	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.65	94.1	6.00	1.69	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *80.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	209	104	200	7.04	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	197	98.5	200	8.26	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *77.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 0 (H260252-75)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *88.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 1 (H260252-76)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.51	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *105 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 2 (H260252-77)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.2 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 3 (H260252-78)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *70.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 4 (H260252-79)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *98.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 5 (H260252-80)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 10 (H260252-85)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *106 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *99.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 15 (H260252-90)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**176**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-05	The surrogate recovery is outside of lab established statistical control limits but still within method limits. Data is not adversely affected.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 692 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H26052

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Parameters

ANALYSIS REQUEST

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-13	8	1/14/2026		S	Grab	1	X	X	X	Hold
2	V-13	9	1/14/2026		S	Grab	1	X	X	X	Hold
3	V-13	10	1/14/2026		S	Grab	1	X	X	X	
4	V-13	11	1/14/2026		S	Grab	1	X	X	X	Hold
5	V-13	12	1/14/2026		S	Grab	1	X	X	X	Hold
6	V-13	13	1/14/2026		S	Grab	1	X	X	X	Hold
7	V-13	14	1/14/2026		S	Grab	1	X	X	X	Hold
8	V-13	15	1/14/2026		S	Grab	1	X	X	X	
9	V-13	16	1/14/2026		S	Grab	1	X	X	X	Hold
10	V-13	17	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Maldonado	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 693 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 1 of 3

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

04024017

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c
Total Containers:		Corrected Temperature:	-3.1c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-13	18	1/14/2026		S	Grab	1	X	X	X	Hold
12	V-13	19	1/14/2026		S	Grab	1	X	X	X	Hold
13	V-13	20	1/14/2026		S	Grab	1	X	X	X	
14	V-13	21	1/14/2026		S	Grab	1	X	X	X	Hold
15	V-13	22	1/14/2026		S	Grab	1	X	X	X	Hold
16	V-13	23	1/14/2026		S	Grab	1	X	X	X	Hold
17	V-13	24	1/14/2026		S	Grab	1	X	X	X	Hold
18	V-13	25	1/14/2026		S	Grab	1	X	X	X	
19	V-13	26	1/14/2026		S	Grab	1	X	X	X	Hold
20	V-13	27	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Maldonado	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 694 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 8 of 30 12

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K - all

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-13	28	1/14/2026		S	Grab	1	X	X	X	Hold
22	V-13	29	1/14/2026		S	Grab	1	X	X	X	Hold
23	V-13	30	1/14/2026		S	Grab	1	X	X	X	
24	V-13	31	1/14/2026		S	Grab	1	X	X	X	Hold
25	V-13	32	1/14/2026		S	Grab	1	X	X	X	Hold
26	V-13	33	1/14/2026		S	Grab	1	X	X	X	Hold
27	V-13	34	1/14/2026		S	Grab	1	X	X	X	Hold
28	V-13	35	1/14/2026		S	Grab	1	X	X	X	
29	V-13	36	1/14/2026		S	Grab	1	X	X	X	Hold
30	V-13	37	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Wedgeworth	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 695 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 1 of 3

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.3°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Parameters — 1/15/26

ANALYSIS REQUEST

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-13	38	1/14/2026		S	Grab	1	X	X	X	Hold
32	V-13	39	1/14/2026		S	Grab	1	X	X	X	Hold
33	V-13	40	1/14/2026		S	Grab	1	X	X	X	
34	V-21	0	1/14/2026		S	Grab	1	X	X	X	
35	V-21	1	1/14/2026		S	Grab	1	X	X	X	
36	V-21	2	1/14/2026		S	Grab	1	X	X	X	
37	V-21	3	1/14/2026		S	Grab	1	X	X	X	
38	V-21	4	1/14/2026		S	Grab	1	X	X	X	
39	V-21	5	1/14/2026		S	Grab	1	X	X	X	
40	V-21	6	1/14/2026		S	Grab	1	X	X	X	Hold

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Holdaway	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 696 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H202752

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

04024011

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-21	7	1/14/2026		S	Grab	1	X	X	X	Hold
42	V-21	8	1/14/2026		S	Grab	1	X	X	X	Hold
43	V-21	9	1/14/2026		S	Grab	1	X	X	X	Hold
44	V-21	10	1/14/2026		S	Grab	1	X	X	X	
45	V-21	11	1/14/2026		S	Grab	1	X	X	X	Hold
46	V-21	12	1/14/2026		S	Grab	1	X	X	X	Hold
47	V-21	13	1/14/2026		S	Grab	1	X	X	X	Hold
48	V-21	14	1/14/2026		S	Grab	1	X	X	X	Hold
49	V-21	15	1/14/2026		S	Grab	1	X	X	X	
50	V-21	16	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Valdez	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 697 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 15 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°
Total Containers:		Corrected Temperature:	-3.1°

Parameters: BTEX 8012B; TPH 8015M (GRO-DRO-MRO); Chloride 4500 or EPA 300

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-21	17	1/14/2026		S	Grab	1	X	X	X	Hold
52	V-21	18	1/14/2026		S	Grab	1	X	X	X	Hold
53	V-21	19	1/14/2026		S	Grab	1	X	X	X	Hold
54	V-21	20	1/14/2026		S	Grab	1	X	X	X	
55	V-21	21	1/14/2026		S	Grab	1	X	X	X	Hold
56	V-21	22	1/14/2026		S	Grab	1	X	X	X	Hold
57	V-21	23	1/14/2026		S	Grab	1	X	X	X	Hold
58	V-21	24	1/14/2026		S	Grab	1	X	X	X	Hold
59	V-21	25	1/14/2026		S	Grab	1	X	X	X	
60	V-21	26	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Whitaker	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 698 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 16 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:			
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman	TAT may vary based on lab start time.	
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c
Total Containers:		Corrected Temperature:	-3.1c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-21	27	1/14/2026		S	Grab	1	X	X	X	Hold
62	V-21	28	1/14/2026		S	Grab	1	X	X	X	Hold
63	V-21	29	1/14/2026		S	Grab	1	X	X	X	Hold
64	V-21	30	1/14/2026		S	Grab	1	X	X	X	
65	V-21	31	1/14/2026		S	Grab	1	X	X	X	Hold
66	V-21	32	1/14/2026		S	Grab	1	X	X	X	Hold
67	V-21	33	1/14/2026		S	Grab	1	X	X	X	Hold
68	V-21	34	1/14/2026		S	Grab	1	X	X	X	Hold
69	V-21	35	1/14/2026		S	Grab	1	X	X	X	
70	V-21	36	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Oldaker	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 699 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 17 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments
0402401K

Project Name:	A79 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Pres. Code	
Project Location:	Lea County, New Mexico	Due Date:	24h
Sampler's Name:	Connor Whitman		TAT may vary based on lab start time.
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes No	Wet Ice:	Yes No	
Samples Received Intact:	Yes No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes No N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes No N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-21	37	1/14/2026		S	Grab	1	X	X	X	Hold
72	V-21	38	1/14/2026		S	Grab	1	X	X	X	Hold
73	V-21	39	1/14/2026		S	Grab	1	X	X	X	Hold
74	V-21	40	1/14/2026		S	Grab	1	X	X	X	
75	V-20	0	1/14/2026		S	Grab	1	X	X	X	
76	V-20	1	1/14/2026		S	Grab	1	X	X	X	
77	V-20	2	1/14/2026		S	Grab	1	X	X	X	
78	V-20	3	1/14/2026		S	Grab	1	X	X	X	
79	V-20	4	1/14/2026		S	Grab	1	X	X	X	
80	V-20	5	1/14/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260252

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 18 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2S0_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-20	6	1/14/2026		S	Grab	1	X	X	X	Hold
82	V-20	7	1/14/2026		S	Grab	1	X	X	X	Hold
83	V-20	8	1/14/2026		S	Grab	1	X	X	X	Hold
84	V-20	9	1/14/2026		S	Grab	1	X	X	X	Hold
85	V-20	10	1/14/2026		S	Grab	1	X	X	X	
86	V-20	11	1/14/2026		S	Grab	1	X	X	X	Hold
87	V-20	12	1/14/2026		S	Grab	1	X	X	X	Hold
88	V-20	13	1/14/2026		S	Grab	1	X	X	X	Hold
89	V-20	14	1/14/2026		S	Grab	1	X	X	X	Hold
90	V-20	15	1/14/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Nemora Abdallah	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 16, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/15/26 11:40.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 20 (H260253-05)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 25 (H260253-10)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.3 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 30 (H260253-15)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *98.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 35 (H260253-20)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *91.6 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *85.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 20 40 (H260253-25)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *95.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *94.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 0 (H260253-26)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**192**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	**11.7**	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	**17.8**	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *102 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 1 (H260253-27)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/15/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/15/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/15/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/15/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/15/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**112**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *100 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 2 (H260253-28)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *95.7 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *97.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 3 (H260253-29)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**544**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *95.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *89.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 4 (H260253-30)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *95.8 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**416**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 5 (H260253-31)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *95.9 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**256**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.8 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 10 (H260253-36)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.81	90.5	2.00	0.229	
Toluene*	<0.050	0.050	01/16/2026	ND	1.88	94.0	2.00	0.982	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.90	94.8	2.00	1.41	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.62	93.7	6.00	1.52	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	212	106	200	0.831	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	190	95.1	200	0.129	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *96.2 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 15 (H260253-41)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *127 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *94.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.6 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 20 (H260253-46)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	**0.051**	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *114 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: AC

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	3.77	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *83.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.4 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 25 (H260253-51)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *120 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *71.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *72.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 30 (H260253-56)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *123 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *74.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *75.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 35 (H260253-61)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *119 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *81.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 23 40 (H260253-66)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *91.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 0 (H260253-67)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *124 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *87.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 1 (H260253-68)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *107 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *75.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *76.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 2 (H260253-69)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**32.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *80.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *83.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 3 (H260253-70)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *85.1 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *88.1 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 4 (H260253-71)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *85.2 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *89.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 5 (H260253-72)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *116 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**16.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	**22.6**	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *88.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.0 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 10 (H260253-77)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *126 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *76.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *78.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 15 (H260253-82)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *123 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *77.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *78.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 20 (H260253-87)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**64.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *86.3 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *86.9 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-05	The surrogate recovery is outside of lab established statistical control limits but still within method limits. Data is not adversely affected.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories

*=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 730 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 19 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A75 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitmen		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c
Total Containers:		Corrected Temperature:	-3.1c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-20	16	1/14/2026		S	Grab	1		X	X	X	Hold
2	V-20	17	1/14/2026		S	Grab	1		X	X	X	Hold
3	V-20	18	1/14/2026		S	Grab	1		X	X	X	Hold
4	V-20	19	1/14/2026		S	Grab	1		X	X	X	Hold
5	V-20	20	1/14/2026		S	Grab	1		X	X	X	
6	V-20	21	1/14/2026		S	Grab	1		X	X	X	Hold
7	V-20	22	1/14/2026		S	Grab	1		X	X	X	Hold
8	V-20	23	1/14/2026		S	Grab	1		X	X	X	Hold
9	V-20	24	1/14/2026		S	Grab	1		X	X	X	Hold
10	V-20	25	1/14/2026		S	Grab	1		X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Nevara Ulloa	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 731 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments 20

0402401H-ael

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°c
Total Containers:		Corrected Temperature:	-3.1°c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-20	26	1/14/2026		S	Grab	1		X	X	X	Hold
12	V-20	27	1/14/2026		S	Grab	1		X	X	X	Hold
13	V-20	28	1/14/2026		S	Grab	1		X	X	X	Hold
14	V-20	29	1/14/2026		S	Grab	1		X	X	X	Hold
15	V-20	30	1/14/2026		S	Grab	1		X	X	X	
16	V-20	31	1/14/2026		S	Grab	1		X	X	X	Hold
17	V-20	32	1/14/2026		S	Grab	1		X	X	X	Hold
18	V-20	33	1/14/2026		S	Grab	1		X	X	X	Hold
19	V-20	34	1/14/2026		S	Grab	1		X	X	X	Hold
20	V-20	35	1/14/2026		S	Grab	1		X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Olivas	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 2 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments 21

0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2S0_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-20	36	1/14/2026		S	Grab	1		X	X	X	Hold
22	V-20	37	1/14/2026		S	Grab	1		X	X	X	Hold
23	V-20	38	1/14/2026		S	Grab	1		X	X	X	Hold
24	V-20	39	1/14/2026		S	Grab	1		X	X	X	Hold
25	V-20	40	1/14/2026		S	Grab	1		X	X	X	
26	V-23	0	1/14/2026		S	Grab	1		X	X	X	
27	V-23	1	1/14/2026		S	Grab	1		X	X	X	
28	V-23	2	1/14/2026		S	Grab	1		X	X	X	
29	V-23	3	1/14/2026		S	Grab	1		X	X	X	
30	V-23	4	1/14/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Whitaker	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 733 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 1 of 10

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments 22

0402401K

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c
Total Containers:		Corrected Temperature:	-3.1c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
31	V-23	5	1/14/2026		S	Grab	1	X	X	X	
32	V-23	6	1/14/2026		S	Grab	1	X	X	X	Hold
33	V-23	7	1/14/2026		S	Grab	1	X	X	X	Hold
34	V-23	8	1/14/2026		S	Grab	1	X	X	X	Hold
35	V-23	9	1/14/2026		S	Grab	1	X	X	X	Hold
36	V-23	10	1/14/2026		S	Grab	1	X	X	X	
37	V-23	11	1/14/2026		S	Grab	1	X	X	X	Hold
38	V-23	12	1/14/2026		S	Grab	1	X	X	X	Hold
39	V-23	13	1/14/2026		S	Grab	1	X	X	X	Hold
40	V-23	14	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Whitman	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 23 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments
0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes
None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
41	V-23	15	1/14/2026		S	Grab	1		X	X	X	
42	V-23	16	1/14/2026		S	Grab	1		X	X	X	Hold
43	V-23	17	1/14/2026		S	Grab	1		X	X	X	Hold
44	V-23	18	1/14/2026		S	Grab	1		X	X	X	Hold
45	V-23	19	1/14/2026		S	Grab	1		X	X	X	Hold
46	V-23	20	1/14/2026		S	Grab	1		X	X	X	
47	V-23	21	1/14/2026		S	Grab	1		X	X	X	Hold
48	V-23	22	1/14/2026		S	Grab	1		X	X	X	Hold
49	V-23	23	1/14/2026		S	Grab	1		X	X	X	Hold
50	V-23	24	1/14/2026		S	Grab	1		X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Wilder	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 24 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments
0402401K

Project Name:	A75 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
51	V-23	25	1/14/2026		S	Grab	1		X	X	X	
52	V-23	26	1/14/2026		S	Grab	1		X	X	X	Hold
53	V-23	27	1/14/2026		S	Grab	1		X	X	X	Hold
54	V-23	28	1/14/2026		S	Grab	1		X	X	X	Hold
55	V-23	29	1/14/2026		S	Grab	1		X	X	X	Hold
56	V-23	30	1/14/2026		S	Grab	1		X	X	X	
57	V-23	31	1/14/2026		S	Grab	1		X	X	X	Hold
58	V-23	32	1/14/2026		S	Grab	1		X	X	X	Hold
59	V-23	33	1/14/2026		S	Grab	1		X	X	X	Hold
60	V-23	34	1/14/2026		S	Grab	1		X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Wilder	1-15-26 1140	4		
3			6		
5					

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 25 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments 25

0402401K

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c
Total Containers:		Corrected Temperature:	-3.1c

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	Parameters: BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
61	V-23	35	1/14/2026		S	Grab	1		X	X	X	
62	V-23	36	1/14/2026		S	Grab	1		X	X	X	Hold
63	V-23	37	1/14/2026		S	Grab	1		X	X	X	Hold
64	V-23	38	1/14/2026		S	Grab	1		X	X	X	Hold
65	V-23	39	1/14/2026		S	Grab	1		X	X	X	Hold
66	V-23	40	1/14/2026		S	Grab	1		X	X	X	
67	V-18	0	1/14/2026		S	Grab	1		X	X	X	
68	V-18	1	1/14/2026		S	Grab	1		X	X	X	
69	V-18	2	1/14/2026		S	Grab	1		X	X	X	
70	V-18	3	1/14/2026		S	Grab	1		X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Maldonado	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 737 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/
Page 26 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments
0402401K

Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°c
Total Containers:		Corrected Temperature:	-3.1°c

Preservative Codes
None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	Pres. Code	BTEX 6012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
71	V-18	4	1/14/2026		S	Grab	1		X	X	X	
72	V-18	5	1/14/2026		S	Grab	1		X	X	X	
73	V-18	6	1/14/2026		S	Grab	1		X	X	X	Hold
74	V-18	7	1/14/2026		S	Grab	1		X	X	X	Hold
75	V-18	8	1/14/2026		S	Grab	1		X	X	X	Hold
76	V-18	9	1/14/2026		S	Grab	1		X	X	X	Hold
77	V-18	10	1/14/2026		S	Grab	1		X	X	X	
78	V-18	11	1/14/2026		S	Grab	1		X	X	X	Hold
79	V-18	12	1/14/2026		S	Grab	1		X	X	X	Hold
80	V-18	13	1/14/2026		S	Grab	1		X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Oldaker	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM
Released to Imaging: 1/22/2026 7:51:08 AM

Page 738 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody H260253

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

04024014

Project Name:	A76 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT			
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°C
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°C
Total Containers:		Corrected Temperature:	-3.1°C

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Com	# of Cont	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
81	V-18	14	1/14/2026		S	Grab	1	X	X	X	Hold
82	V-18	15	1/14/2026		S	Grab	1	X	X	X	
83	V-18	16	1/14/2026		S	Grab	1	X	X	X	Hold
84	V-18	17	1/14/2026		S	Grab	1	X	X	X	Hold
85	V-18	18	1/14/2026		S	Grab	1	X	X	X	Hold
86	V-18	19	1/14/2026		S	Grab	1	X	X	X	Hold
87	V-18	20	1/14/2026		S	Grab	1	X	X	X	
88	V-18	21	1/14/2026		S	Grab	1	X	X	X	Hold
89	V-18	22	1/14/2026		S	Grab	1	X	X	X	Hold
90	V-18	23	1/14/2026		S	Grab	1	X	X	X	Hold

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Rodriguez	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

January 16, 2026

ETHAN SESSUMS

STANDARD SAFETY & SUPPLY

PO BOX 14987

ODESSA, TX 79764

RE: A78 HIGHWAY LINE

Enclosed are the results of analyses for samples received by the laboratory on 01/15/26 11:40.

Cardinal Laboratories is accredited through Texas NELAP under certificate number TX-C25-00101. Accreditation applies to drinking water, non-potable water and solid and chemical materials. All accredited analytes are denoted by an asterisk (*). For a complete list of accredited analytes and matrices visit the TCEQ website at www.tceq.texas.gov/field/qa/lab_accred_certif.html.

Cardinal Laboratories is accreditated through the State of Colorado Department of Public Health and Environment for:

Method EPA 552.2	Haloacetic Acids (HAA-5)
Method EPA 524.2	Total Trihalomethanes (TTHM)
Method EPA 524.4	Regulated VOCs (V1, V2, V3)

Accreditation applies to public drinking water matrices.

This report meets NELAP requirements and is made up of a cover page, analytical results, and a copy of the original chain-of-custody. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Celey D. Keene

Celey D. Keene

Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 25 (H260254-02)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *125 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *93.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *95.7 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 30 (H260254-07)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**80.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *91.9 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *92.8 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 35 (H260254-12)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *115 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *91.0 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *93.5 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 18 40 (H260254-17)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *121 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *89.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *90.3 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 12 3 (H260254-18)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.93	96.6	2.00	4.58	
Toluene*	<0.050	0.050	01/16/2026	ND	1.81	90.4	2.00	11.3	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	2.01	101	2.00	10.9	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	6.34	106	6.00	11.3	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *117 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	179	89.6	200	4.50	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	204	102	200	4.49	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *104 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 12 4 (H260254-19)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**0.120**	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	**0.259**	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	**0.075**	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	**0.555**	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *97.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *101 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *107 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 16 3 (H260254-20)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	**28.0**	5.00	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	**154**	5.00	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	**100**	5.00	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	**213**	15.0	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	**495**	30.0	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: KH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**1470**	16.0	01/16/2026	ND	416	104	400	0.00	

TPH 8015M mg/kg Analyzed By: JF S-06

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**3920**	50.0	01/16/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	**7460**	50.0	01/16/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	**953**	50.0	01/16/2026	ND					

Surrogate: 1-Chlorooctane *451 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *186 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 16 4 (H260254-21)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	**0.382**	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	**0.606**	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	**1.68**	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	**2.66**	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *111 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**464**	16.0	01/16/2026	ND	448	112	400	3.64	QM-07

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	**19.5**	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	**97.1**	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	**10.4**	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.7 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *105 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: V - 16 5 (H260254-22)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	<0.050	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *98.6 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**96.0**	16.0	01/16/2026	ND	448	112	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *103 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *106 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 7 0-0.5' (H260254-23)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	<0.050	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.5 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	448	112	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *97.4 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *103 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 8 0-0.5' (H260254-24)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	<0.050	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.1 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	<16.0	16.0	01/16/2026	ND	448	112	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *99.5 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *101 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Analytical Results For:

STANDARD SAFETY & SUPPLY
ETHAN SESSUMS
PO BOX 14987
ODESSA TX, 79764
Fax To: NA

Received:	01/15/2026	Sampling Date:	01/14/2026
Reported:	01/16/2026	Sampling Type:	Soil
Project Name:	A78 HIGHWAY LINE	Sampling Condition:	Cool & Intact
Project Number:	NONE GIVEN	Sample Received By:	Tamara Oldaker
Project Location:	ETC-LEA COUNTY, NM		

Sample ID: H - 9 0-0.5' (H260254-25)

BTEX 8021B mg/kg Analyzed By: JH

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Benzene*	<0.050	0.050	01/16/2026	ND	1.75	87.7	2.00	2.65	
Toluene*	<0.050	0.050	01/16/2026	ND	1.82	91.0	2.00	3.08	
Ethylbenzene*	<0.050	0.050	01/16/2026	ND	1.84	91.9	2.00	3.17	
Total Xylenes*	<0.150	0.150	01/16/2026	ND	5.45	90.8	6.00	3.15	
Total BTEX	<0.300	0.300	01/16/2026	ND					

Surrogate: 4-Bromofluorobenzene (PID *96.4 %* *70.4-141*

Chloride, SM4500Cl-B mg/kg Analyzed By: HM

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
Chloride	**48.0**	16.0	01/16/2026	ND	448	112	400	3.64	

TPH 8015M mg/kg Analyzed By: JF

Analyte	Result	Reporting Limit	Analyzed	Method Blank	BS	% Recovery	True Value QC	RPD	Qualifier
GRO C6-C10*	<10.0	10.0	01/15/2026	ND	182	90.9	200	3.19	
DRO >C10-C28*	<10.0	10.0	01/15/2026	ND	173	86.4	200	0.289	
EXT DRO >C28-C36	<10.0	10.0	01/15/2026	ND					

Surrogate: 1-Chlorooctane *108 %* *52.4-130*

Surrogate: 1-Chlorooctadecane *108 %* *39.9-141*

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

CARDINAL Laboratories

PHONE (575) 393-2326 ° 101 E. MARLAND ° HOBBS, NM 88240

Notes and Definitions

S-06	The recovery of this surrogate is outside control limits due to sample dilution required from high analyte concentration and/or matrix interference's.
QM-07	The spike recovery was outside acceptance limits for the MS and/or MSD. The batch was accepted based on acceptable LCS recovery.
ND	Analyte NOT DETECTED at or above the reporting limit
RPD	Relative Percent Difference
**	Samples not received at proper temperature of 6°C or below.
***	Insufficient time to reach temperature.
-	Chloride by SM4500Cl-B does not require samples be received at or below 6°C
	Samples reported on an as received basis (wet) unless otherwise noted on report

Cardinal Laboratories *=Accredited Analyte

PLEASE NOTE: Liability and Damages. Cardinal's liability and client's exclusive remedy for any claim arising, whether based in contract or tort, shall be limited to the amount paid by client for analyses. All claims, including those for negligence and any other cause whatsoever shall be deemed waived unless made in writing and received by Cardinal within thirty (30) days after completion of the applicable service. In no event shall Cardinal be liable for incidental or consequential damages, including, without limitation, business interruptions, loss of use, or loss of profits incurred by client, its subsidiaries, affiliates or successors arising out of or related to the performance of the services hereunder by Cardinal, regardless of whether such claim is based upon any of the above stated reasons or otherwise. Results relate only to the samples identified above. This report shall not be reproduced except in full with written approval of Cardinal Laboratories.

Celey D. Keene, Lab Director/Quality Manager

Page 753 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260254

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 28 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments

0402401K

Project Name:	A78 Highway Line	Turn Around	Routine ☐ Rush ☑
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitmen		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT				
Temp Blank:	Yes (No)	Wet Ice:	(Yes) No	
Samples Received Intact:	(Yes) No	Thermometer ID:	#140	
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1c	
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2c	
Total Containers:		Corrected Temperature:	-3.1c	

Sample Identification		Depth	Date Sampled	Time Sampled	Matrix	Grab Comp	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
1	V-18	24	1/14/2026		S	Grab	1		X	X	X	Hold
2	V-18	25	1/14/2026		S	Grab	1		X	X	X	
3	V-18	26	1/14/2026		S	Grab	1		X	X	X	Hold
4	V-18	27	1/14/2026		S	Grab	1		X	X	X	Hold
5	V-18	28	1/14/2026		S	Grab	1		X	X	X	Hold
6	V-18	29	1/14/2026		S	Grab	1		X	X	X	Hold
7	V-18	30	1/14/2026		S	Grab	1		X	X	X	
8	V-18	31	1/14/2026		S	Grab	1		X	X	X	Hold
9	V-18	32	1/14/2026		S	Grab	1		X	X	X	Hold
10	V-18	33	1/14/2026		S	Grab	1		X	X	X	Hold

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2SO_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1	Tamara Latchford	1-15-26 1140	2		
3			4		
5			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

STANDARD SAFETY & SUPPLY

Chain of Custody

H260254

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 29 of 30

Project Manager:	Ethan Sessums	Bill to: (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com

Work Order Comments: 29

0402401K

Project Name:	475 Highway Line	Turn Around	Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitman		
PO #:	C-26029-GL-21300171		

SAMPLE RECEIPT	Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:		#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:		+0.1c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:		-3.2c
Total Containers:		Corrected Temperature:		-3.1c

Preservative Codes

None: NO — DI Water: H_2O
Cool: Cool — MeOH: Me
HCL: HC — HNO_3: HN
H_2SO_4: H_2 — NaOH: Na
H_3PO_4: HP
$NaHSO_4$: NABIS
$Na_2S_2O_3$: $NaSO_3$
Zn Acetate+NaOH: Zn
NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Comp	# of Cont	Pres. Code	BTEX 8012B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
11	V-18	34	1/14/2026		S	Grab	1		X	X	X	Hold
12	V-18	35	1/14/2026		S	Grab	1		X	X	X	
13	V-18	36	1/14/2026		S	Grab	1		X	X	X	Hold
14	V-18	37	1/14/2026		S	Grab	1		X	X	X	Hold
15	V-18	38	1/14/2026		S	Grab	1		X	X	X	Hold
16	V-18	39	1/14/2026		S	Grab	1		X	X	X	Hold
17	V-18	40	1/14/2026		S	Grab	1		X	X	X	
18	V-12	3	1/14/2026		S	Grab	1		X	X	X	
19	V-12	4	1/14/2026		S	Grab	1		X	X	X	
20	V-16	3	1/14/2026		S	Grab	1		X	X	X	

	Relinquished by: (Signature)	Received by: (Signature)	Date/Time		Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		Tamara Wadsworth	1-15-26 1140	2			
3				4			
5				6			

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Page 755 of 762

STANDARD SAFETY & SUPPLY

Chain of Custody

H260254

Main Office: 2524 Trunk Street, Odessa Texas 79761
Contact: (432) 653-0393
https://standardtx.com/

Page 30 of 30

Project Manager:	Ethan Sessums	Bill to (if different)	Dean Ericcson
Company Name:	Standard Safety & Supply	Company Name:	Energy Transfer
Address:	2425 Trunk St.	Address:	
City, State ZIP:	Odessa, Texas, 79761	City, State ZIP:	
Phone:	254-266-5456	Email:	CarlsbadOffice@standardtx.com
Project Name:	A78 Highway Line	Turn Around	☐ Routine ☑ Rush
Project Number:		Due Date:	24h
Project Location:	Lea County, New Mexico	TAT may vary based on lab start time.	
Sampler's Name:	Connor Whitmen		
PO #:	C-26029-GL-21300171		

Work Order Comments: 04024014

SAMPLE RECEIPT

Temp Blank:	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	#140
Cooler Custody Seals:	Yes (No) N/A	Correction Factor:	+0.1°c
Sample Custody Seals:	Yes (No) N/A	Temperature Reading:	-3.2°c
Total Containers:		Corrected Temperature:	-3.1°c

ANALYSIS REQUEST

Preservative Codes

None: NO; DI Water: H_2O; Cool: Cool; MeOH: Me; HCL: HC; HNO_3: HN; H_2SO_4: H_2; NaOH: Na; H_3PO_4: HP; $NaHSO_4$: NABIS; $Na_2S_2O_3$: $NaSO_3$; Zn Acetate+NaOH: Zn; NaOH+Ascorbic Acid: SAPC

	Sample Identification	Depth	Date Sampled	Time Sampled	Matrix	Grab Comp	# of Cont	BTEX 8021B	TPH 8015M (GRO-DRO-MRO)	Chloride 4500 or EPA 300	Sample Comments
21	V-16	4	1/14/2026		S	Grab	1	X	X	X	
22	V-16	5	1/14/2026		S	Grab	1	X	X	X	
23	H-7	0-0.5	1/14/2026		S	Grab	1	X	X	X	
24	H-8	0-0.5	1/14/2026		S	Grab	1	X	X	X	
25	H-9	0-0.5	1/14/2026		S	Grab	1	X	X	X	

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
	Tamara Valdez	1-15-26 1140	2		
			4		
			6		

Disclaimer: This document and any files transmitted with it are confidential and intended solely for the use of the individual or entity to whom they are addressed

Received by OCD: 1/21/2026 11:44:22 AM

Released to Imaging: 1/22/2026 7:51:08 AM

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS

Operator: ET Gathering & Processing, LLC 1025 Bounds Rd Loving, NM 88256	OGRID: 371183
	Action Number: 545110
	Action Type: [C-141] Site Char./Remediation Plan C-141 (C-141-v-Plan)

QUESTIONS

Prerequisites	
Incident ID (n#)	**nAPP2601343850**
Incident Name	**NAPP2601343850 A-7-8 PIPELINE RELEASE @ E-10-21S-37E 1935N 400W**
Incident Type	**Release Other**
Incident Status	**Remediation Plan Received**

Location of Release Source *Please answer all the questions in this group.*	
Site Name	A-7-8 Pipeline Release
Date Release Discovered	01/06/2026
Surface Owner	State

Incident Details *Please answer all the questions in this group.*	
Incident Type	Release Other
Did this release result in a fire or is the result of a fire	No
Did this release result in any injuries	No
Has this release reached or does it have a reasonable probability of reaching a watercourse	No
Has this release endangered or does it have a reasonable probability of endangering public health	No
Has this release substantially damaged or will it substantially damage property or the environment	Yes
Is this release of a volume that is or may with reasonable probability be detrimental to fresh water	No

Nature and Volume of Release *Material(s) released, please answer all that apply below. Any calculations or specific justifications for the volumes provided should be attached to the follow-up C-141 submission.*	
Crude Oil Released (bbls) Details	Cause: Other | Pipeline (Any) | Crude Oil | Released: 1 BBL | Recovered: 0 BBL | Lost: 1 BBL.
Produced Water Released (bbls) Details	Cause: Other | Pipeline (Any) | Produced Water | Released: 0 BBL | Recovered: 0 BBL | Lost: 0 BBL.
Is the concentration of chloride in the produced water >10,000 mg/l	No
Condensate Released (bbls) Details	*Not answered.*
Natural Gas Vented (Mcf) Details	Cause: Other | Pipeline (Any) | Natural Gas Vented | Released: 1 MCF | Recovered: 0 MCF | Lost: 1 MCF.
Natural Gas Flared (Mcf) Details	*Not answered.*
Other Released Details	*Not answered.*
Are there additional details for the questions above (i.e. any answer containing Other, Specify, Unknown, and/or Fire, or any negative lost amounts)	Cause is undetermined this time

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: ET Gathering & Processing, LLC 1025 Bounds Rd Loving, NM 88256	OGRID: 371183
	Action Number: 545110
	Action Type: [C-141] Site Char./Remediation Plan C-141 (C-141-v-Plan)

QUESTIONS

Nature and Volume of Release (continued)	
Is this a gas only submission (i.e. only significant Mcf values reported)	**Yes, according to supplied volumes this will be treated as a "gas only" report.**
Was this a major release as defined by Subsection A of 19.15.29.7 NMAC	**Yes**
Reasons why this would be considered a submission for a notification of a major release	**From paragraph A. "Major release" determine using:** **(2) an unauthorized release of a volume that:** **(d) substantially damages property or the environment.**
With the implementation of the 19.15.27 NMAC (05/25/2021), venting and/or flaring of natural gas (i.e. gas only) are to be submitted on the C-129 form.	

Initial Response	
The responsible party must undertake the following actions immediately unless they could create a safety hazard that would result in injury.	
The source of the release has been stopped	True
The impacted area has been secured to protect human health and the environment	True
Released materials have been contained via the use of berms or dikes, absorbent pads, or other containment devices	True
All free liquids and recoverable materials have been removed and managed appropriately	True
If all the actions described above have not been undertaken, explain why	*Not answered.*
Per Paragraph (4) of Subsection B of 19.15.29.8 NMAC the responsible party may commence remediation immediately after discovery of a release. If remediation has begun, please prepare and attach a narrative of actions to date in the follow-up C-141 submission. If remedial efforts have been successfully completed or if the release occurred within a lined containment area (see Subparagraph (a) of Paragraph (5) of Subsection A of 19.15.29.11 NMAC), please prepare and attach all information needed for closure evaluation in the follow-up C-141 submission.	

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to OCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the OCD does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to groundwater, surface water, human health or the environment. In addition, OCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

I hereby agree and sign off to the above statement	Name: Dean Ericson Title: Sr. Environmental Specialist Email: dean.ericson@energytransfer.com Date: 01/21/2026

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: ET Gathering & Processing, LLC 1025 Bounds Rd Loving, NM 88256	OGRID: 371183
	Action Number: 545110
	Action Type: [C-141] Site Char./Remediation Plan C-141 (C-141-v-Plan)

QUESTIONS

Site Characterization	
Please answer all the questions in this group (only required when seeking remediation plan approval and beyond). This information must be provided to the appropriate district office no later than 90 days after the release discovery date.	
What is the shallowest depth to groundwater beneath the area affected by the release in feet below ground surface (ft bgs)	Between 51 and 75 (ft.)
What method was used to determine the depth to ground water	Direct Measurement
Did this release impact groundwater or surface water	No
What is the minimum distance, between the closest lateral extents of the release and the following surface areas:	
A continuously flowing watercourse or any other significant watercourse	Greater than 5 (mi.)
Any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark)	Between 1 and 5 (mi.)
An occupied permanent residence, school, hospital, institution, or church	Between ½ and 1 (mi.)
A spring or a private domestic fresh water well used by less than five households for domestic or stock watering purposes	Between ½ and 1 (mi.)
Any other fresh water well or spring	Between ½ and 1 (mi.)
Incorporated municipal boundaries or a defined municipal fresh water well field	Between 1 and 5 (mi.)
A wetland	Between 1 and 5 (mi.)
A subsurface mine	Greater than 5 (mi.)
An (non-karst) unstable area	Greater than 5 (mi.)
Categorize the risk of this well / site being in a karst geology	Low
A 100-year floodplain	Between 1 and 5 (mi.)
Did the release impact areas not on an exploration, development, production, or storage site	Yes

Remediation Plan		
Please answer all the questions that apply or are indicated. This information must be provided to the appropriate district office no later than 90 days after the release discovery date.		
Requesting a remediation plan approval with this submission		Yes
Attach a comprehensive report demonstrating the lateral and vertical extents of soil contamination associated with the release have been determined, pursuant to 19.15.29.11 NMAC and 19.15.29.13 NMAC.		
Have the lateral and vertical extents of contamination been fully delineated		Yes
Was this release entirely contained within a lined containment area		No
Soil Contamination Sampling: (Provide the highest observable value for each, in milligrams per kilograms.)		
Chloride	(EPA 300.0 or SM4500 Cl B)	5760
TPH (GRO+DRO+MRO)	(EPA SW-846 Method 8015M)	20830
GRO+DRO	(EPA SW-846 Method 8015M)	11800
BTEX	(EPA SW-846 Method 8021B or 8260B)	651
Benzene	(EPA SW-846 Method 8021B or 8260B)	68.6
Per Subsection B of 19.15.29.11 NMAC unless the site characterization report includes completed efforts at remediation, the report must include a proposed remediation plan in accordance with 19.15.29.12 NMAC, which includes the anticipated timelines for beginning and completing the remediation.		
On what estimated date will the remediation commence		01/22/2026
On what date will (or did) the final sampling or liner inspection occur		01/28/2026
On what date will (or was) the remediation complete(d)		02/02/2026
What is the estimated surface area (in square feet) that will be reclaimed		0
What is the estimated volume (in cubic yards) that will be reclaimed		0
What is the estimated surface area (in square feet) that will be remediated		2600
What is the estimated volume (in cubic yards) that will be remediated		634
These estimated dates and measurements are recognized to be the best guess or calculation at the time of submission and may (be) change(d) over time as more remediation efforts are completed.		
The OCD recognizes that proposed remediation measures may have to be minimally adjusted in accordance with the physical realities encountered during remediation. If the responsible party has any need to significantly deviate from the remediation plan proposed, then it should consult with the division to determine if another remediation plan submission is required.		

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: ET Gathering & Processing, LLC 1025 Bounds Rd Loving, NM 88256	OGRID: 371183
	Action Number: 545110
	Action Type: [C-141] Site Char./Remediation Plan C-141 (C-141-v-Plan)

QUESTIONS

Remediation Plan (continued)	
Please answer all the questions that apply or are indicated. This information must be provided to the appropriate district office no later than 90 days after the release discovery date.	
This remediation will (or is expected to) utilize the following processes to remediate / reduce contaminants:	
(Select all answers below that apply.)	
(Ex Situ) Excavation and **off-site** disposal (i.e. dig and haul, hydrovac, etc.)	Yes
Which OCD approved facility will be used for **off-site** disposal	fJEG1635837006 SUNDANCE WEST
OR which OCD approved well (API) will be used for **off-site** disposal	*Not answered.*
OR is the **off-site** disposal site, to be used, out-of-state	No
OR is the **off-site** disposal site, to be used, an NMED facility	No
(Ex Situ) Excavation and **on-site** remediation (i.e. On-Site Land Farms)	No
(In Situ) Soil Vapor Extraction	No
(In Situ) Chemical processing (i.e. Soil Shredding, Potassium Permanganate, etc.)	No
(In Situ) Biological processing (i.e. Microbes / Fertilizer, etc.)	No
(In Situ) Physical processing (i.e. Soil Washing, Gypsum, Disking, etc.)	No
Ground Water Abatement pursuant to 19.15.30 NMAC	No
OTHER (Non-listed remedial process)	No
Per Subsection B of 19.15.29.11 NMAC unless the site characterization report includes completed efforts at remediation, the report must include a proposed remediation plan in accordance with 19.15.29.12 NMAC, which includes the anticipated timelines for beginning and completing the remediation.	
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to OCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the OCD does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to groundwater, surface water, human health or the environment. In addition, OCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.	
I hereby agree and sign off to the above statement	Name: Dean Ericson Title: Sr. Environmental Specialist Email: dean.ericson@energytransfer.com Date: 01/21/2026
The OCD recognizes that proposed remediation measures may have to be minimally adjusted in accordance with the physical realities encountered during remediation. If the responsible party has any need to significantly deviate from the remediation plan proposed, then it should consult with the division to determine if another remediation plan submission is required.	

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: ET Gathering & Processing, LLC 1025 Bounds Rd Loving, NM 88256	OGRID: 371183
	Action Number: 545110
	Action Type: [C-141] Site Char./Remediation Plan C-141 (C-141-v-Plan)

QUESTIONS

Deferral Requests Only	
Only answer the questions in this group if seeking a deferral upon approval this submission. Each of the following items must be confirmed as part of any request for deferral of remediation.	
Requesting a deferral of the remediation closure due date with the approval of this submission	No

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: ET Gathering & Processing, LLC 1025 Bounds Rd Loving, NM 88256	OGRID: 371183
	Action Number: 545110
	Action Type: [C-141] Site Char./Remediation Plan C-141 (C-141-v-Plan)

QUESTIONS

Sampling Event Information	
Last sampling notification (C-141N) recorded	*{Unavailable.}*

Remediation Closure Request	
Only answer the questions in this group if seeking remediation closure for this release because all remediation steps have been completed.	
Requesting a remediation closure approval with this submission	No

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Operator: ET Gathering & Processing, LLC 1025 Bounds Rd Loving, NM 88256	OGRID: 371183
	Action Number: 545110
	Action Type: [C-141] Site Char./Remediation Plan C-141 (C-141-v-Plan)

CONDITIONS

Created By	Condition	Condition Date
nvelez	Remediation plan is approved as written except with the following conditions; 1. USGS water well 322939103093901 was located west from the release within 1000 feet. Per 19.15.29.12C (4c) (ii) NMAC, ET Gathering & Process, LLC (ET) must complete the excavation and removal of impacted soils until confirmation samples collected from the bottom and sidewalls of the excavation report NMOCD Closure Criteria per 19.15.29.12 NMAC to the most stringent standards (groundwater <50 feet below grade) have been achieved. 2. Prior to backfilling any open excavation per 19.15.29.12D (2) NMAC, ET must collect a minimum of one (1) 5-point composite sample from the media being used as backfill to verify that it meets non-waste containing, uncontaminated, earthen material with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, or other test methods approved by the division.	1/22/2026
nvelez	This is especially important for the material being used within the top four (4) feet from the ground surface. 3. ET has 90-days (April 22, 2026) to submit to OCD its appropriate or final remediation closure report.	1/22/2026