


McClellan Oil Corp.

REQUIREMENTS  
(NTL-6)

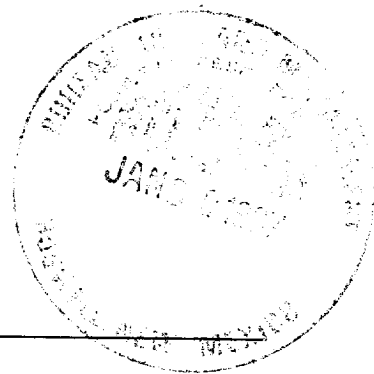

1. Location: 660' FNL & 660' FWL of Section 28-T5S-R25E
2. Elevation: 3769' G.L.
3. Geologic name of surface formation: See archaeological report
4. Type of drilling rig and associated equipment: Rotary
5. Proposed drilling depth and objective formation: 4250', Abo
6. Estimated tops of geologic markers:

|          |                   |            |              |          |                   |
|----------|-------------------|------------|--------------|----------|-------------------|
| Yates    | <u>          </u> | San Andres | <u>589'</u>  | Abo      | <u>3632'</u>      |
| 7-Rivers | <u>          </u> | Glorieta   | <u>1618'</u> | Wolfcamp | <u>          </u> |
| Queen    | <u>          </u> | Tubb       | <u>3022'</u> |          |                   |
7. Estimated depths of any oil, water, or gas: Possible gas at 3632'-4250'
- 8-9. Proposed casing program:

|                |   |              |       |             |     |                 |             |                  |
|----------------|---|--------------|-------|-------------|-----|-----------------|-------------|------------------|
| <u>13-3/8"</u> | @ | <u>40'</u>   | Grade | <u>H-40</u> | Wt. | <u>48 lb.</u>   | Type Cement | <u>6 yards</u>   |
| <u>8-5/8"</u>  | @ | <u>900'</u>  | Grade | <u>J-55</u> | Wt. | <u>24 lb.</u>   | Type Cement | <u>Class "C"</u> |
| <u>4-1/2"</u>  | @ | <u>4250'</u> | Grade | <u>J-55</u> | Wt. | <u>10.5 lb.</u> | Type Cement | <u>Class "C"</u> |
10. Specifications for pressure control equipment and testing procedures:  
Schaeffer type E 10" series 900 hydraulic BOP. See Exhibit "E"
11. Type and characteristics of drilling fluids: Drill to top of Abo with native mud. Mud up 100' above Abo with salt base gel, 45 visc., 9.5 lb/gal weight & 15 cc water loss.
12. Testing, logging, and coring programs: No D.S.T.'s or coring are anticipated. Will run CNL-LDT & DLL Gamma Ray Logs.
13. Anticipated abnormal pressures or temperature: None
14. Anticipated commencement and completion date: March 15, 1987 - March 25, 1987