

Used a DL-46

201 1/30/57

NEW MEXICO OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO

6-1-56

PACKER-SETTING AFFIDAVIT
(Dual Completions) ✓

STATE OF New Mexico)
County of San Juan) ss

L. H. Procter, being first duly sworn according to law, upon his oath deposes and says:

That he is of lawful age and has full knowledge of the facts herein below set out.

That he is employed by Magnolia Petroleum Company in the capacity of Production Foreman and as such is its authorized agent.

That on July 13, 1957, he personally supervised the setting of a Baker Model "J" in Magnolia Petroleum Company's
(Make and Type of Packer) (Operator)
Alcarilla "G" Well No. 3, located in Unit
(lease)
Letter H, Section 35, Township 27 N, Range 3 W, NMPM,
Rio Arriba County, New Mexico.

That said packer was set at a subsurface depth of 5572 feet,
said depth measurement having been furnished by Lane Wells.

That the purpose of setting this packer was to effect a seal in the annular space between the two strings of pipe where the packer was set so as to prevent the commingling, within the well-bore, of fluids produced from a stratum below the packer with fluids produced from a stratum above the packer. That this packer was properly set and that it did, when set, effectively and absolutely seal off the annular space between the two strings of pipe where it was set in such manner as that it prevented any movement of fluids across the packer.

Magnolia Petroleum Company
(Company)

[Signature]
(its Agent)


Subscribed and sworn to before me this the 26th day of August, AD, 1957.

Notary Public in and for the County
of San Juan, New Mexico.

My Commission Expires June 3, 1959.

Magnolia Petroleum Company
 Jicarilla "G" No. 3
 Blanco
 Rio Arriba County, New Mexico

Ground Elevation - 1190'
 All measurements are from 9' above
 10-3/4" casing flange

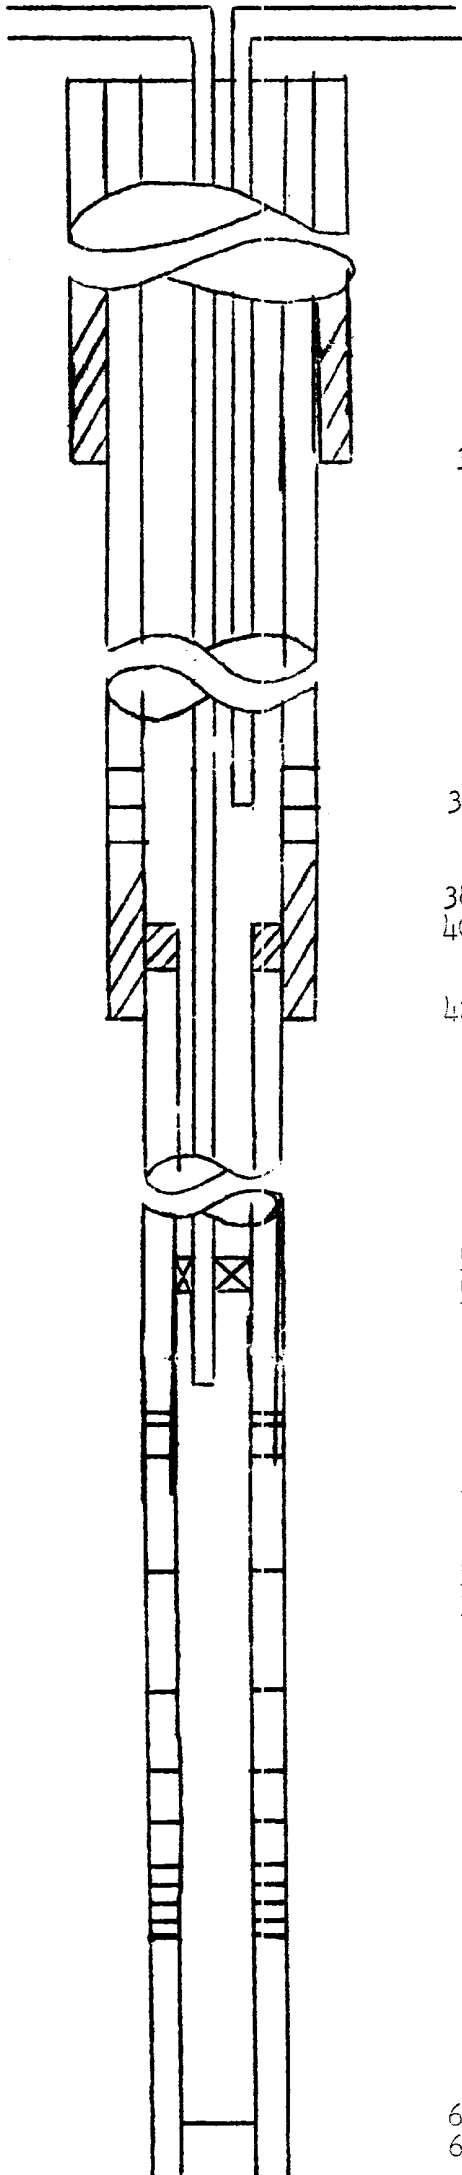

316' - 10-3/4" casing w/150 sacks circ.

	Perforated w/6 shots per foot.
3775' - Bottom of 2" tubing	3804 - 3816
	3834 - 3839
	3865 - 3885
3895' - Top of Pictured Cliffs	Total 222 shots
4072' - Top of 5 1/2" Liner w/100 sacks	
4212' - 7-5/8 Casing w/100 sacks	

5572' - Baker Mod. "D" Prod. Packer	Perforated w/4 shots per foot.
5579' - Top of Cliffhouse	5602 - 5611
	5619 - 5622
5580' - Bottom of 2" tubing	5633 - 5636
	5657 - 5664
	5852 - 5863
5667' - Top of Menafee	5962 - 5979
	5994 - 6009
	6022 - 6041
5900' - Top of Cement	6060 - 6063
5959' - Top of Point Lookout	6071 - 6075
	6080 - 6094
	6116 - 6126
	Total 452 shots

6131' - Top of Mancos

6175' - Plugged Back Total Depth
 6210' - 5 1/2" Liner w/200 sacks

