

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505
RECEIVED
2010 MAR 4 PM 4:23

Form C-144
July 21, 2008

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

**Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application**

- Type of action: ☒ Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
☐ Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
☐ Modification to an existing permit
☐ Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: Chevron Midcontinent, LP OGRID #: 241333
Address: P.O. Box 36366 Houston, TX 77236
Facility or well name: Rincon Unit No. 171
API Number: 30-039-06944 OCD Permit Number: _____
U/L or Qtr/Qtr Qtr/Qtr M Section 21 Township 27 N Range 6W County: Rio Arriba
Center of Proposed Design: Latitude 36 555018° Longitude 107 478559° NAD: ☐ 1927 ☐ 1983
Surface Owner: ☒ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment

2.
☐ **Pit:** Subsection F or G of 19.15.17.11 NMAC
Temporary: ☐ Drilling ☐ Workover
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A
☐ Lined ☐ Unlined Liner type: Thickness _____ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☐ Welded ☐ Factory ☐ Other _____ Volume: _____ bbl Dimensions: L _____ x W _____ x D _____

3.
☐ **Closed-loop System:** Subsection H of 19.15.17.11 NMAC
Type of Operation: ☐ P&A ☐ Drilling a new well ☐ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other _____
☐ Lined ☐ Unlined Liner type: Thickness _____ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
Liner Seams: ☐ Welded ☐ Factory ☐ Other _____

4. **Tank #1**
☒ **Below-grade tank:** Subsection I of 19.15.17.11 NMAC
Volume: 45bbl bbl Type of fluid: Produced Water
Tank Construction material: Steel
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☒ Other Buried
Liner type: Thickness _____ mil ☐ HDPE ☐ PVC ☒ Other None

5.
☐ **Alternative Method:**
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6.

Fencing: Subsection D of 19.15.17.11 NMAC (*Applies to permanent pits, temporary pits, and below-grade tanks*)

- ☐ Chain link, six feet in height, two strands of barbed wire at top (*Required if located within 1000 feet of a permanent residence, school, hospital, institution or church*)
- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify Four foot, pipe frame with square wire mesh.

7.

Netting: Subsection E of 19.15.17.11 NMAC (*Applies to permanent pits and permanent open top tanks*)

- ☒ Screen ☐ Netting ☐ Other _____
- ☐ Monthly inspections (If netting or screening is not physically feasible)

8.

Signs: Subsection C of 19.15.17.11 NMAC

- ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☒ Signed in compliance with 19.15.3.103 NMAC

9.

Administrative Approvals and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

- ☒ Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.
- ☐ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

10.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.

Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - Please reference hydrogeologic report and printout from iWATERS database.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Please reference the attached topographic map with distance rings. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no watercourses within the distance specified above.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Please reference the attached aerial photo. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no referenced buildings within the distance specified above.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Please reference the attached aerial photo. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no referenced buildings within the distance specified above.	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - Please reference the attached iWATERS printout. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no wells or springs within the distances specified above.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. The site is not within any known incorporated municipal boundaries, please reference the attached topographic map.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 500 feet of a wetland. - Please reference the attached topographic map with distance rings. In addition, a field visit was conducted by Envirotech in July 2008 certifying that, at the time, there were no wetlands within the distance specified above	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within the area overlying a subsurface mine. - Please reference the attached topographic map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within an unstable area. - Please reference the attached topographic map which includes FEMA flood map data. The map indicates the well site is outside of any known 100 year floodplains.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within a 100-year floodplain. - FEMA map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

11.

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC
☒ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
☒ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
☒ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
☒ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
☐ Previously Approved Design (attach copy of design) API Number: _____ or Permit Number: _____

12.

Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
☐ Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
☐ Previously Approved Design (attach copy of design) API Number: _____
☐ Previously Approved Operating and Maintenance Plan API Number: _____ (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)

13.

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
☐ Climatological Factors Assessment
☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Quality Control/Quality Assurance Construction and Installation Plan
☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan
☐ Emergency Response Plan
☐ Oil Field Waste Stream Characterization
☐ Monitoring and Inspection Plan
☐ Erosion Control Plan
☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

14.

Proposed Closure: 19.15.17.13 NMAC**Instructions:** Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.

- Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☐ Permanent Pit ☒ Below-grade Tank ☐ Closed-loop System
☐ Alternative
 Proposed Closure Method: ☒ Waste Excavation and Removal
☐ Waste Removal (Closed-loop systems only)
☐ On-site Closure Method (Only for temporary pits and closed-loop systems)
☐ In-place Burial ☐ On-site Trench Burial
☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)

15.

Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
☒ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☒ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
☒ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
☒ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
☒ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

16.

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC)

Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____
 Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Will any of the proposed closed-loop system operations and associated activities occur on or in areas that *will not* be used for future service and operations?

☐ Yes (If yes, please provide the information below) ☐ No

Required for impacted areas which will not be used for future service and operations:

- ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

17.

Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC

Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.

Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within a 100-year floodplain. - FEMA map	<input type="checkbox"/> Yes <input type="checkbox"/> No

18.

On-Site Closure Plan Checklist: (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
☐ Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☐ Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC
☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☐ Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)
☐ Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19.

Operator Application Certification:

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): Rodney Bailey Title: Waste & Water Group Lead

Signature:  Date: March 1, 2010

e-mail address: Bailerg@chevron.com Telephone: (432) 687 7123

20.

OCD Approval: ☒ Permit Application (including closure plan) ☐ Closure Plan (only) ☐ OCD Conditions (see attachment)

OCD Representative Signature:  Approval Date: 9/24/12

Title: Environmental Engineer OCD Permit Number: _____

21.

Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC

Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.

☐ Closure Completion Date: _____

22.

Closure Method:

☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-loop systems only)
☐ If different from approved plan, please explain.

23.

Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:

Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Were the closed-loop system operations and associated activities performed on or in areas that *will not* be used for future service and operations?

☐ Yes (If yes, please demonstrate compliance to the items below) ☐ No

Required for impacted areas which will not be used for future service and operations:

- ☐ Site Reclamation (Photo Documentation)
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique

24.

Closure Report Attachment Checklist: *Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.*

- ☐ Proof of Closure Notice (surface owner and division)
☐ Proof of Deed Notice (required for on-site closure)
☐ Plot Plan (for on-site closures and temporary pits)
☐ Confirmation Sampling Analytical Results (if applicable)
☐ Waste Material Sampling Analytical Results (required for on-site closure)
☐ Disposal Facility Name and Permit Number
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique
☐ Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude _____ Longitude _____ NAD: ☐ 1927 ☐ 1983

25.

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): _____ Title: _____

Signature: _____ Date: _____

e-mail address: _____ Telephone: _____

- Well Name & Number: Rincon 171
- API #: 3003906944
- Lease #: SF 079366
- Quarter/Quarter: M Section: 21 Township: 27N Range: 6W
- Lat: N 36.555018 Long: W 107.478559

- Pit Tank #1: Manufacturer: Double Tank Corp
- Serial #: UL 958 DOM: 5/00 Size 45 bbl
 - If N/A – Dimensions: Diameter _____ Height _____
- Material: Steel ☒ Galvanized _____ Fiberglass _____
- Tank Configuration: Double Wall _____ Single Wall ☒ (Buried ☒ or Exposed _____ Walls)
- Contents: Produced Water ☒ Condensate _____ Recycled Oil _____
- Tank Top Covering: Solid/Cone-top ☒ Netting _____ (Solid _____ Fiber _____)
- Secondary Containment: Yes ☒ No _____
- Fencing around berm: Yes ☒ No _____
 - Fence Type: Cattle Panel _____ Field Fence ☒ Barbwire _____

- Pit Tank #2: Manufacturer: _____
- Serial #: _____ DOM: _____ Size _____ bbl
 - If N/A – Dimensions: Diameter _____ Height _____
- Material: Steel _____ Galvanized _____ Fiberglass _____
- Tank Configuration: Double Wall _____ Single Wall _____ (Buried _____ or Exposed _____ Walls)
- Contents: Produced Water _____ Condensate _____ Recycled Oil _____
- Tank Top Covering: Solid/Cone-top _____ Netting _____ (Solid _____ Fiber _____)
- Secondary Containment: Yes _____ No _____
- Fencing around berm: Yes _____ No _____
 - Fence Type: Cattle Panel _____ Field Fence _____ Barbwire _____


- Above-Ground Tank #1: Manufacturer: American Tank and Steel
- Serial #: 9.26 DOM: 6-56 Size 100 bbl
 - If N/A – Dimensions: Diameter _____ Height _____
- Material: Steel ☒ Galvanized _____ Fiberglass _____
- Contents: Produced Water _____ Condensate ☒ (State # 300091) Recycled Oil _____
- Secondary Containment: Yes ☒ No _____

- Above-Ground Tank #2: Manufacturer: _____
- Serial #: _____ DOM: _____ Size _____ bbl
 - If N/A – Dimensions: Diameter _____ Height _____
- Material: Steel _____ Galvanized _____ Fiberglass _____
- Contents: Produced Water _____ Condensate _____ (State # _____) Recycled Oil _____
- Secondary Containment: Yes _____ No _____

- Above-Ground Tank #3: Manufacturer: _____
- Serial #: _____ DOM: _____ Size _____ bbl
 - If N/A – Dimensions: Diameter _____ Height _____
- Material: Steel _____ Galvanized _____ Fiberglass _____
- Contents: Produced Water _____ Condensate _____ (State # _____) Recycled Oil _____
- Secondary Containment: Yes _____ No _____

Well Schematic

NORTH

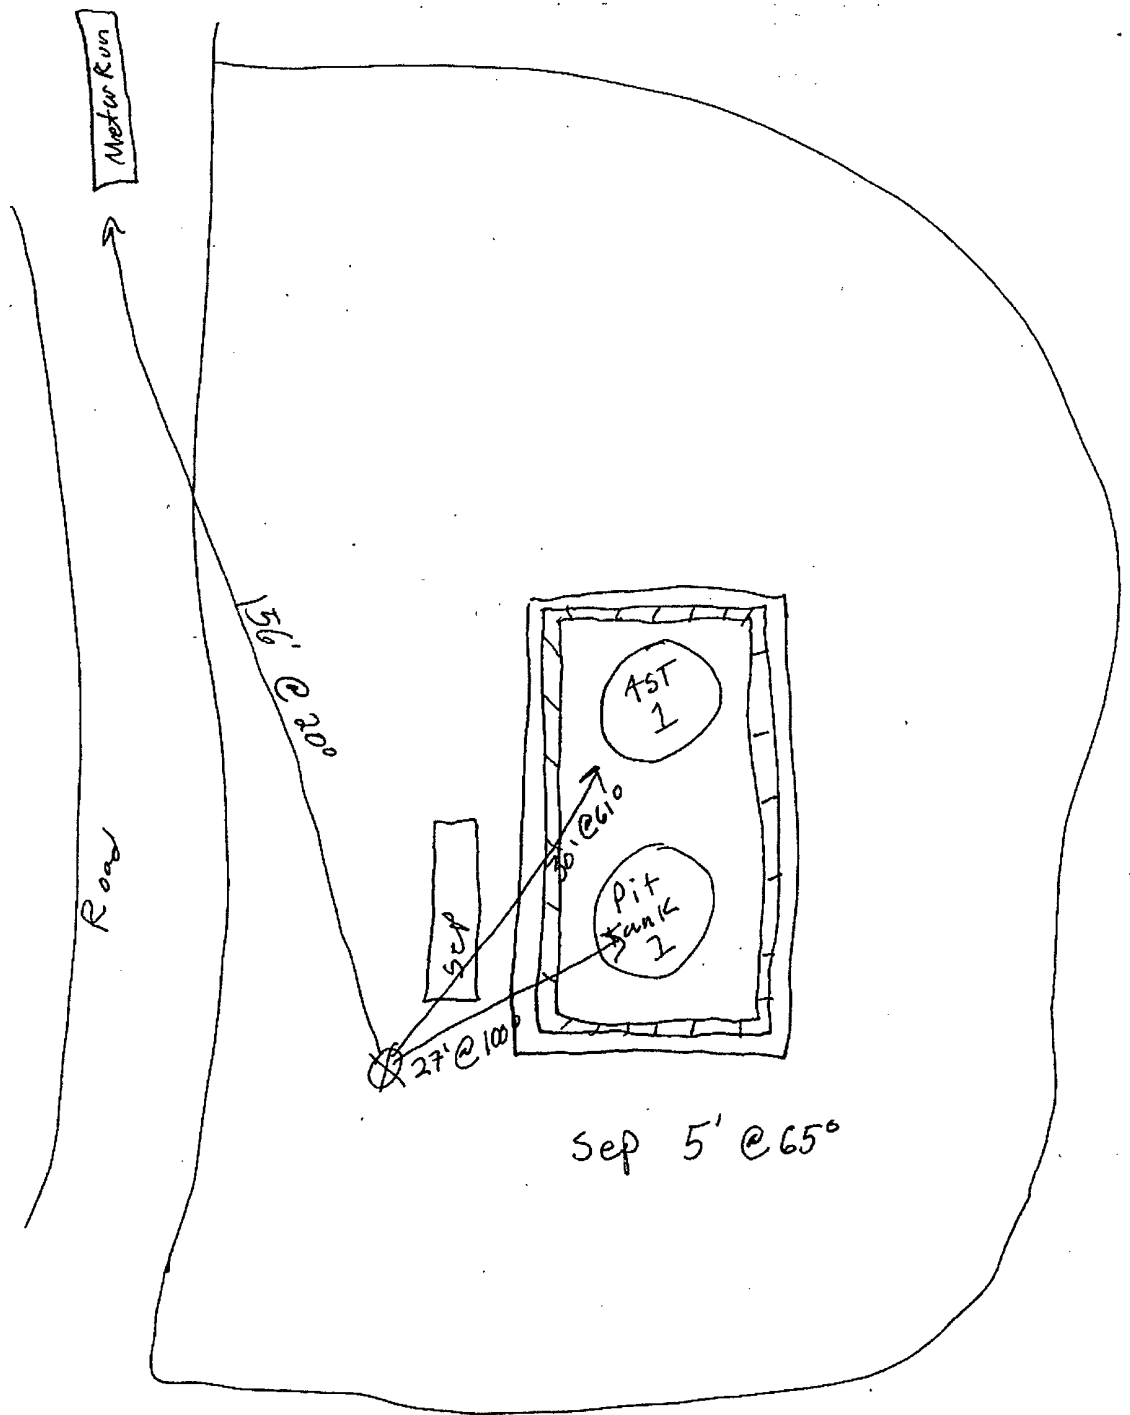

Schematic Key:

Separator

SEP

Artificial Lift

AL

Condensate Tank

COND

Compressor

COM

Meter Run

METER RUN

Dehydrator

DEH

Well Head



Water Tank

WATER

Measure any distance 1000ft or less of the following:

- From wellhead to any continuous flowing or significant water course. N/A

- From below-grade tanks to any permanent residence, school, church, hospital, etc. N/A

Chevron Midcontinent, LP
BGT Permit Siting Criteria Summary Sheet
Rincon Unit #171

RECEIVED OGD
MAR 22 2011

- Groundwater is estimated to be 136 feet below the bottom of the BGT. This was calculated using information from the cathodic well located on the well site. The top of casing elevation for the cathodic well is 6611 feet and the depth to groundwater is recorded as 120 feet; see the *attached Data Sheet for Deep Ground Bed Cathodic Protection Wells*. (Depth to groundwater for water wells is measured from the top of casing so that all wells are labeled from a common point of interest.) This gives a groundwater elevation of 6491 feet. The topographic map indicates the site elevation to be 6632 feet. The BGT is buried five (5) feet below ground surface which gives a bottom of the BGT elevation of 6627 feet. The difference between the BGT bottom elevation and groundwater elevation is 136 feet.
- The below-grade tank is not within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake. The nearest continuously flowing watercourse is the San Juan River estimated to be 18 miles northwest of the BGT. The nearest lake is Navajo Lake estimated to be 18 miles northwest of the BGT. The nearest wash is estimated to be 1300 feet northeast of the BGT and is an un-named, ephemeral wash that is not a significant watercourse; see attached *Topographic Map*. (The red dot on the topographic map indicates the location of the BGT.) The nearest significant watercourse is estimated to be 3300 feet from the BGT and is an un-named, first order tributary to Martinez Canyon Wash. There are no lakebeds, sinkholes, or playa lakes within the mapped area of the well site.
- The below-grade tank is not within 300 feet of a permanent residence, school, hospital, institution, or church in existence at the time of initial application; see the attached *Aerial Map*. (The red dot on the aerial map indicates the location of the BGT.) There are no permanent residences, schools, hospitals, institutions or churches within the mapped area of the *Aerial Map*. The nearest residence is 6.5 miles southwest of the BGT. The nearest school, hospital, institution, or church is at least 23 miles southwest of the BGT.
- The BGT is not within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. There are no freshwater springs within the mapped area of the attached *Topographic Map*. The closest water well is estimated to be 3,020 meters (1.9 miles) southwest of the BGT and was revealed on the attached *NMOSE Water Column/Average Depth to Water Report*. (The water well is located outside the boundaries of the *Topographic Map* and therefore not shown.)
- The below-grade tank is not within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended; see the attached *Municipal Boundary Map*. The closest boundary is the Nageezi Municipal Boundary located approximately 23 miles southwest of the site. (The Nageezi City Limits are colored orange and the BGT is indicated by a red circle on the *Municipal Boundary Map*.)
- The below-grade tank is not within 500 feet of a wetland; see the attached *Topographic Map* and *U.S. Fish and Wildlife Service National Wetlands Inventory Map*. Any wetlands on the topographic map are noted in dark blue. The nearest wetland area is estimated to be 1.3 miles east of the BGT and is indicated as other on the attached *U.S. Fish and Wildlife Service National Wetlands Inventory Map*.
- The below-grade tank is not within an area overlying a subsurface mine; see the attached *NM EMNRD-Mining and Mineral Division Map*. The nearest mine is an aggregate mine located approximately 32 miles northwest of the BGT.
- The below-grade tank is not within an unstable area; see the attached *USGS Geologic Map* and *USGS Karst Map*. The site is indicated on the maps by a red square. The nearest Karst Feature is approximately 40 miles southeast of the site and is shown on the *USGS Karst Map*. The underlying geology is comprised of the San Jose Formation, a Tertiary formation composed of shale, siltstone and sandstone.
- The well site is outside of any known 100 year floodplains as evidenced on the attached *FIRM Flood Insurance Rate Map*. (Any floodplains are indicated by blue dotted hatching on the map.)

HYDROGEOLOGIC REPORT

Rincon Unit #171 Hydrogeologic Report

Topography and Surface Hydrology

The Rincon Unit #171 well site is located in what is considered the Colorado River Basin, within the Gould Pass, Rio Arriba County, New Mexico, United States Geological Survey (USGS) 7.5-minute Quadrangle Map approximately 23 miles to the northeast of the Nageezi, New Mexico, municipal boundary; see attached *Municipal Boundary Map*. The largest, continuously flowing streams of the Colorado River Basin are the Animas and San Juan Rivers. The San Juan River is the closest continuously flowing waterway to the site and is approximately 18 miles northwest of the site. Most stream channels within the Colorado River Basin are ephemeral, with some being intermittent (Stone et al., 1983). The tributaries of the San Juan River that contribute large quantities of water during precipitation events are Canyon Largo, Gallegos Canyon, Chaco River, and the La Plata River. The nearest wash is estimated to be 1300 feet northeast of the below grade tank and is an un-named, ephemeral wash that is not a significant wash. The nearest significant wash is estimated to be 3300 feet northeast of the below grade tank and is an unnamed wash that is a first order tributary to Martinez Canyon Creek. The Martinez Canyon Creek is an ephemeral wash that only exists during periods of heavy precipitation and is a second order tributary to the Canyon Largo Wash; see attached *Topographic Map*.

Wetland areas can be found to the northeast and southwest of the well site. The nearest wetland area to the Rincon Unit #171 well site is approximately 1.3 miles east of the BGT. This wetland area is identified as other in accordance with the attached *U.S. Fish and Wildlife Service National Wetlands Inventory Map*. The well site is not within any known flood zone and no flood zones were identified within the mapped area; see attached *Firm Flood Insurance Rate Map*.

Residential areas are mostly within the San Juan River Valley to the north and within the Bloomfield City Municipal Boundaries. The closest permanent residence is approximately 6.5 miles to the southwest of the Rincon Unit #171 well site. The nearest school is the Dzilh-Na-O-Dith-Hle School located 23 miles southwest of the Rincon Unit #171. The nearest churches and institutions are located within Blanco, New Mexico. The closest hospital is located within Farmington, New Mexico, approximately 15 miles west of Bloomfield, New Mexico.

The only mining activities identified are to the northwest of the Rincon Unit #171. The mining activities are Aggregate and Stone Mines and the nearest mine is approximately 32 miles northwest of the well site; see attached *NM EMNRD – Mining and Mineral Division Map*.

Soil

The San Juan Basin contains a wide range of soil types, with the northwest part of the basin, including the bulk of the drainage area of the Chaco and San Juan Rivers, characterized by light-colored, cool, desertic soil types. The higher elevations bordering the basin are characterized by moderately dark to dark mountain soils, and the area in between the two zones being characterized by dark-colored, western plateau soils. The majority of the soils within the basin are of alluvial valley fill and consist of gravel, sand, silt, and clay (Stone et al., 1983). The soil type in the area of the Rincon Unit #171 well site is the Vessilla-Menefee-Orlie complex. This soil is characterized by moderate organic material and high permeability. The unit consists of slope alluvium over residuum weathered from sandstone. The unit is low to moderately steep and ranges between one (1) and 30 percent sloping grade. It is a well drained soil with a very low available water capacity. The depth to paralithic bedrock is between 10 and 20 inches. The underlying bedrock is mainly weathered sandstone and shale with visible outcrops along the canyon rim to the west of the well site. The unit is found between the elevations of 6,100 feet and 7,200 feet. Mean annual precipitation is between 13 to 16 inches per year (*Natural Resources Conservation Service Soil Survey*).

Geology and Groundwater Hydrology

The area geology is comprised of mostly sandstone, mudstone, and siltstone. Karst features are formed by the dissolution of soluble rocks, such as limestone and dolomite, and can be characterized by springs, caves, and sinkholes. The nearest documented Karst features are approximately 40 miles southeast of the well site in accordance with a search of Karst features conducted from the *New Mexico Institute of Mining and Technological*

Petroleum Recovery Research Center Webb Mapping Portal. The information used to create the Karst feature search was compiled using data from the *United States Geological Survey (USGS) Digital Engineering Aspects of Karst Map web site*. The identified Karst features consist of fissures, tubes and caves generally less than 1,000 feet long, 50 feet or less vertical extent, in moderately to steeply dipping beds of carbonate rock.

Most water supplies in the San Juan Basin are from groundwater that is accessed through wells completed within the surficial valley-fill deposits of Quaternary age and sandstones of Tertiary, Cretaceous, Jurassic, and Triassic age. The Rincon Unit #171 well site lies in the San Jose Formation Aquifer which dips at 7 degrees to the north-east (Frenzel, 1983). The San Jose Formation ranges from less than 200 feet in the west and south to nearly 2,700 feet in the basin center between Cuba and Gobernador (Frenzel, 1983).

The San Jose Formation (Tsj) is the youngest Tertiary unit in the San Juan Basin and was named by Simpson (1948, p. 277-283). It is of early Eocene age and as early as 1875 was correlated with the Wasatch Formation in Wyoming. The San Jose is the surface formation in the eastern two-thirds of the San Juan Basin. Although largely exposed in New Mexico, the San Jose also straddles the New Mexico/Colorado State boundaries. It outcrops in its west, south and northeast boundaries in a broad, and in some places irregular, southeasterly trending band in the Blanco Canyon to Largo Canyon area. On the east side, it rises structurally and outcrops in a narrow band along the west face of the Nacimiento Uplift forming the eastern boundary of the San Juan Basin. There are several smaller, isolated remnants of the San Jose Formation west of the central exposure. The San Jose has eroded deeply in some areas and because of differential resistance to erosion of its various sandstone and shale units, produces a large thickness variance and in some places formation of very rugged topographic expression (Baltz, 1967, p. 45). In some places it erodes to horseshoe-shaped badlands and massive cliffs. The San Jose overlays the nonresistant slope-forming Nacimiento Formation (Tn). Thickness of the San Jose ranges from less than 200' at the outcrop on the west and south sides to almost 2700 feet in the Basin center (Stone, et al, p. 25). The thickness is 1300' or less on the southern part of the Tapicitos Plateau where the San Jose structurally rises and its upper beds are eroded. In the Largo Plains area (Largo Canyon) which marks the western exposure of the preserved San Jose, more than half of the Formation was removed by erosion (Baltz, p. 46). The San Jose Formation contact is that of an angular unconformity surface with the underlying Paleocene-age Nacimiento Formation near the Nacimiento Uplift, but is slightly disconformable to conformable in the Basin center (Stone, et al, p. 25). The San Jose Formation is comprised of four identifiable rock facies (in ascending order) called the Cuba Mesa, the Regina, the Llaves and the Tapicitos Members. These four members are only present in the far eastern part of the basin (Brimhall, 1973, p. 198). Within the preserved area, only the Cuba Mesa and Regina are widespread throughout the basin. The oldest Member of the San Jose is the Cuba Mesa (150-800 feet thick), which is largely a massive cliff-forming buff and yellow, rusty-weathering cross-bedded arkosic coarse-grained sandstone with lenticular reddish, green and gray shale beds (Baltz, p. 46). The Cuba Mesa is overlain in the southern two-thirds of the area by drab-colored variegated shale and interbedded soft to hard sandstones known as the Regina Member (100 to 1700 feet thick) and overlain in the northern one-third by a thick sequence of sandstone called the Llaves (50 to 1300 feet thick) which in turn intertongues and grades southward into the Regina. In the northeastern part of the area, the upper Llaves Member grades southward and westward into the red silty mudstones, siltstones and interbedded poorly consolidated sandstones of the Tapicitos Member (120-500 feet thick) (Stone, et al, p. 25).

The nearest registered water well determined by a radius search of 3,200 meters (2.0 miles) from the center of the BGT on the Rincon Unit #171 well site is approximately 3,020 meters (1.9 miles) southwest of the BGT with a depth of groundwater of 485 feet below the top of casing; see attached *New Mexico Office of the State Engineer Water Column/Average Depth to Water Report*. Groundwater is estimated to be 136 feet below the bottom of the BGT. This was calculated using information from the cathodic well servicing the well site. The top of casing elevation for the cathodic well is 6,611 feet and the depth to groundwater is recorded as 120 feet; see the attached *Data Sheet for Deep Ground Bed Cathodic Protection Wells*. This gives a groundwater elevation of 6,491 feet. The topographic map indicates the site elevation to be 6,632 feet. The BGT is buried approximately five (5) feet below the surface elevation giving the bottom of the BGT an elevation of approximately 6,627 feet. The difference between the BGT bottom elevation and groundwater elevation is 136 feet.

Resources


New Mexico Office of the State Engineer (NMOSE) New Mexico Water Right Reporting System (iWaters database)

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.


Natural Resources Conservation Service Soil Survey web page

New Mexico Institute of Mining and Technological Petroleum Recovery Research Center Webb Mapping Portal

**SITING CRITERIA COMPLIANCE
DEMONSTRATIONS**

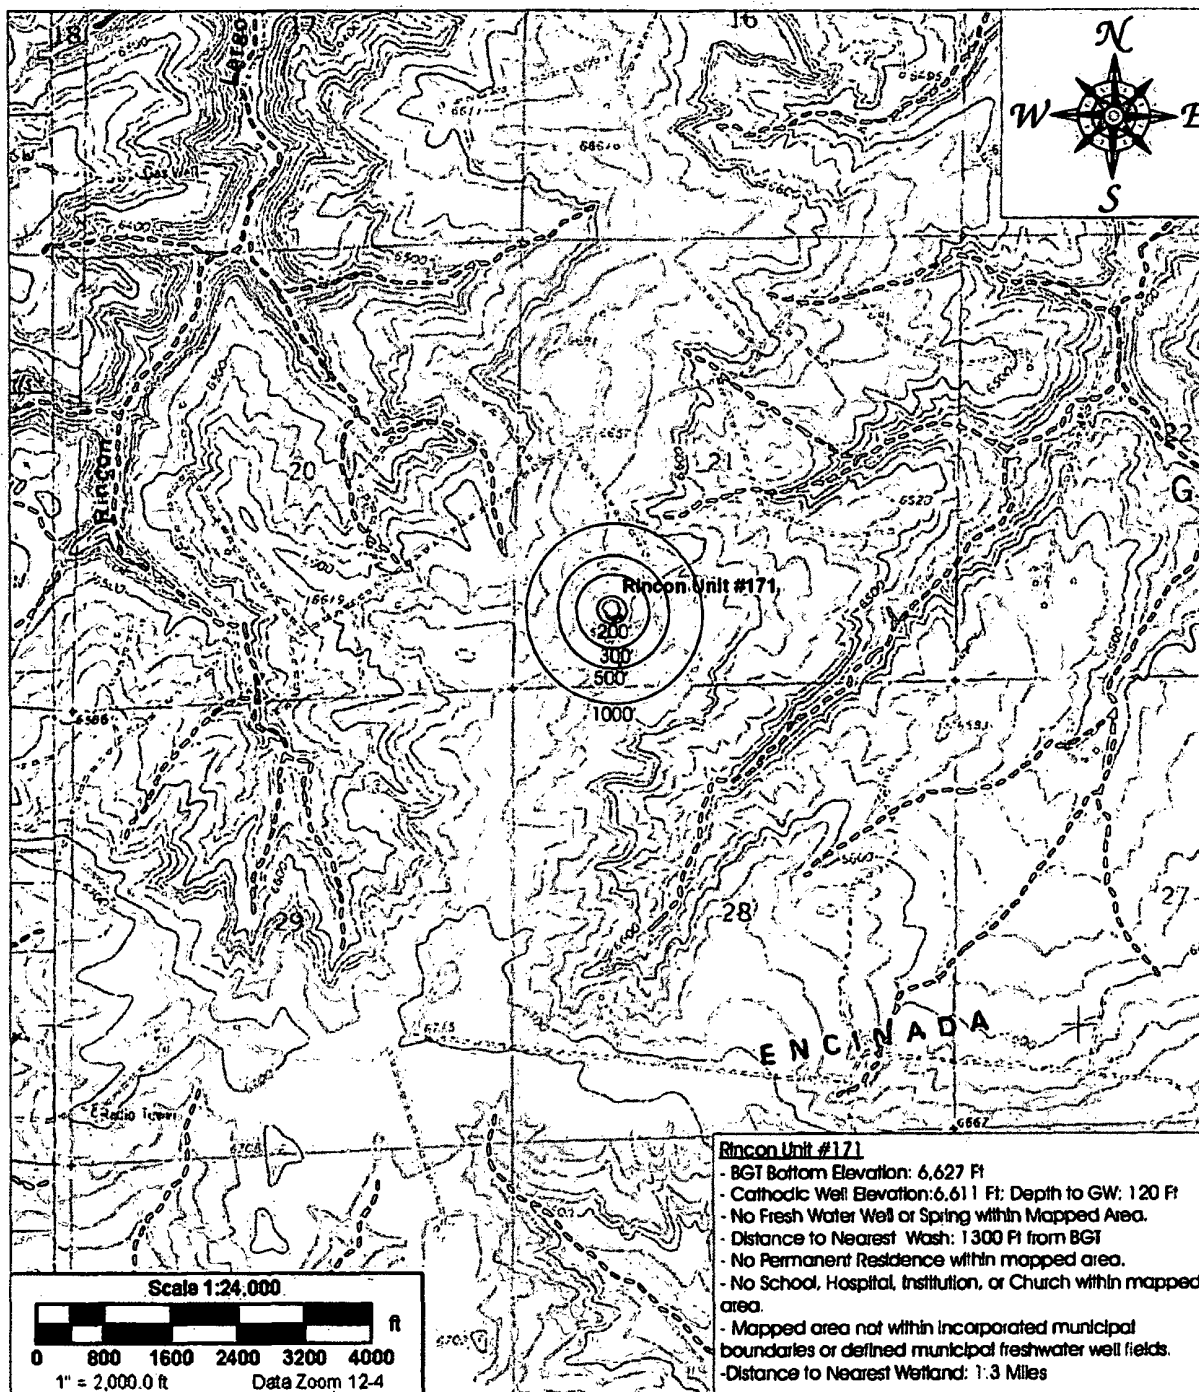

Source: USGS 7.5-minute Quadrangle Map - Gould Pass, Rio Arriba County, New Mexico

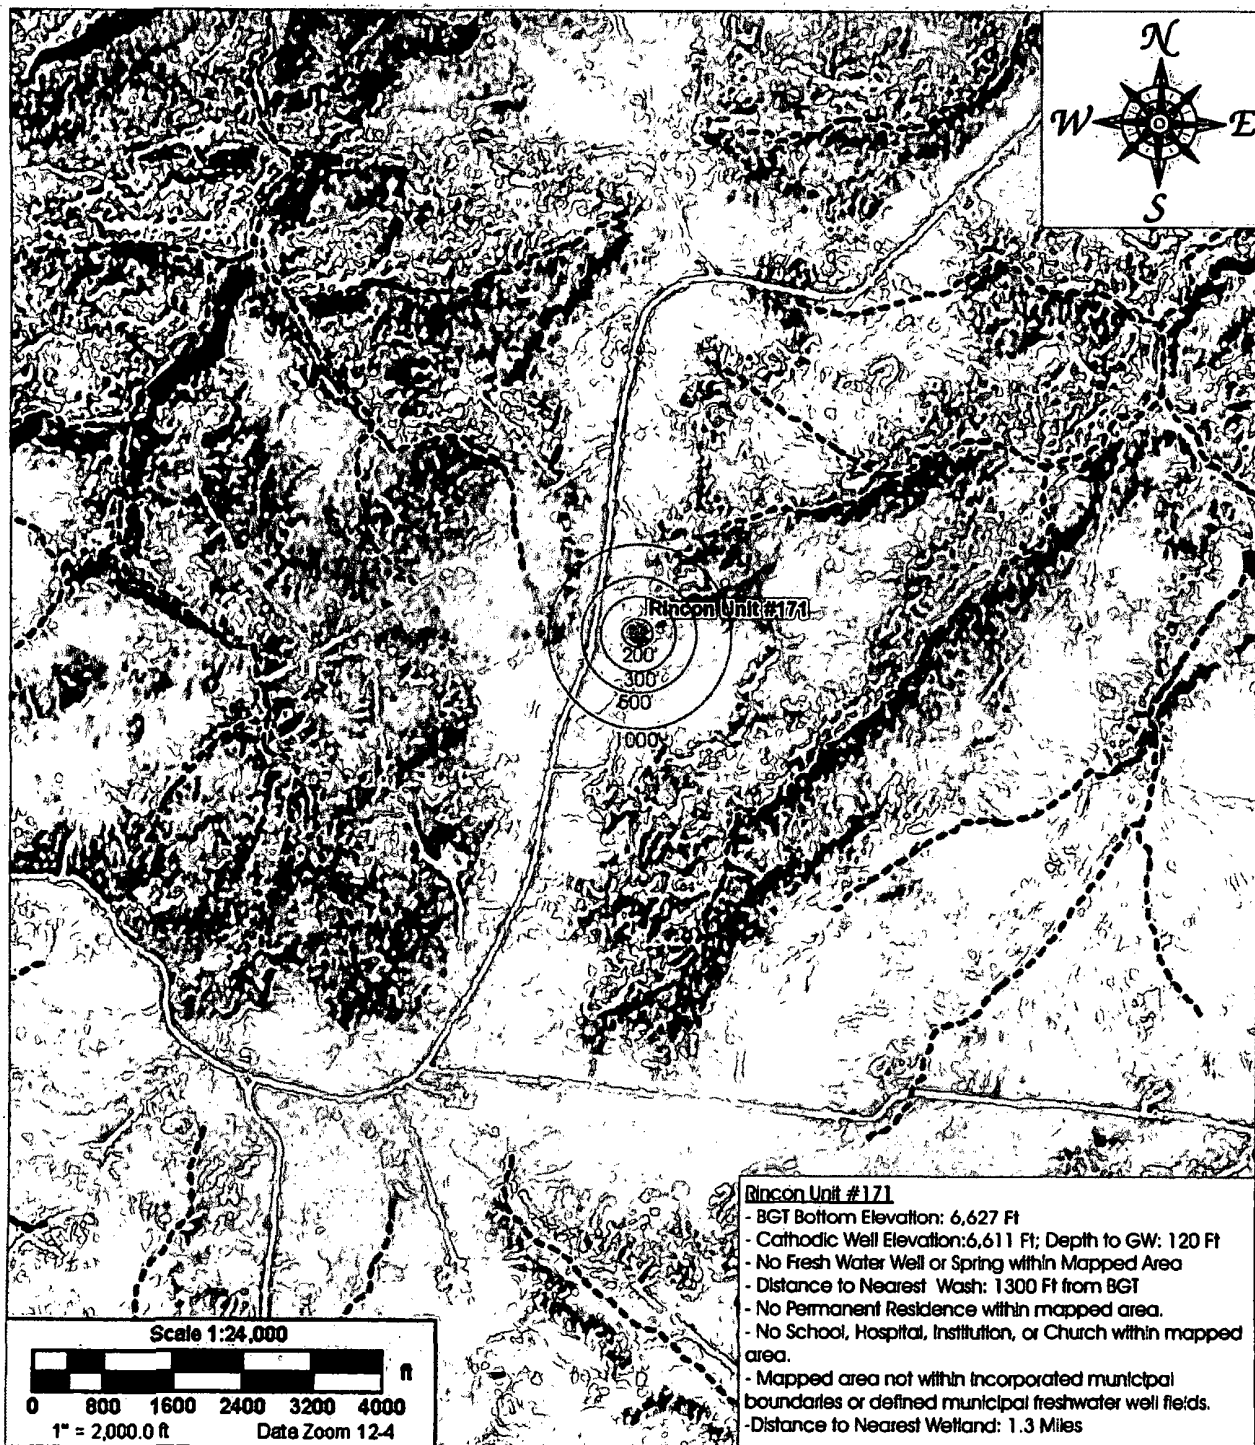

Source: USGS 7.5-minute Quadrangle Map - Gould Pass, Rio Arriba County, New Mexico

LEGEND	
○	Below Grade Tank
○	Water Well
●	Wetland Area
—	Perennial Stream
- - -	Ephemeral Wash
PROJECT Number: 92270-1005	Date Drawn: 08/22/12

envirotech
ENVIRONMENTAL SCIENTISTS & ENGINEERS

5796 U.S. HIGHWAY 64
Farmington, New Mexico 87401
505.632.0615

Aerial Map	
Chevron North America	
Rincon Unit #171	
Section 21, Township 27 N, Range 6 W	
Rio Arriba County, New Mexico	
DRAWN BY: Toni McKnight	PROJECT MANAGER: Greg Crabtree

115 - 30-039-06970

171 - 30-039-06944

**DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)**

Operator Union Oil Company of California Location: Unit Sec. 21 Twp 27N Rng 6WName of Well/Wells or Pipeline Serviced Rincon #115 PC/MV, Rincon #171 DKRincon #240 FcElevation 6611' Completion Date 11-6-1989 Total Depth 300 Land Type* FCasing, Sizes, Types & Depths NoneIf Casing is cemented, show amounts & types used None

If Cement or Bentonite Plugs have been placed, show depths & amounts used


None

Depths & thickness of water zones with description of water when possible:


Fresh, Clear, Salty, Sulphur, Etc. 120' deep 30' thick FreshDepths gas encountered: NAType & amount of coke breeze used: Carbo 60 3000 lbsDepths anodes placed: 200'-255' Lida stringDepths vent pipes placed: 300'Vent pipe perforations: 200'Remarks: Unocal was operator when this ground bed was installed.This was the second ground bed installed on this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.



Cathodic Protection Services Company
P. O. Box 388
Farmington, New Mexico 87499
1608 Schofield Lane
Farmington, New Mexico 87401
(505) 325-1948



February 2, 1990

Unocal Corporation
3300 N. Butler, Suite 201
Farmington, NM 87401

Attention: Mr. Steve Gregory

Subject: Major Water Zones in Cathodic Protection Deep-Well Groundbeds

Dear Mr. Gregory:

Per your recent request for information concerning the cathodic protection deep-well groundbeds for your well casings in the San Juan Basin area, we are pleased to submit the following information.

Township & Range	Depths Ranging From Shallowest to Deepest	Average Depth	Average Thickness of Water Zone
T-25N - R-10W	110' - 140'	122.5'	20'
T-25N - R-11W	60' - 140'	93.3'	45'
T-26N - R-7W	80' - 150'	112.5'	30'
T-27N - R-7W	80' - 200'	123.3'	22.5'
T-27N - R-6W	80' - 200'	131.1'	30'

This data reflects information supplied by the drilling logs acquired at the time the wells were drilled. The depths shown are based on the type of sand which was being extruded from the drilled hole and the dampness of the sand.

The thickness of the water zones are determined by the change in the strata which was being drilled.

It has been a pleasure providing this information to your company. If you have any further questions or desire additional information, please do not hesitate to contact us.

Sincerely,

Cathodic Protection Services Company


John Kerr, Corrosion Technician

cc: Mike Tabet

CPS
Cathodic Protection Services
A LUKENS COMPANY

COMPANY Unocal JOB No. 00027 DATE: 11-6-89
 WELL: RINCON #240 PIPELINE: Rio Arriba
 LOCATION: SEC. 21 TWP. 27 RGE. 6 CO. Santa Fe STATE N.M.
 ELEV. _____ FT: ROTARY 300 FT: CABLE TOOL 0 FT: CASING 0
 GROUNDBED: DEPTH 300 FT. DIA. 6 IN. GAS 3000 LBS. ANODES WIDA STRONG


DEPTH. FT.	DRILLER'S LOG	EXPLORING ANODE TO STRUCTURE			NO COKE	WITH COKE	ANODE NO.	DEPTH, TOP OF ANODES
		E	I	R	I	I		
	First Water 120'							
	0-200 SAND							
200		2.7						
5		2.2						
10		2.2						
5		2.1						
20	Top of WIDA Anodes	2.4			3.0	5.5		220
5		2.4						
30		2.3						
5		2.7						
40		2.6						
5		2.4						
50		2.2						
5		2.4						
60		2.4						
5		2.3						
70		2.2						
5		1.0						
80		1.9						
5		1.6						
90		1.1						
5		1.0						
300	T.D. 300							

GROUNDED RESISTANCE: (I) VOLTS 12.01 - AMPS 5.5 - 2.18 OHMS

C1 VIBROGROUND _____ OHMS

GENERAL CATHODIC PROTECTION SERVICES CO.

A LUXENS COMPANY

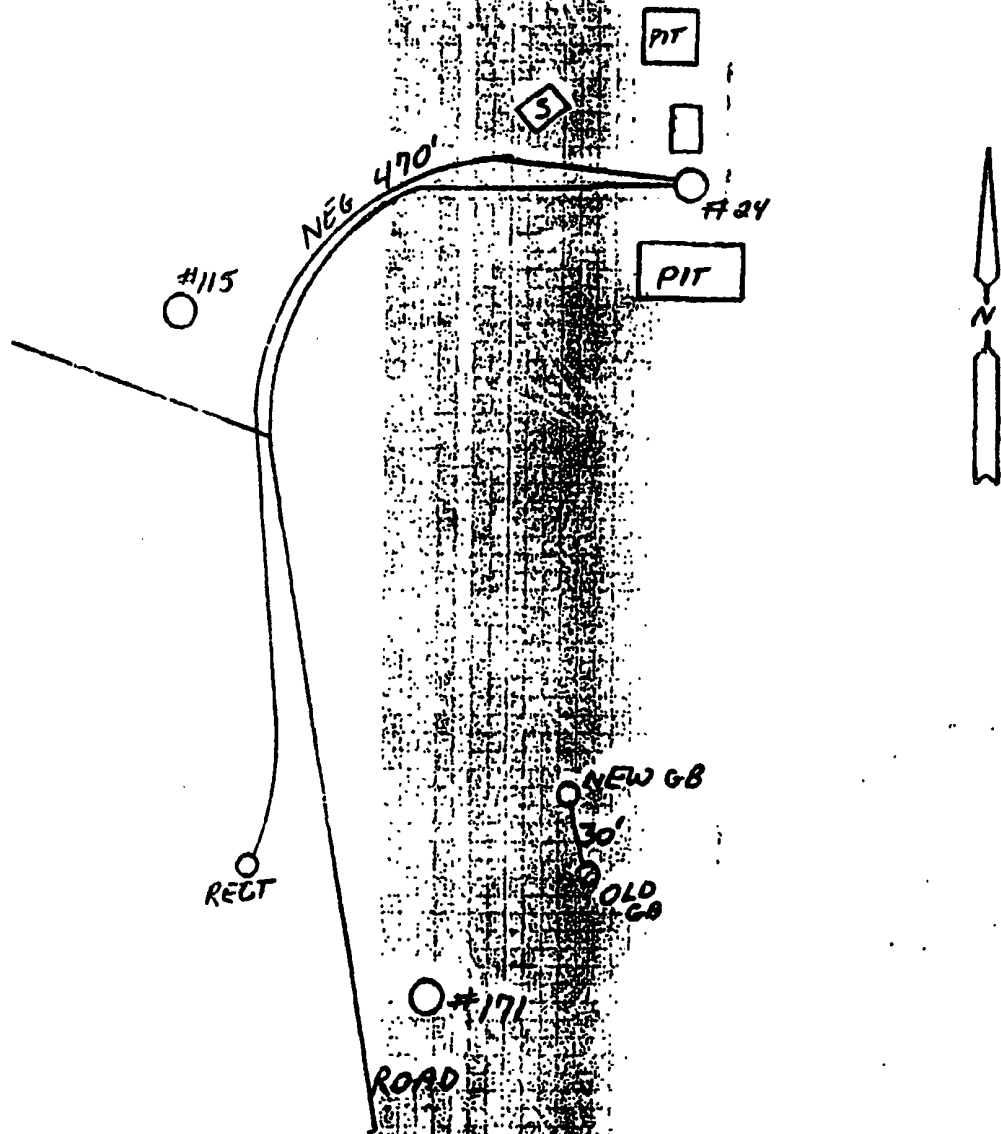

POS. 30'
NEG 470'




693

Cathodic Protection Services

A LUKENS COMPANY

RINCON UNIT #240
RINCON UNIT #115
RINCON UNIT #171

NO	REVISION	DATE	DESIGN OR SCALE	CHK APP DATE	DWG NO REV.
			SCALE NONE	DATE 12-11-89	00027 -18

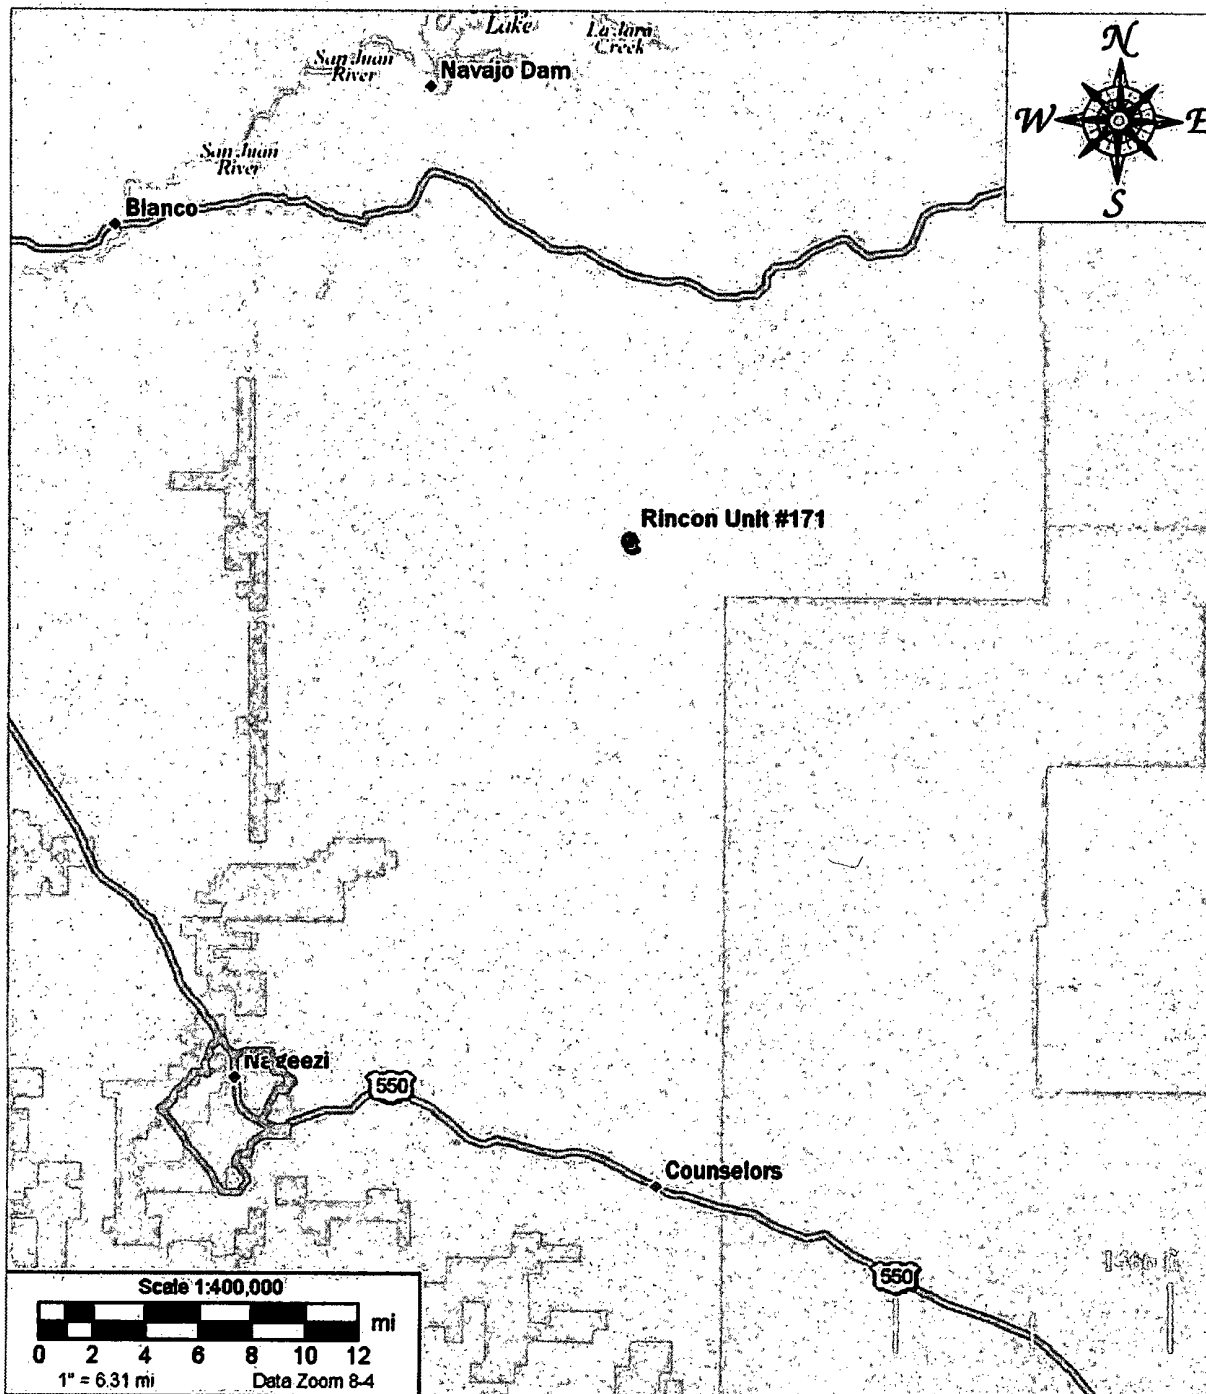

Source: Delorme Topo USA 7.0; Google Earth 2012

LEGEND

- Below Grade Tank
- City Boundary



5796 U.S. HIGHWAY 64
Farmington, New Mexico 87401
505.632.0615

Municipality Map

Chevron North America
Rincon Unit #171

Section 21, Township 27 N, Range 6 W
Rio Arriba County, New Mexico

PROJECT Number: 92270-1009 Date Drawn: 08/22/12

DRAWN BY:
Toni McKnight

PROJECT MANAGER:
Greg Crabtree



New Mexico Office of the State Engineer Water Column/Average Depth to Water

(A CLW##### in the
POD suffix indicates the
POD has been replaced
& no longer serves a
water right file.)

(R=POD has
been replaced,

O=orphaned,

C=the file is

closed)

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest)

(NAD83 UTM in meters)

(In feet)

POD Number	POD Code	Subbasin	County	Q	Q	Q	Sec	Tws	Rng	X	Y	Distance	Depth Well	Depth Water	Water Column
SJ 00213			RA	4	4	1	32	27N	06W	276897	4045750*	3020	1308	485	823

Average Depth to Water: 485 feet

Minimum Depth: 485 feet

Maximum Depth: 485 feet

Record Count: 1

UTMNAD83 Radius Search (in meters):

Easting (X): 278410.38

Northing (Y): 4048364.53

Radius: 3200

*UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

8/17/12 4:39 PM

Page 1 of 1

WATER COLUMN/ AVERAGE
DEPTH TO WATER




U.S. Fish and Wildlife Service

National Wetlands Inventory

Chevron North
America / Rincon
Unit #171

Aug 20, 2012

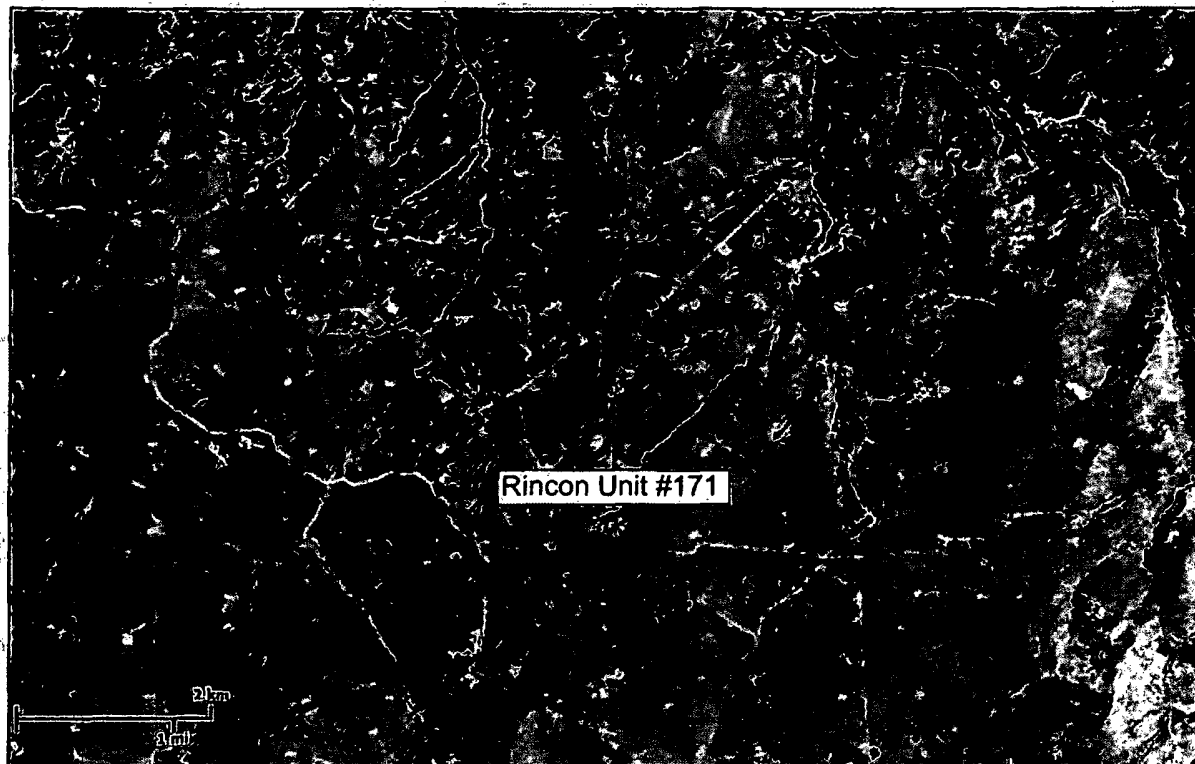

Wetlands

- ☐ Freshwater Emergent
- ☐ Freshwater Forested/Shrub
- ☐ Estuarine and Marine Deepwater
- ☐ Estuarine and Marine
- ☐ Freshwater Pond
- ☐ Lake
- ☐ Riverine
- ☐ Other

This map is for general reference only. The US Fish and Wildlife Service is not responsible for the accuracy or currentness of the base data shown on this map. All wetlands related data should be used in accordance with the layer metadata found on the Wetlands Mapper web site.


User Remarks:

MMQonline Public Version

NM EMNRD - Mining and Mineral Division Map
Chevron North America / Rincon Unit #171


Mines, Mills & Quarries Commodity Groups

- △ Aggregate & Stone Mines
- ◆ Coal Mines
- ☆ Industrial Minerals Mines
- ▽ Industrial Minerals Mills
- ☐ Metal Mines and Mill Concentrate
- ▣ Potash Mines & Refineries
- ⌌ Smelters & Refinery Ops.
- ✱ Uranium Mines
- ⊕ Uranium Mills

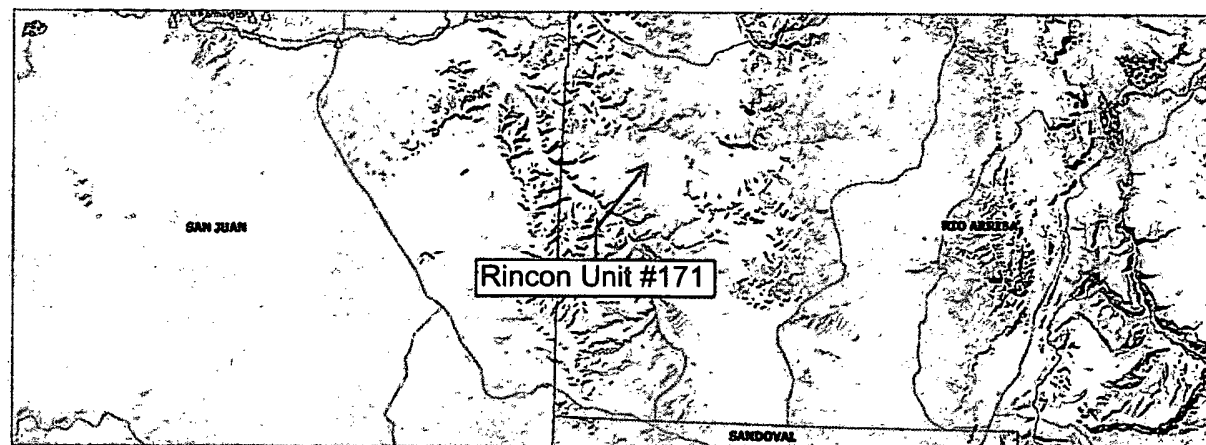

SCALE 1 : 1,000,000



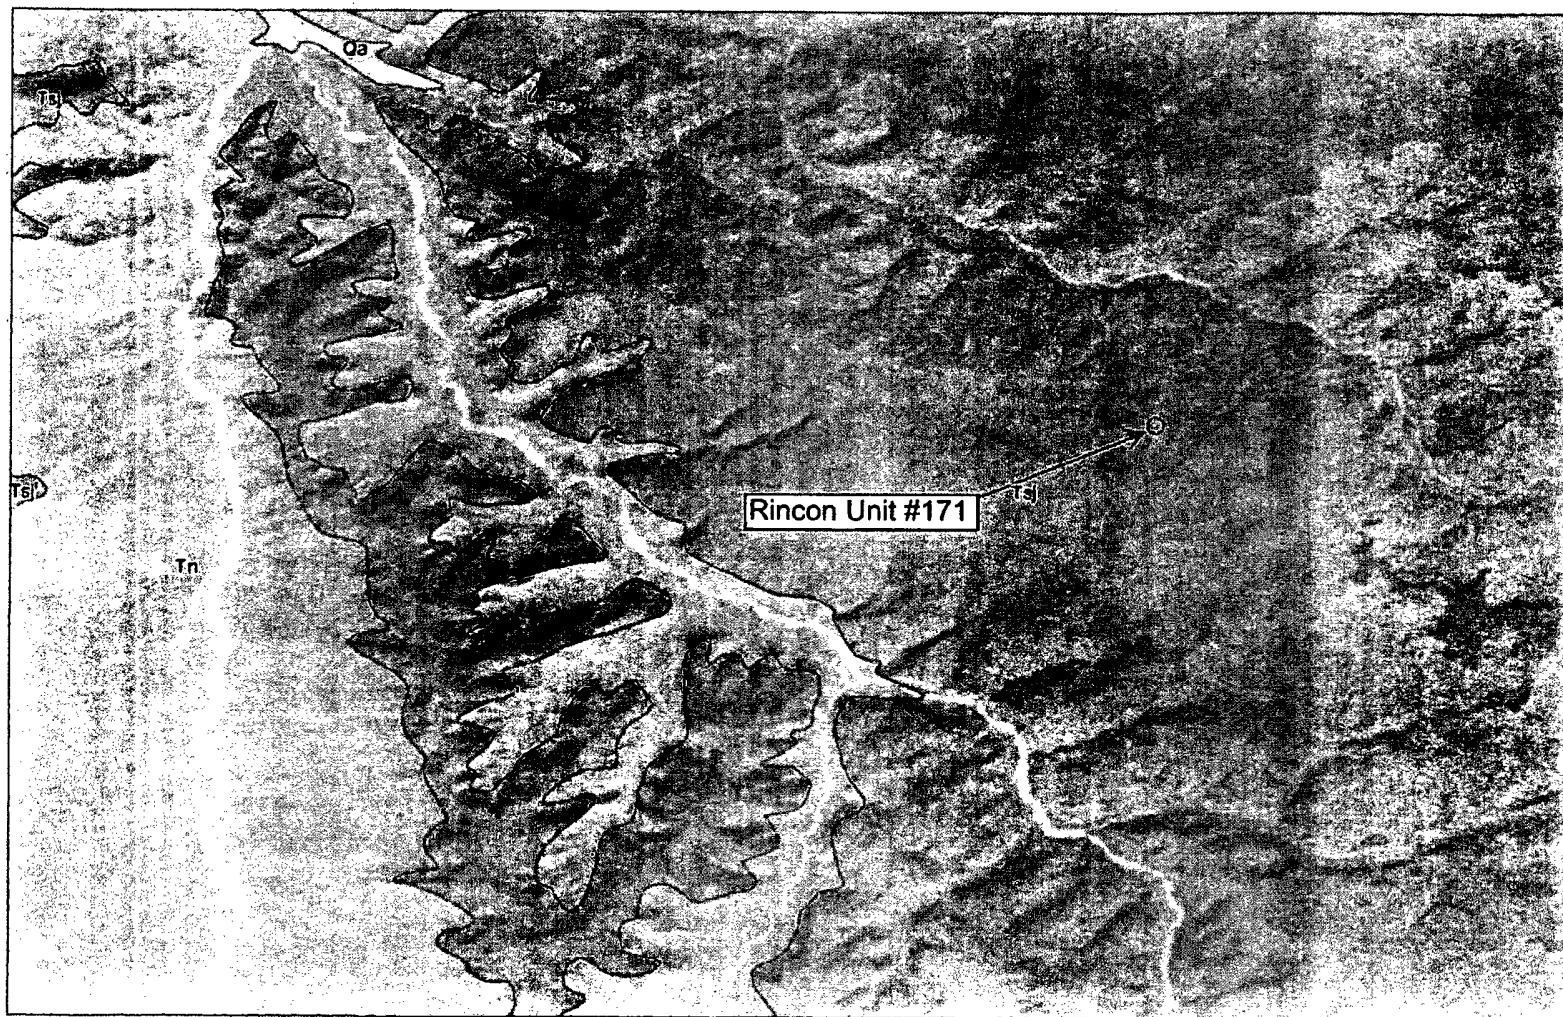

0 2 4mi



Petroleum Recovery
Research Center

USGS Geologic Map


Figure:

Chevron North America/Rincon Unit 171


08/21/2012

USGS Geologic Map Legend

- ☐ Tmb, Basalt and andesite flows; Miocene
- ☐ Tn, Nacimiento Formation
- ☐ Tnb, Basalt and andesite flows; Neogene
- ☐ Tnr, Tertiary-Silicic to intermediate volcanic rocks
- ☐ Tnv, Tertiary-Neogene volcanic rocks
- ☐ To, Tertiary-Ogallala Formation
- ☐ Toa, Tertiary-Ojo Alamo Formation
- ☐ Tos, Tertiary-sedimentary and volcanoclastic rocks
- ☐ Tpb, Basalt and andesite flows; Pliocene
- ☐ Tpc, Tertiary-Poison Canyon Formation
- ☐ Tps, Tertiary-Paleogene sedimentary units
- ☐ Tsf, Tertiary-Lower and Middle Santa Fe Group
- ☐ Tsj, Tertiary-San Jose Formation
- ☐ Tual, Tertiary-Upper Oligocene andesites and basaltic andesites
- ☐ Tuan, Tertiary-Lower Miocene and uppermost Oligocene basaltic andesites
- ☐ Tui, Tertiary-Miocene to Oligocene silicic to intermediate intrusive rocks; dikes, stocks, plugs, and diatremes
- ☐ Tuin, Upper and Middle Tertiary mafic intrusive rocks
- ☐ Turf, Tertiary-Upper Oligocene silicic (or felsic) flows and masses and associated pyroclastic rocks
- ☐ Turp, Tertiary-Upper Oligocene rhyolitic pyroclastic rocks
- ☐ Tus, Upper Tertiary sedimentary units
- ☐ Tuv, Tertiary-Volcanic and some volcanoclastic rocks; undifferentiated
- ☐ Tv, Middle Tertiary volcanic rocks; undifferentiated
- ☒ Water
- ☐ X, Precambrian-Lower Proterozoic rocks; undivided
- ☐ Xm, Precambrian-Lower Proterozoic metasedimentary rocks
- ☐ Xmo, Precambrian-Lower Proterozoic metamorphic rocks; dominantly mafic
- ☐ Xms, Precambrian-Lower Proterozoic metasedimentary rocks
- ☐ Xmu, Precambrian-Lower Proterozoic metamorphic rocks, undivided
- ☐ Xp, Precambrian-Lower Proterozoic plutonic rocks
- ☐ Xmp, Precambrian-Middle and Lower Proterozoic plutonic rocks, undivided

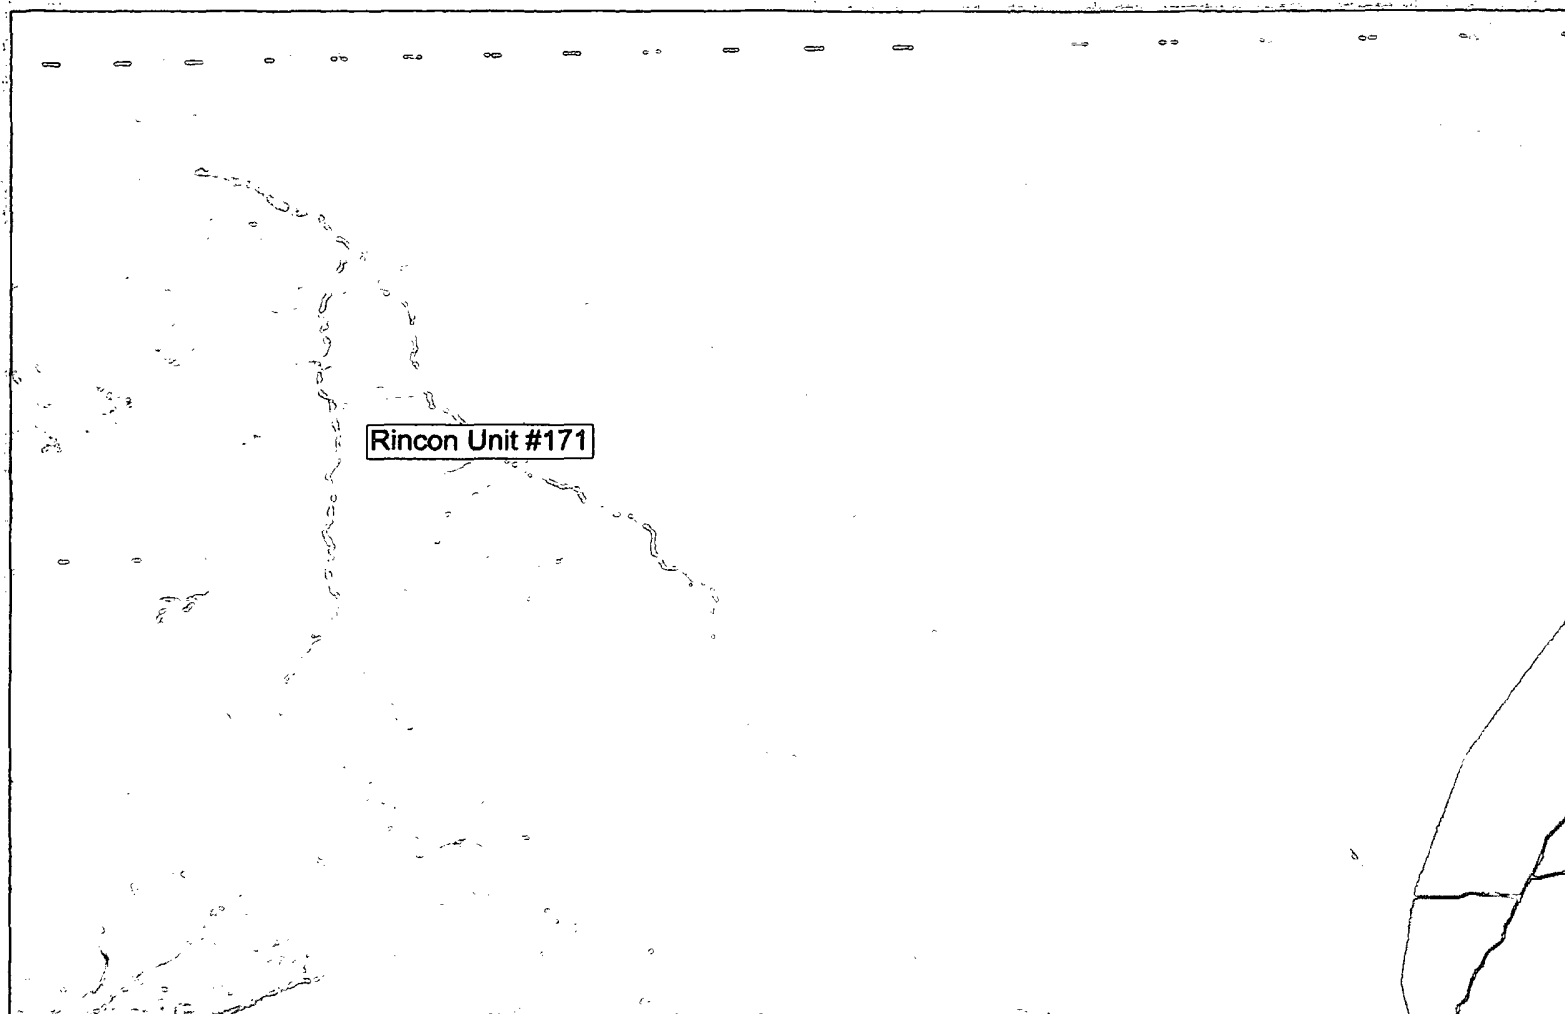

0 5 10mi



Petroleum Recovery
Research Center

USGS Karst Map

Figure:

Chevron North America/Rincon Unit #171

08/21/2012

USGS Karst Map Legend

- ☐ Fissures, tubes, and caves over 1,000 ft (300 m) long; 50 ft (15 m) to over 250 ft (75 m) vertical extent; in metamorphosed limestone, dolostone, and marble
- ☐ Fissures, tubes, and caves over 1,000 ft (300 m) long; 50 ft (15 m) to over 250 ft (75 m) vertical extent; in moderately to steeply dipping beds of carbonate rock
- ☐ Fissures, tubes, and caves over 1,000 ft (300 m) long; 50 ft (15 m) to over 250 ft (75 m) vertical extent; in gently dipping to flat-lying beds of carbonate rock
- ☐ Fissures, tubes, and caves over 1,000 ft (300 m) long; 50 ft (15 m) to over 250 ft (75 m) vertical extent; in gently dipping to flat-lying beds of carbonate rock beneath an overburden of
- ☐ Fissures, tubes, and caves over 1,000 ft (300 m) long; 50 ft (15 m) to over 250 ft (75 m) vertical extent; in moderately to steeply dipping beds of gypsum
- ☐ Fissures, tubes, and caves over 1,000 ft (300 m) long; 50 ft (15 m) to over 250 ft (75 m) vertical extent; in gently dipping to flat-lying beds of gypsum
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in metamorphosed limestone, dolostone, and marble
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in crystalline, highly siliceous, intensely folded carbonate rock
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in moderately to steeply dipping beds of carbonate rock
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in gently dipping to flat-lying beds of carbonate rock
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in gently dipping to flat-lying beds of carbonate rock beneath an overburden of
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in moderately to steeply dipping beds of gypsum
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in gently dipping to flat-lying beds of gypsum
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in gently dipping to flat-lying beds of gypsum beneath an overburden of non-gyps
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in carbonate zones in highly calcitic granite (Alaska only)
- ☐ Fissures, tubes, and caves generally less than 1,000 ft (300 m) long; 50 ft (15 m) or less vertical extent; in moderately to steeply dipping beds of carbonate rock with a thin cover of gla
- ☐ Fissures, tubes, and caves generally absent; where present in small isolated areas, less than 50 ft (15 m) long; less than 50 ft (15 m) vertical extent; in crystalline, highly siliceous inter
- ☐ Fissures, tubes, and caves generally absent; where present in small isolated areas, less than 50 ft (15 m) long; less than 50 ft (15 m) vertical extent; in moderately to steeply dipping b
- ☐ Fissures, tubes, and caves generally absent; where present in areas of subsidence from piping in thick, unconsolidated material
- ☐ Fissures and voids present to a depth of 250 ft (75 m) or more in areas of subsidence from piping in thick, unconsolidated material
- ☐ Fissures and voids present to a depth of 50 ft (15 m) in areas of subsidence from piping in thick, unconsolidated material
- ☐ Fissures, tubes, and tunnels present to a depth of 250 ft (75m) or more in lava
- ☐ Fissures, tubes, and tunnels present to a depth of 50 ft. (15 m) in lava
- ☐ Transparent - no karst



MAP SCALE 1" = 2000'



PANEL 1250D

FIRM

FLOOD INSURANCE RATE MAP
RIO ARRIBA COUNTY,
NEW MEXICO
AND INCORPORATED AREAS

PANEL 1250 OF 3175

(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:

COMMUNITY	NUMBER	PANEL	SHEET
RIO ARRIBA COUNTY	35039C	1250	0
JACINTA WATCHE MOUNTAIN	35039D	1250	0

Notice to User: The Map Number shown below should be used when preparing map orders. For Community Number orders, the number should be used on insurance applications for the subject community.



MAP NUMBER
35039C1250D
EFFECTIVE DATE
MARCH 15, 2012

Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msc.fema.gov

BELOW GRADE TANK (BGT) DESIGN AND CONSTRUCTION PLAN

SUBMITTED TO:

ENVIRONMENTAL BUREAU,
NEW MEXICO OIL CONSERVATION DIVISION

ON BEHALF OF:

CHEVRON USA INC., CHEVRON MIDCONTINENT, L.P., AND FOUR STAR OIL & GAS
COMPANY
P.O. Box 730
AZTEC, NEW MEXICO 87410
(505) 333-1901

Chevron
San Juan Basin
Below Grade Tank Design and Construction Plan

INTRODUCTION


In accordance with NMAC §§ 19.15.17.9(B)(4) and 19.15.17.11 Chevron (representing Chevron USA Inc, Chevron Midcontinent, L.P., and Four Star Oil & Gas Company) submits this Design and Construction Plan for below grade tanks (BGTs) in New Mexico. This Plan contains standard conditions that attach to multiple BGTs.

1. Chevron will design and construct a BGT to contain liquids and solids, prevent contamination of fresh water, and protect public health and the environment. NMAC § 19.15.17.11(A).
2. Chevron will post an upright sign not less than 12 inches by 24 inches with lettering not less than two inches in height in a conspicuous place on the fence surrounding the BGT, unless the BGT is located on a site where there is an existing well, signed in compliance with NMAC § 19.15.16.8, that is operated by Chevron. Chevron will post the sign in a manner and location such that a person can easily read the legend. The sign will provide the following information: Chevron's name; the location of the site by quarter-quarter or unit letter, section, township and range; and emergency telephone numbers. NMAC § 19.15.17.11(C).
3. Chevron will fence or enclose a BGT in a manner that prevents unauthorized access and will maintain the fences in good repair. Fences are not required if there is an adequate surrounding perimeter fence that prevents unauthorized access to the well site or facility, including the BGT. NMAC § 19.15.17.11(D)(1).
4. Chevron will fence or enclose a BGT located within 1000 feet of a permanent residence, school, hospital, institution or church with a chain link security fence, at least six feet in height with at least two strands of barbed wire at the top. Chevron will close and lock all gates associated with the fence when responsible personnel are not on-site. NMAC § 19.15.17.11(D)(2).
5. Chevron will fence BGTs to exclude livestock with a four foot fence that has at least four strands of barbed wire evenly spaced in the interval between one foot and four feet above ground level. NMAC § 19.15.17.11(D)(3). Chevron may install tubular steel cattle panels, as it determines appropriate (photo of cattle

panel fence submitted to NMOCD, 24 June 2009). As illustrated on the attach photo.

6. Chevron will screen the permanent opening on the tank top with expanding steel mesh in order to render it non-hazardous to wildlife, including migratory birds. NMAC § 19.15.17.11(E).
7. Chevron's BGTs will be constructed with the design features illustrated on the attached drawing.
8. Only double-walled, double-bottomed BGTs will be installed.
9. Chevron will use 3/16" carbon steel which is resistant to the anticipated contents and resistant to damage from sunlight. NMAC § 19.15.17.11(I)(1).
10. Chevron will construct a BGT foundation on a level base free of rocks, debris, sharp edges or irregularities to help prevent punctures, cracks or indentations of the liner or tank bottom. NMAC § 19.15.17.11(I)(2).
11. Chevron will construct a BGT to prevent overflow and the collection of surface water run-on. NMAC § 19.15.17.11(I)(3). Chevron, or a contractor representing Chevron, will install a level control device to help prevent overflow from the BGT and will use berms and/or a diversion ditch to prevent surface run on from entering the BGT. NMAC §§ 19.15.17.11(I)(3), 19.15.17.12(A)(7), and 19.15.17.12(D)(1).
12. All BGTs, in which the side walls are not open for visible inspection for leaks, will be double walled with leak detection capability. NMAC § 19.15.17.11(I)(4)(b).
13. Chevron, as the operator of a below-grade tank constructed and installed prior to June 16, 2008 that does not meet all the requirements in Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC and is not included in Paragraph (6) of Subsection I of 19.15.17.11 NMAC, is not required to equip or retrofit the below-grade tank to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC so long as it demonstrates integrity. If the existing below-grade tank does not demonstrate integrity, the operator shall promptly remove that below-grade tank and install a below-grade tank that complies with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, as illustrated in the approved drawing. Chevron shall comply with the operational requirements of 19.15.17.12 NMAC.

14. Chevron, as the operator of a below-grade tank constructed and installed prior to June 16, 2008 that is single walled and where any portion of the tank sidewall is below the ground surface and not visible, shall equip or retrofit the below-grade tank to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, or close it, within five years after June 16, 2008. If the existing below-grade tank does not demonstrate integrity, Chevron shall promptly remove that below-grade tank and install a below-grade tank that complies with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, as illustrated in the approved drawing. Chevron shall comply with the operational requirements of 19.15.17.12 NMAC.

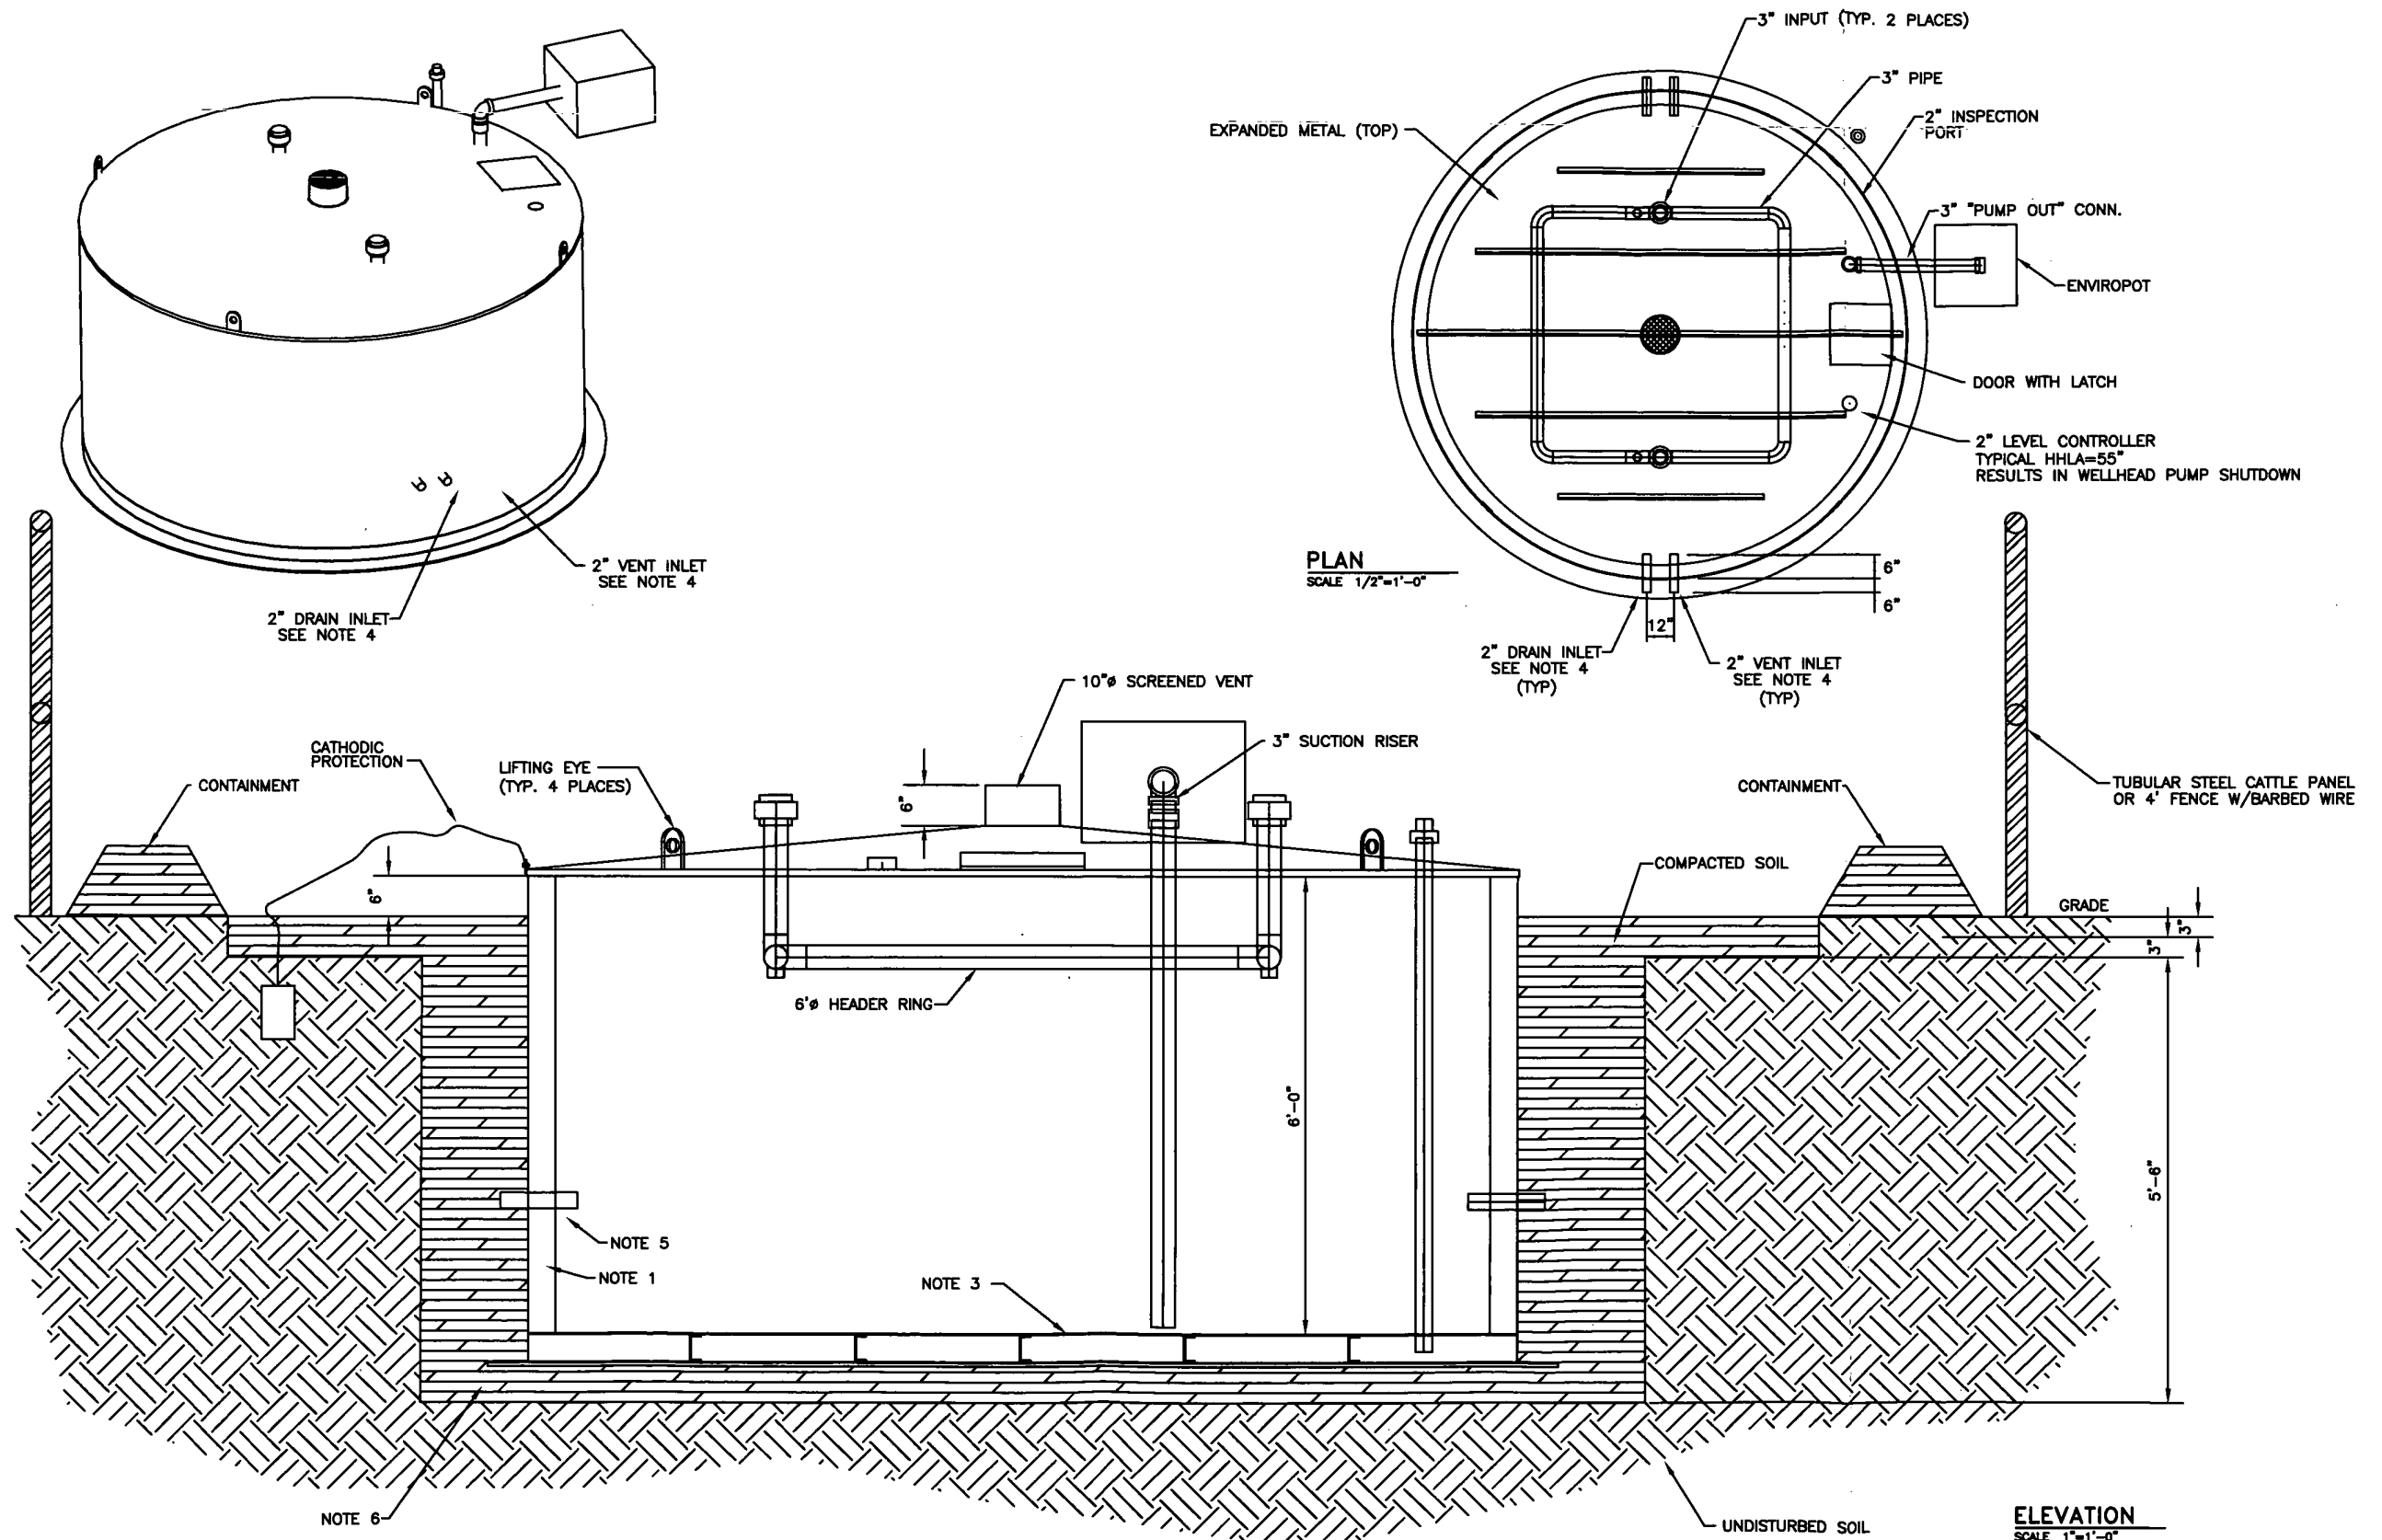

NOTES:

- FABRICATOR TO PRESSURE TEST THE AREA BETWEEN THE TANK WALLS TO ENSURE LEAK-FREE DOUBLE CONTAINMENT.
- TANK TO BE CONSTRUCTED OF 3/16" THK. ASTM A36 STEEL. ALL PIPING TO BE SCH. 40 CARBON STEEL.
- DOUBLE WALL DOUBLE BOTTOM.
- DEPENDING ON THE ORIENTATION OF THE EQUIPMENT ON LOCATION, ONE OF THE STUBS MAY BE CONNECTED TO THE DIFFUSER. ANY OF THE FOUR 2" STUBS THAT ARE NOT CONNECTED TO THE DIFFUSER WILL BE CAPPED BOTH INTERNALLY AND EXTERNALLY.
- UNDERGROUND TANK CONNECTIONS AND TRANSFER LINES ARE WELDED. ALL UNDERGROUND TRANSFER LINES HAVE A FUSION BONDED EPOXY (FBE) COATING OR SIMILAR
- CHEVRON WILL CONSTRUCT A BGT FOUNDATION ON A LEVEL BASE FREE OF ROCKS, DEBRIS, SHARP EDGES OR IRREGULARITIES TO HELP PREVENT PUNCTURES, CRACKS OR INDENTATIONS OF THE LINER OR TANK BOTTOM. NMAC 19.15.17.11(1)(2).

This document is the exclusive property of Forerunner Corp. and/or client. It has not been published and is confidential in consideration of the client thereof. This document is NOT to be copied, reproduced, exhibited, loaned or otherwise published, disposed of, nor to be used for the purpose other than that for which it is specifically published without the written permission of Forerunner Corp. and/or client, or to use the same in any way detrimental to Forerunner Corp. and/or client.

FORERUNNER
CORPORATION
10000 W. 10th Ave. Suite 100
Denver, CO 80231
(303) 750-1000

REV	BY	DATE	REVISION	ENG. DESIGNED	ENG. APPROVED	DATE	CHIEF DESIGNED	CHIEF APPROVED	DATE
D	RJP	4/28	ADDED NOTE 6.						
C	MDG	3/09	ADDED NOTES						
B	MDG	11/08	REVISED DIFFUSER, ADDED NOTES						
A	JF	2/08	ISSUED FOR APPROVAL						

ELEVATION SCALE 1"=1'-0"

**CHEVRON NORTH AMERICA
EXPLORATION AND PRODUCTION**



95 BBL
STANDARD BELOW GRADE TANK

DATE DRAWN 05/15/08	SCALE AS NOTED	FIG. NO. 12088	DRAW. NO. 110	REV. D
DRAWN BY J. FUNK	CHECKED BY T.M.S.	BLowdown TANK	DATE 05/15/08	

BELOW GRADE TANK (BGT) OPERATING AND MAINTENANCE PLAN

SUBMITTED TO:

ENVIRONMENTAL BUREAU,
NEW MEXICO OIL CONSERVATION DIVISION

ON BEHALF OF:

CHEVRON USA INC., CHEVRON MIDCONTINENT, L.P., AND FOUR STAR OIL & GAS
COMPANY

P.O. Box 730

AZTEC, NEW MEXICO 87410

(505) 333-1901

Chevron

San Juan Basin

Below Grade Tank Operating and Maintenance Plan

INTRODUCTION

In accordance with NMAC §§ 19.15.17.9(B)(4) and 19.15.17.12 Chevron (representing Chevron USA Inc, Chevron Midcontinent, L.P., and Four Star Oil & Gas Company) submits this Operating and Maintenance Plan (O&M Plan) for below grade tanks (BGTs) in New Mexico. This O&M Plan contains standard conditions that attach to multiple BGTs. If needed for a particular BGT, a modified O&M Plan will be submitted to the New Mexico Oil Conservation Division (NMOCD or the division) for approval prior to implementation.

GENERAL PLAN:

1. Chevron, or a contractor representing Chevron, will operate and maintain a BGT to contain liquids and solids to prevent contamination of fresh water and to protect public health and environment. NMAC § 19.15.17.12(A)(1).
2. Chevron will not discharge into or store any hazardous waste in a BGT. NMAC § 19.15.17.12(A)(3).
3. If a BGT develops a leak or is penetrated below the liquid surface, Chevron will remove liquid above the damage within 48 hours, notify the appropriate division district office within 48 hours of discovery and will promptly repair the BGT. If a BGT develops a leak Chevron will remove liquid above the damage within 48 hours, notify the appropriate division district office within 48 hours of discovery and will promptly repair or replace the BGT. If replacement is required, the BGT will meet all specification included in the attached approved design drawing and comply with 19.15.17.11(I)(1-4).
4. If Chevron as an operator of a below-grade tank that was constructed and installed prior to June 16, 2008 that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC and discovers that the below-grade tank does not demonstrate integrity or that the below-grade tank develops any of the conditions identified in Paragraph (5) of Subsection A of 19.15.17.12 NMAC, then Chevron or their representative shall close the existing below-grade tank pursuant to the closure requirements of 19.15.17.13 NMAC and install a below-grade tank that complies with the requirements of Paragraphs

(1) through (4) of Subsection I of 19.15.17.11 NMAC. NMAC § 19.15.17.12(D)(5). If replacement is required, the BGT will meet all specification included in the attached approved design drawing.

5. If Chevron as the operator of the below-grade tank that was constructed and installed prior to June 16, 2008 that does not comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC and equips or retrofits the existing tank to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, then Chevron or their representative shall visually inspect the area beneath the below-grade tank during the retrofit and document any areas that are wet, discolored or showing other evidence of a release on form C-141. Chevron shall demonstrate to the division whether the evidence of contamination indicates that an imminent threat to fresh water, public health, safety or the environment exists. If the division determines that the contamination does not pose an imminent threat to fresh water, public health, safety or the environment, the operator shall complete the retrofit or the replacement of the below-grade tank. If Chevron or division determines that the contamination poses an imminent threat to fresh water, public health, safety or the environment, then Chevron shall close the existing below-grade tank pursuant to the closure requirements of 19.15.17.13 NMAC prior to initiating the retrofit or replacement. NMAC § 19.15.17.12(D)(6). If replacement is required, the BGT will meet all specification included in the attached approved design drawing.
6. Chevron, or a contractor representing Chevron, will use berms and/or diversion ditches to prevent surface run-on from entering the BGT by diverting surface water run-on away from the bermed area. NMAC §§ 19.15.17.12(A)(7) and 19.15.17.12(D)(1).
7. Chevron, or a contractor representing Chevron, will not allow a BGT to overflow and will maintain adequate freeboard on existing BGTs by routine inspections utilizing pumper trucks whose routes are timed based on known production rates. Fluid is pumped out on this schedule. For newly constructed BGTs Chevron, or a contractor representing Chevron, will maintain adequate freeboard by installing level control devices that automatically shut off inflow to alleviate potential overtopping. NMAC § 19.15.17.12(D)(1) and 19.15.17.12(D)(4).
8. Chevron, or a contractor representing Chevron, will remove a visible or measurable layer of oil from the fluid surface of a BGT. NMAC § 19.15.17.12(D)(2).
9. Chevron, or a contractor representing Chevron, will inspect the BGT to assess compliance with NMAC § 19.15.17.12, Operational Requirements, at least once monthly and maintain a written record of each inspection for at least five (5) years. The approved inspection form is attached.

Chevron: New Mexico Inspection Form for Below Grade Tanks

Inspection Date: _____

Below Grade Tank (BGT) Location: _____

Does the BGT have adequate freeboard to prevent overflow; yes no

Does the tank have visible leaks or sign of corrosion; yes no

Do tank valves, flanges and hatches have visible leaks; yes no

Is there evidence of significant spillage of produced liquids; yes no

Is this a single or double wall tank; _____

Are berms and/or diversion ditches in place to prevent surface

run-on from entering the BGT; yes no

Have visible or measurable layers of oil been removed from

liquid surface fluid; yes no

BELOW GRADE TANK (BGT) CLOSURE PLAN

SUBMITTED TO:

ENVIRONMENTAL BUREAU,
NEW MEXICO OIL CONSERVATION DIVISION

ON BEHALF OF:

CHEVRON USA INC., CHEVRON MIDCONTINENT, L.P., AND FOUR STAR OIL & GAS
COMPANY
P.O. Box 730
AZTEC, NEW MEXICO 87410
(505) 333-1901

Chevron
San Juan Basin
Below Grade Tank Closure Plan

INTRODUCTION

In accordance with NMAC §§ 19.15.17.9(B)(4) and 19.15.17.13, Chevron (representing Chevron USA Inc, Chevron Midcontinent, L.P., and Four Star Oil & Gas Company) submits this Closure Plan for below grade tanks (BGTs) in New Mexico. This Closure Plan contains standard conditions that attach to multiple BGTs. If needed for a particular BGT, a modified Closure Plan for a proposed alternative closure will be submitted to the New Mexico Oil Conservation Division (NMOCD or the division) for approval prior to closure.

CLOSURE PLAN PROCEDURES AND PROTOCOLS (NMAC §§ 19.15.17.9(C) and 19.15.17.13).

- 1) Chevron, or a contractor acting on behalf of Chevron, will close a BGT within the time periods provided in NMAC § 19.15.17.13(A), or by an earlier date required by NMOCD to prevent an imminent danger to fresh water, public health, or the environment. NMAC § 19.15.17.13(A).
- 2) Chevron, or a contractor acting on behalf of Chevron, will close an existing BGT that does not meet the requirements of NMAC § 19.15.17.11(I)(1 through 4) or is not included in NMAC § 19.15.17.11(I)(5) within five years after June 16, 2008, if not retrofitted to comply with § 19.15.17.11(I)(1 through 4). NMAC § 19.15.17.13(A)(4).
- 3) Chevron shall close an existing below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not retrofitted to comply with Paragraphs 1) through (4) of Subsection I of 19.15.17.11 NMAC, prior to any sale or change of operator pursuant to 19.15.9.9 NMAC.
- 4) Chevron, or a contractor acting on behalf of Chevron, will close a permitted BGT within 60 days of cessation of the BGT's operation or as required by the transitional provisions of NMAC § 19.15.17.17(B) in accordance with a closure plan that the appropriate division district office approves. NMAC §§ 19.15.17.13(A)(9) and 19.15.17.9(C).
- 5) In accordance with NMAC § 19.15.17.13(J)(1), Chevron will notify the surface owner by certified mail, return receipt requested, of its plans to close a BGT prior to beginning closure activities. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance. Chevron will also notify the appropriate division district office verbally or by other means at least 72 hours, but not more than one week, prior to any closure operation. The notice shall include the operator's name and the location to be closed by unit letter, section, township and range. If the closure is associated with a particular well, then the notice shall also include the well's name, number and API number. NMAC § 19.15.17.13(J)(2).

- 6) Chevron, or a contractor acting on behalf of Chevron, will remove liquids and sludge from a BGT prior to implementing a closure method and will dispose of the liquids and sludge in a division approved facility. NMAC § 19.15.17.13(E)(1). A list of Chevron currently approved disposal facilities is included at the end of this document.
- 7) The proposed method of closure for this Closure Plan is waste excavation and removal. NMAC §§ 19.15.17.13 (E)(1).
- 8) Chevron, or a contractor acting on behalf of Chevron, shall remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves. When required, prior approval for disposal will be obtained. NMAC § 19.15.17.13(E)(2). Documentation regarding disposal of the BGT and its associated liner, if any, will be included in the closure report.
- 9) Waste generated during closure will be handled and disposed of in accordance with applicable laws. NMAC § 19.15.35.8(C)(1)(m) provides that plastic pit liners may be disposed at a solid waste facility without testing before disposal, provided they are cleaned well.
- 10) Chevron, or a contractor acting on behalf of Chevron, will remove on-site equipment associated with a BGT unless the equipment is required for some other purpose. NMAC § 19.15.17.13(E)(3).
- 11) Chevron, or a contractor acting on behalf of Chevron, will test the soils beneath the BGT to determine whether a release has occurred. At a minimum, 5 point composite samples will be collected along with individual grab samples from any area that is wet, discolored, or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250mg/kg; or the background concentration, whichever is greater. Chevron, or a contractor acting on behalf of Chevron, will notify the NMOCD Division District office of its results on form C-141. NMAC § 19.15.17.13(E)(4).
- 12) If Chevron or the division determines that a release has occurred, Chevron will comply with NMAC §§ 19.15.29 and 19.15.30, as appropriate. NMAC § 19.15.17.13(E)(5).
- 13) If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in NMAC § 19.15.17.13(E)(4), Chevron will backfill the excavation with compacted, non-waste containing, earthen materials; construct a division prescribed soil cover; re-contour and re-vegetate the site. The division-prescribed soil cover, recontouring and re-vegetation requirements shall comply with NMAC § 19.15.17.13)(G, H and I). NMAC § 19.15.17.13(E)(6).

- 14) As per NMAC § 19.15.17.13(G)(1), once Chevron has closed a BGT or is no longer using the BGT or an area associated with the BGT, Chevron will reclaim the BGT location and all areas associated with it including associated access roads not needed by the surface estate owner to a safe and stable condition that blends with the surrounding undisturbed area. Chevron will substantially restore impacted surface area to the condition that existed prior to its oil and gas operations by placement of soil cover as provided in NMAC § 19.15.17.13(H) (see below), re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography, and re-vegetate according to NMAC § 19.15.17.13(I). NMAC § 19.15.17.13(G)(1).
- 15) Chevron may propose an alternative to the re-vegetation requirement of NMAC § 19.15.17.13(G)(1) if it demonstrates that the proposed alternative effectively prevents erosion, and protects fresh water, human health and the environment. The proposed alternative must be agreed upon in writing by the surface owner. Chevron will submit the proposed alternative, with written documentation that the surface owner agrees to the alternative, to the division for approval. NMAC § 19.15.17.13(G)(2).
- 16) Soil cover for closures where Chevron has removed the pit contents or remediated the contaminated soil to the division's satisfaction will consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. NMAC § 19.15.17.13(H)(1).
- 17) Chevron will construct the soil cover to the site's existing grade and prevent ponding of water and erosion of the cover material. NMAC § 19.15.17.13(H)(3).
- 18) As per NMAC § 19.15.17.13(I)(1) and 19.15.17.13(G)(2), Chevron will seed or plant disturbed areas during the first growing season after it is no longer using a BGT or an area associated with the BGT including access roads unless needed by the surface estate owner as evidenced by a written agreement with the surface estate owner, if any and written approval by NMOCD.
- 19) Seeding will be accomplished by drilling on the contour whenever practical or by other division approved methods. Chevron will obtain vegetative cover that equals 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. During the two growing seasons that prove viability, Chevron will not artificially irrigate the vegetation. NMAC § 19.15.17.13(I)(2).
- 20) Chevron will notify the division when it has seeded or planted and when it successfully achieves re-vegetation. NMAC § 19.15.17.13(I)(5).
- 21) Seeding or planting will be repeated until Chevron successfully achieves the required vegetative cover. NMAC § 19.15.17.13(I)(3).

- 22) When conditions are not favorable for the establishment of vegetation, such as periods of drought, the division may allow Chevron to delay seeding or planting until soil moisture conditions become favorable or may require Chevron to use additional cultural techniques such as mulching, fertilizing, irrigating, fencing or other practices. NMAC § 19.15.17.13(I)(4).
- 23) As per NMAC § 19.15.17.13(K), within 60 days of closure completion, Chevron will submit a closure report containing the elements required by NMAC § 19.15.17.13(K) including:
- i) Confirmation sampling results,
 - ii) A plot plan ,
 - iii) Details on back-filling, capping and covering, where applicable, including revegetation application rates and seeding technique,
 - iv) Proof of closure notice to the surface owner, if any, and the division,
 - v) Name and permit number of disposal facility, and
 - vi) Photo documentation.
- 24) The closure report will be filed on NMOCD Form C-144. Chevron will certify that all information in the closure report and attachments is correct and that it has complied with all applicable closure requirements and conditions specified in the approved closure plan. NMAC § 19.15.17.13(K).
- 25) As requested, the following are the current Chevron approved Waste Disposal Sites for the identified waste streams:

Soils and Sludges

- i) Envirotech Inc. Soil Remediation Facility, Permit No. NM-01-0011

Solids

- ii) San Juan County Regional Land Fill (NMAC § 19.15.35.8 items only, with prior NMOCD approval when required)

Liquids

- i) Key Energy Disposal Facility, Permit No. NM-01-0009
- ii) Basin Disposals Facility, Permit No. NM-01-005.

- 26) These waste disposal sites are subject to change if their certification is lost or they are closed or other more appropriate, equally protective sites become available. Chevron will provide notice if such a change is affected.

Jones, Brad A., EMNRD

From: Clenney, Laura E <Laura.Clenney@chevron.com>
Sent: Wednesday, August 08, 2012 3:48 PM
To: Jones, Brad A., EMNRD
Cc: Barnes, Leslie (LeslieBarnes)
Subject: Chevron Below Ground Tank Replacements

Brad,

Chevron is planning to replace the following 12 BGT's in 2012, beginning in mid to late August with a planned completion in late October. Each site is listed in the table below. Identified in the 5th column of the table is the BGT targeted for removal, so you can reference it from the respective C-144's.

We are in the process of revising the C144 packages, beginning with the Keys Com #001 and Mexico Federal B #001 packages which should arrive at your office the week of August 13th.

Well Name	API	Global Positioning Coordinates	ULSTR	Pit Tank/ BGT
KEYS COM #001	30-045-07641	36.678344/107.910790	N-32-29N-10W	BGT #1
MEXICO FEDERAL B #001	30-045-07575	36.67821/107.903642	N-9 -28N-10W	BGT #1
RINCON UNIT #011	30-039-06648	36.511551/ 107.51163	K-6 -26N-06W	BGT #1
RINCON UNIT #083	30-039-07005	36.564423/ 107.433258	B-23-27N-06W	BGT #1
RINCON UNIT #085	30-039-07072	36.577438/ 107.55613	H-15-27N-07W	BGT #1
RINCON UNIT #093	30-039-06539	36.495069/ 107.539531	P-11-26N-07W	BGT #1
RINCON UNIT #100A	30-039-21972	36.543428/ 107.434117	J-26-27N-06W	BGT #1
RINCON UNIT #101	30-039-06693	36.512185/ 107.532949	L-1 -26N-07W	BGT #1
RINCON UNIT #136	30-039-82376	36.564792/ 107.540523	A-23-27N-07W	BGT #1
RINCON UNIT #159	30-039-07071	36.57653/ 107.505573	G-18-27N-06W	BGT #1
RINCON UNIT #171	30-039-06944	36.555018/ 107.478559	M-21-27N-06W	BGT #1
RINCON UNIT #176	30-039-82373	36.534753/ 107.530862	5-31-27N-06W	BGT #1

Please let me know if you need additional information in order to process the approval of these BGT packages.

Thanks,

Laura Clenney
Facilities Engineer - San Juan FMT
Laura.Clenney@Chevron.com

Chevron North America Exploration and Production
Mid-Continent Business Unit
332 ROAD 3100
Aztec, NM 87410

Tel 505 333 1950
Mobile 281 881 0322