

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY**

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well  gas well  other

2. NAME OF OPERATOR  
El Paso Natural Gas Company

3. ADDRESS OF OPERATOR  
Box 289, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
1120'S, 1750'E  
AT SURFACE:  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

5. LEASE  
SF 078390 A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
Hardie D

9. WELL NO.  
1A

10. FIELD OR WILDCAT NAME  
Blanco Mesa Verde

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 12, T-28-N, R-8-W  
N.M.P.M

12. COUNTY OR PARISH  
San Juan

13. STATE  
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6410' GL

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

PULL OR ALTER CASING


MULTIPLE COMPLETE

CHANGE ZONES

ABANDON\*

(other)

SUBSEQUENT REPORT OF:

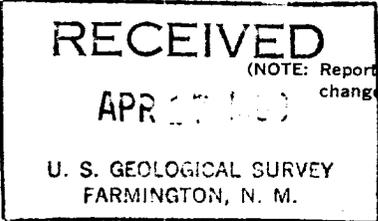

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

4-14-80: PBDT 5662'. Tested casing to 3500#, OK. Perfed P.L. 5237,5242,5248,5254,5260, 5266,5302,5312,5332,5355,5370,5392,5401,5420,5458,5483,5539,5558,5576,5592,5610, 5630'W/1 SPZ. Fraced w/ 68,755# 20/40 sand, 150,988 gal. wtr. Flushed w/ 7140 gal. wtr. Perfed C.H. & Men. 4658,4663,4668,4679,4685,4691,4698,4707,4713,4719, 4747,4760,4772,4777,4782,4957,5022,5044,5050,5147,5168' W/1 SPZ. Fraced w/62,000# 20/40 and, 124,000 gal.wtr. Flushed w/6468 gal. wtr. Perfed P.C. 3044-3066, 3095-3112,3129-3145,3156-3170' W/16 SPZ. Fraced w/70,000# 10/20 sand, 77,500 gal. wtr. Dropped 3. sets of 16 balls each. Flushed w/5170 gal. wtr.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Ft.


18. I hereby certify that the foregoing is true and correct

SIGNED D. P. Duico TITLE Drilling Clerk DATE April 16 1980

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

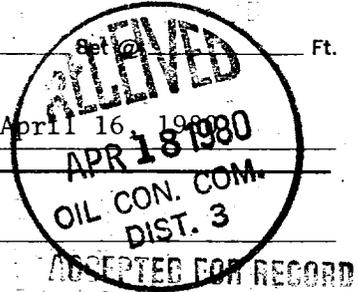

APR 17 1980

\*See Instructions on Reverse Side

NMOCC

FARMINGTON DISTRICT BY [Signature]