


U. S. LAND OFFICE Santa Fe, N.M.SERIAL NUMBER 0807017

LEASE OR PERMIT TO PROSPECT _____

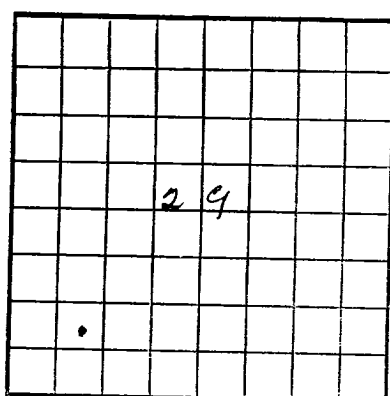

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Barron Kidd Address 2106 Mercantile Bank Bldg.
Lessor or Tract Abraham Field Blanco State New Mexico
Well No. 8 Sec. 29 T. 30N R. 6W Meridian NMPM County Rio Arriba
Location 715 ft. ^[N.] of S Line and 715 ft. ^[E.] of W Line of Sec. 29 Elevation 6850.3 ^(Derrick floor relative to sea level) GL

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date 9-16-53 Signed PC Shands
Title Supt

The summary on this page is for the condition of the well at above date.

Commenced drilling May 4, 1953 Finished drilling July 16, 1953

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 5628 to 5810 G No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>9 5/8</u>	<u>36#</u>		<u>J & L</u>	<u>258</u>					<u>Surface</u>
<u>7"</u>	<u>28#</u>		<u>J & L</u>	<u>5633</u>					<u>Long string</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>9 5/8</u>	<u>258</u>	<u>217</u>	<u>Circulated</u>		
<u>7"</u>	<u>5565</u>	<u>200</u>	<u>Pump</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
<u>4 1/2</u>	<u>L</u>	<u>Solidified</u>	<u>600</u>		<u>5810</u> <u>5628-5810</u>	<u>5810</u>

TOOLS USED

Rotary tools were used from 0 feet to 5565 feet, and from _____ feet to _____ feet
Cable tools were used from 5565 feet to 5971 feet, and from _____ feet to _____ feet

DATES

Comp. 9-7, 1953 Put to producing _____, 19____

The production for the first 24 hours was 0 barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours 1,524,000 Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. 1132

EMPLOYEES

_____, Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
<u>0</u>	<u>300</u>	<u>300</u>	<u>Sand and Shale</u>
<u>300</u>	<u>3480</u>	<u>3180</u>	<u>Sand and Shale</u>
<u>3480</u>	<u>3710</u>	<u>230</u>	<u>Sand and Shale</u>
<u>3710</u>	<u>5620</u>	<u>1910</u>	<u>Shale</u>
<u>5620</u>	<u>5670</u>	<u>50</u>	<u>Sand</u>
<u>5670</u>	<u>5971</u>	<u>301</u>	<u>Sand and Shale</u>
			<u>Tops</u>
			<u>Fruitland 3480</u>
			<u>Picture Cliff 3710</u>
			<u>Cliff House 5630</u>
			<u>Manefee Shale 5670</u>
			<u>Point Lookout 5870</u>
			<u>(Shaled Out)</u>

