

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-104
Revised August 1, 2011

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address Devon Energy Production Company, L.P. 333 West Sheridan, Oklahoma City, OK 73102		² OGRID Number 6137
		³ Reason for Filing Code/ Effective Date NW / 9/18/20
⁴ API Number 30-015-46576	⁵ Pool Name PURPLE SAGE; WOLFCAMP (GAS)	⁶ Pool Code 98220
⁷ Property Code 326778	⁸ Property Name PAPAS FRITAS 27-22 FED COM	⁹ Well Number 623H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	27	23S	29E		150	South	762	East	EDDY

¹¹ Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	22	23S	29E		145	North	358	East	EDDY
¹² Lse Code F	¹³ Producing Method Code F	¹⁴ Gas Connection Date 9/18/20	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters


¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
036785	DCP Midstream P.O. Box 50020 Midland, TX 79710-0020	Gas
320009	EnLink Midstream Operating, LP 2501 Cedar Springs Road, Suite 100, Dallas, TX 75201	Oil

IV. Well Completion Data

²¹ Spud Date 2/2/20	²² Ready Date 9/18/20	²³ TD 20547	²⁴ PBTD 20478	²⁵ Perforations 10400 - 20420	²⁶ DHC, MC
²⁷ Hole Size 17-1/2"	²⁸ Casing & Tubing Size 13-3/8"	²⁹ Depth Set 493	³⁰ Sacks Cement 885		
9-7/8"	8-5/8"	9751	1160		
7-7/8"	5-1/5"	20530	2735		
	Tubing: 2-7/8"	10046			

V. Well Test Data

³¹ Date New Oil 9/18/20	³² Gas Delivery Date 9/18/20	³³ Test Date 9/29/20	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure 1377 psi	³⁶ Csg. Pressure 1400 psi
³⁷ Choke Size	³⁸ Oil 1743 bbl	³⁹ Water 6430 bbl	⁴⁰ Gas 4315 mcf		⁴¹ Test Method

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature:  Printed name: Chelsey Green Title: Regulatory Analyst E-mail Address: Chelsey.Green@dvn.com Date: 1/5/2021 Phone: 405-228-8595	OIL CONSERVATION DIVISION
	Approved by: Kurt Simmons
	Title: NMOCD, Santa Fe
	Approval Date: 02/16/2021

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (505) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011

Submit one copy to
appropriate District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-46576		² Pool Code 98220	³ Pool Name PURPLE SAGE - WOLFCAMP (GAS)
⁴ Property Code 326778	⁵ Property Name PAPAS FRITAS 27-22 FED COM		⁶ Well Number 623H
⁷ OGRID No. 6137	⁸ Operator Name DEVON ENERGY PRODUCTION COMPANY, L.P.		⁹ Elevation 3067.9'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	27	23-S	29-E		150	SOUTH	762	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	22	23-S	29-E		145	NORTH	358	EAST	EDDY

¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
640	INFILL		

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

16

PAPAS FRITAS
27-22 FED COM 623H
 ELEV: 3067.9'
 LAT: 32.269003°
 LON: 103.966480°
 N: 461790.30
 E: 654724.72

KICK OFF POINT
LAT: 32.268690°
LON: 103.965218°
N: 461677.43
E: 655115.07

FIRST TAKE POINT
LAT: 32.269559°
LON: 103.965103°
N: 461993.86
E: 655149.62

LAST TAKE POINT
LAT: 32.297071°
LON: 103.965158°
N: 472002.45
E: 655098.26

BOTTOM HOLE LOCATION
LAT: 32.297419°
LON: 103.965195°
N: 472128.86
E: 655086.37


- 3" USGLO BRASS CAP
ON 2.5" IRON PIPE
- ◆ 2" USGLO BRASS CAP
ON 2" IRON PIPE

NOTES:

1. BEARINGS SHOWN ARE GRID BASED ON THE NEW MEXICO STATE PLANE EAST ZONE COORDINATE SYSTEM (3001), NAD 83 (2011), BASED FROM GPS OBSERVATIONS, OCCUPYING A WHS CONTROL POINT (5/8" REBAR), LOCATED AT NORTH: 456034.443, EAST: 653560.641, ELEVATION: 3101.373, DETERMINED BY AN OPUS SOLUTION ON NOVEMBER 9TH, 2018. ELEVATIONS ARE OF NAVD 88 COMPUTED USING GEOID 12B.

2. DISTANCES DEPICTED HEREON ARE REPORTED AS GROUND DISTANCE IN US SURVEY FEET USING A COMBINED SCALE FACTOR OF 1.000220979

3. DRILL PATH INFORMATION HAS BEEN PROVIDED TO WHS BY THE CLIENT.

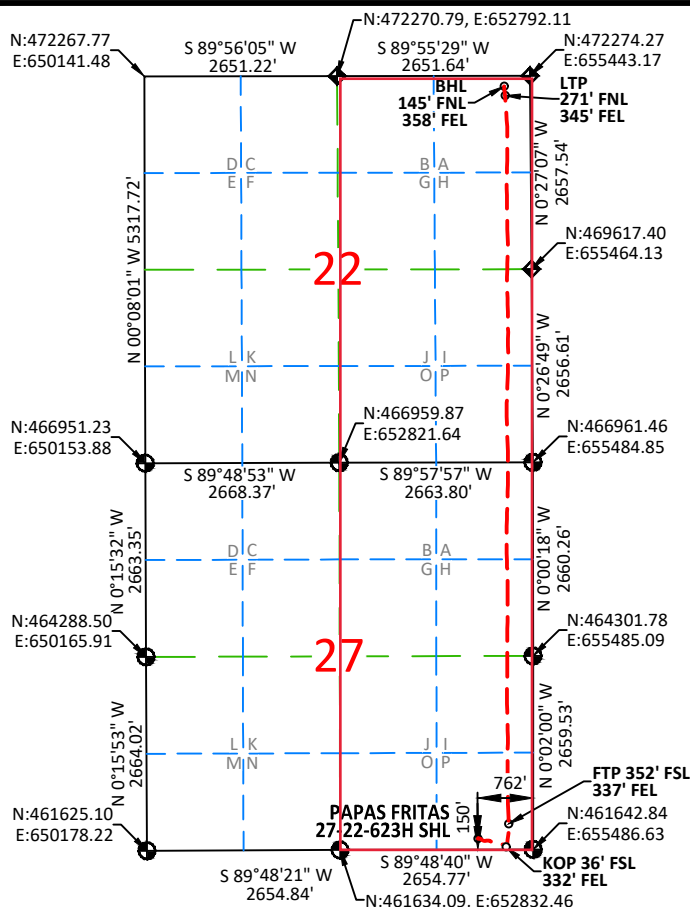

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.


Signature Chelsey Green Date 10/12/2020

CHELSEY GREEN
Printed Name
chelsey.green@dvn.com
E-mail Address

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

10/06/2020
Date of Survey
Signature and Seal of Professional Surveyor:



Certificate No. 23261		Albert Dehoyos
Drawn by: JEB	Checked by: ARD	Date: 10/07/2020

Intent ☐ As Drilled ☒

API # 30-015-46576		
Operator Name: DEVON ENERGY PRODUCTION COMPANY, L.P.	Property Name: PAPAS FRITAS 27-22 FED COM	Well Number 623H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
P	27	23-S	29-E		36	SOUTH	332	EAST	EDDY
Latitude 32.268690°					Longitude 103.965218°				NAD 83

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
P	27	23-S	29-E		352	SOUTH	337	EAST	EDDY
Latitude 32.269559°					Longitude 103.965103°				NAD 83

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
A	22	23-S	29-E		271	NORTH	345	EAST	EDDY
Latitude 32.297071°					Longitude 103.965158°				NAD 83

Is this well the defining well for the Horizontal Spacing Unit? ☐ NOIs this well an infill well? ☐ YES

If infill is yes provide API if available, Operator name and well number for Defining well for Horizontal Spacing Unit.

API # 30-015-46577		
Operator Name: DEVON ENERGY PRODUCTION CO, LP	Property Name: PAPAS FRITAS 27-22 FED COM	Well Number 622H

KZ 06/29/2018



Final MWD Survey Certification

Lea County, New Mexico

Client: Devon Energy

Well Name: Papas Fritas 27-22 Fed Com 623H

Total Job No: SW-200078

API No: 30-015-46576

Start Date: 02/02/2020

End Date: 03/16/2020

Measured Start Depth: 0 feet

Measured End Depth: 20,547 feet

Vertical Section from well center at TD: 10,292.35 feet (10,344.86 @ PTB)

I, Robert Brewer, certify that; I am employed by Total Directional Services, LLC and we conducted or supervised the taking of these open hole MWD surveys at the request of this client. This data is true, correct, complete and within the limitations of the tool as set forth by Total Directional Services, LLC. I am authorized and qualified to make this report and have reviewed this report and find that it conforms to the principals and procedures as set forth by Total Directional Services, LLC.

Date: 03/16/2020

Signed: *Robert R. Brewer*



Devon Energy

Eddy County, NM (NAD83)

Papas Fritas 27-22 Fed Com

Papas Fritas 27-22 Fed Com 623H

OH

Design: FINAL

Standard Survey Report

06 August, 2020





Survey Report



Company:	Devon Energy	Local Co-ordinate Reference:	Well Papas Fritas 27-22 Fed Com 623H
Project:	Eddy County, NM (NAD83)	TVD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Site:	Papas Fritas 27-22 Fed Com	MD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Well:	Papas Fritas 27-22 Fed Com 623H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	FINAL	Database:	EDM 5000.15 Single User Db

Project	Eddy County, NM (NAD83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Papas Fritas 27-22 Fed Com			
Site Position:		Northing:	461,788.80 usft	Latitude:	32.269009
From:	Map	Easting:	653,664.94 usft	Longitude:	-103.969909
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.19 °

Well	Papas Fritas 27-22 Fed Com 623H					
Well Position	+N/-S	0.0 usft	Northing:	461,790.30 usft	Latitude:	32.269004
	+E/-W	0.0 usft	Easting:	654,724.72 usft	Longitude:	-103.966480
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	3,067.9 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	1/14/2020	6.86	60.01	47,660.86958607

Design	FINAL				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	2.00	

Survey Program	Date	8/6/2020			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
205.0	20,547.0	Survey #1 (OH)	OWSG (Rev2) MWD	OWSG MWD - Standard	

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SHL (PF 27-22 Fed Com 623H)									
205.0	1.10	24.10	205.0	1.8	0.8	1.8	0.54	0.54	0.00
297.0	0.90	30.00	297.0	3.2	1.5	3.3	0.24	-0.22	6.41
388.0	1.00	28.00	388.0	4.5	2.3	4.6	0.12	0.11	-2.20
423.0	1.00	29.50	423.0	5.1	2.5	5.2	0.07	0.00	4.29
602.0	0.80	22.20	601.9	7.6	3.8	7.7	0.13	-0.11	-4.08
692.0	1.70	93.90	691.9	8.1	5.4	8.3	1.82	1.00	79.67
783.0	4.10	105.80	782.8	7.1	9.8	7.5	2.71	2.64	13.08
873.0	4.80	111.80	872.5	4.8	16.4	5.4	0.93	0.78	6.67
964.0	4.60	114.50	963.2	1.9	23.3	2.7	0.33	-0.22	2.97



Survey Report



Company:	Devon Energy	Local Co-ordinate Reference:	Well Papas Fritas 27-22 Fed Com 623H
Project:	Eddy County, NM (NAD83)	TVD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Site:	Papas Fritas 27-22 Fed Com	MD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Well:	Papas Fritas 27-22 Fed Com 623H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	FINAL	Database:	EDM 5000.15 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,056.0	5.70	117.10	1,054.8	-1.7	30.7	-0.6	1.22	1.20	2.83
1,147.0	6.60	119.40	1,145.3	-6.3	39.3	-4.9	1.03	0.99	2.53
1,238.0	6.60	127.60	1,235.7	-12.1	48.0	-10.4	1.03	0.00	9.01
1,329.0	6.90	125.40	1,326.1	-18.4	56.6	-16.5	0.44	0.33	-2.42
1,420.0	7.60	114.90	1,416.4	-24.1	66.5	-21.8	1.64	0.77	-11.54
1,515.0	7.50	103.30	1,510.5	-28.2	78.2	-25.5	1.61	-0.11	-12.21
1,609.0	6.10	92.60	1,603.9	-29.9	89.2	-26.7	2.00	-1.49	-11.38
1,704.0	5.10	85.90	1,698.4	-29.8	98.4	-26.3	1.26	-1.05	-7.05
1,799.0	4.50	79.40	1,793.1	-28.8	106.3	-25.1	0.85	-0.63	-6.84
1,893.0	4.60	86.50	1,886.8	-27.9	113.7	-23.9	0.61	0.11	7.55
1,987.0	4.60	86.40	1,980.5	-27.4	121.2	-23.2	0.01	0.00	-0.11
2,081.0	4.10	84.10	2,074.2	-26.8	128.3	-22.3	0.56	-0.53	-2.45
2,175.0	4.30	88.10	2,168.0	-26.4	135.2	-21.6	0.38	0.21	4.26
2,268.0	3.90	85.40	2,260.7	-26.0	141.8	-21.0	0.48	-0.43	-2.90
2,363.0	4.20	102.90	2,355.5	-26.5	148.5	-21.3	1.33	0.32	18.42
2,457.0	4.50	106.80	2,449.2	-28.4	155.3	-22.9	0.45	0.32	4.15
2,551.0	4.70	109.60	2,542.9	-30.7	162.5	-25.0	0.32	0.21	2.98
2,645.0	4.20	109.80	2,636.6	-33.2	169.4	-27.2	0.53	-0.53	0.21
2,740.0	4.00	115.10	2,731.4	-35.8	175.6	-29.6	0.45	-0.21	5.58
2,834.0	4.00	124.40	2,825.2	-39.0	181.3	-32.6	0.69	0.00	9.89
2,928.0	5.60	115.30	2,918.8	-42.8	188.2	-36.2	1.88	1.70	-9.68
3,022.0	5.60	112.10	3,012.4	-46.5	196.6	-39.6	0.33	0.00	-3.40
3,116.0	4.80	111.20	3,106.0	-49.6	204.5	-42.5	0.86	-0.85	-0.96
3,210.0	4.30	111.10	3,199.7	-52.3	211.4	-44.9	0.53	-0.53	-0.11
3,304.0	4.20	109.50	3,293.5	-54.8	218.0	-47.1	0.17	-0.11	-1.70
3,398.0	4.10	109.80	3,387.2	-57.0	224.4	-49.2	0.11	-0.11	0.32
3,492.0	5.40	106.90	3,480.9	-59.5	231.8	-51.3	1.41	1.38	-3.09
3,586.0	6.30	105.20	3,574.4	-62.1	241.0	-53.6	0.97	0.96	-1.81
3,680.0	5.80	104.70	3,667.9	-64.7	250.5	-55.9	0.53	-0.53	-0.53
3,774.0	5.40	103.40	3,761.4	-66.9	259.4	-57.8	0.45	-0.43	-1.38
3,868.0	5.20	101.40	3,855.0	-68.8	267.9	-59.3	0.29	-0.21	-2.13
3,962.0	4.90	100.00	3,948.7	-70.3	276.0	-60.6	0.35	-0.32	-1.49
4,056.0	5.00	96.20	4,042.3	-71.4	284.1	-61.5	0.36	0.11	-4.04
4,150.0	5.20	95.80	4,135.9	-72.3	292.4	-62.0	0.22	0.21	-0.43
4,244.0	5.00	98.00	4,229.6	-73.3	300.7	-62.8	0.30	-0.21	2.34
4,338.0	6.60	99.80	4,323.1	-74.8	310.1	-63.9	1.71	1.70	1.91
4,432.0	7.40	99.80	4,416.4	-76.7	321.3	-65.5	0.85	0.85	0.00
4,526.0	7.20	97.40	4,509.6	-78.5	333.2	-66.8	0.39	-0.21	-2.55
4,621.0	6.90	95.10	4,603.9	-79.8	344.7	-67.7	0.43	-0.32	-2.42
4,715.0	6.30	93.00	4,697.3	-80.6	355.5	-68.1	0.69	-0.64	-2.23
4,809.0	6.10	93.20	4,790.7	-81.1	365.7	-68.3	0.21	-0.21	0.21
4,902.0	6.00	93.50	4,883.2	-81.7	375.4	-68.5	0.11	-0.11	0.32
4,997.0	6.00	93.80	4,977.7	-82.3	385.4	-68.8	0.03	0.00	0.32



Survey Report



Company:	Devon Energy	Local Co-ordinate Reference:	Well Papas Fritas 27-22 Fed Com 623H
Project:	Eddy County, NM (NAD83)	TVD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Site:	Papas Fritas 27-22 Fed Com	MD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Well:	Papas Fritas 27-22 Fed Com 623H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	FINAL	Database:	EDM 5000.15 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,091.0	4.60	97.60	5,071.3	-83.2	394.0	-69.3	1.53	-1.49	4.04
5,185.0	3.90	110.60	5,165.0	-84.8	400.7	-70.7	1.26	-0.74	13.83
5,279.0	3.00	107.10	5,258.8	-86.6	406.1	-72.4	0.98	-0.96	-3.72
5,373.0	2.10	100.40	5,352.8	-87.7	410.1	-73.3	1.01	-0.96	-7.13
5,468.0	0.20	129.30	5,447.7	-88.1	411.9	-73.6	2.03	-2.00	30.42
5,562.0	0.30	233.60	5,541.7	-88.3	411.9	-73.9	0.43	0.11	110.96
5,656.0	0.40	228.40	5,635.7	-88.7	411.4	-74.3	0.11	0.11	-5.53
5,750.0	0.40	242.70	5,729.7	-89.1	410.9	-74.6	0.11	0.00	15.21
5,844.0	0.40	231.40	5,823.7	-89.4	410.3	-75.0	0.08	0.00	-12.02
5,937.0	0.50	237.80	5,916.7	-89.8	409.8	-75.5	0.12	0.11	6.88
6,031.0	0.70	245.50	6,010.7	-90.3	408.9	-75.9	0.23	0.21	8.19
6,125.0	0.80	245.40	6,104.7	-90.8	407.8	-76.5	0.11	0.11	-0.11
6,220.0	0.80	236.50	6,199.7	-91.5	406.6	-77.2	0.13	0.00	-9.37
6,314.0	0.70	228.90	6,293.7	-92.2	405.6	-78.0	0.15	-0.11	-8.09
6,409.0	0.70	216.70	6,388.7	-93.0	404.8	-78.8	0.16	0.00	-12.84
6,503.0	0.80	224.20	6,482.7	-94.0	404.0	-79.8	0.15	0.11	7.98
6,597.0	1.10	226.00	6,576.7	-95.1	402.9	-80.9	0.32	0.32	1.91
6,691.0	1.10	219.30	6,670.6	-96.4	401.7	-82.3	0.14	0.00	-7.13
6,786.0	0.60	209.60	6,765.6	-97.5	400.9	-83.5	0.55	-0.53	-10.21
6,880.0	0.70	216.80	6,859.6	-98.4	400.3	-84.4	0.14	0.11	7.66
6,974.0	0.80	225.00	6,953.6	-99.3	399.5	-85.3	0.16	0.11	8.72
7,068.0	0.80	229.70	7,047.6	-100.2	398.5	-86.2	0.07	0.00	5.00
7,162.0	1.20	248.40	7,141.6	-101.0	397.1	-87.1	0.54	0.43	19.89
7,256.0	1.60	252.20	7,235.6	-101.8	395.0	-87.9	0.44	0.43	4.04
7,349.0	1.50	255.30	7,328.5	-102.5	392.5	-88.7	0.14	-0.11	3.33
7,443.0	1.30	240.50	7,422.5	-103.3	390.4	-89.6	0.44	-0.21	-15.74
7,537.0	1.50	198.00	7,516.5	-105.0	389.1	-91.3	1.10	0.21	-45.21
7,632.0	1.60	207.90	7,611.4	-107.4	388.1	-93.7	0.30	0.11	10.42
7,726.0	1.90	223.20	7,705.4	-109.7	386.4	-96.1	0.59	0.32	16.28
7,820.0	1.50	212.60	7,799.4	-111.8	384.7	-98.3	0.54	-0.43	-11.28
7,914.0	1.30	214.00	7,893.3	-113.8	383.4	-100.3	0.22	-0.21	1.49
8,009.0	0.50	158.80	7,988.3	-115.0	383.0	-101.6	1.15	-0.84	-58.11
8,103.0	0.40	157.10	8,082.3	-115.7	383.3	-102.3	0.11	-0.11	-1.81
8,198.0	0.30	161.50	8,177.3	-116.3	383.5	-102.8	0.11	-0.11	4.63
8,292.0	0.40	110.20	8,271.3	-116.6	383.9	-103.1	0.34	0.11	-54.57
8,386.0	0.60	118.40	8,365.3	-117.0	384.6	-103.4	0.23	0.21	8.72
8,481.0	0.70	193.60	8,460.3	-117.8	384.9	-104.2	0.84	0.11	79.16
8,575.0	0.50	33.10	8,554.3	-118.0	385.0	-104.4	1.26	-0.21	-170.74
8,669.0	0.90	2.80	8,648.3	-116.9	385.2	-103.4	0.57	0.43	-32.23
8,764.0	0.70	326.80	8,743.3	-115.7	385.0	-102.1	0.56	-0.21	-37.89
8,858.0	1.00	23.60	8,837.3	-114.4	385.0	-100.9	0.90	0.32	60.43
8,952.0	1.10	60.70	8,931.3	-113.2	386.1	-99.7	0.72	0.11	39.47
9,046.0	0.80	64.50	9,025.3	-112.5	387.5	-98.9	0.33	-0.32	4.04



Survey Report



Company:	Devon Energy	Local Co-ordinate Reference:	Well Papas Fritas 27-22 Fed Com 623H
Project:	Eddy County, NM (NAD83)	TVD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Site:	Papas Fritas 27-22 Fed Com	MD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Well:	Papas Fritas 27-22 Fed Com 623H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	FINAL	Database:	EDM 5000.15 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,139.0	0.40	123.50	9,118.3	-112.4	388.3	-98.8	0.74	-0.43	63.44
9,233.0	0.50	130.70	9,212.2	-112.9	388.9	-99.2	0.12	0.11	7.66
9,327.0	0.90	74.50	9,306.2	-112.9	389.9	-99.2	0.80	0.43	-59.79
9,421.0	1.20	87.00	9,400.2	-112.7	391.6	-98.9	0.40	0.32	13.30
9,516.0	1.00	98.10	9,495.2	-112.7	393.4	-98.9	0.31	-0.21	11.68
9,610.0	0.90	119.50	9,589.2	-113.2	394.9	-99.4	0.39	-0.11	22.77
9,704.0	0.60	115.30	9,683.2	-113.8	396.0	-99.9	0.32	-0.32	-4.47
9,822.6	1.70	351.44	9,801.8	-112.3	396.3	-98.4	1.77	0.93	-104.41
KOP (PF 27-22 Fed Com 623H)									
9,834.0	1.90	350.00	9,813.2	-112.0	396.2	-98.0	1.77	1.72	-12.67
KOP - 9834.0' (37 FSL, 366 FEL)									
9,928.0	14.80	14.10	9,906.0	-98.7	398.9	-84.7	13.92	13.72	25.64
10,023.0	27.70	9.40	9,994.3	-65.0	405.5	-50.8	13.69	13.58	-4.95
10,117.0	38.20	7.20	10,073.1	-14.5	412.7	-0.1	11.24	11.17	-2.34
10,211.0	46.40	5.80	10,142.6	48.3	419.8	63.0	8.78	8.72	-1.49
10,306.0	54.20	1.20	10,203.2	121.2	424.1	135.9	9.01	8.21	-4.84
10,400.0	68.80	0.00	10,248.0	203.6	424.9	218.3	15.57	15.53	-1.28
10,495.0	78.30	357.80	10,274.8	294.5	423.1	309.2	10.24	10.00	-2.32
10,581.4	90.70	357.89	10,283.1	380.3	419.9	394.7	14.36	14.36	0.11
LP (PF 27-22 Fed Com 623H)									
10,589.0	91.80	357.90	10,282.9	387.9	419.6	402.3	14.36	14.36	0.11
10,682.0	92.80	358.10	10,279.2	480.8	416.4	495.0	1.10	1.08	0.22
10,777.0	91.90	358.70	10,275.3	575.7	413.7	589.8	1.14	-0.95	0.63
10,867.0	90.10	0.30	10,273.7	665.6	412.9	679.7	2.68	-2.00	1.78
10,958.0	89.40	359.30	10,274.1	756.6	412.6	770.6	1.34	-0.77	-1.10
11,050.0	89.10	358.60	10,275.3	848.6	410.9	862.5	0.83	-0.33	-0.76
11,142.0	89.50	0.60	10,276.5	940.6	410.3	954.4	2.22	0.43	2.17
11,233.0	89.50	0.70	10,277.3	1,031.6	411.3	1,045.3	0.11	0.00	0.11
11,324.0	88.80	359.70	10,278.6	1,122.6	411.6	1,136.3	1.34	-0.77	-1.10
11,415.0	90.60	0.60	10,279.1	1,213.6	411.9	1,227.2	2.21	1.98	0.99
11,506.0	91.50	0.80	10,277.4	1,304.5	413.0	1,318.2	1.01	0.99	0.22
11,595.0	90.60	359.00	10,275.8	1,393.5	412.8	1,407.1	2.26	-1.01	-2.02
11,687.0	91.40	359.60	10,274.2	1,485.5	411.7	1,499.0	1.09	0.87	0.65
11,779.0	91.20	359.10	10,272.1	1,577.5	410.7	1,590.9	0.59	-0.22	-0.54
11,870.0	91.30	358.20	10,270.1	1,668.4	408.5	1,681.7	0.99	0.11	-0.99
11,961.0	91.30	357.40	10,268.0	1,759.3	405.0	1,772.4	0.88	0.00	-0.88
12,051.0	90.60	359.30	10,266.6	1,849.3	402.4	1,862.2	2.25	-0.78	2.11
12,143.0	90.90	358.90	10,265.3	1,941.3	401.0	1,954.1	0.54	0.33	-0.43
12,237.0	90.40	0.30	10,264.3	2,035.2	400.3	2,048.0	1.58	-0.53	1.49
12,330.0	89.90	1.70	10,264.0	2,128.2	402.0	2,141.0	1.60	-0.54	1.51
12,425.0	89.40	0.80	10,264.6	2,223.2	404.0	2,236.0	1.08	-0.53	-0.95
12,519.0	90.30	0.60	10,264.9	2,317.2	405.2	2,329.9	0.98	0.96	-0.21
12,614.0	91.10	0.30	10,263.7	2,412.2	405.9	2,424.9	0.90	0.84	-0.32
12,708.0	91.30	359.20	10,261.7	2,506.2	405.5	2,518.8	1.19	0.21	-1.17



Survey Report



Company:	Devon Energy	Local Co-ordinate Reference:	Well Papas Fritas 27-22 Fed Com 623H
Project:	Eddy County, NM (NAD83)	TVD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Site:	Papas Fritas 27-22 Fed Com	MD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Well:	Papas Fritas 27-22 Fed Com 623H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	FINAL	Database:	EDM 5000.15 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,802.0	90.10	0.80	10,260.6	2,600.1	405.5	2,612.7	2.13	-1.28	1.70
12,896.0	90.20	0.30	10,260.3	2,694.1	406.4	2,706.7	0.54	0.11	-0.53
12,990.0	91.50	0.10	10,258.9	2,788.1	406.7	2,800.6	1.40	1.38	-0.21
13,085.0	89.10	1.00	10,258.4	2,883.1	407.7	2,895.6	2.70	-2.53	0.95
13,180.0	90.00	1.20	10,259.2	2,978.1	409.5	2,990.6	0.97	0.95	0.21
13,273.0	89.50	0.10	10,259.6	3,071.1	410.5	3,083.6	1.30	-0.54	-1.18
13,367.0	90.80	0.40	10,259.4	3,165.1	410.9	3,177.5	1.42	1.38	0.32
13,461.0	90.80	359.40	10,258.0	3,259.1	410.8	3,271.4	1.06	0.00	-1.06
13,556.0	91.90	359.70	10,255.8	3,354.0	410.0	3,366.3	1.20	1.16	0.32
13,650.0	89.60	359.90	10,254.6	3,448.0	409.7	3,460.2	2.46	-2.45	0.21
13,744.0	89.70	358.90	10,255.1	3,542.0	408.7	3,554.1	1.07	0.11	-1.06
13,838.0	89.40	358.00	10,255.9	3,636.0	406.2	3,648.0	1.01	-0.32	-0.96
13,932.0	90.50	359.00	10,256.0	3,729.9	403.7	3,741.8	1.58	1.17	1.06
14,026.0	89.40	357.30	10,256.1	3,823.9	400.7	3,835.6	2.15	-1.17	-1.81
14,121.0	91.60	358.70	10,255.2	3,918.8	397.4	3,930.3	2.74	2.32	1.47
14,214.0	91.80	0.80	10,252.5	4,011.8	397.0	4,023.2	2.27	0.22	2.26
14,309.0	91.70	359.90	10,249.6	4,106.7	397.5	4,118.1	0.95	-0.11	-0.95
14,403.0	88.40	1.00	10,249.5	4,200.7	398.3	4,212.1	3.70	-3.51	1.17
14,498.0	88.60	0.00	10,252.0	4,295.7	399.1	4,307.0	1.07	0.21	-1.05
14,592.0	88.50	1.70	10,254.3	4,389.6	400.5	4,400.9	1.81	-0.11	1.81
14,686.0	90.60	1.90	10,255.1	4,483.6	403.5	4,494.9	2.24	2.23	0.21
14,780.0	91.70	1.80	10,253.2	4,577.5	406.5	4,588.9	1.18	1.17	-0.11
14,874.0	92.00	1.20	10,250.2	4,671.4	409.0	4,682.9	0.71	0.32	-0.64
14,968.0	88.00	1.90	10,250.2	4,765.4	411.5	4,776.8	4.32	-4.26	0.74
15,063.0	88.40	1.20	10,253.1	4,860.3	414.1	4,871.8	0.85	0.42	-0.74
15,157.0	88.60	0.80	10,255.6	4,954.2	415.7	4,965.7	0.48	0.21	-0.43
15,250.0	88.90	359.80	10,257.6	5,047.2	416.2	5,058.7	1.12	0.32	-1.08
15,345.0	90.50	0.10	10,258.1	5,142.2	416.1	5,153.6	1.71	1.68	0.32
15,439.0	90.60	359.10	10,257.2	5,236.2	415.4	5,247.5	1.07	0.11	-1.06
15,533.0	90.60	358.10	10,256.2	5,330.2	413.2	5,341.4	1.06	0.00	-1.06
15,628.0	90.90	357.40	10,255.0	5,425.1	409.4	5,436.1	0.80	0.32	-0.74
15,722.0	88.00	358.10	10,255.9	5,519.0	405.7	5,529.8	3.17	-3.09	0.74
15,817.0	89.80	358.30	10,257.7	5,613.9	402.8	5,624.6	1.91	1.89	0.21
15,911.0	90.10	359.30	10,257.8	5,707.9	400.8	5,718.4	1.11	0.32	1.06
16,005.0	91.30	358.60	10,256.7	5,801.9	399.1	5,812.3	1.48	1.28	-0.74
16,100.0	92.30	1.20	10,253.7	5,896.8	398.9	5,907.2	2.93	1.05	2.74
16,194.0	91.30	359.50	10,250.7	5,990.8	399.5	6,001.1	2.10	-1.06	-1.81
16,289.0	93.00	2.50	10,247.2	6,085.7	401.1	6,096.0	3.63	1.79	3.16
16,414.0	92.80	2.90	10,240.8	6,210.4	407.0	6,220.8	0.36	-0.16	0.32
16,508.0	90.60	2.20	10,238.0	6,304.2	411.2	6,314.8	2.46	-2.34	-0.74
16,602.0	87.90	1.30	10,239.3	6,398.2	414.1	6,408.7	3.03	-2.87	-0.96
16,697.0	87.10	1.90	10,243.4	6,493.0	416.7	6,503.6	1.05	-0.84	0.63
16,790.0	88.80	359.80	10,246.7	6,586.0	418.1	6,596.6	2.90	1.83	-2.26



Survey Report



Company:	Devon Energy	Local Co-ordinate Reference:	Well Papas Fritas 27-22 Fed Com 623H
Project:	Eddy County, NM (NAD83)	TVD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Site:	Papas Fritas 27-22 Fed Com	MD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Well:	Papas Fritas 27-22 Fed Com 623H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	FINAL	Database:	EDM 5000.15 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,885.0	88.30	359.50	10,249.2	6,680.9	417.5	6,691.5	0.61	-0.53	-0.32
16,979.0	90.00	0.00	10,250.5	6,774.9	417.1	6,785.4	1.89	1.81	0.53
17,073.0	90.20	0.10	10,250.4	6,868.9	417.2	6,879.3	0.24	0.21	0.11
17,167.0	90.70	0.00	10,249.6	6,962.9	417.3	6,973.3	0.54	0.53	-0.11
17,261.0	90.20	359.20	10,248.9	7,056.9	416.6	7,067.2	1.00	-0.53	-0.85
17,355.0	89.90	358.90	10,248.8	7,150.9	415.0	7,161.0	0.45	-0.32	-0.32
17,449.0	89.10	358.40	10,249.6	7,244.9	412.8	7,254.9	1.00	-0.85	-0.53
17,543.0	89.60	358.70	10,250.7	7,338.8	410.4	7,348.7	0.62	0.53	0.32
17,638.0	91.50	359.60	10,249.8	7,433.8	409.0	7,443.6	2.21	2.00	0.95
17,732.0	89.40	357.90	10,249.1	7,527.8	407.0	7,537.4	2.87	-2.23	-1.81
17,826.0	90.60	358.40	10,249.1	7,621.7	404.0	7,631.2	1.38	1.28	0.53
17,921.0	92.80	0.90	10,246.2	7,716.7	403.4	7,726.1	3.50	2.32	2.63
18,015.0	93.60	1.60	10,241.0	7,810.5	405.4	7,819.9	1.13	0.85	0.74
18,109.0	91.00	1.80	10,237.2	7,904.4	408.2	7,913.8	2.77	-2.77	0.21
18,203.0	91.10	1.70	10,235.5	7,998.3	411.1	8,007.8	0.15	0.11	-0.11
18,297.0	92.00	1.80	10,233.0	8,092.2	413.9	8,101.8	0.96	0.96	0.11
18,391.0	91.90	359.30	10,229.8	8,186.2	414.8	8,195.7	2.66	-0.11	-2.66
18,485.0	91.30	356.90	10,227.1	8,280.1	411.7	8,289.4	2.63	-0.64	-2.55
18,579.0	88.70	357.60	10,227.1	8,374.0	407.2	8,383.1	2.86	-2.77	0.74
18,673.0	91.70	1.00	10,226.8	8,467.9	406.1	8,476.9	4.82	3.19	3.62
18,767.0	90.20	358.40	10,225.2	8,561.9	405.6	8,570.8	3.19	-1.60	-2.77
18,861.0	89.40	358.70	10,225.6	8,655.9	403.2	8,664.7	0.91	-0.85	0.32
18,955.0	88.40	359.00	10,227.4	8,749.8	401.3	8,758.5	1.11	-1.06	0.32
19,050.0	88.00	359.50	10,230.4	8,844.8	400.1	8,853.4	0.67	-0.42	0.53
19,144.0	87.60	359.40	10,234.0	8,938.7	399.2	8,947.2	0.44	-0.43	-0.11
19,239.0	90.70	0.60	10,235.4	9,033.7	399.2	9,042.1	3.50	3.26	1.26
19,333.0	91.40	1.10	10,233.7	9,127.7	400.6	9,136.1	0.92	0.74	0.53
19,426.0	84.60	1.70	10,236.9	9,220.5	402.8	9,229.0	7.34	-7.31	0.65
19,520.0	87.60	0.50	10,243.3	9,314.3	404.6	9,322.7	3.44	3.19	-1.28
19,615.0	86.10	1.60	10,248.5	9,409.1	406.4	9,417.6	1.96	-1.58	1.16
19,709.0	89.40	0.90	10,252.2	9,503.0	408.4	9,511.5	3.59	3.51	-0.74
19,803.0	91.70	359.60	10,251.3	9,597.0	408.8	9,605.4	2.81	2.45	-1.38
19,897.0	91.40	358.60	10,248.8	9,690.9	407.4	9,699.2	1.11	-0.32	-1.06
19,991.0	94.20	357.50	10,244.2	9,784.8	404.2	9,792.9	3.20	2.98	-1.17
20,085.0	95.30	356.20	10,236.4	9,878.3	399.0	9,886.2	1.81	1.17	-1.38
20,180.0	90.00	356.60	10,232.0	9,973.0	393.1	9,980.6	5.59	-5.58	0.42
20,273.0	90.10	355.30	10,231.9	10,065.7	386.5	10,073.1	1.40	0.11	-1.40
20,368.0	90.40	354.70	10,231.5	10,160.4	378.2	10,167.4	0.71	0.32	-0.63
20,463.0	91.70	355.00	10,229.8	10,255.0	369.7	10,261.6	1.40	1.37	0.32
20,494.0	91.00	354.40	10,229.0	10,285.8	366.8	10,292.4	2.97	-2.26	-1.94
LAST SURVEY - 20494.0' MD									
20,547.0	91.00	354.40	10,228.1	10,338.6	361.6	10,344.9	0.00	0.00	0.00
PTB - 20547.0' MD (145 FNL, 358 FEL) - PBHL (PF 27-22 Fed Com 623H)									



Survey Report



Company:	Devon Energy	Local Co-ordinate Reference:	Well Papas Fritas 27-22 Fed Com 623H
Project:	Eddy County, NM (NAD83)	TVD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Site:	Papas Fritas 27-22 Fed Com	MD Reference:	3067.9' GE + 25' KB @ 3092.9usft
Well:	Papas Fritas 27-22 Fed Com 623H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	FINAL	Database:	EDM 5000.15 Single User Db

Design Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment	
		+N/-S (usft)	+E/-W (usft)		
9,834.0	9,813.2	-112.0	396.2	KOP - 9834.0' (37 FSL, 366 FEL)	
20,494.0	10,229.0	10,285.8	366.8	LAST SURVEY - 20494.0' MD	
20,547.0	10,228.1	10,338.6	361.6	PTB - 20547.0' MD (145 FNL, 358 FEL)	

Checked By: _____ Approved By: _____ Date: _____

Form 3160-5
(June 2015)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018**SUNDRY NOTICES AND REPORTS ON WELLS**
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.5. Lease Serial No.
NMNM105557

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
PAPA FRITAS 27-22 FED COM 623H9. API Well No.
30-015-46576-00-X110. Field and Pool or Exploratory Area
PURPLE SAGE-WOLFCAMP (GAS)11. County or Parish, State
EDDY COUNTY, NM**SUBMIT IN TRIPLICATE - Other instructions on page 2**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

DEVON ENERGY PRODUCTION COMPANY

Contact: CHELSEY GREEN

E-MAIL: CHELSEY.GREEN@DVN.COM

3a. Address

6488 SEVEN RIVERS HIGHWAY
ARTESIA, NM 88210

3b. Phone No. (include area code)

Ph: 405-228-8595

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 27 T23S R29E SESE 150FSL 762FEL
32.269005 N Lat, 103.966476 W Lon**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION				
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off	
☒ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity	
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☒ Other	
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	Hydraulic Fracture	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

COMPLETION SUMMARY

Devon Energy Production Co., L.P. (Devon) respectfully requests for OCD extension of time to file BLM- approved Form 3160-4.

7/9/20 ? 8/24/20: MIRU WL & PT. TIH PT csg 5000 psi for 30min, OK. TIH w/pump through frac plug and guns. Perf Wolfcamp, 10,400'-20,420'. Frac totals 20334500# prop, 35 bbl acid. ND frac, MIRU PU, NU BOP, DO plugs & CO to PBTD 20,478'. CHC, FWB, ND BOP. RIH w/301 jts 2-7/8" L-80 tbg, set @ 10046'. TOP.

Formation Top Depth

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #538676 verified by the BLM Well Information System
For DEVON ENERGY PRODUCTION COMPANY, sent to the Carlsbad
Committed to AFMSS for processing by PRISCILLA PEREZ on 12/01/2020 (21PP0748SE)**

Name (Printed/Typed) CHELSEY GREEN

Title REGULATORY PROFESSIONAL

Signature (Electronic Submission)

Date 11/30/2020

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By ACCEPTED	JONATHON SHEPARD Title PETROLEUM ENGINEER	Date 12/10/2020
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office Carlsbad

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

Additional data for EC transaction #538676 that would not fit on the form

32. Additional remarks, continued

RUSTLER	187
SALADO	3150
DELAWARE	6885
BONE SPRING	10100

Revisions to Operator-Submitted EC Data for Sundry Notice #538676

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	HF SR	HF SR
Lease:	NMNM105557	NMNM105557
Agreement:		
Operator:	DEVON ENERGY PRODUCTION COMPAN 333 W SHERIDAN AVE OKLAHOMA CITY, OK 73102 Ph: 405-228-8595	DEVON ENERGY PRODUCTION COMPAN 6488 SEVEN RIVERS HIGHWAY ARTESIA, NM 88210 Ph: 575.748.3371
Admin Contact:	CHELSEY GREEN REGULATORY COMPLIANCE PROFESSI E-Mail: Chelsey.Green@dvn.com Ph: 405.228.8595	CHELSEY GREEN REGULATORY PROFESSIONAL E-Mail: CHELSEY.GREEN@DVN.COM Ph: 405-228-8595
Tech Contact:	CHELSEY GREEN REGULATORY COMPLIANCE PROFESSI E-Mail: Chelsey.Green@dvn.com Ph: 405.228.8595	CHELSEY GREEN REGULATORY PROFESSIONAL E-Mail: CHELSEY.GREEN@DVN.COM Ph: 405-228-8595
Location:		
State:	NM	NM
County:	EDDY	EDDY
Field/Pool:	PURPLE SAGE;WOLFCAMP(GAS)	PURPLE SAGE-WOLFCAMP (GAS)
Well/Facility:	PAPAS FRITAS 27-22 FED COM 623H Sec 27 T23S R29E SESE 150FSL 762FEL	PAPA FRITAS 27-22 FED COM 623H Sec 27 T23S R29E SESE 150FSL 762FEL 32.269005 N Lat, 103.966476 W Lon

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 15199

CONDITIONS OF APPROVAL

Operator: DEVON ENERGY PRODUCTION COMPAN333 West Sheridan Ave. Oklahoma City, OK73102			OGRID: 6137	Action Number: 15199	Action Type: C-104C
OCD Reviewer			Condition		
ksimmons			None		