Jumes 12

FAFMSS

Well Number: 24

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT



Well Name: FARRELL FEDERAL

Well Location: T7S / R33E / SEC 28 /

SESW /

County or Parish/State: ROOSEVELT / NM

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM83197

Unit or CA Name:

Unit or CA Number:

US Well Number: 300412069900S1

Well Status: Oil Well Shut In

Operator: RIDGEWAY ARIZONA

OIL CORPORATION

Notice of Intent

Type of Submission: Notice of Intent

Type of Action Plug and Abandonment

Date Sundry Submitted: 08/25/2021

Time Sundry Submitted: 04:51

Date proposed operation will begin: 09/30/2021

Procedure Description: 1) SET 5-1/2" CIBP @ 4,150'; CIRC. WELL W/ M.L.F.; PRES TEST CSG. X CIBP; PUMP 25 SXS. CMT. @ 4,150'-4,000'; WOC X TAG CMT. PLUG. 2) PERF. X ATTEMPT TO SQZ. 50 SXS. CMT. @ 3,538'-3,408' (T/S.A.); WOC X TAG CMT. PLUG. 3) PERF. X ATTEMPT TO SQZ. 45 SXS. CMT. @ 2,350'-2,230' (T/YATES, B/SALT); WOC X TAG CMT. PLUG. 4) PERF. X SQZ. 75 SXS. CMT. @ 1,950'-1,750' (T/SALT, 8-5/8" CSG. SHOE); WOC X TAG CMT. PLUG. 5) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, 35 SXS. CMT. @ 100'-3'. 6) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; VERIFY CMT. TO SURF. ON ALL ANNULI; WELD ON STEEL PLATE TO CSGS. X INSTALL BELOW GROUND DRY HOLE MARKER. DURING THIS PROCDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM WITH A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD **RULE 19.15.17**

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description


Accepted for Record Only

SUBJECT TO LIKE APPROVAL BY BLM

NMOCD 9/27/21

	Form <i>Page 2 of 12</i> Revised July 18, 2013
District II – (575) 393-6161 Energy, Minerals and Natural Resources 1625 N. French Dr., Hobbs, NM 88240 District II – (575) 748-1283	WELL API NO. 30-041-20699
811 S. First St., Artesia, NM 88210 OIL CONSERVATION DIVISION	5. Indicate Type of Lease
District III - (505) 334-6178 1220 South St. Francis Dr. 1000 Rio Brazos Rd., Aztec, NM 87410	STATE FEE
<u>District IV</u> – (505) 476-3460 Santa Fe, NM 8/505	6. State Oil & Gas Lease No.
1220 S. St. Francis Dr., Santa Fe, NM 87505	
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH	7. Lease Name or Unit Agreement Name Farrell Federal
PROPOSALS.) 1. Type of Well: Oil Well Gas Well Other	8. Well Number 24
Name of Operator Ridgeway Arizona Operating Company	9. OGRID Number 164557
3. Address of Operator	10. Pool name or Wildcat
575 N Dairy Ashford Rd, EC II Suite 210, Houston, TX 77079	SAN ANDRES
4. Well Location Unit Letter N: 1310 feet from the South line and 20	630 feet from the West line
Section 28 Township 07S Range 33E	NMPM County Roosevelt
11. Elevation (Show whether DR, RKB, RT, GR, etc.	
(3.00)	
12. Check Appropriate Box to Indicate Nature of Notice,	Report or Other Data
	SEQUENT REPORT OF:
PERFORM REMEDIAL WORK PLUG AND ABANDON REMEDIAL WOR	
TEMPORARILY ABANDON	Section 19 (19 19 19 19 19 19 19 19 19 19 19 19 19 1
DOWNHOLE COMMINGLE	1 30B
CLOSED-LOOP SYSTEM	
OTHER: OTHER:	
13. Describe proposed or completed operations. (Clearly state all pertinent details, and	
of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Corproposed completion or recompletion.	npletions: Attach wellbore diagram of
proposed completion of recompletion.	
BLM COA attached including procedure and WBS	
Spud Date: Rig Release Date:	
Spud Date: Rig Release Date:	
Spud Date: Rig Release Date: I hereby certify that the information above is true and complete to the best of my knowledge	e and belief.
I hereby certify that the information above is true and complete to the best of my knowledg	
I hereby certify that the information above is true and complete to the best of my knowledg SIGNATURE	grDATE9/14/2021
I hereby certify that the information above is true and complete to the best of my knowledg	grDATE9/14/2021
I hereby certify that the information above is true and complete to the best of my knowledg SIGNATURE	grDATE9/14/2021 omPHONE:713-574-7912
I hereby certify that the information above is true and complete to the best of my knowledg SIGNATURE	grDATE9/14/2021 omPHONE:713-574-7912

Final	Installation		Well API #:	Farrell Federal 24 30-041-20699 Roosevelt Co NM		
Installation	Surface Casing	Make	Size	Wellhead Detail	OD	ID
	OD: 8-5/8" Weight: 24 Grade:	-				•
	Top: 0 Bottom: 1802 Intermediate Csg. OD: Weight: Grade: Top: Bottom: Production Casing OD: 5.5" Weight: 10.5# Grade: Top: 0 Bottom: 4501 TOC 300 sacks DV Tool	Length	Depth	Tubing Detail (Top Down) KB N/A 2 - 3/3 " 4,431 " ??	OD .	ID
	Liner Top N/A KOP N/A Top Perf 4202 Bottom Perf 4295 TD 4501 PBTD 4461 TVD 4501	P.U. Make:	Length 0'	ROD DETAIL (Bottom Up) N/A Pump Set Depth Pumping Unit Specs		
	4311	P.U. SL: SPM: PUMP SIZE: PLUNGER: STDG VALVE: STROKE:	N/A	Pump Details		

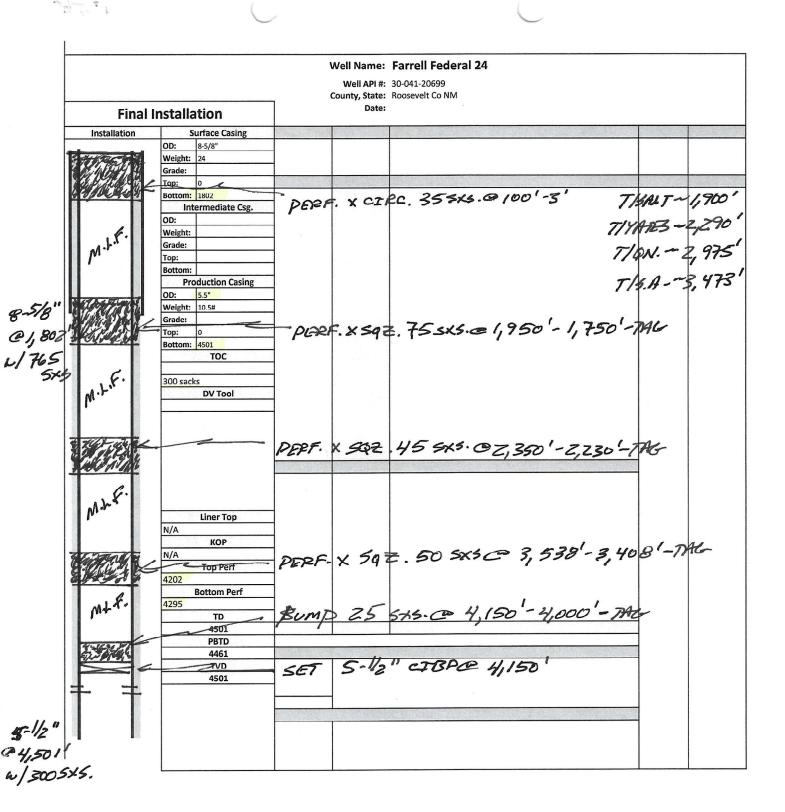

Farrell Federal 24 30-041-20699 Ridgeway Arizona Oil Corp September 02, 2021 Conditions of Approval

- 1. Operator shall place CIBP at 4,150' (50'-100' above top most perf) and place 25 sx of Class C cement on top as proposed. WOC and TAG.
- 2. Operator shall perf at 3,538' and squeeze Class C cement to 3,408' as proposed. WOC and TAG.
- 3. Operator shall perf at 2,350' and squeeze Class C cement to 2,230' to seal the Yates Formation and the bottom of the Salt. WOC and TAG.
- 4. Operator shall perf at 2,000'and squeeze Class C cement to 1,752' to seal the top of the Salt and the 8-5/8' casing shoe. WOC and TAG.
- 5. Operator shall perf at 200'and squeeze Class C cement to surface.
- 6. See Attached for general plugging stipulations.

JAM 09022021

			Well Name:	Farrell Federal 24		
Finall		7		30-041-20699 Roosevelt Co NM		
	nstallation			T	-	
Installation	OD: 8-5/8"	Make	Size	Wellhead Detail	OD	ID
	Weight: 24 Grade:					
	Top: 0 Bottom: 1802	Length	Depth	Tubing Detail (Top Down) KB	OD	ID
	Intermediate Csg. OD:					
	Weight: Grade:	,		N/A		
	Тор:			176		
	Bottom: Production Casing	_				
	OD: 5.5" Weight: 10.5#	_	20			
	Grade: Top: 0	_				
	Bottom: 4501 TOC			21.11	2	
	300 sacks	7		2.3/9 "@ 4,431"??	4	
	DV Tool	7				
		1				
		Count	Length	ROD DETAIL (Bottom Up)		
				N/A		
	Liner Top	_				
	N/A KOP	\exists				
	N/A Top Perf	-				
	4202 Bottom Perf	7				
	4295 TD	7				
	4501		0'	Pump Set Depth		
	PBTD			Pour in Hait Cases		
	4461 TVD	P.U. Make:	N/A	Pumping Unit Specs		
	4501	P.U. Size:	/.			
	u u	P.U. SL: SPM:	-			
		PUMP SIZE:	N/A	Pump Details		
8		PLUNGER:	137			
		STDG VALVE: STROKE:				

FAFMSS

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT Sundry Print Report

Well Name: FARRELL FEDERAL

Well Location: T7S / R33E / SEC 28 /

SESW /

County or Parish/State: ROOSEVELT / NM

Well Number: 24

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM83197

Unit or CA Name:

Unit or CA Number:

US Well Number: 300412069900S1

Well Status: Oil Well Shut In

Operator: RIDGEWAY ARIZONA

OIL CORPORATION

Notice of Intent

Type of Submission: Notice of Intent

Type of Action Plug and Abandonment

Date Sundry Submitted: 08/25/2021

Time Sundry Submitted: 04:51

Date proposed operation will begin: 09/30/2021

Procedure Description: 1) SET 5-1/2" CIBP @ 4,150'; CIRC. WELL W/ M.L.F.; PRES TEST CSG. X CIBP; PUMP 25 SXS. CMT. @ 4,150'-4,000'; WOC X TAG CMT. PLUG. 2) PERF. X ATTEMPT TO SQZ. 50 SXS. CMT. @ 3,538'-3,408' (T/S.A.); WOC X TAG CMT. PLUG. 3) PERF. X ATTEMPT TO SQZ. 45 SXS. CMT. @ 2,350'-2,230' (T/YATES, B/SALT); WOC X TAG CMT. PLUG. 4) PERF. X SQZ. 75 SXS. CMT. @ 1,950'-1,750' (T/SALT, 8-5/8" CSG. SHOE); WOC X TAG CMT. PLUG. 5) PERF. X CIRC. TO SURF., FILLING ALL ANNULI, 35 SXS. CMT. @ 100'-3'. 6) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; VERIFY CMT. TO SURF. ON ALL ANNULI; WELD ON STEEL PLATE TO CSGS. X INSTALL BELOW GROUND DRY HOLE MARKER. DURING THIS PROCDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM WITH A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17


Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Final II	nstallation		Well API #:	Farrell Federal 24 30-041-20699 Roosevelt Co NM		
Installation	Surface Casing	Make	Size	Wellhead Detail	OD	ID
installation	Surface Casing	Length	Depth	Tubing Detail (Top Down) KB N/A 2 - 3/B @ 4,431 ??	OD	ID
	Liner Top N/A KOP N/A Top Perf 4202 Bottom Perf 4295 TD 4501 PBTD 4461 TVD 4501	P.U. Make: P.U. Size: P.U. SI: SPM: PUMP SIZE: PLUNGER:	Length 0' N/A	Pump Set Depth Pumping Unit Specs		

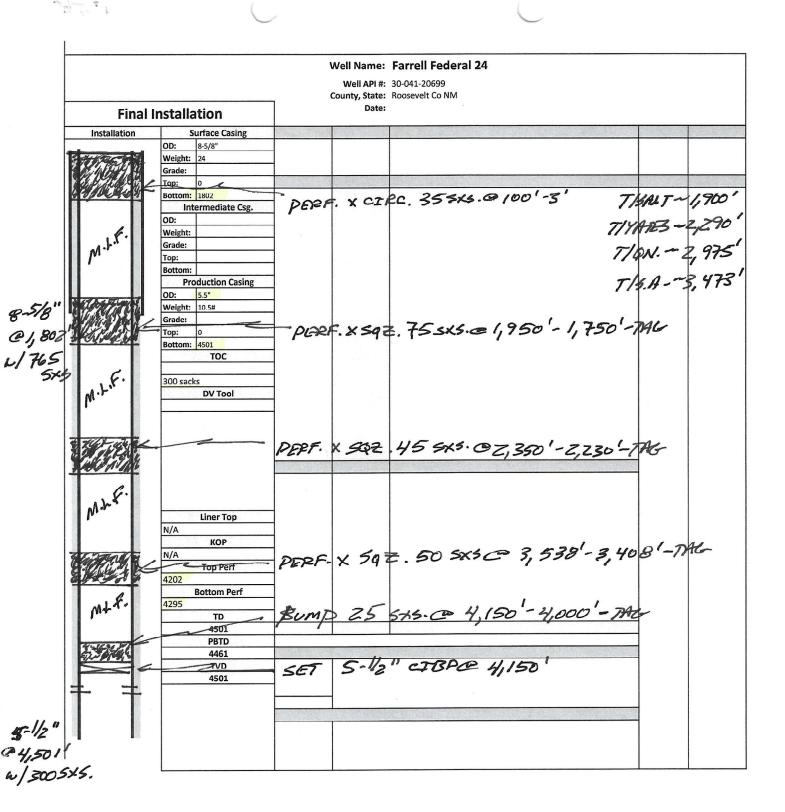

Farrell Federal 24 30-041-20699 Ridgeway Arizona Oil Corp September 02, 2021 Conditions of Approval

- 1. Operator shall place CIBP at 4,150' (50'-100' above top most perf) and place 25 sx of Class C cement on top as proposed. WOC and TAG.
- 2. Operator shall perf at 3,538' and squeeze Class C cement to 3,408' as proposed. WOC and TAG.
- 3. Operator shall perf at 2,350' and squeeze Class C cement to 2,230' to seal the Yates Formation and the bottom of the Salt. WOC and TAG.
- 4. Operator shall perf at 2,000'and squeeze Class C cement to 1,752' to seal the top of the Salt and the 8-5/8' casing shoe. WOC and TAG.
- 5. Operator shall perf at 200'and squeeze Class C cement to surface.
- 6. See Attached for general plugging stipulations.

JAM 09022021

			Well API #: County, State:	Farrell Federal 24 30-041-20699 Roosevelt Co NM		
Final	Installation		Date:			
Installation	Surface Casing	Make	Size	Wellhead Detail	OD	ID
	OD: 8-5/8"					
	Weight: 24					
	Grade:			Table Date (Table Date)	0.0	
	Top: 0 Bottom: 1802	Length	Depth	Tubing Detail (Top Down)	OD	ID
	Intermediate Csg.			ND		
	OD:					
	Weight:					
	Grade:	,		N/A		
	Тор:					
	Bottom:	_				
	Production Casing					
	OD: 5.5" Weight: 10.5#		200			
	Grade:	\dashv				
	Top: 0					
	Bottom: 4501					ĺ
	TOC			2 3/4"	7	
				2.19 @ 4.431	١.	
	300 sacks			2.3/9" @ 4,431'?	•	
	DV Tool					
		\dashv				
				η		
		Count	Length	ROD DETAIL (Bottom Up)		
				N/A		
	Liner Top	_				
	N/A					
	КОР	\neg				
	N/A					
	Top Perf					
	4202	_				
	Bottom Perf					
	4295	-				
	TD 4501	-	0'	Pump Set Depth	1	
	PBTD	+		i amp sec pepui	1	
	4461		4	Pumping Unit Specs		
	TVD	P.U. Make:	N/A		1	
	4501	P.U. Size:				
		P.U. SL:	4			
		SPM:		Down Date illa	-	
		DUMAN CITE	TNI/A	Pump Details	1	
		PUMP SIZE: PLUNGER:	N/A			
-		STDG VALVE:				

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 52134

CONDITIONS

	0.0015
Operator:	OGRID:
RIDGEWAY ARIZONA OIL CORP.	164557
575 N. Dairy Ashford	Action Number:
Houston, TX 77079	52134
	Action Type:
	[C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date		
kfortner	Need BLM approval	9/27/2021		