

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address Matador Production Company 5400 LBJ Freeway, Ste 1500 Dallas, TX 75240		² OGRID Number 228937
		³ Reason for Filing Code/ Effective Date RT
⁴ API Number 30 - 015-48103	⁵ Pool Name MALAGA; BONE SPRING	⁶ Pool Code 42780
⁷ Property Code 330294	⁸ Property Name KEN WILSON 14 15	⁹ Well Number 112

II. ¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
H	14	24S	28E		1936	NORTH	356	EAST	EDDY

¹¹ Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	15	24S	28E		1974	NORTH	120	WEST	EDDY
¹² Lse Code P	¹³ Producing Method Code F	¹⁴ Gas Connection Date 04/23/2022	¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date		


III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
372018	Longwood RB Pipeline, LLC 5400 LBJ Freeway, Ste 1500, Dallas, TX 75240	G
34053	Plains Marketing, L.P. P.O. Box 4648 Houston, TX 77210	O

IV. Well Completion Data

²¹ Spud Date 12/12/2021	²² Ready Date 04/23/2022	²³ TD 17749MD/ 7197TVD	²⁴ PBTD 17639MD / 17202TVD	²⁵ Perforations 7455-17592 MD 7275-7206 TVD	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size	²⁹ Depth Set		³⁰ Sacks Cement
17 1/2		13 3/8	594		845 sxs
12 1/4		9 5/8	2760		1015 sxs
8 3/4		5 1/2	17734		2845 sxs

V. Well Test Data

³¹ Date New Oil	³² Gas Delivery Date	³³ Test Date	³⁴ Test Length	³⁵ Tbg. Pressure	³⁶ Csg. Pressure
³⁷ Choke Size	³⁸ Oil	³⁹ Water	⁴⁰ Gas		⁴¹ Test Method
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: 			OIL CONSERVATION DIVISION		
Printed name: Brett Jennings			Approved by: PATRICIA MARTINEZ		
Title: Regulatory Analyst			Title: PETROLEUM SPECIALIST		
E-mail Address: Brett.Jennings@matadorresources.com			Approval Date: 5/4/2022		
Date: 04/18/2022		Phone: 972-629-2160	RT EXPIRES 7/23/2022		

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-48103	² Pool Code 42780	³ Pool Name MALAGA; BONE SPRING
⁴ Property Code 3302094	⁵ Property Name KEN WILSON	⁶ Well Number 112H
⁷ OGRID No. 228937	⁸ Operator Name MATADOR PRODUCTION COMPANY	⁹ Elevation 2966'

¹⁰Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	14	24-S	28-E	-	1936'	NORTH	356'	EAST	EDDY

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	15	24-S	28-E	-	1974'	NORTH	120'	WEST	EDDY

¹² Dedicated Acres 320	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.


¹⁶					
SURFACE LOCATION NEW MEXICO EAST NAD 1927 X=587603 Y=443720 LAT.: N 32.2195854 LONG.: W 104.0500601 NAD 1983 X=628787 Y=443779 LAT.: N 32.2197074 LONG.: W 104.0505513					
PROPOSED TAKE POINT/ BOTTOM HOLE LOCATION NEW MEXICO EAST NAD 1927 X=577347 Y=443783 LAT.: N 32.2198296 LONG.: W 104.0832248 NAD 1983 X=618530 Y=443842 LAT.: N 32.2199510 LONG.: W 104.0837174 MD = 17683'					
PROPOSED TAKE POINT NEW MEXICO EAST NAD 1927 X=587861 Y=443642 LAT.: N 32.2193700 LONG.: W 104.0492290 NAD 1983 X=629044 Y=443701 LAT.: N 32.2194920 LONG.: W 104.0497202 MD = 6995'					
¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.					
Signature: <i>Brett Jennings</i> Date: 04/19/2022 Printed Name: Brett Jennings E-mail Address: Brett.Jennings@matadorresources.com					
¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true to the best of my belief.					
Date of Survey: 08/27/2020 Signature and Seal of Professional Surveyor:					
Certificate Number:					

SCALE: 1" = 2000'

0' 1000' 2000'



SECTION 14, TOWNSHIP 24-S, RANGE 28-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

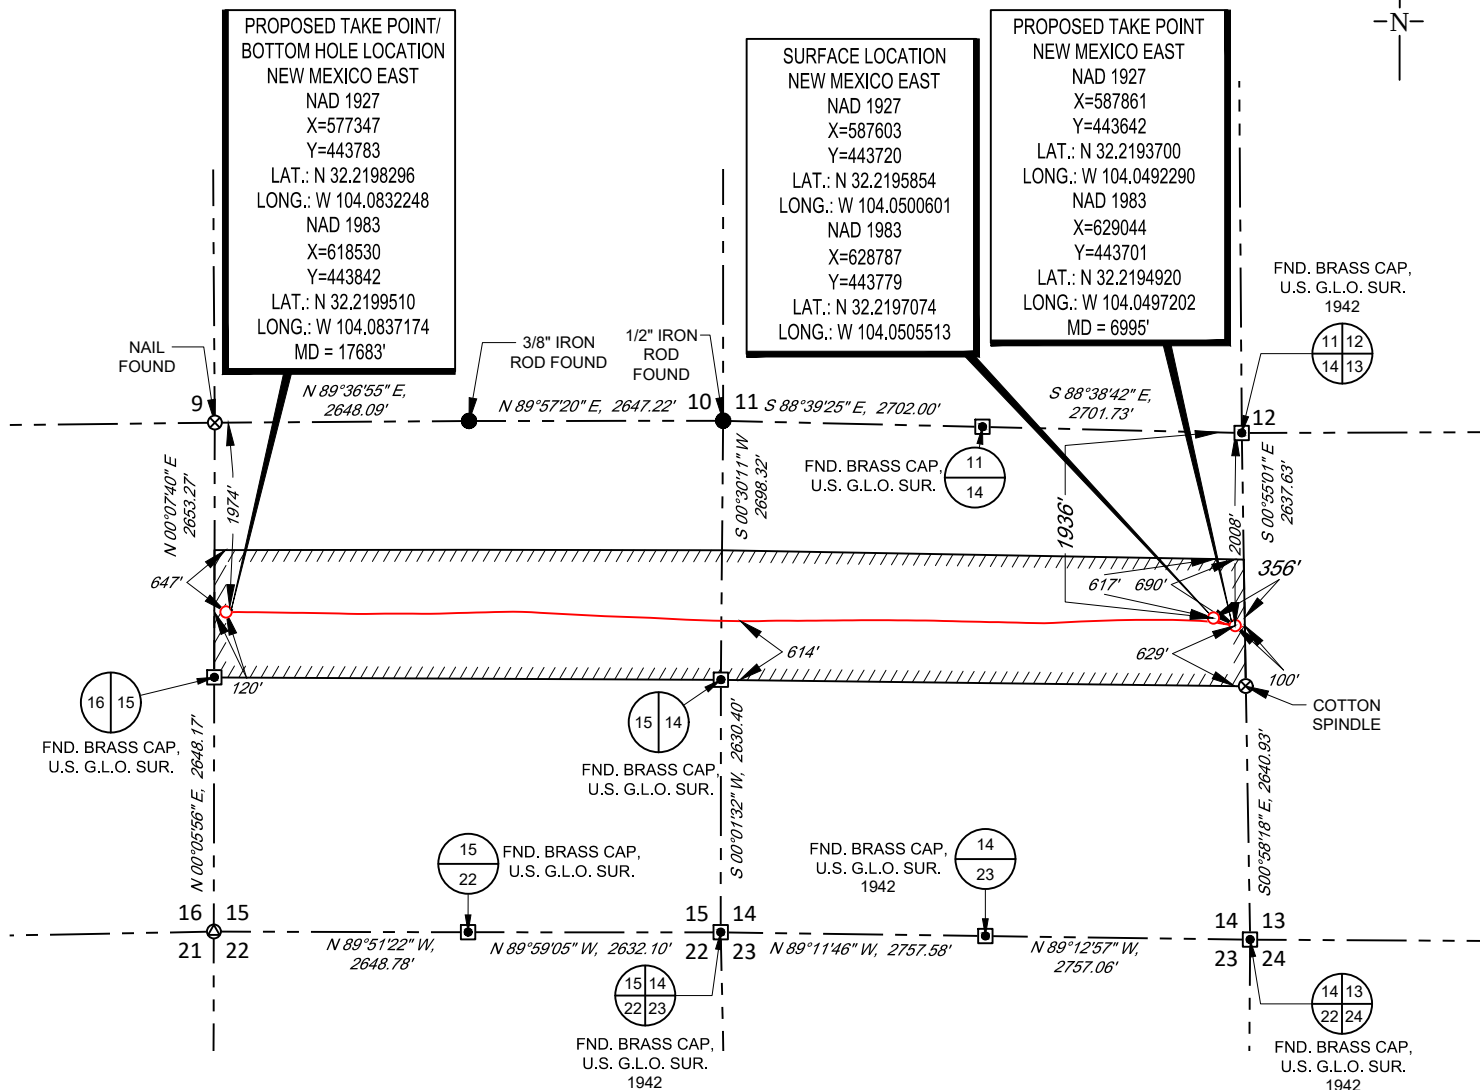

LEASE NAME & WELL NO.: KEN WILSON 112H
SECTION 14 TWP 24-S RGE 28-E SURVEY N.M.P.M.
COUNTY EDDY STATE NM ELEVATION 2966'
DESCRIPTION 1936' FNL & 356' FEL



INTERNAL
PRE-COMPLETION
PLAT

Michael Blake Brown, P.S. No. 18329
March 11, 2022

KEN WILSON 112H PRE-COMPLETION	REVISION:		NOTES:
	INT	DATE	
DATE: 03/11/22			1. ORIGINAL DOCUMENT SIZE: 8.5" X 11" 2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY FEET. 3. THIS WELL LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.
FILE: C_KEN_WILSON_112H			
DRAWN BY: AMD			
SHEET: 2 OF 2			

Matador Resources Company

Eddy County, New Mexico (NAD27)

Ken Wilson 14&15

Ken Wilson 14&15 112H

OH

Design: OH

Standard Survey Report

28 December, 2021


This survey is correct to the best of my knowledge and is supported by actual field data.

Cameron Stevens

Notarized this date 28th of December, 2021.

Carrie Reed

Notary Signature
County of Midland
State of Texas

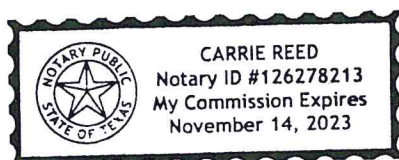

Legacy Directional Survey Report

Company:	Matador Resources Company	Local Co-ordinate Reference:	Well Ken Wilson 14&15 112H
Project:	Eddy County, New Mexico (NAD27)	TVD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Site:	Ken Wilson 14&15	MD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Well:	Ken Wilson 14&15 112H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.14 Single User Db

Project	Eddy County, New Mexico (NAD27)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Ken Wilson 14&15		
Site Position:		Northing:	443,720.00 usft
From:	Map	Easting:	587,603.00 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32.219586
		Longitude:	-104.050062

Well	Ken Wilson 14&15 112H		
Well Position	+N/-S	0.00 usft	Northing: 443,720.00 usft
	+E/-W	0.00 usft	Easting: 587,603.00 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
Grid Convergence:	0.15 °	Ground Level:	2,966.00 usft

Wellbore	OH		
Magnetics	Model Name	Sample Date	Declination (°)
	IGRF2020	12/1/2021	6.71
			Dip Angle (°)
			59.81
			Field Strength (nT)
			47,397.29350160

Design	OH		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
		Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)
	0.00	0.00	0.00
			Direction (°)
			270.58

Survey Program	Date	12/28/2021		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
162.00	17,749.00	Legacy MWD (OH)	MWD+IGRF	OWSG MWD + IGRF or WMM

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
Ken Wilson 14&15 112H PP (50' LL)										
162.00	0.71	241.60	162.00	-0.48	-0.88	0.88	0.44	0.44	0.00	
257.00	0.18	115.53	256.99	-0.82	-1.27	1.26	0.87	-0.56	-132.71	
352.00	0.64	47.93	351.99	-0.53	-0.74	0.73	0.63	0.48	-71.16	
446.00	1.00	62.48	445.98	0.20	0.38	-0.38	0.44	0.38	15.48	
537.00	1.24	63.62	536.96	1.00	1.97	-1.96	0.26	0.26	1.25	
692.00	1.74	60.52	691.91	2.91	5.52	-5.49	0.33	0.32	-2.00	
787.00	1.70	77.99	786.87	3.91	8.15	-8.11	0.55	-0.04	18.39	
881.00	1.39	87.05	880.84	4.26	10.65	-10.61	0.42	-0.33	9.64	

Legacy Directional Survey Report

Company:	Matador Resources Company	Local Co-ordinate Reference:	Well Ken Wilson 14&15 112H
Project:	Eddy County, New Mexico (NAD27)	TVD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Site:	Ken Wilson 14&15	MD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Well:	Ken Wilson 14&15 112H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.14 Single User Db

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
973.00	1.37	83.52	972.81	4.44	12.86	-12.81	0.09	-0.02	-3.84	
1,068.00	0.71	193.31	1,067.80	4.00	13.85	-13.81	1.84	-0.69	115.57	
1,162.00	0.96	217.84	1,161.79	2.81	13.24	-13.21	0.46	0.27	26.10	
1,257.00	1.04	217.24	1,256.77	1.49	12.23	-12.21	0.08	0.08	-0.63	
1,353.00	0.57	205.89	1,352.76	0.37	11.49	-11.49	0.51	-0.49	-11.82	
1,448.00	0.53	245.19	1,447.76	-0.24	10.89	-10.89	0.39	-0.04	41.37	
1,544.00	0.26	182.83	1,543.76	-0.64	10.47	-10.48	0.49	-0.28	-64.96	
1,639.00	0.16	83.60	1,638.76	-0.84	10.59	-10.60	0.34	-0.11	-104.45	
1,735.00	1.35	77.80	1,734.75	-0.59	11.83	-11.84	1.24	1.24	-6.04	
1,830.00	2.59	101.06	1,829.69	-0.77	15.03	-15.04	1.53	1.31	24.48	
1,925.00	4.39	108.59	1,924.51	-2.34	20.59	-20.61	1.95	1.89	7.93	
2,021.00	5.78	112.47	2,020.13	-5.36	28.54	-28.59	1.49	1.45	4.04	
2,116.00	6.19	113.94	2,114.61	-9.26	37.64	-37.73	0.46	0.43	1.55	
2,211.00	7.78	112.80	2,208.91	-13.83	48.25	-48.38	1.68	1.67	-1.20	
2,307.00	8.78	112.71	2,303.90	-19.18	61.00	-61.19	1.04	1.04	-0.09	
2,402.00	9.27	112.94	2,397.73	-24.96	74.73	-74.98	0.52	0.52	0.24	
2,497.00	8.53	114.66	2,491.58	-30.88	88.18	-88.49	0.83	-0.78	1.81	
2,592.00	7.61	114.73	2,585.64	-36.45	100.30	-100.66	0.97	-0.97	0.07	
2,687.00	6.71	114.26	2,679.90	-41.37	111.07	-111.48	0.95	-0.95	-0.49	
2,702.00	6.80	115.97	2,694.80	-42.11	112.67	-113.09	1.47	0.60	11.40	
2,825.00	6.53	116.96	2,816.96	-48.47	125.45	-125.93	0.24	-0.22	0.80	
2,921.00	8.25	106.21	2,912.17	-52.87	136.93	-137.46	2.29	1.79	-11.20	
3,016.00	9.19	101.97	3,006.07	-56.35	150.90	-151.46	1.20	0.99	-4.46	
3,111.00	9.13	100.30	3,099.86	-59.27	165.73	-166.32	0.29	-0.06	-1.76	
3,206.00	9.36	97.17	3,193.62	-61.58	180.81	-181.43	0.58	0.24	-3.29	
3,302.00	9.65	96.87	3,288.31	-63.52	196.55	-197.18	0.31	0.30	-0.31	
3,418.00	9.55	95.76	3,402.68	-65.65	215.77	-216.43	0.18	-0.09	-0.96	
3,514.00	8.91	93.72	3,497.44	-66.93	231.12	-231.78	0.75	-0.67	-2.13	
3,609.00	5.05	92.49	3,591.72	-67.59	242.64	-243.31	4.07	-4.06	-1.29	
3,705.00	4.78	89.57	3,687.36	-67.74	250.86	-251.53	0.38	-0.28	-3.04	
3,800.00	4.35	110.20	3,782.07	-68.96	258.20	-258.88	1.78	-0.45	21.72	
3,896.00	4.66	111.80	3,877.77	-71.66	265.24	-265.95	0.35	0.32	1.67	
3,991.00	4.27	107.05	3,972.48	-74.13	272.20	-272.94	0.57	-0.41	-5.00	
4,087.00	4.04	105.25	4,068.23	-76.07	278.88	-279.64	0.28	-0.24	-1.88	
4,182.00	3.80	101.78	4,163.01	-77.59	285.19	-285.96	0.36	-0.25	-3.65	
4,277.00	2.81	141.91	4,257.86	-80.07	289.71	-290.51	2.58	-1.04	42.24	
4,373.00	2.60	147.76	4,353.76	-83.76	292.32	-293.16	0.36	-0.22	6.09	
4,468.00	2.67	147.34	4,448.66	-87.45	294.67	-295.54	0.08	0.07	-0.44	
4,564.00	2.52	145.49	4,544.56	-91.07	297.07	-297.98	0.18	-0.16	-1.93	
4,659.00	2.49	145.40	4,639.47	-94.49	299.42	-300.37	0.03	-0.03	-0.09	
4,755.00	2.17	56.89	4,735.41	-95.21	302.13	-303.08	3.40	-0.33	-92.20	
4,850.00	2.30	61.79	4,830.34	-93.33	305.32	-306.25	0.24	0.14	5.16	
4,945.00	2.23	64.40	4,925.27	-91.63	308.67	-309.58	0.13	-0.07	2.75	

Legacy Directional

Survey Report

Company:	Matador Resources Company	Local Co-ordinate Reference:	Well Ken Wilson 14&15 112H
Project:	Eddy County, New Mexico (NAD27)	TVD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Site:	Ken Wilson 14&15	MD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Well:	Ken Wilson 14&15 112H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.14 Single User Db

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,041.00	2.05	67.49	5,021.20	-90.16	311.94	-312.83	0.22	-0.19	3.22	
5,136.00	1.98	65.33	5,116.14	-88.83	315.00	-315.88	0.11	-0.07	-2.27	
5,232.00	1.92	65.11	5,212.08	-87.46	317.96	-318.83	0.06	-0.06	-0.23	
5,328.00	1.81	62.38	5,308.03	-86.08	320.76	-321.62	0.15	-0.11	-2.84	
5,423.00	1.39	72.80	5,403.00	-85.04	323.19	-324.04	0.54	-0.44	10.97	
5,519.00	0.13	241.78	5,498.99	-84.75	324.21	-325.05	1.58	-1.31	176.02	
5,614.00	0.44	255.04	5,593.99	-84.90	323.76	-324.61	0.33	0.33	13.96	
5,710.00	0.37	268.83	5,689.98	-85.00	323.10	-323.94	0.12	-0.07	14.36	
5,806.00	0.44	258.60	5,785.98	-85.08	322.43	-323.27	0.10	0.07	-10.66	
5,902.00	0.38	272.75	5,881.98	-85.13	321.75	-322.59	0.12	-0.06	14.74	
5,997.00	0.48	269.38	5,976.98	-85.12	321.03	-321.88	0.11	0.11	-3.55	
6,093.00	0.55	280.27	6,072.97	-85.05	320.18	-321.02	0.13	0.07	11.34	
6,188.00	0.63	252.27	6,167.97	-85.12	319.23	-320.08	0.31	0.08	-29.47	
6,284.00	0.60	264.24	6,263.96	-85.33	318.23	-319.08	0.14	-0.03	12.47	
6,380.00	1.28	260.64	6,359.95	-85.56	316.67	-317.52	0.71	0.71	-3.75	
6,475.00	1.76	246.97	6,454.92	-86.30	314.28	-315.14	0.63	0.51	-14.39	
6,570.00	1.66	253.10	6,549.87	-87.27	311.62	-312.49	0.22	-0.11	6.45	
6,666.00	1.88	263.98	6,645.83	-87.84	308.73	-309.60	0.42	0.23	11.33	
6,761.00	1.78	267.55	6,740.78	-88.07	305.70	-306.58	0.16	-0.11	3.76	
6,857.00	9.22	284.94	6,836.27	-86.15	296.77	-297.63	7.85	7.75	18.11	
6,952.00	19.72	282.30	6,928.13	-80.76	273.69	-274.50	11.07	11.05	-2.78	
6,997.20	22.81	280.66	6,970.25	-77.51	257.63	-258.40	6.95	6.83	-3.64	
FTP 7000.00 MD / 6972.83 TVD										
7,048.00	26.29	279.25	7,016.45	-73.88	236.84	-237.58	6.95	6.86	-2.77	
7,143.00	36.14	277.18	7,097.60	-66.98	188.16	-188.83	10.43	10.37	-2.18	
7,239.00	45.68	279.17	7,170.07	-57.95	126.03	-126.61	10.03	9.94	2.07	
Ken Wilson 14&15 112H FTP										
7,335.00	56.88	279.87	7,230.03	-45.54	52.28	-52.74	11.68	11.67	0.73	
7,429.00	64.56	276.87	7,275.97	-33.70	-28.77	28.43	8.63	8.17	-3.19	
7,525.00	68.83	272.35	7,313.96	-26.67	-116.61	116.33	6.20	4.45	-4.71	
7,620.00	73.13	271.76	7,344.91	-23.46	-206.34	206.10	4.56	4.53	-0.62	
7,716.00	77.79	272.59	7,369.01	-19.93	-299.18	298.96	4.93	4.85	0.86	
7,812.00	86.01	270.23	7,382.53	-17.61	-394.10	393.90	8.90	8.56	-2.46	
7,907.00	91.67	270.96	7,384.45	-16.62	-489.04	488.84	6.01	5.96	0.77	
8,002.00	89.77	269.18	7,383.26	-16.51	-584.02	583.82	2.74	-2.00	-1.87	
8,098.00	91.98	270.97	7,381.79	-16.38	-680.00	679.80	2.96	2.30	1.86	
8,194.00	90.53	269.06	7,379.69	-16.36	-775.97	775.76	2.50	-1.51	-1.99	
8,289.00	90.64	268.58	7,378.72	-18.31	-870.94	870.71	0.52	0.12	-0.51	
8,385.00	87.78	268.29	7,380.04	-20.94	-966.89	966.63	2.99	-2.98	-0.30	
8,419.39	87.83	268.25	7,381.36	-21.97	-1,001.24	1,000.96	0.18	0.15	-0.10	
1000'VS Ken Wilson 14&15 112H										
8,481.00	87.92	268.19	7,383.64	-23.88	-1,062.78	1,062.48	0.18	0.15	-0.10	
8,577.00	88.37	268.17	7,386.75	-26.93	-1,158.68	1,158.35	0.47	0.47	-0.02	
8,672.00	88.65	267.75	7,389.22	-30.31	-1,253.59	1,253.21	0.53	0.29	-0.44	

Legacy Directional Survey Report

Company:	Matador Resources Company	Local Co-ordinate Reference:	Well Ken Wilson 14&15 112H
Project:	Eddy County, New Mexico (NAD27)	TVD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Site:	Ken Wilson 14&15	MD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Well:	Ken Wilson 14&15 112H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.14 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,768.00	89.16	267.29	7,391.05	-34.46	-1,349.48	1,349.06	0.72	0.53	-0.48
8,864.00	89.86	267.24	7,391.87	-39.04	-1,445.36	1,444.89	0.73	0.73	-0.05
8,960.00	90.64	267.19	7,391.46	-43.71	-1,541.25	1,540.73	0.81	0.81	-0.05
9,055.00	92.04	267.44	7,389.23	-48.16	-1,636.12	1,635.54	1.50	1.47	0.26
9,151.00	89.57	268.69	7,387.89	-51.40	-1,732.04	1,731.43	2.88	-2.57	1.30
9,247.00	87.84	271.49	7,390.06	-51.25	-1,828.00	1,827.39	3.43	-1.80	2.92
9,343.00	87.41	271.55	7,394.03	-48.70	-1,923.89	1,923.30	0.45	-0.45	0.06
9,419.70	89.59	271.76	7,396.04	-46.49	-2,000.52	1,999.95	2.86	2.84	0.27
2000'VS Ken Wilson 14&15 112H									
9,438.00	90.11	271.81	7,396.09	-45.92	-2,018.82	2,018.25	2.86	2.84	0.27
9,534.00	90.58	271.35	7,395.51	-43.27	-2,114.78	2,114.23	0.69	0.49	-0.48
9,628.00	90.72	271.08	7,394.45	-41.28	-2,208.75	2,208.22	0.32	0.15	-0.29
9,724.00	89.77	270.79	7,394.03	-39.71	-2,304.74	2,304.22	1.03	-0.99	-0.30
9,818.00	92.09	271.52	7,392.51	-37.82	-2,398.70	2,398.19	2.59	2.47	0.78
9,915.00	93.36	271.45	7,387.90	-35.31	-2,495.55	2,495.07	1.31	1.31	-0.07
10,010.00	93.83	271.25	7,381.94	-33.07	-2,590.34	2,589.87	0.54	0.49	-0.21
10,106.00	92.74	271.58	7,376.44	-30.71	-2,686.15	2,685.70	1.19	-1.14	0.34
10,201.00	93.80	271.68	7,371.02	-28.01	-2,780.96	2,780.53	1.12	1.12	0.11
10,297.00	92.85	271.24	7,365.45	-25.57	-2,876.76	2,876.36	1.09	-0.99	-0.46
10,392.00	89.18	270.56	7,363.77	-24.08	-2,971.72	2,971.32	3.93	-3.86	-0.72
10,420.65	89.25	270.50	7,364.16	-23.81	-3,000.36	2,999.97	0.31	0.23	-0.21
3000'VS Ken Wilson 14&15 112H									
10,487.00	89.40	270.36	7,364.95	-23.31	-3,066.71	3,066.31	0.31	0.23	-0.21
10,583.00	89.68	270.26	7,365.72	-22.79	-3,162.70	3,162.31	0.31	0.29	-0.10
10,678.00	90.46	270.45	7,365.60	-22.21	-3,257.70	3,257.31	0.85	0.82	0.20
10,774.00	91.25	270.59	7,364.17	-21.33	-3,353.69	3,353.30	0.84	0.82	0.15
10,869.00	91.78	270.50	7,361.66	-20.43	-3,448.65	3,448.26	0.57	0.56	-0.09
10,965.00	90.83	269.56	7,359.47	-20.38	-3,544.62	3,544.23	1.39	-0.99	-0.98
11,058.00	91.42	269.68	7,357.65	-21.00	-3,637.60	3,637.20	0.65	0.63	0.13
11,152.00	92.23	269.46	7,354.65	-21.70	-3,731.55	3,731.14	0.89	0.86	-0.23
11,246.00	91.56	269.48	7,351.54	-22.57	-3,825.49	3,825.07	0.71	-0.71	0.02
11,340.00	91.33	269.51	7,349.17	-23.40	-3,919.46	3,919.02	0.25	-0.24	0.03
11,420.67	91.99	269.56	7,346.84	-24.05	-4,000.09	3,999.64	0.82	0.82	0.06
4000'VS Ken Wilson 14&15 112H									
11,433.00	92.09	269.57	7,346.40	-24.15	-4,012.41	4,011.96	0.82	0.82	0.06
11,528.00	92.37	269.38	7,342.70	-25.02	-4,107.34	4,106.87	0.36	0.29	-0.20
11,624.00	93.13	269.08	7,338.10	-26.30	-4,203.22	4,202.74	0.85	0.79	-0.31
11,720.00	89.90	270.14	7,335.56	-26.96	-4,299.17	4,298.68	3.54	-3.36	1.10
11,815.00	90.52	270.74	7,335.21	-26.23	-4,394.16	4,393.67	0.91	0.65	0.63
11,941.00	89.61	269.35	7,335.07	-26.13	-4,520.16	4,519.66	1.32	-0.72	-1.10
12,034.00	90.28	268.76	7,335.16	-27.66	-4,613.15	4,612.63	0.96	0.72	-0.63
12,129.00	91.88	268.59	7,333.37	-29.86	-4,708.10	4,707.56	1.69	1.68	-0.18
12,224.00	92.92	270.01	7,329.39	-31.02	-4,803.01	4,802.45	1.85	1.09	1.49
12,319.00	92.13	270.89	7,325.20	-30.27	-4,897.91	4,897.35	1.24	-0.83	0.93

Legacy Directional

Survey Report

Company:	Matador Resources Company	Local Co-ordinate Reference:	Well Ken Wilson 14&15 112H
Project:	Eddy County, New Mexico (NAD27)	TVD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Site:	Ken Wilson 14&15	MD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Well:	Ken Wilson 14&15 112H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.14 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,413.00	90.00	270.96	7,323.45	-28.76	-4,991.88	4,991.33	2.27	-2.27	0.07
12,421.98	90.05	271.01	7,323.45	-28.60	-5,000.85	5,000.31	0.78	0.54	0.57
5000'VS Ken Wilson 14&15 112H									
12,508.00	90.51	271.50	7,323.03	-26.72	-5,086.85	5,086.32	0.78	0.54	0.57
12,601.00	91.80	271.01	7,321.16	-24.68	-5,179.81	5,179.29	1.48	1.39	-0.53
12,694.00	91.63	271.80	7,318.37	-22.40	-5,272.74	5,272.24	0.87	-0.18	0.85
12,789.00	91.54	272.49	7,315.75	-18.85	-5,367.63	5,367.17	0.73	-0.09	0.73
12,883.00	91.35	272.41	7,313.38	-14.83	-5,461.52	5,461.09	0.22	-0.20	-0.09
12,976.00	89.53	273.08	7,312.66	-10.38	-5,554.40	5,554.02	2.09	-1.96	0.72
13,070.00	89.30	273.05	7,313.62	-5.35	-5,648.27	5,647.92	0.25	-0.24	-0.03
13,164.00	90.00	273.02	7,314.20	-0.37	-5,742.13	5,741.83	0.75	0.74	-0.03
13,258.00	89.81	272.59	7,314.35	4.23	-5,836.02	5,835.76	0.50	-0.20	-0.46
13,351.00	90.23	272.12	7,314.32	8.05	-5,928.94	5,928.72	0.68	0.45	-0.51
13,422.24	91.47	271.91	7,313.26	10.55	-6,000.12	5,999.92	1.76	1.74	-0.29
6000'VS Ken Wilson 14&15 112H									
13,446.00	91.88	271.84	7,312.57	11.33	-6,023.86	6,023.67	1.76	1.74	-0.29
13,542.00	93.59	271.72	7,307.99	14.31	-6,119.70	6,119.54	1.79	1.78	-0.13
13,638.00	91.57	272.21	7,303.67	17.60	-6,215.54	6,215.40	2.17	-2.10	0.51
13,734.00	90.42	272.84	7,302.00	21.83	-6,311.44	6,311.33	1.37	-1.20	0.66
13,829.00	89.61	273.21	7,301.98	26.84	-6,406.30	6,406.25	0.94	-0.85	0.39
13,925.00	89.86	272.81	7,302.42	31.88	-6,502.17	6,502.16	0.49	0.26	-0.42
14,021.00	91.94	272.50	7,300.91	36.33	-6,598.05	6,598.08	2.19	2.17	-0.32
14,117.00	89.86	273.04	7,299.40	40.96	-6,693.92	6,693.99	2.24	-2.17	0.56
14,212.00	89.58	272.80	7,299.87	45.80	-6,788.79	6,788.91	0.39	-0.29	-0.25
14,308.00	90.11	273.24	7,300.13	50.86	-6,884.66	6,884.82	0.72	0.55	0.46
14,404.00	90.73	273.21	7,299.42	56.26	-6,980.50	6,980.72	0.65	0.65	-0.03
14,421.61	91.03	273.33	7,299.15	57.27	-6,998.08	6,998.30	1.83	1.68	0.70
7000'VS Ken Wilson 14&15 112H									
14,499.00	92.33	273.88	7,296.89	62.13	-7,075.29	7,075.55	1.83	1.68	0.71
14,595.00	90.81	271.74	7,294.26	66.84	-7,171.13	7,171.43	2.73	-1.58	-2.23
14,690.00	91.04	269.63	7,292.72	67.97	-7,266.10	7,266.42	2.23	0.24	-2.22
14,785.00	92.78	268.76	7,289.56	66.64	-7,361.03	7,361.33	2.05	1.83	-0.92
14,880.00	92.44	268.30	7,285.23	64.20	-7,455.90	7,456.17	0.60	-0.36	-0.48
14,976.00	90.59	268.74	7,282.69	61.73	-7,551.83	7,552.07	1.98	-1.93	0.46
15,071.00	92.77	268.29	7,279.91	59.27	-7,646.76	7,646.96	2.34	2.29	-0.47
15,167.00	91.51	268.90	7,276.32	56.91	-7,742.66	7,742.84	1.46	-1.31	0.64
15,263.00	91.18	267.70	7,274.07	54.07	-7,838.59	7,838.73	1.30	-0.34	-1.25
15,358.00	90.39	268.02	7,272.77	50.52	-7,933.51	7,933.62	0.90	-0.83	0.34
15,425.14	91.54	267.99	7,271.64	48.18	-8,000.60	8,000.68	1.72	1.72	-0.04
8000' VS Ken Wilson 14&15 112H									
15,453.00	92.02	267.98	7,270.77	47.20	-8,028.43	8,028.49	1.72	1.72	-0.04
15,548.00	91.06	269.90	7,268.22	45.45	-8,123.37	8,123.42	2.26	-1.01	2.02
15,644.00	90.87	271.19	7,266.60	46.36	-8,219.35	8,219.40	1.36	-0.20	1.34
15,739.00	92.33	270.56	7,263.95	47.81	-8,314.30	8,314.36	1.67	1.54	-0.66

Legacy Directional Survey Report

Company:	Matador Resources Company	Local Co-ordinate Reference:	Well Ken Wilson 14&15 112H
Project:	Eddy County, New Mexico (NAD27)	TVD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Site:	Ken Wilson 14&15	MD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Well:	Ken Wilson 14&15 112H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.14 Single User Db

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
15,835.00	89.97	270.22	7,262.02	48.47	-8,410.27	8,410.33	2.48	-2.46	-0.35	
15,930.00	90.08	269.83	7,261.98	48.51	-8,505.27	8,505.33	0.43	0.12	-0.41	
16,026.00	91.57	269.11	7,260.60	47.62	-8,601.25	8,601.30	1.72	1.55	-0.75	
16,122.00	94.10	268.55	7,255.85	45.66	-8,697.11	8,697.13	2.70	2.64	-0.58	
16,217.00	92.86	269.72	7,250.08	44.23	-8,791.92	8,791.92	1.79	-1.31	1.23	
16,313.00	90.81	271.11	7,247.01	44.93	-8,887.86	8,887.86	2.58	-2.14	1.45	
16,409.00	92.55	271.18	7,244.20	46.84	-8,983.80	8,983.81	1.81	1.81	0.07	
16,425.01	92.41	271.24	7,243.50	47.18	-8,999.78	8,999.80	0.95	-0.88	0.35	
9000' BS Ken Wilson 14&15 112H										
16,504.00	91.71	271.51	7,240.66	49.07	-9,078.70	9,078.74	0.95	-0.88	0.35	
16,600.00	93.22	271.29	7,236.54	51.42	-9,174.58	9,174.63	1.59	1.57	-0.23	
16,695.00	92.35	270.36	7,231.92	52.78	-9,269.46	9,269.52	1.34	-0.92	-0.98	
16,791.00	91.40	270.97	7,228.78	53.90	-9,365.40	9,365.47	1.18	-0.99	0.64	
16,886.00	90.34	270.88	7,227.34	55.43	-9,460.38	9,460.45	1.12	-1.12	-0.09	
16,982.00	90.59	270.85	7,226.56	56.88	-9,556.36	9,556.45	0.26	0.26	-0.03	
17,077.00	92.55	270.70	7,223.95	58.16	-9,651.31	9,651.41	2.07	2.06	-0.16	
17,173.00	92.02	270.84	7,220.13	59.45	-9,747.23	9,747.33	0.57	-0.55	0.15	
17,268.00	93.64	271.08	7,215.44	61.04	-9,842.09	9,842.21	1.72	1.71	0.25	
17,364.00	92.21	270.59	7,210.54	62.44	-9,937.96	9,938.08	1.57	-1.49	-0.51	
17,425.65	90.97	270.49	7,208.83	63.02	-9,999.58	9,999.71	2.02	-2.01	-0.17	
10000'VS Ken Wilson 14&15 112H										
17,460.00	90.28	270.43	7,208.45	63.29	-10,033.93	10,034.05	2.02	-2.01	-0.17	
17,555.00	92.04	270.07	7,206.53	63.71	-10,128.90	10,129.03	1.89	1.85	-0.38	
17,650.00	93.19	269.68	7,202.20	63.50	-10,223.80	10,223.92	1.28	1.21	-0.41	
17,683.00	93.67	269.41	7,200.22	63.24	-10,256.74	10,256.85	1.67	1.45	-0.82	
Last Survey 17683.00 MD / 7200.22 TVD										
17,701.25	93.67	269.41	7,199.05	63.05	-10,274.95	10,275.07	0.00	0.00	0.00	
Ken Wilson 14&15 112H LTP										
17,702.50	93.67	269.41	7,198.97	63.04	-10,276.20	10,276.31	0.00	0.00	0.00	
LTP 17703.00 MD / 7198.94 TVD										
17,741.24	93.67	269.41	7,196.49	62.64	-10,314.85	10,314.96	0.00	0.00	0.00	
Ken Wilson 14&15 112H BHL										
17,749.00	93.67	269.41	7,196.00	62.56	-10,322.60	10,322.71	0.00	0.00	0.00	
PTB 17749.00 MD / 7196.00 TVD										

Design Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment	
		+N/-S (usft)	+E/-W (usft)		
6,997.20	6,970.25	-77.51	257.63	FTP 7000.00 MD / 6972.83 TVD	
17,683.00	7,200.22	63.24	-10,256.74	Last Survey 17683.00 MD / 7200.22 TVD	
17,702.50	7,198.97	63.04	-10,276.20	LTP 17703.00 MD / 7198.94 TVD	
17,749.00	7,196.00	62.56	-10,322.60	PTB 17749.00 MD / 7196.00 TVD	

Legacy Directional
Survey Report

Company:	Matador Resources Company	Local Co-ordinate Reference:	Well Ken Wilson 14&15 112H
Project:	Eddy County, New Mexico (NAD27)	TVD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Site:	Ken Wilson 14&15	MD Reference:	GL: 2966' + 28.5' KB @ 2994.50usft
Well:	Ken Wilson 14&15 112H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.14 Single User Db


Checked By: _____	Approved By: _____	Date: _____
-------------------	--------------------	-------------



Rig: Patterson 256

Company: Matador Resources Company
Field: Eddy County, New Mexico (NAD27)
Location: Ken Wilson 14&15
Well: Ken Wilson 14&15 112H
Wellbore: OH
Plan: Plan 2
GL: GL: 2966' + 28.5' KB @ 2994.50usft


PROJECT DETAILS: Eddy County, New Mexico (NAD27)
Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Mean Sea Level

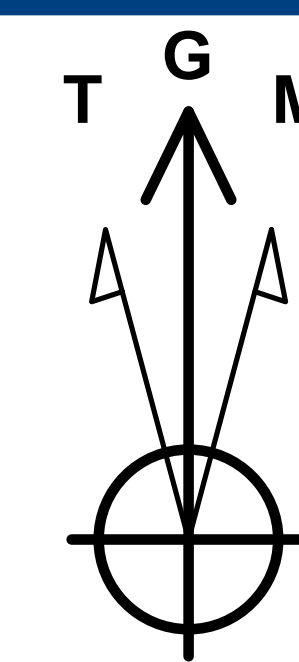

Azimuths to Grid North
True North: -0.15°
Magnetic North: 6.56°
Magnetic Field
Strength: 47397.3nT
Dip Angle: 59.81°
Date: 12/1/2021
Model: IGRF2020



To convert a Magnetic Direction to a Grid Direction, Add 6.56°



WELL DETAILS: Ken Wilson 14&15 112H

+N/-S	+E/-W	GL: 2966' + 28.5' KB @ 2994.50usft	2966.00	Longitude
0.00	0.00	Northing 443720.00	Easting 587603.00	Latitude 32.219586

CASING DETAILS

TVD	MD	Size
600.00	600.00	13-3/8
2750.00	2754.92	9-5/8

SECTION DETAILS




Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	1700.00	0.00	0.00	1700.00	0.00	0.00	0.00	0.00	0.00	
3	2475.06	7.75	106.42	2472.70	-14.79	50.21	1.00	106.42	-50.36	
4	4203.01	7.75	106.42	4184.87	-80.65	273.74	0.00	0.00	-274.55	
5	4719.72	0.00	0.00	4700.00	-90.51	307.22	1.50	180.00	-308.12	
6	6847.15	0.00	0.00	6827.43	-90.51	307.22	0.00	0.00	-308.12	
7	7755.15	90.80	273.90	7400.33	-51.00	-272.39	10.00	273.90	271.86	
8	7976.78	90.80	270.58	7397.24	-42.34	-493.80	1.50	-89.97	493.34	
9	8483.48	90.80	270.58	7390.16	-37.26	-1000.43	0.00	0.00	1000.00	1000'VS Ken Wilson 14&15 112H
10	9483.58	90.80	270.58	7376.19	-27.22	-2000.38	0.00	0.00	2000.00	2000'VS Ken Wilson 14&15 112H
11	10483.68	90.80	270.58	7362.22	-17.18	-3000.33	0.00	0.00	3000.00	3000'VS Ken Wilson 14&15 112H
12	11483.78	90.80	270.58	7348.26	-7.13	-4000.28	0.00	0.00	4000.00	4000'VS Ken Wilson 14&15 112H
13	12483.87	90.80	270.58	7334.29	2.91	-5000.23	0.00	0.00	5000.00	5000'VS Ken Wilson 14&15 112H
14	13483.97	90.80	270.58	7320.32	12.95	-6000.18	0.00	0.00	6000.00	6000'VS Ken Wilson 14&15 112H
15	13493.97	90.80	270.58	7320.18	13.05	-6010.17	0.00	0.00	6010.00	
16	13533.62	91.40	270.58	7319.42	13.45	-6049.82	1.50	0.00	6049.65	
17	14484.26	91.40	270.58	7296.28	22.99	-7000.13	0.00	0.00	7000.00	7000'VS Ken Wilson 14&15 112H
18	15484.56	91.40	270.58	7271.93	33.03	-8000.08	0.00	0.00	8000.00	8000' VS Ken Wilson 14&15 112H
19	16484.85	91.40	270.58	7247.57	43.07	-9000.03	0.00	0.00	9000.00	9000' BS Ken Wilson 14&15 112H
20	17485.15	91.40	270.58	7223.22	53.11	-9999.97	0.00	0.00	10000.00	10000'VS Ken Wilson 14&15 112H
21	17761.27	91.40	270.58	7216.50	55.88	-10276.00	0.00	0.00	10276.04	Ken Wilson 14&15 112H LTP
22	17801.29	91.40	270.58	7215.52	56.29	-10316.01	0.00	0.00	10316.05	Ken Wilson 14&15 112H BHL

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
250.00	250.00	Rustler
2640.26	2644.17	Lamar
2692.38	2696.77	Bell Canyon
3592.44	3605.12	Cherry Canyon
4797.38	4817.10	Brushy Canyon
6353.38	6373.10	Bone Spring Lime
7276.59	7363.38	First Bone Spring Sand
7303.94	7409.85	Top Target
7318.54	7437.12	Mid Target
7333.09	7466.66	Bottom Target
7360.07	7530.94	M. FBSS

Hardlines:
100' FWL / FEL
330' FNL / FSL

Target Box:
50' L/R

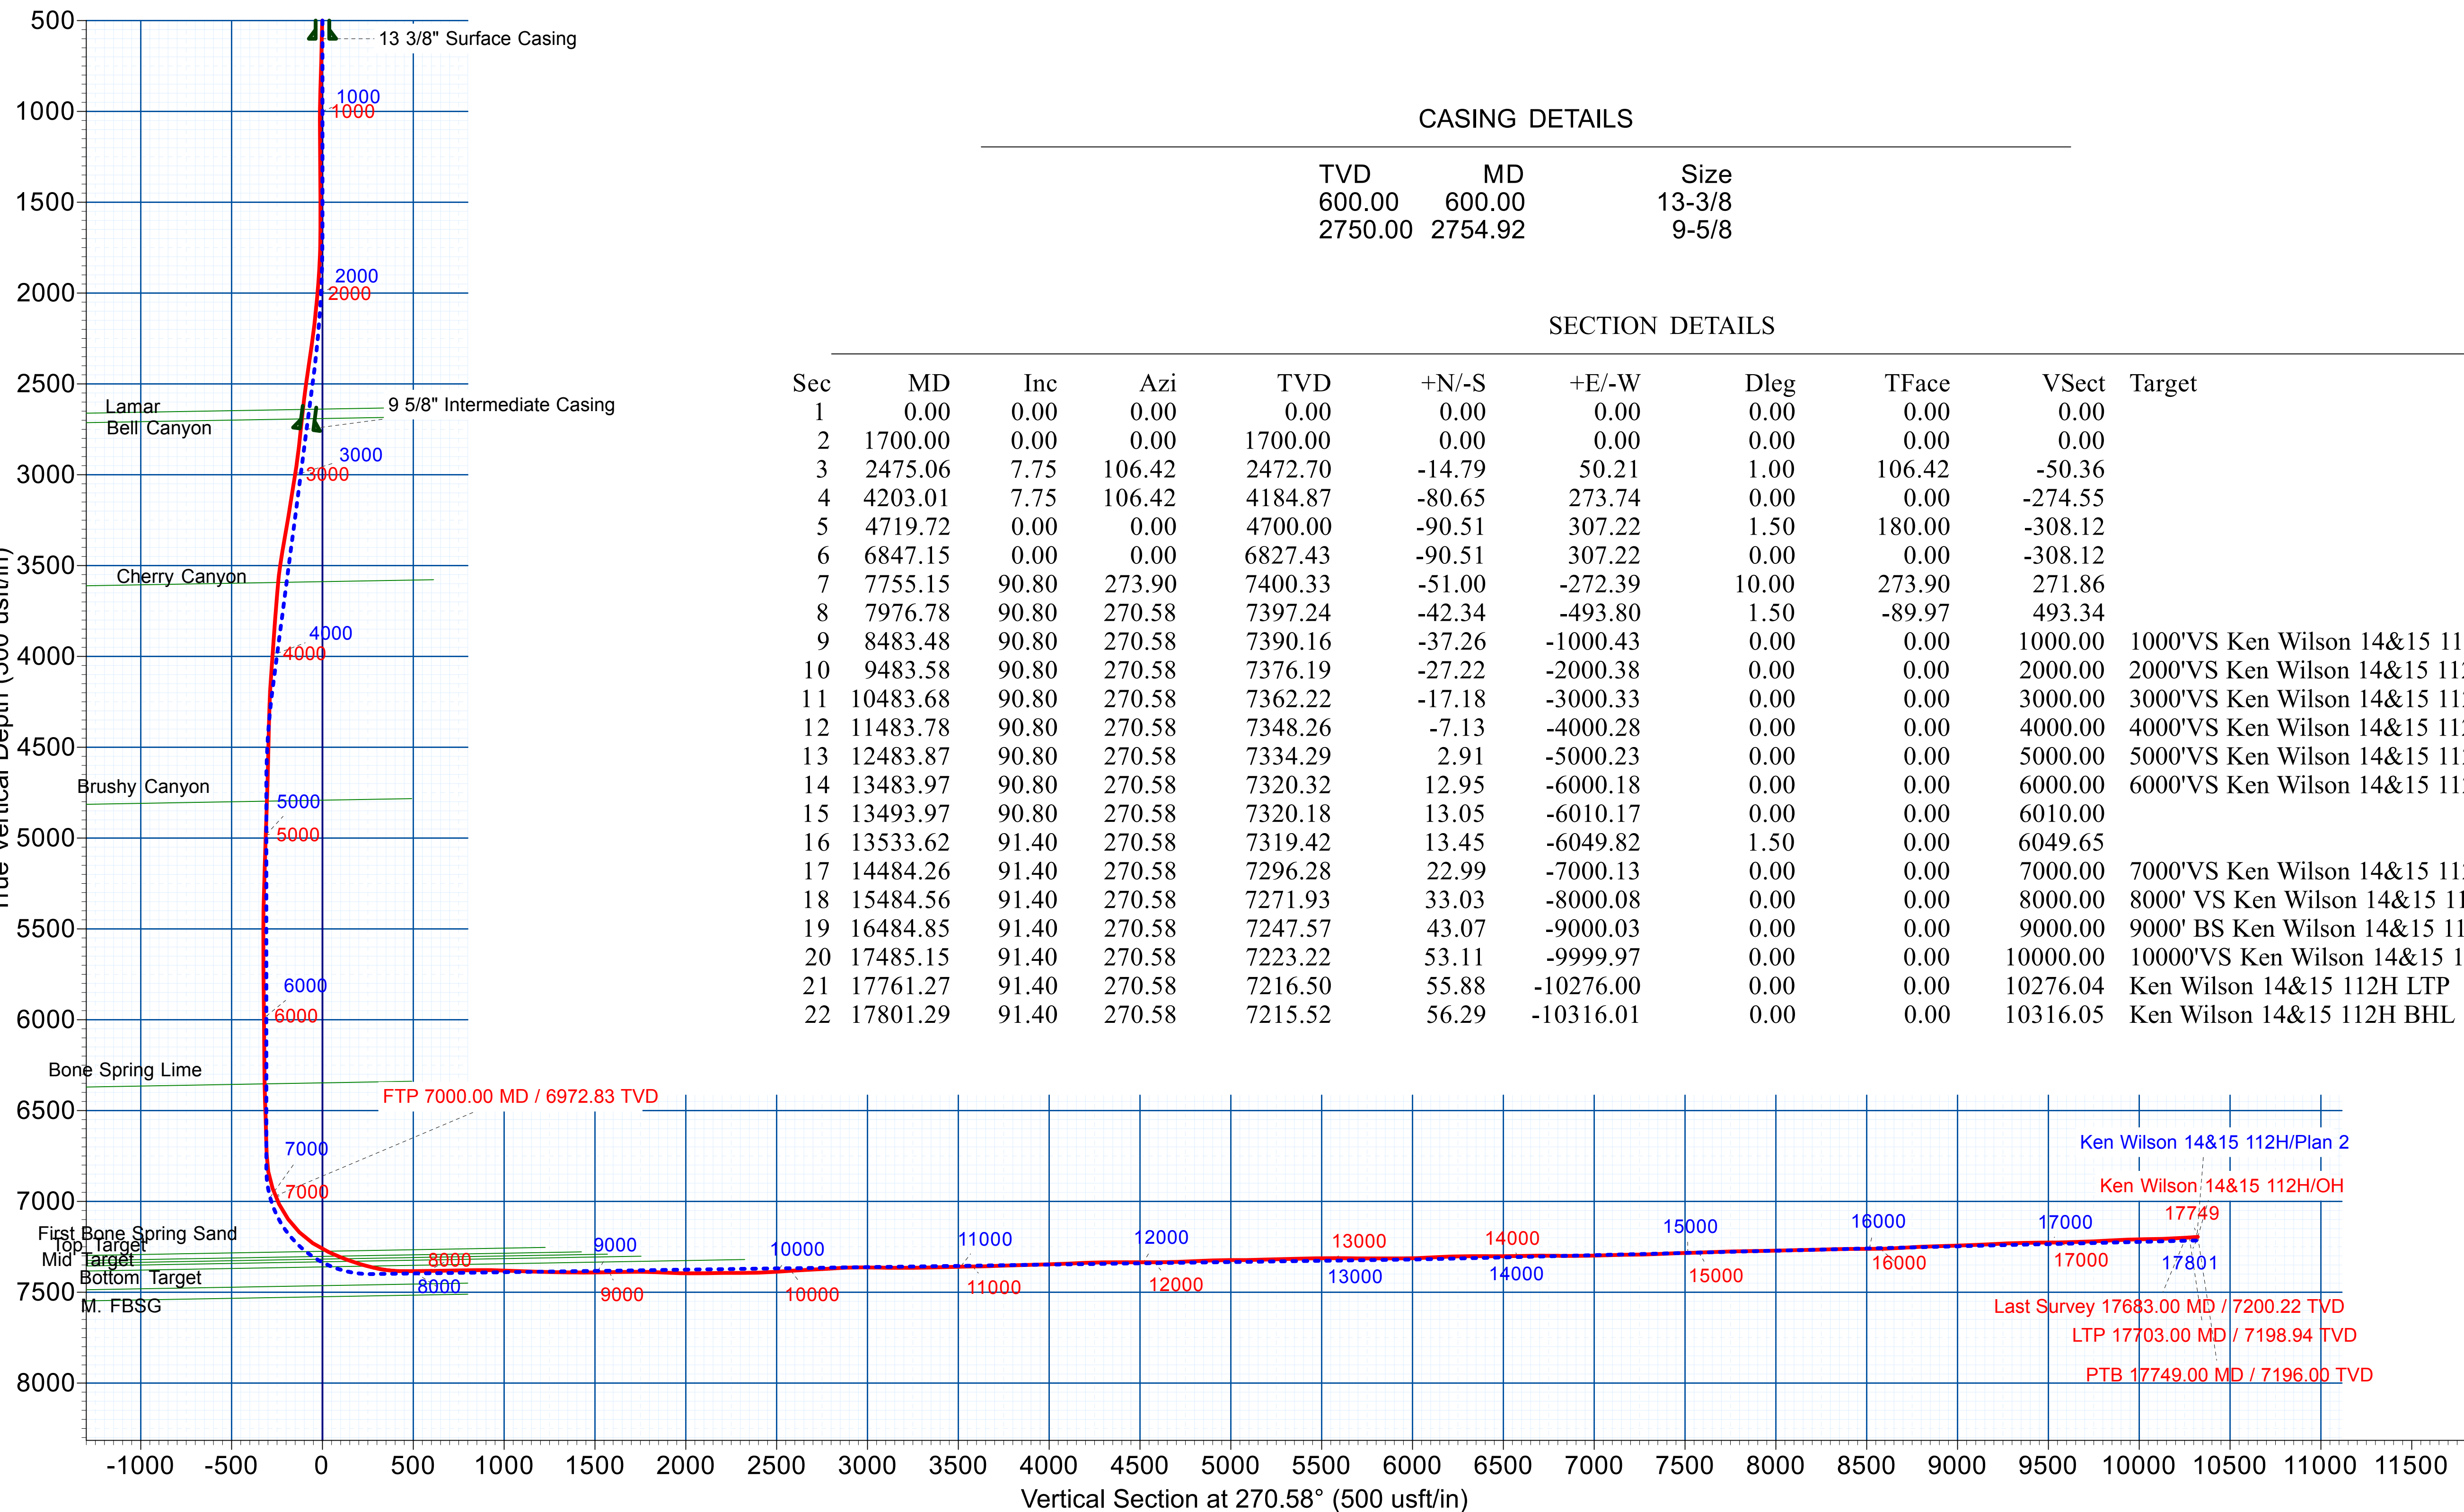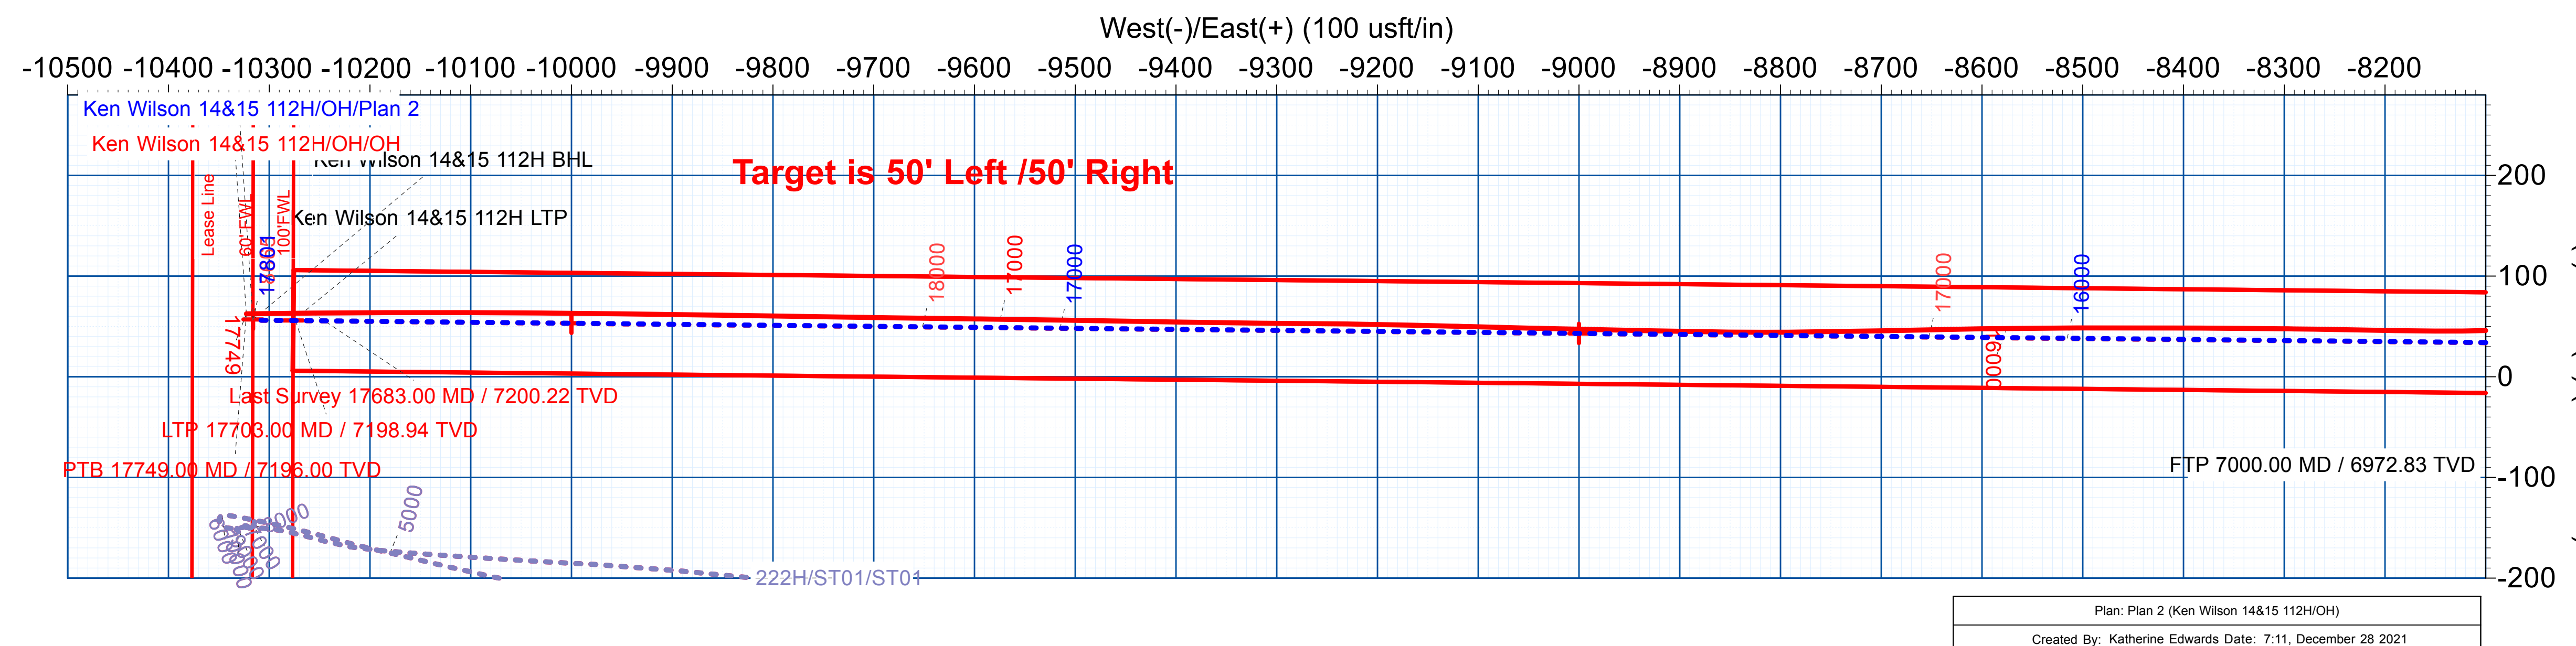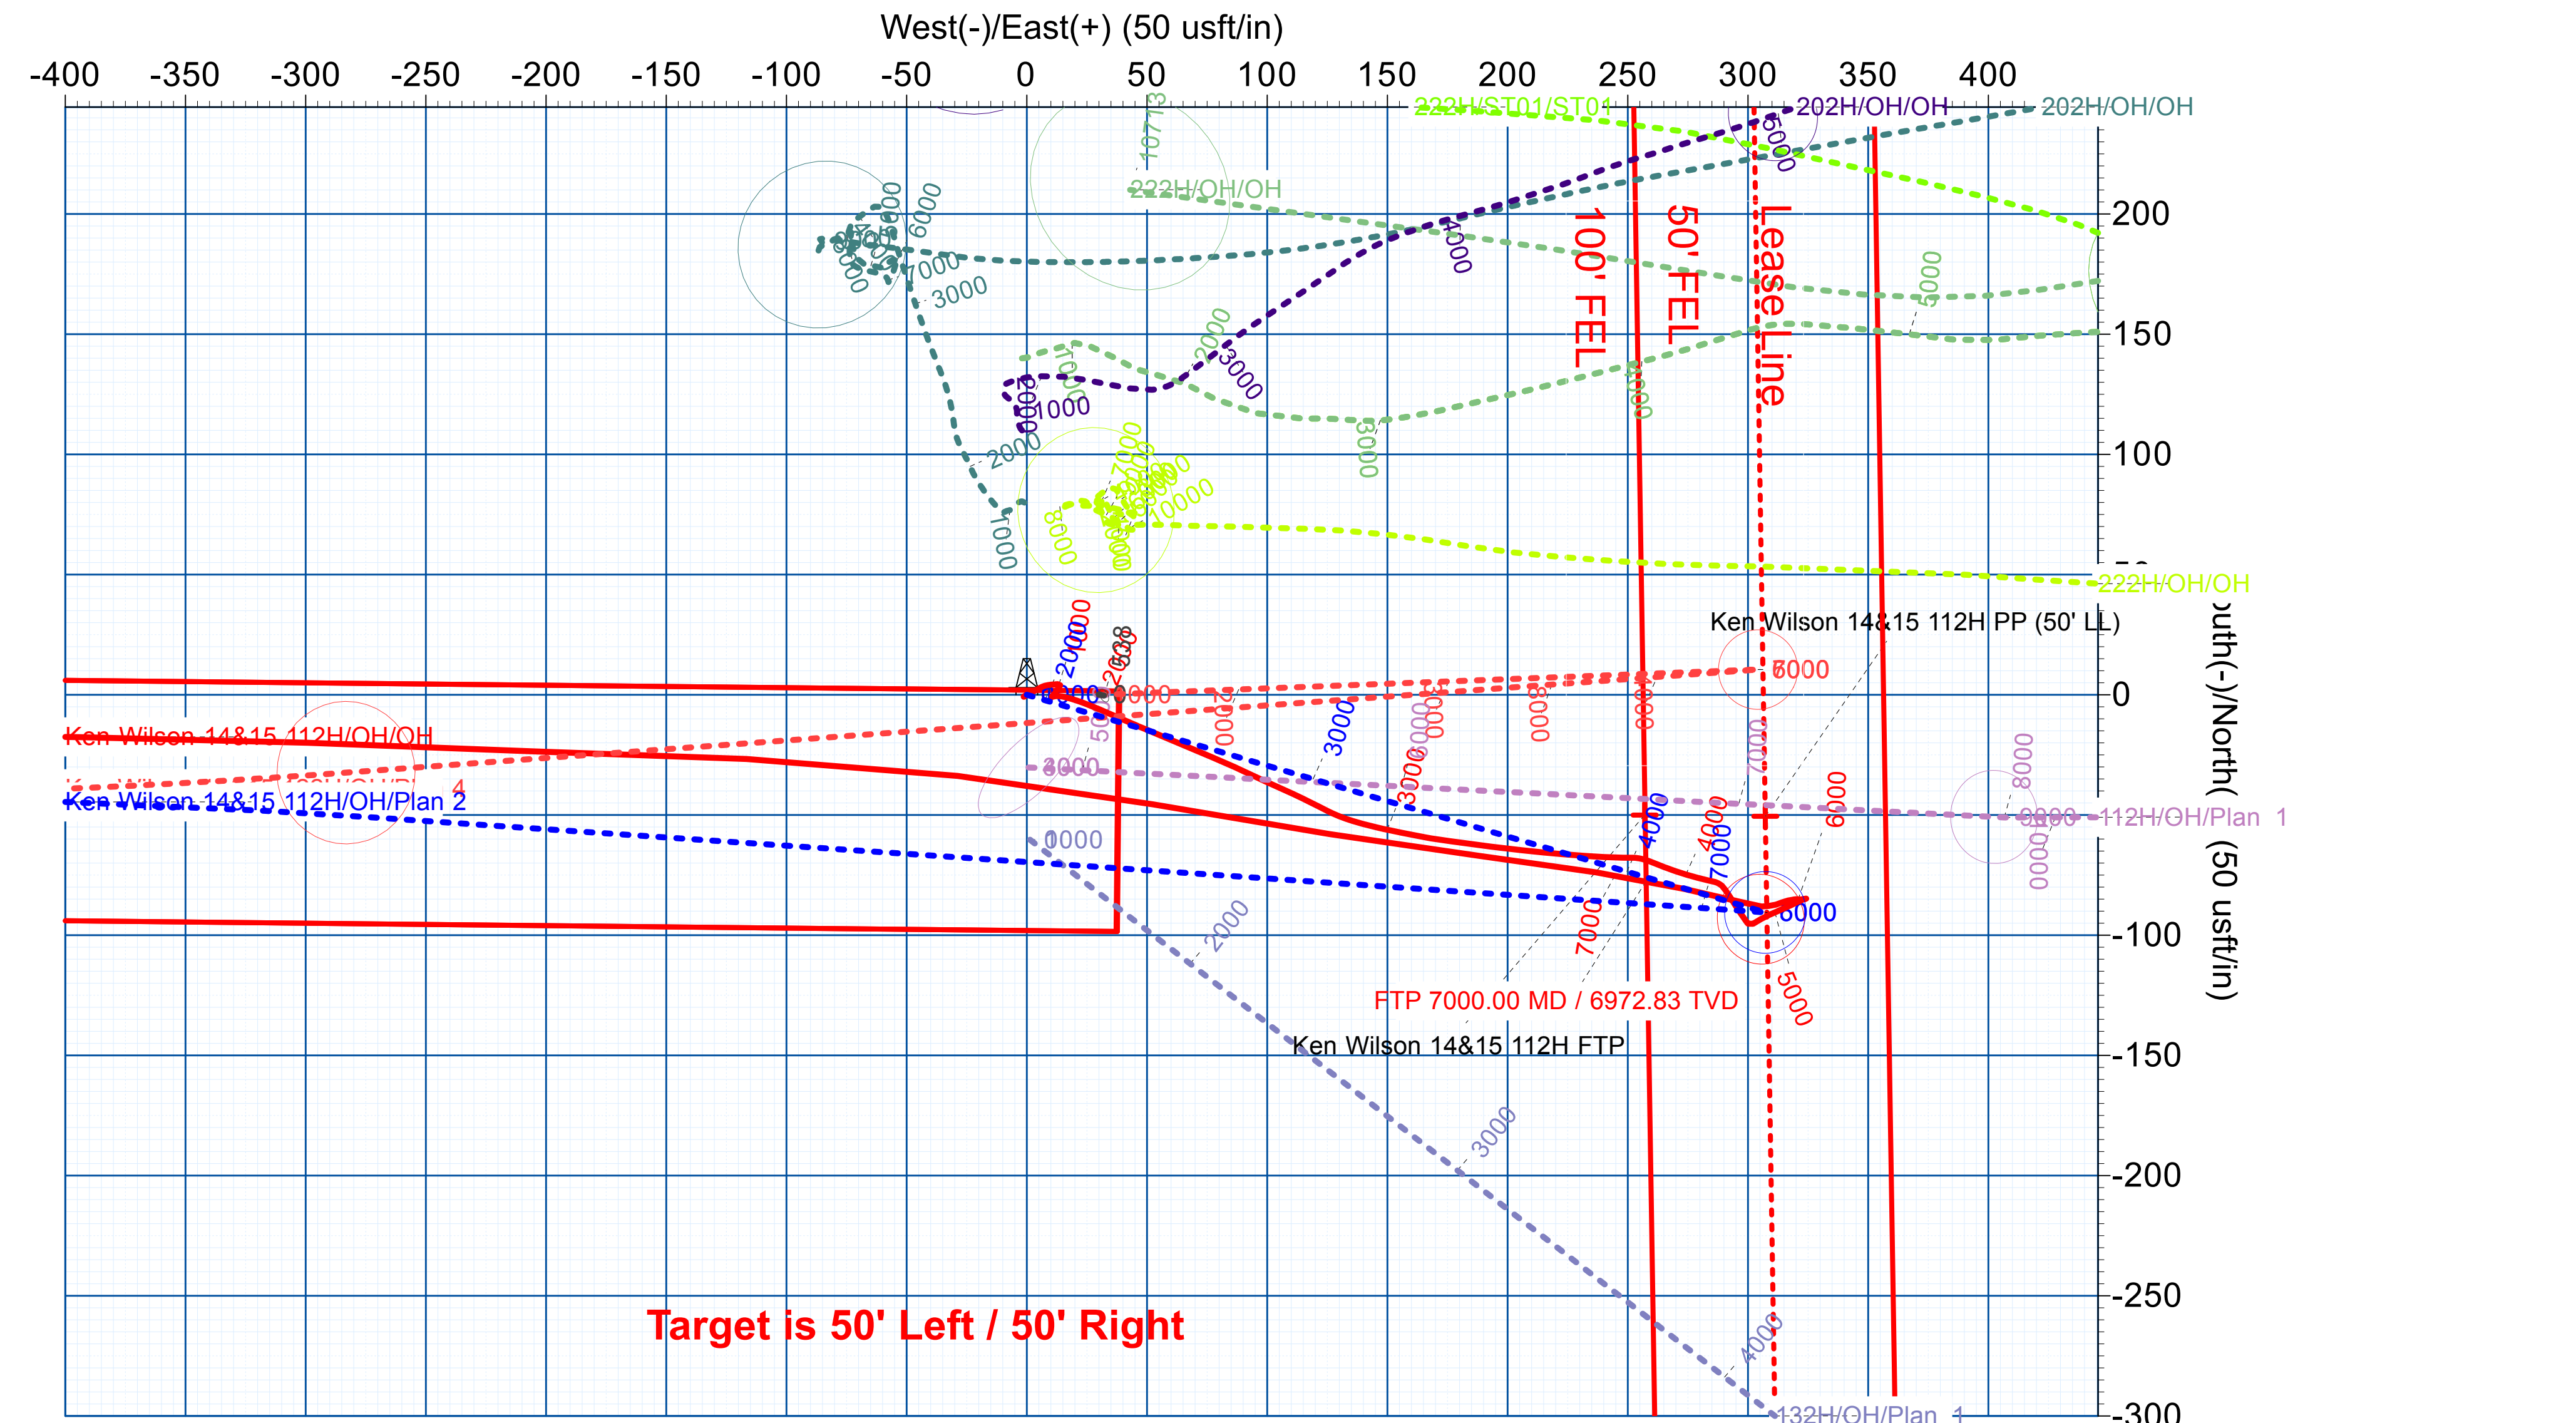

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 99808

ACKNOWLEDGMENTS

Operator: MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240	OGRID: 228937
	Action Number: 99808
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 99808

CONDITIONS

Operator: MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240	OGRID: 228937
	Action Number: 99808
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	RT EXPIRES 7/23/2022	5/4/2022