

District I
1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

District II
811 S. First St., Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☒ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 05/27/2022
⁴ API Number 30 - 015-48930	⁵ Pool Name PURPLE SAGE WOLFCAMP	⁶ Pool Code 98220
⁷ Property Code: 329988	⁸ Property Name: TAILS CC 10-3 FEDERAL COM	⁹ Well Number: 312H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
B	15	24S	29E		305	NORTH	1880	EAST	EDDY

¹¹ Bottom Hole Location FTP- 145' FSL 2288' FEL LTP- 159' FNL 2233' FEL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L2	3	24S	29E		31	NORTH	2226	EAST	EDDY
¹² Lse Code F	¹³ Producing Method Code : P		¹⁴ Gas Connection Date: 05/24/22		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 12/27/21	²² Ready Date 05/27/2022	²³ TD 20886'M 10289'V	²⁴ PBTD 20829'M 10289'V	²⁵ Perforations 10428-20757'	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size		²⁹ Depth Set		³⁰ Sacks Cement
14-3/4"	10-3/4"		490'		515
9-7/8"	7-5/8"		9716'		2067
6-3/4"	5-1/2"		20854'		866
	2-3/8" tbg		9879'		na

V. Well Test Data

³¹ Date New Oil 05/24/22	³² Gas Delivery Date 05/24/22	³³ Test Date 06/21/22	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 1663
³⁷ Choke Size 128/128	³⁸ Oil 3242	³⁹ Water 6168	⁴⁰ Gas 5432		⁴¹ Test Method P

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name: JANA MENDIOLA


Title: SR. REGULATORY ANALYST

E-mail Address:
Janalyn_mendiola@oxy.com

Date: 08/24/2022 Phone: 422-685-5936

OIL CONSERVATION DIVISION

Approved by:



Title: Petroleum Engineer

Approval Date: 09/20/22

COA: (1) File 3160-4 Completion Report within 10 days to NMOCD after BLM approval. (2) File Well Logs.

1625 N. French Dr., Hobbs, NM 88240
 Phone: (575) 393-6161 Fax: (575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone: (575) 748-1283 Fax: (575) 748-9720
District III
 1000 Rio Brazos Road, Aztec, NM 87410
 Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505
 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
 Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Revised August 1, 2011
 Submit one copy to appropriate
 District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-48930	² Pool Code 98220	³ Pool Name PURPLE SAGE; WOLFCAMP
⁴ Property Code 329988	Property Name TAILS CC 10_3 FED COM	⁶ Well Number 312H
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC	⁹ Elevation 2938'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	15	24S	29E		305	NORTH	1880	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B 1-2--	3	24S	29E		31	NORTH	2226	EAST	EDDY

¹² Dedicated Acres 1278.62	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. NSL-8246
---	-------------------------------	----------------------------------	--

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 652903.76' / Y: 456331.32' B - X: 655544.67' / Y: 456330.90' C - X: 655569.82' / Y: 453685.20' D - X: 655595.08' / Y: 451030.27' E - X: 655608.14' / Y: 448375.24' F - X: 655621.54' / Y: 445720.18' G - X: 652967.76' / Y: 445724.10' H - X: 650312.09' / Y: 445726.24' I - X: 650298.13' / Y: 448381.95' J - X: 650284.73' / Y: 451033.82' K - X: 650273.76' / Y: 453689.39' L - X: 650262.85' / Y: 456331.74'	CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 611720.17' / Y: 456272.14' B - X: 614361.07' / Y: 456271.72' C - X: 614386.15' / Y: 453626.09' D - X: 614411.31' / Y: 450971.20' E - X: 614424.32' / Y: 448316.23' F - X: 614437.66' / Y: 445661.21' G - X: 611783.88' / Y: 445665.15' H - X: 609128.23' / Y: 445667.29' I - X: 609114.33' / Y: 448322.94' J - X: 609101.00' / Y: 450974.76' K - X: 609090.10' / Y: 453630.27' L - X: 609079.26' / Y: 456272.56'	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature: Date: 05/25/2022 Printed Name: JANA MENDIOLA E-mail Address: janalyn_mendiola@oxy.com	
	BOTTOM HOLE LOCATION 31' FNL 2226' FEL, SECTION 3 20886' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 653318.43' / Y: 456300.57' LAT: 32.25392627N / LON: 103.97108978W NAD 27, SPCS NM EAST X: 612134.83' / Y: 456241.40' LAT: 32.25380382N / LON: 103.97060020W	LAST TAKE POINT 159' FNL 2233' FEL, SECTION 3 20757' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 653312.78' / Y: 456172.55' LAT: 32.25357442N / LON: 103.97110945W NAD 27, SPCS NM EAST X: 612129.18' / Y: 456113.38' LAT: 32.25345197N / LON: 103.97061989W	FIRST TAKE POINT 145' FSL 2288' FEL, SECTION 10 10428' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 653333.13' / Y: 445868.06' LAT: 32.22524878N / LON: 103.97115604W NAD 27, SPCS NM EAST X: 612149.25' / Y: 445809.10' LAT: 32.22512601N / LON: 103.97066750W	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. Date of Survey: MAY 24, 2022 Signature and Seal of Professional Surveyor: Certificate Number: DAVID W. MYERS 11403
	KICK OFF POINT 218' FNL 2155' FEL, SECTION 15 9746' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 653467.57' / Y: 445505.25' LAT: 32.22425022N / LON: 103.97072523W NAD 27, SPCS NM EAST X: 612283.69' / Y: 445448.30' LAT: 32.22412744N / LON: 103.97023674W	SURFACE HOLE LOCATION 305' FNL 1880' FEL, SECTION 15 0' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 653742.70' / Y: 445418.00' LAT: 32.22400783N / LON: 103.96983648W NAD 27, SPCS NM EAST X: 612558.81' / Y: 445359.05' LAT: 32.22388504N / LON: 103.96934803W	NEAREST TO LEASE MD = 13,304' FURTHEST FROM LEASE MD = 11,836' FTP SHL KOP	DAVID W. MYERS NEW MEXICO PROFESSIONAL SURVEYOR 11403

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99978625 Convergence Angle: 00°11'10.650012"

Schlumberger



OXY



Borehole:	Well:	Field:	Structure:
Tails CC 10_3 Federal Com 312H	Tails CC 10_3 Federal Com 312H	NM Eddy County (NAD 83)	Oxy Tails CC 10_3 Federal Com Pad_Citadel 2

Gravity & Magnetic Parameters	Surface Location	NAD83 New Mexico State Plane, Eastern Zone, US Feet	Miscellaneous
Model: IFR1 MagDec: 6.8°	Dip: 59.951° FS: 47606.1nT Gravity FS: 998.471mg (9.80665 Based)	Date: 27-Mar-2022 Lat: N 32 13 26.43 Northing: 445418RUS Grid Conv: 0.1938° Scale Fact: 0.99992356	Slot: Tails CC 10_3 Federal Com 312H Plan: Oxy Tails CC 10_3 Federal Com 312H Gyro-MWD 0' to 20886MD

Critical Points								
Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	
First Gyro Survey	94.58	0.13	12.12	94.58	0.08	0.08	0.02	0.18
Last Gyro Survey	477.39	0.55	55.69	477.38	0.81	0.89	2.18	0.14
First SLB Survey	576.00	0.24	344.88	575.99	1.26	1.36	2.52	0.53
Actual KOP	9746.20	14.80	277.43	9719.63	97.63	87.25	-275.13	3.52
Wolfcamp A Intersection	10258.28	48.48	354.46	10147.40	325.55	310.99	-389.79	7.67
100' FSL Crossing	10377.00	59.70	351.07	10218.60	419.91	404.94	-402.26	15.90
Exit Target Box	11572.00	88.72	355.66	10290.50	1603.11	1586.03	-480.41	0.85
Enter Target Box	12089.00	88.58	3.64	10302.16	2119.26	2102.37	-484.97	1.79
Exit Target Box	12816.00	88.77	8.76	10311.99	2835.61	2822.83	-390.29	1.26
Enter Target Box	14169.00	89.09	356.80	10283.88	4183.39	4171.21	-400.06	0.65
100' FNL Crossing	20815.00	90.06	2.44	10289.31	10820.89	10812.47	-427.03	0.80
Final MWD	20859.00	90.11	2.09	10289.25	10864.76	10856.44	-425.29	0.80
Proj to TD	20886.00	90.11	2.09	10289.20	10891.68	10883.42	-424.31	0.00

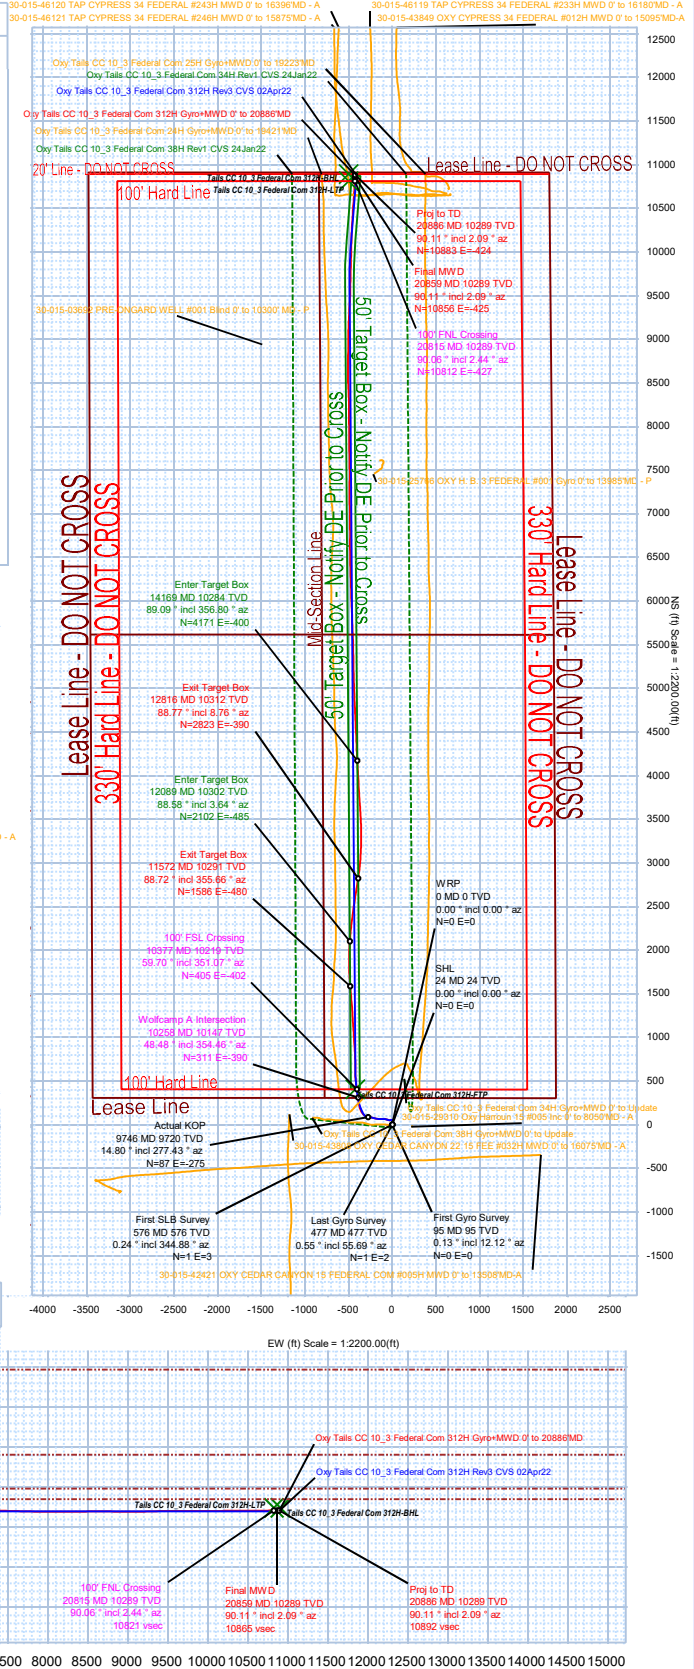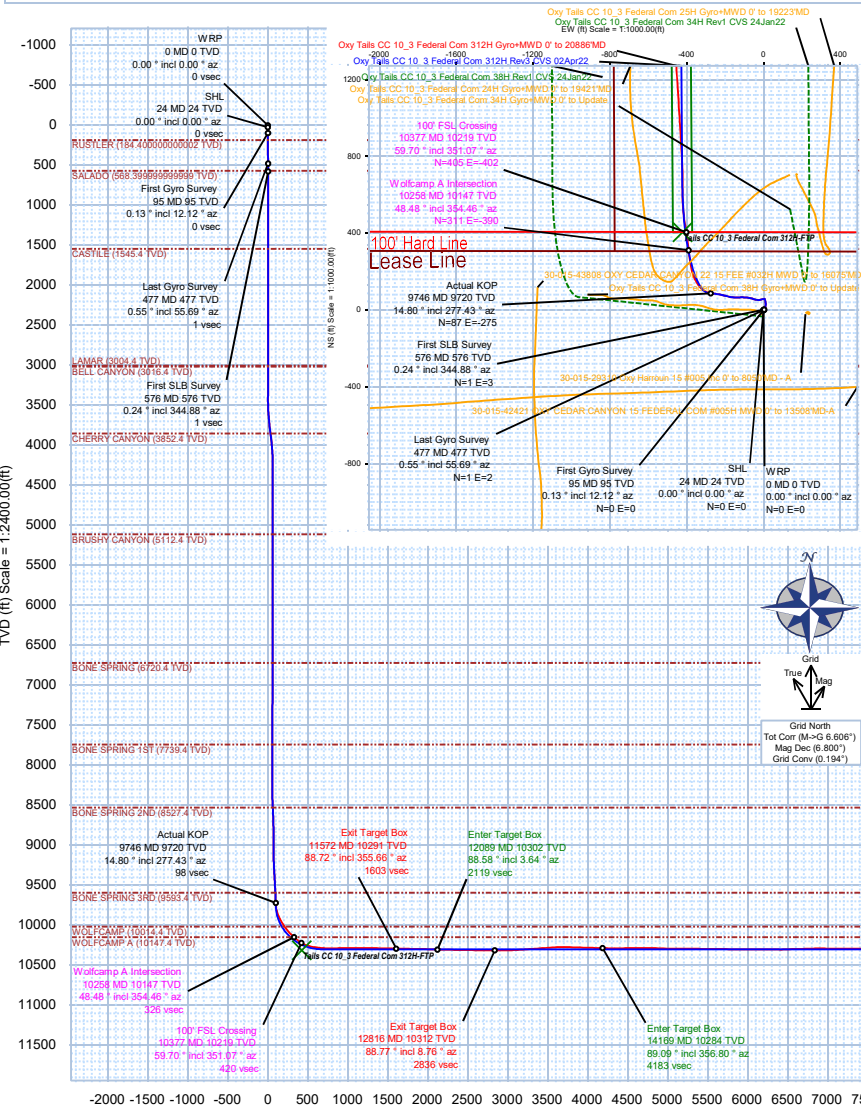

Schlumberger



Oxy Tails CC 10_3 Federal Com 312H Gyro+MWD 0' to 20886'MD Survey Geodetic Report (Def Survey)

Report Date: April 11, 2022 - 10:24 PM Client: OXY Field: NM Eddy County (NAD 83) Structure / Slot: Oxy Tails CC 10_3 Federal Com Pad_Citadel 2 / Tails CC 10_3 Federal Well: Tails CC 10_3 Federal Com 312H Borehole: Tails CC 10_3 Federal Com 312H UWI / API#: Unknown / Unknown Survey Name: Oxy Tails CC 10_3 Federal Com 312H Gyro+MWD 0' to 20886'MD Survey Date: January 24, 2022 Tort / AHD / DDI / ERD Ratio: 277.984' / 11220.024 ft / 6.800 / 1.088 Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet Location Lat / Long: N 32° 13' 26.4818" W 103° 58' 11.41134" Location Grid W/E Y/X: N 445418.000 TUS, E 653742.700 TUS CRS Grid Convergence Angle: 0.1938 ° Grid Scale Factor: 0.99992356 Version / Patch: 2.10.829.1	Survey / DLS Computation: Minimum Curvature / Lubinski Vertical Section Azimuth: 357.826 ° (Grid North) Vertical Section Origin: 0.000 ft, 0.000 ft TVD Reference Datum: RKB TVD Reference Elevation: 2962.400 ft above MSL Seabed / Ground Elevation: 2938.400 ft above MSL Magnetic Declination: 6.800 ° Total Gravity Field Strength: 998.4714mgm (9.80665 Based) Gravity Model: GARM Total Magnetic Field Strength: 47606.100 nT Magnetic Dip Angle: 59.951 ° Declination Date: March 27, 2022 Magnetic Declination Model: IFR1 North Reference: Grid North Grid Convergence Used: 0.1900 ° Total Corr Mag North->Grid North: 6.6100 ° Local Coord Referenced To: Well Head
---	---

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (N/S ° ' '')	Longitude (E/W ° ' '')
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	445418.00	653742.70	N 32 13 26.43	W 103 58 11.41
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00	0.00	0.00	445418.00	653742.70	N 32 13 26.43	W 103 58 11.41
First Gyro Survey	94.58	0.13	12.12	94.58	0.08	0.08	0.02	0.18	0.08	12.12	445418.08	653742.72	N 32 13 26.43	W 103 58 11.41
	185.16	0.37	86.27	185.16	0.19	0.20	0.33	0.39	0.38	59.08	445418.20	653743.03	N 32 13 26.43	W 103 58 11.41
	273.95	0.30	83.47	273.95	0.21	0.24	0.85	0.08	0.88	74.01	445418.24	653743.55	N 32 13 26.43	W 103 58 11.40
	368.34	0.40	62.85	368.34	0.37	0.42	1.39	0.17	1.45	73.09	445418.42	653744.09	N 32 13 26.43	W 103 58 11.40
	462.89	0.55	287.57	462.89	0.81	0.81	2.06	0.16	2.21	68.49	445418.81	653744.76	N 32 13 26.45	W 103 58 11.39
	477.39	0.55	55.69	477.38	0.81	0.89	2.18	0.14	2.35	67.80	445418.89	653744.88	N 32 13 26.44	W 103 58 11.39
Last Gyro Survey	576.00	0.24	344.88	575.99	1.26	1.36	2.52	0.53	2.86	61.69	445419.36	653745.22	N 32 13 26.44	W 103 58 11.38
First SLB Survey	669.00	0.26	355.48	668.99	1.66	1.75	2.45	0.05	3.01	54.40	445419.75	653745.15	N 32 13 26.45	W 103 58 11.38
	759.00	0.02	316.42	758.99	1.88	1.97	2.42	0.27	3.12	50.90	445419.97	653745.12	N 32 13 26.45	W 103 58 11.38
	853.00	0.09	353.06	852.99	1.96	2.05	2.40	0.08	3.16	49.47	445420.05	653745.10	N 32 13 26.45	W 103 58 11.38
	946.00	0.08	334.29	945.99	2.09	2.19	2.37	0.03	3.22	47.27	445420.19	653745.07	N 32 13 26.45	W 103 58 11.38
	1039.00	0.08	287.57	1038.99	2.13	2.08	2.07	0.07	3.21	45.16	445420.26	653744.98	N 32 13 26.45	W 103 58 11.38
	1132.00	0.09	228.88	1131.99	2.15	2.23	2.16	0.09	3.11	44.01	445420.23	653744.86	N 32 13 26.45	W 103 58 11.39
	1226.00	0.04	216.07	1225.99	2.08	2.16	2.08	0.06	3.00	43.97	445420.16	653744.78	N 32 13 26.45	W 103 58 11.39
	1319.00	0.02	185.71	1318.99	2.04	2.12	2.06	0.03	2.96	44.26	445420.12	653744.76	N 32 13 26.45	W 103 58 11.39
	1413.00	0.07	252.64	1412.99	2.01	2.08	2.01	0.07	2.89	43.92	445420.08	653744.71	N 32 13 26.45	W 103 58 11.39
	1508.00	0.05	227.59	1507.99	1.96	2.04	1.92	0.03	2.80	43.29	445420.04	653744.62	N 32 13 26.45	W 103 58 11.39
	1602.00	0.08	190.64	1601.99	1.87	1.95	1.88	0.05	2.71	43.98	445419.95	653744.58	N 32 13 26.45	W 103 58 11.39
	1697.00	0.06	271.22	1696.99	1.81	1.88	1.82	0.10	2.62	43.97	445419.88	653744.52	N 32 13 26.45	W 103 58 11.39
	1792.00	0.09	77.31	1791.99	1.83	1.90	1.84	0.16	2.64	44.07	445419.90	653744.54	N 32 13 26.45	W 103 58 11.39
	1887.00	0.00	136.76	1886.99	1.84	1.92	1.91	0.09	2.71	44.94	445419.92	653744.61	N 32 13 26.45	W 103 58 11.39
	1981.00	0.02	18.73	1980.99	1.86	1.93	1.92	0.02	2.72	44.78	445419.93	653744.62	N 32 13 26.45	W 103 58 11.39
	2076.00	0.06	273.06	2075.99	1.88	1.95	1.87	0.07	2.70	43.84	445419.95	653744.57	N 32 13 26.45	W 103 58 11.39
	2171.00	0.15	39.27	2170.99	1.98	2.05	1.90	0.20	2.80	42.87	445420.05	653744.60	N 32 13 26.45	W 103 58 11.39
	2266.00	0.07	159.68	2265.99	2.01	2.09	2.00	0.21	2.89	43.74	445420.09	653744.70	N 32 13 26.45	W 103 58 11.39
	2361.00	0.09	226.93	2360.99	1.98	1.98	1.92	0.20	2.82	45.90	445419.96	653744.72	N 32 13 26.45	W 103 58 11.39
	2455.00	0.10	155.47	2454.99	1.73	1.86	2.06	0.04	2.75	48.68	445419.81	653744.76	N 32 13 26.45	W 103 58 11.39
	2550.00	0.12	181.05	2549.99	1.56	1.64	2.10	0.06	2.66	51.97	445419.64	653744.80	N 32 13 26.44	W 103 58 11.39
	2645.00	0.09	206.77	2644.99	1.39	1.47	2.06	0.06	2.53	54.44	445419.47	653744.76	N 32 13 26.44	W 103 58 11.39
	2740.00	0.12	186.47	2739.99	1.23	1.31	2.02	0.05	2.40	57.03	445419.31	653744.72	N 32 13 26.44	W 103 58 11.39
	2834.00	0.27	220.30	2833.99	0.97	1.04	1.86	0.19	2.13	60.79	445419.04	653744.56	N 32 13 26.44	W 103 58 11.39
	2929.00	0.12	225.49	2928.99	0.74	0.80	1.65	0.16	1.83	64.06	445418.80	653744.35	N 32 13 26.44	W 103 58 11.39
	3024.00	0.03	98.13	3023.99	0.73	0.80	1.60	0.15	1.76	65.55	445418.73	653744.30	N 32 13 26.44	W 103 58 11.39
	3118.00	0.08	225.66	3117.99	0.62	0.68	1.58	0.11	1.72	66.18	445418.68	653744.28	N 32 13 26.43	W 103 58 11.39
	3213.00	0.03	168.39	3212.99	0.55	0.61	1.54	0.07	1.65	68.46	445418.61	653744.23	N 32 13 26.43	W 103 58 11.39
	3308.00	0.09	330.75	3307.99	0.59	0.65	1.50	0.13	1.64	66.73	445418.65	653744.20	N 32 13 26.43	W 103 58 11.39
	3402.00	1.21	111.50	3401.98	0.26	0.35	2.39	1.36	2.42	81.73	445418.35	653745.09	N 32 13 26.43	W 103 58 11.38
	3497.00	2.00	44.79	3496.95	0.99	1.16	4.49	1.98	4.64	75.57	445419.16	653747.19	N 32 13 26.44	W 103 58 11.36
	3592.00	3.97	20.15	3591.82	5.16	5.42	6.79	2.43	8.69	51.41	445423.42	653749.49	N 32 13 26.48	W 103 58 11.33
	3687.00	5.89	12.06	3686.48	12.77	13.11	8.91	1.94	15.85	34.19	445431.11	653751.61	N 32 13 26.56	W 103 58 11.31
	3782.00	6.83	6.77	3780.91	22.33	23.33	10.56	1.34	25.61	24.35	445441.33	653753.26	N 32 13 26.66	W 103 58 11.29
	3876.00	6.59	356.75	3874.27	33.83	34.27	10.91	1.27	35.96	17.67	445452.26	653753.61	N 32 13 26.77	W 103 58 11.28
	3971.00	6.78	348.25	3968.63	44.81	45.20	9.46	1.06	46.18	11.82	445463.20	653752.16	N 32 13 26.88	W 103 58 11.30
	4066.00	4.40	339.89	4063.17	53.76	54.07	7.08	2.70	54.53	7.46	445472.06	653749.78	N 32 13 26.96	W 103 58 11.33
	4161.00	1.34	317.17	4158.05	58.06	58.29	5.06	3.26	58.51	4.96	445476.29	653747.76	N 32 13 27.00	W 103 58 11.35
	4255.00	0.08	137.83	4252.04	58.88	59.09	4.32	1.57	59.24	4.18	445477.08	653747.02	N 32 13 27.01	W 103 58 11.36
	4350.00	0.08	285.74	4347.04	58.85	59.06	4.30	0.16	59.21	4.17	445477.05	653747.00	N 32 13 27.01	W 103 58 11.36
	4445.00	0.09	286.61	4442.04	59.11	59.11	4.04	0.02	59.12	3.71	445476.99	653746.97	N 32 13 27.01	W 103 58 11.36
	4540.00	0.03	253.23	4537.04	58.94	59.13	4.08	0.07	59.27	3.95	445477.13	653746.78	N 32 13 27.01	W 103 58 11.36
	4634.00	0.07	227.96	4631.04	58.89	59.09	4.02	0.05	59.22	3.89	445477.08	653746.72	N 32 13 27.01	W 103 58 11.36
	4729.00	0.07	236.43	4726.04	58.83	59.02	3.92	0.01	59.15	3.80	445477.01	653746.62	N 32 13 27.01	W 103 58 11.36
	4823.00	0.05	150.68	4820.04	58.76	58.95	3.90	0.09	59.08	3.78	445476.94	653746.60	N 32 13 27.01	W 103 58 11.36
	4918.00	0.08	249.44	4915.04	58.70	58.89	3.85	0.11	59.02	3.74	445476.89	653746.55	N 32 13 27.01	W 103 58 11.36
	5013.00	0.01	75.31	5010.04	58.68	58.87	3.80	0.09	58.99	3.69	445476.86	653746.50	N 32 13 27.01	W 103 58 11.36
	5107.00	0.07	125.56	5104.04	58.74	58.93	3.82	0.11	59.05	3.71	445476.92	653746.52	N 32 13 27.01	W 103 58 11.36
	5202.00	0.10	288.84	5199.04	58.83	59.01	3.76	0.12	59.13	3.64	445477.01	653746.45	N 32 13 27.01	W 103 58 11.37
	5297.00	0.15	240.65	5294.04	58.80	58.98	3.57	0.12	59.08	3.46	445476.97	653746.27	N 32 13 27.01	W 103 58 11.37
	5392.00	0.18	78.63	5389.04	58.77	58.94	3.61	0.34	59.05	3.50	445476.94	653746.31	N 32 13 27.01	W 103 58 11.37
	5486.00	0.26	166.53	5483.04	58.58	58.77	3.80	0.33	58.89	3.70	445476.76	653746.50	N 32 13 27.01	W 103 58 11.36
	5581.00	0.12	269.38	5578.04	58.37	58.56	3.75	0.33	58.68	3.67	445476.55	653746.45	N 32 13 27.01	W 103 58 11.37
	5676.00	0.10	306.85	5673.04	58.42	58.60	3.58	0.08	58.71	3.50	445476.60	653746.28	N 32 13 27.01	W 103 58 11.37
	5771.00	0.19	279.98	5768.04	58.51	58.68	3.36	0.11	58.78	3.28	445476.67	653746.21	N 32 13 27.01	W 103 58 11.37

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' '')	Longitude (E/W ° ' '')
Actual KOP	9190.00	8.93	276.47	9166.33	71.64	65.69	-158.09	1.16	171.19	292.57	445483.69	653584.62	N 32 13 27.08	W 103 58 13.25
	9275.00	10.07	281.03	9260.02	74.55	68.11	-173.57	1.44	186.45	291.43	445486.11	653589.11	N 32 13 27.11	W 103 58 13.43
	9370.00	11.54	284.02	9353.34	79.20	72.00	-190.94	1.66	204.06	290.66	445490.00	653593.78	N 32 13 27.15	W 103 58 13.63
	9465.00	13.03	283.09	9446.16	84.67	76.73	-210.59	1.58	224.13	290.02	445494.73	653532.13	N 32 13 27.19	W 103 58 13.86
	9559.00	13.39	280.84	9537.67	89.91	81.18	-231.60	0.67	245.42	289.32	445499.17	653511.12	N 32 13 27.24	W 103 58 14.10
	9654.00	13.44	277.80	9630.08	94.30	84.75	-253.34	0.74	267.14	288.50	445502.74	653489.38	N 32 13 27.28	W 103 58 14.36
	9707.00	13.51	275.45	9681.62	96.18	86.17	-265.61	1.04	279.24	287.97	445504.16	653477.11	N 32 13 27.29	W 103 58 14.50
	9746.20	14.80	277.43	9719.63	97.63	87.25	-275.13	3.52	288.64	287.60	445505.25	653467.59	N 32 13 27.30	W 103 58 14.61
	9777.00	15.83	278.76	9749.34	98.08	88.40	-283.19	3.52	296.67	287.34	445506.39	653459.53	N 32 13 27.31	W 103 58 14.70
	9871.00	27.65	306.34	9836.71	115.19	103.37	-313.61	16.31	330.21	288.24	445521.36	653429.11	N 32 13 27.46	W 103 58 15.06
Wolfcamp A Intersection	9966.00	31.46	327.28	9919.55	150.37	137.39	-344.86	11.53	371.22	291.72	445555.38	653397.87	N 32 13 27.80	W 103 58 15.42
	10061.00	34.42	340.61	9999.38	197.44	183.65	-367.21	8.22	410.57	296.57	445601.63	653375.52	N 32 13 28.26	W 103 58 15.68
	10156.00	40.79	350.84	10074.68	254.00	239.72	-381.09	9.37	450.22	302.17	445657.70	653361.64	N 32 13 28.81	W 103 58 15.84
	10251.00	47.96	354.74	10142.55	320.13	305.58	-389.28	8.07	494.89	308.13	445723.56	653353.45	N 32 13 29.46	W 103 58 15.93
	10258.28	48.48	354.46	10147.40	325.55	310.99	-389.79	7.67	498.65	308.58	445728.96	653352.94	N 32 13 29.52	W 103 58 15.94
	10346.00	54.78	351.44	10201.83	394.02	379.18	-398.30	7.67	549.93	313.59	445797.15	653344.43	N 32 13 30.19	W 103 58 16.03
	10377.00	59.70	351.07	10218.60	419.91	404.94	-402.26	15.90	570.78	315.19	445822.91	653340.47	N 32 13 30.45	W 103 58 16.08
	10440.00	69.70	350.43	10245.49	476.36	461.08	-411.42	15.90	617.95	318.26	445879.05	653331.31	N 32 13 31.00	W 103 58 16.18
	10535.00	80.28	357.57	10270.09	567.73	552.16	-420.85	13.29	694.26	322.69	445970.12	653321.88	N 32 13 31.91	W 103 58 16.29
	10630.00	85.05	0.73	10282.22	661.88	646.33	-422.23	6.01	772.03	326.84	446064.28	653320.50	N 32 13 32.84	W 103 58 16.30
100' FSL Crossing	10725.00	89.38	358.12	10286.83	756.70	741.18	-423.19	5.32	853.49	330.28	446159.13	653319.55	N 32 13 33.78	W 103 58 16.31
	10763.00	90.59	356.97	10286.85	814.70	799.13	-425.67	2.88	905.43	331.96	446217.07	653317.06	N 32 13 34.35	W 103 58 16.34
	10854.00	91.75	356.48	10285.67	885.67	870.00	-429.73	1.77	970.34	333.71	446287.93	653313.03	N 32 13 35.05	W 103 58 16.38
	10949.00	91.59	356.45	10283.63	964.70	964.78	-435.58	1.17	1058.55	335.70	446320.15	653307.15	N 32 13 35.99	W 103 58 16.44
	11043.00	88.31	356.50	10282.71	1074.57	1058.59	-441.36	3.49	1146.91	337.37	446476.50	653301.37	N 32 13 36.92	W 103 58 16.51
	11138.00	89.96	356.25	10284.15	1169.52	1153.38	-447.37	1.76	1237.10	338.80	446571.29	653295.37	N 32 13 37.86	W 103 58 16.57
	11232.00	90.23	356.70	10283.99	1263.49	1247.20	-453.15	0.56	1326.97	340.03	446665.10	653289.59	N 32 13 38.78	W 103 58 16.64
	11327.00	88.29	355.12	10285.22	1358.43	1341.95	-459.92	2.63	1418.57	341.08	446759.84	653282.82	N 32 13 39.72	W 103 58 16.71
	11422.00	89.20	355.09	10287.30	1453.30	1436.58	-468.02	0.96	1510.89	341.95	446854.46	653274.71	N 32 13 40.66	W 103 58 16.80
	11517.00	88.53	355.23	10289.18	1548.17	1531.22	-476.01	0.72	1603.18	342.73	446949.10	653266.11	N 32 13 41.60	W 103 58 16.89
Exit Target Box	11572.00	88.72	355.66	10290.50	1603.11	1586.03	-480.41	0.85	1657.19	343.59	447030.21	653262.33	N 32 13 42.55	W 103 58 16.94
	11611.00	88.85	355.96	10291.33	1642.08	1624.91	-483.26	0.85	1695.25	343.44	447042.79	653259.48	N 32 13 43.52	W 103 58 16.97
	11706.00	89.20	356.95	10292.95	1737.03	1719.72	-489.13	1.11	1787.92	344.12	447137.58	653253.61	N 32 13 44.46	W 103 58 17.04
	11801.00	89.24	359.19	10294.24	1832.02	1814.65	-492.33	2.36	1880.25	344.82	447232.51	653250.41	N 32 13 45.40	W 103 58 17.07
	11895.00	88.71	0.93	10295.92	1925.93	1908.63	-492.23	1.93	1971.08	345.54	447326.48	653250.51	N 32 13 45.33	W 103 58 17.07
	11990.00	87.86	1.98	10298.93	2020.69	2003.55	-489.82	1.56	2062.55	346.26	447421.39	653252.92	N 32 13 46.27	W 103 58 17.03
	12085.00	88.56	3.57	10302.06	2115.28	2098.36	-485.22	1.92	2153.75	346.98	447516.22	653252.82	N 32 13 47.25	W 103 58 16.98
	12089.00	88.58	3.64	10302.06	2119.26	2102.37	-484.97	1.79	2157.58	347.01	447520.21	653250.77	N 32 13 47.25	W 103 58 16.97
	12180.00	89.03	5.20	10304.06	2209.63	2193.08	-477.96	1.79	2244.56	347.71	447610.91	653264.78	N 32 13 48.14	W 103 58 16.89
	12275.00	89.42	6.46	10305.35	2303.70	2287.58	-468.31	1.39	2335.02	348.43	447705.42	653274.42	N 32 13 49.08	W 103 58 16.77
Enter Target Box	12370.00	89.32	7.77	10306.39	2397.44	2381.84	-456.55	1.38	2425.20	349.15	447799.65	653286.19	N 32 13 50.01	W 103 58 16.63
	12464.00	88.57	8.20	10308.12	2489.95	2474.91	-443.49	0.92	2514.33	349.84	447892.72	653299.24	N 32 13 50.93	W 103 58 16.48
	12559.00	89.38	8.37	10309.82	2583.36	2568.90	-429.80	0.87	2604.61	350.50	447986.70	653312.93	N 32 13 51.86	W 103 58 16.31
	12654.00	89.82	8.92	10310.48	2676.67	2662.82	-415.52	0.74	2695.05	351.13	448080.61	653327.21	N 32 13 52.79	W 103 58 16.14
	12749.00	89.85	9.07	10311.01	2769.87	2756.65	-400.67	0.83	2785.62	351.73	448174.03	653342.02	N 32 13 53.72	W 103 58 15.96
	12816.00	88.77	8.76	10311.99	2835.61	2822.83	-390.29	1.26	2849.69	352.13	448240.61	653352.44	N 32 13 54.37	W 103 58 15.84
	12844.00	88.44	8.63	10312.67	2863.10	2850.50	-386.06	1.26	2876.53	352.29	448268.28	653356.67	N 32 13 54.65	W 103 58 15.79
	12938.00	90.85	6.54	10313.26	2955.72	2943.67	-373.65	3.39	2967.29	352.77	448361.44	653369.08	N 32 13 55.57	W 103 58 15.65
	13033.00	92.67	4.33	10310.34	3049.83	3038.19	-364.66	3.01	3059.99	353.16	448455.95	653378.07	N 32 13 56.50	W 103 58 15.54
	13128.00	93.71	2.43	10305.05	3144.23	3132.87	-359.07	2.28	3153.38	353.46	448550.62	653383.66	N 32 13 57.44	W 103 58 15.47
Exit Target Box	13223.00	94.11	1.07	10298.57	3238.79	3227.60	-356.17	1.49	3247.19	353.70	448645.35	653386.56	N 32 13 58.38	W 103 58 15.43
	13318.00	93.93	359.84	10291.51	3333.45	3322.36	-355.42	1.31	3341.32	353.89	448740.10	653391.73	N 32 13 59.32	W 103 58 15.42
	13413.00	94.41	358.82	10285.00	3428.17	3417.10	-356.53	1.18	3435.65	354.01	448834.83	653386.20	N 32 14 0.25	W 103 58 15.43
	13507.00	93.62	357.01	10278.42	3521.93	3510.80	-359.94	2.10	3529.21	354.15	448928.53	653382.79	N 32 14 1.18	W 103 58 15.46
	13602.00	93.01	356.06	10272.93	3616.75	3605.47	-365.67	1.19	3623.97	354.21	449023.19	653377.06	N 32 14 2.12	W 103 58 15.53
	13697.00	88.86	355.94	10271.38										

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
	20617.00	90.33	3.66	10290.60	10623.89	10614.86	-439.27	1.14	10623.95	357.63	456032.03	653303.47	N 32 15 11.48	W 103 58 16.11
	20712.00	90.58	4.10	10289.84	10718.35	10709.64	-432.84	0.53	10718.39	357.69	456126.80	653309.89	N 32 15 12.42	W 103 58 16.03
	20807.00	90.05	2.50	10289.32	10812.92	10804.48	-427.37	1.77	10812.93	357.73	456221.63	653315.36	N 32 15 13.35	W 103 58 15.96
100' FNL Crossing	20815.00	90.06	2.44	10289.31	10820.89	10812.47	-427.03	0.80	10820.90	357.74	456229.63	653315.71	N 32 15 13.43	W 103 58 15.96
Final MWD	20859.00	90.11	2.09	10289.25	10864.76	10856.44	-425.29	0.80	10864.77	357.76	456273.59	653317.44	N 32 15 13.87	W 103 58 15.94
Proj to TD	20886.00	90.11	2.09	10289.20	10891.68	10883.42	-424.31	0.00	10891.69	357.77	456300.57	653318.43	N 32 15 14.13	W 103 58 15.92

Survey Type: Def Survey

Survey Error Model: ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma

Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	1	0.000	24.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Tails CC 10_3 Federal Com 312H / Oxy Tails CC 10_3 Federal Com 312H Gyro+MWD 0' to 20886'MD
	1	24.000	24.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Tails CC 10_3 Federal Com 312H / Oxy Tails CC 10_3 Federal Com 312H Gyro+MWD 0' to 20886'MD
	1	24.000	477.390	Act Stns	26.400	26.400	GYD_GC+DROP+OH	Tails CC 10_3 Federal Com 312H / Oxy Tails CC 10_3 Federal Com
	1	477.390	759.000	Act Stns	26.400	26.400	A009Mb_MWD+IFR1+SAG	Tails CC 10_3 Federal Com 312H / Oxy Tails CC 10_3 Federal Com
	1	759.000	20886.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Tails CC 10_3 Federal Com 312H / Oxy Tails CC 10_3 Federal Com 312H Gyro+MWD 0' to 20886'MD

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Well Name: TAILS CC 10_3 FED COM	Well Location: T24S / R29E / SEC 15 / NWSE /	County or Parish/State: /
Well Number: 312H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM81616	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548930	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2689044

Type of Submission: Subsequent Report

Date Sundry Submitted: 08/24/2022

Date Operation Actually Began: 04/28/2022

Type of Action: Workover Operations

Time Sundry Submitted: 03:17

Actual Procedure: RUPU 04/28/22, RIH & clean out to PBTD @ 20829', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 20757-10428 Total 1462 holes. Frac in 43 stages w/ 245213BBL Produced Water + 253791BBL Brackish Water (> 1,000 mg/I TDS and 10,000 mg/I TDS) w/ 25488228# sand, RD Liberty 05/19/22. Well ready to produce 05/27/22. 08/10/22 RIH with 2-3/8" L80 tbg & gas lift set @ 9879', RD 08/11/22. Formation Tops for this completion are as follows: RUSTLER 202'M 202'V SALADO 509'M 509'V CASTILE 1434'M 1434'V DELAWARE 3003'M 3003'V BELL CANYON 3026'M 3026'V CHERRY CANYON 3853'M 3852'V BRUSHY CANYON 5094'M 5091'V BONE SPRING 6701'M 6698'V 1ST BONE SPRING 7756'M 7753'V 2ND BONE SPRING 8559'M 8553'V 3RD BONE SPRING 9659'M 9635'V WOLFCAMP 10043'M 9984'V

Well Name: TAILS CC 10_3 FED COM	Well Location: T24S / R29E / SEC 15 / NWSE /	County or Parish/State: /
Well Number: 312H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM81616	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548930	Well Status: Drilling Well	Operator: OXY USA INCORPORATED


Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JANA MENDIOLA	Signed on: AUG 24, 2022 03:16 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Coordinator	
Street Address: PO BOX 50250	
City: Midland	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG							1. WELL API NO. 30-015-48930			
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)							2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN			
							3. State Oil & Gas Lease No.			
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER							5. Lease Name or Unit Agreement Name TAILS CC 10-3 FEDERAL COM			
8. Name of Operator: OXY USA INC.						9. OGRID: 16696				
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710						11. Pool name or Wildcat PURPLE SAGE WOLFCAMP				
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	B	15	24S	29E		305	NORTH	1880	EAST	EDDY
BH:	L2	3	24S	29E		31	NORTH	2226	EAST	EDDY
13. Date Spudded 12/27/21	14. Date T.D. Reached 04/10/2022		15. Date Rig Released 04/13/2022		16. Date Completed (Ready to Produce) 05/27/2022		17. Elevations (DF and RKB, RT, GR, etc.) 2938' GL			
18. Total Measured Depth of Well 20886'M 10289'V			19. Plug Back Measured Depth 20829'M 10289'V		20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL			
22. Producing Interval(s), of this completion - Top, Bottom, Name 10428-20757' Wolfcamp										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
10.75" J55		45.5		490'		14.75"		515sx-surf circ		
7.625" HCL80		26.4		9716'		9.875"		2067sx-surf		
5.5" P110CY		20		20854'		6.75"		866sx-TOC@9208'		
24. LINER RECORD										
SIZE	TOP	BOTTOM		SACKS CEMENT		SCREEN		25. TUBING RECORD		
								SIZE		DEPTH SET
								2.375"		9879'
26. Perforation record (interval, size, and number) 10428-20757' Total 1462 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						10428-20757'		245213BBL Produced Water + 253791BBL Brackish Water + 25488228# sand		
28. PRODUCTION										
Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)				Well Status (Prod. or Shut-in)				
05/24/2022		Gas Lift				Prod.				
Date of Test	Hours Tested	Choke Size	Prod'n For	Oil - Bbl	Gas - MCF	Water - Bbl.	Gas - Oil Ratio			
06/21/2022	24 hrs.	128/128	Test Period	3242	5432	6168	1676			
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)				
	1663		3242	5432	6168					
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD							30. Test Witnessed By			
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:			
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>08/25/2022</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 202'	T. Bell Canyon 3026'	T. Ojo Alamo	T. Penn A "
T. Salado 509'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1434'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 3003'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3853'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 5094'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs 6701'	T. Todilto	
T. Abo	T. 1 st Bone Springs 7756'	T. Entrada	
T. Wolfcamp 10043'	T. 2 nd Bone Springs 8559'	T. Wingate	
T. Penn	T. 3 rd Bone Springs 9659'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....


No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

OXY USA Inc.
Tails CC 10-3 Federal Com 312H
API No. 30-015-48930

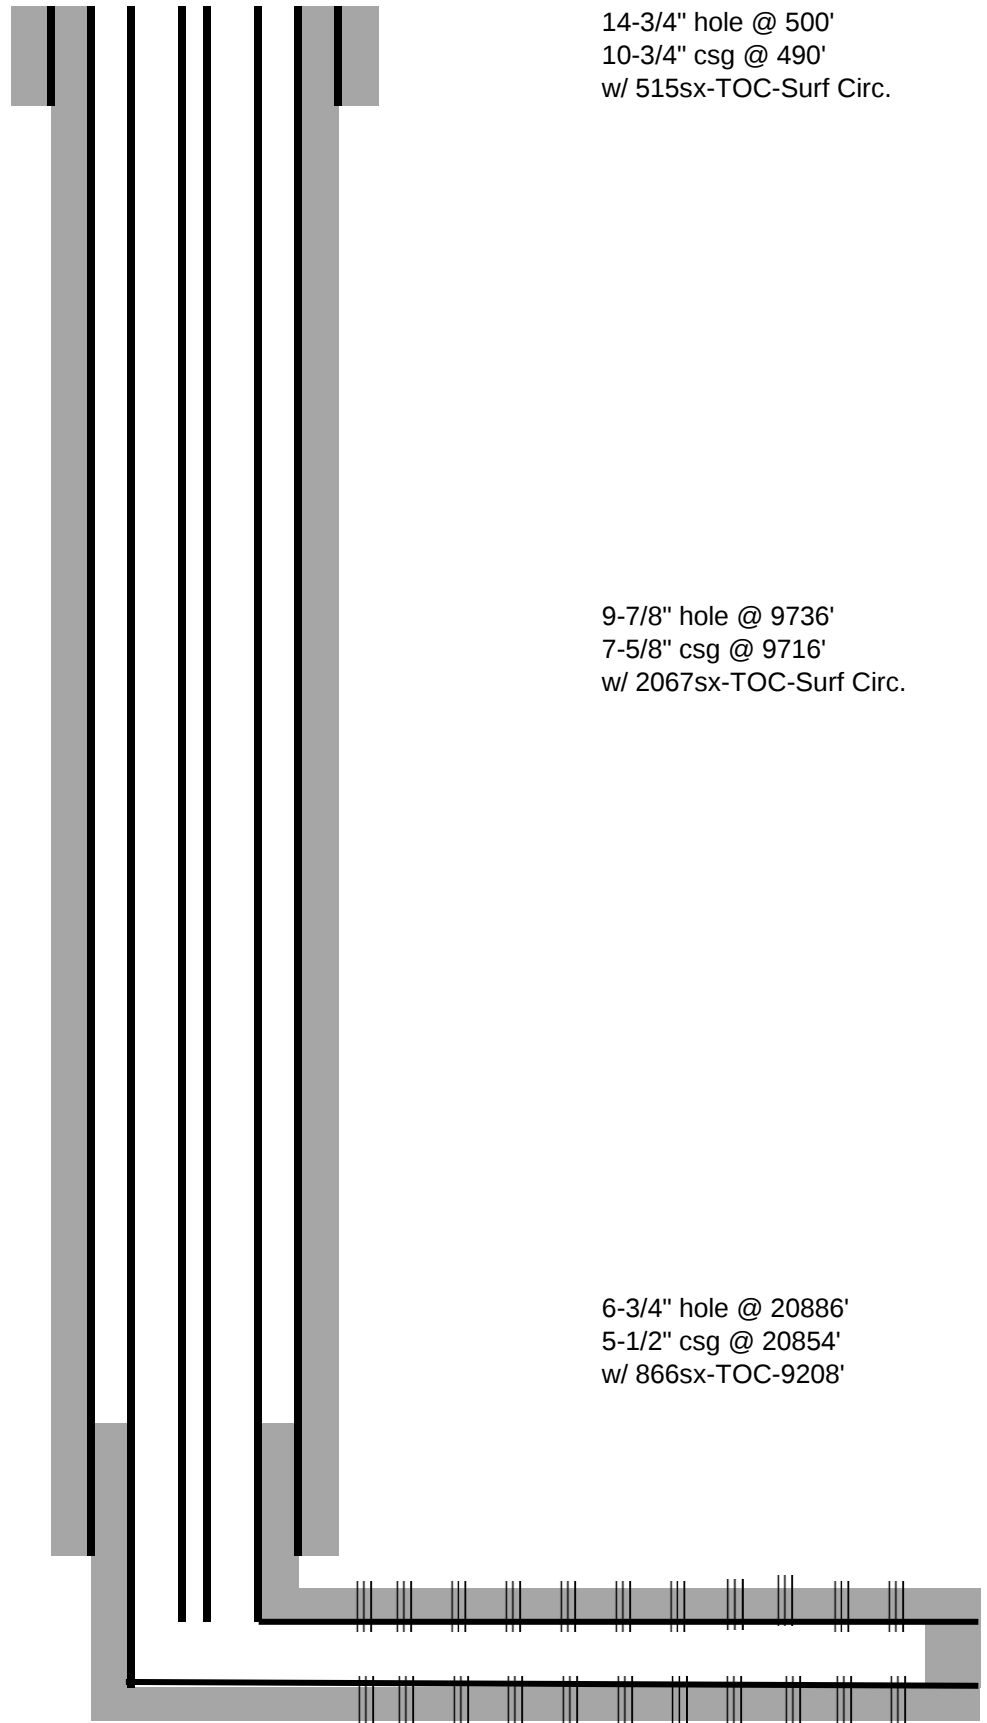

2-3/8" tbg w/ gas lift @ 9879'

Perfs @ 10428-20757'

TD- 20886'M 10289'V

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 138179

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 138179
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 138179

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 138179
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
Ilowe	COA: (1) File 3160-4 Completion Report within 10 days to NMOCD after BLM approval. (2) File Well Logs.	9/20/2022