

Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-015-30316
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name GEORGE PAGAN 26 STATE
8. Well Number #001
9. OGRID Number 192463
10. Pool name or Wildcat
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3520' GL

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

OXY WTP LP

3. Address of Operator

5 GREENWAY PLAZA, SUITE 110, HOUSTON, TX

4. Well Location

Unit Letter D : 800 feet from the FNL line and 660 feet from the FWL line

Section 26 Township 18S Range 29E NMPM County

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐
 CLOSED-LOOP SYSTEM ☐
 OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☒
 CASING/CEMENT JOB ☐
 OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

This well has been plugged. Job start: 9/15/22. Job complete: 9/23/22. See the attached job summary details and plugged wellbore diagram for reference.

Approved for plugging of well bore only. Liability under bond is retained pending Location cleanup & receipt of C-103Q (Subsequent Report of Well Plugging) which may be found at OCD Web Page, OCD Permitting @ www.emnrd.state.nm.us

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Leslie T. Reeves TITLE REGULATORY MANAGER DATE 10/7/2022

Type or print name LESLIE REEVES E-mail address: LESLIE_REEVES@OXY.COM PHONE: 713-497-2492

For State Use Only

APPROVED BY: [Signature] TITLE Staff Manager DATE 10/7/22
 Conditions of Approval (if any):

PAGAN STATE #001
30-015-30316 – PA SR JOB SUMMARY

9/15- 9/16/22

MIRU. POOH WITH PUMP AN RODS.

9/19/22

NDWH. NU AND FUNCTION TEST BOP. POOH WITH 2-7/8" TUBING.

9/20/22

RIH WITH CIBP AND SET @ 7100'. PSI TEST TO 500 PSI FOR 20 MIN, GOOD TEST. PUMPED 25SC CLASS H CMT ON TOP OF CIBP. WOC. RIH AND TAGGED TOC @ 6912'. PULLED UP, EOT @ 5652'.

9/21/22

RAN CBL F/ 6930' TO SURFACE. (GOOD CEMENT TO 1950', SPOTTY FROM 1950' – 170'.) CONFIRMED WITH DAVID ALVARADO, NMOC D FOR REVIEW. RIH, EOT @ 6360'. PUMPED 25SX CL C CMT. NO TAG REQUIRED. PULLED UP, EOT @ 3770'. PUMPED 25SX CL C CMT. NO TAG REQUIRED. PULLED UP, EOT @ 3018'.

9/22/22

PUMPED 25SX CLASS C CMT. NO TAG REQUIRED. RIH AND PERF'D @ 1850'. EST RATE. SQUEEZED 70SX CLASS C CMT. WOC. RIH AND TAGGED TOC @ 1573'. RIH AND PERF'D @ 848'. EST RATE.

9/23/22

SQUEEZED 370SX CLASS C CMT TO SURFACE. GOT FULL RETURNS. WOC. TOPPED OFF. VERIFIED CEMENT TO SURFACE. RDMO.

OXY USA Inc. - Plugged WBD
 Pagan 26 State #1
 API No. 30-015-30316

Perf'd @ 848'. Sqzd 370sx CI C to surface. Verified.

Perf'd @ 1850'. Sqzd 70sx CI C. Tagged TOC @ 1573'.

EOT @ 3018'. Pumped 25sx CI C. No tag req .

EOT @ 3770'. Pumped 25sx CI C. No tag req.

EOT @ 6360'. Pumped 25sx CI C. No tag req.


CIBP set @ 7100'. Pumped 25sx CI H. Tagged TOC @ 6912'.
 BSPG2 Perfs 7,148'-7,345'

BSPG3 Perfs 8,133-8,343'

CIBP w/ 40' Cement 9,455'

Perfs 9,674-9,786'

PBTD-10,039'

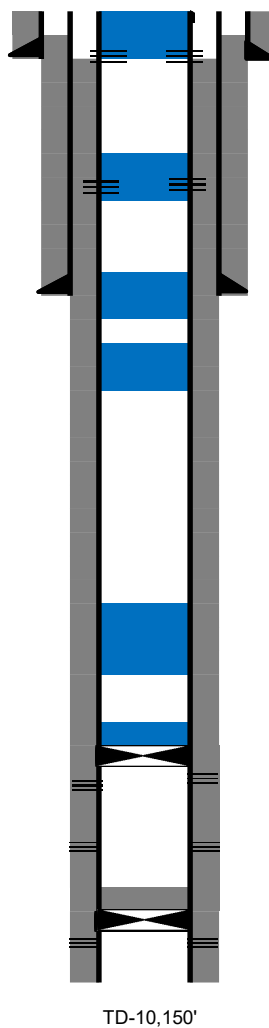

17-1/2" hole @ 450'
 13-3/8" csg @ 448'
 w/ 400sx-TOC-Surf-Circ

12-1/4" hole @ 2,968'
 9-5/8" csg @ 2,968'
 w/ 875sx-TOC-149'-Calc

8-3/4" hole @ 10,150'
 7" csg @ 10,135'
 w/ 1100sx-TOC-500'-Calc
 DVT @ 8,501'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 149609

CONDITIONS

Operator: OXY USA WTP LIMITED PARTNERSHIP P.O. Box 4294 Houston, TX 772104294	OGRID: 192463
	Action Number: 149609
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	10/7/2022