

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address Enduring Resources IV LLC. 200 Energy Court Farmington NM 87401		² OGRID Number 372286	
		³ Reason for Filing Code/ Effective Date NW	
⁴ API Number 30-045-35821	⁵ Pool Name LYBROOK MANCOS W		⁶ Pool Code 98157
⁷ Property Code 332891	⁸ Property Name GREATER LYBROOK UNIT		⁹ Well Number #794H

II. ¹⁰ Surface Location

UL or lot no. C	Section 28	Township 23N	Range 9W	Lot Idn	Feet from the 181'	North/South Line North	Feet from the 2397'	East/West line West	County San Juan
--------------------	---------------	-----------------	-------------	---------	-----------------------	---------------------------	------------------------	------------------------	--------------------

¹¹ Bottom Hole Location

UL or lot no. A	Section 20	Township 23N	Range 9W	Lot Idn	Feet from the 246'	North/South line North	Feet from the 1281'	East/West line East	County San Juan
¹² Lse Code F	¹³ Producing Method Code		¹⁴ Gas Connection Date 8/31/2022		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
248440	WESTERN REFINING COMPANY, LLC	O
373888	HARVEST FOUR CORNERS. LLC	G

IV. Well Completion Data

²¹ Spud Date 3/27/2022	²² Ready Date 8/31/2022	²³ TD 10797' MD 4077' TVD	²⁴ PBDT 10684' MD 4074' TVD	²⁵ Perforations ~ 4456' - 10670' MD ~ 3997'-4073' TVD	²⁶ DHC, MC R-14051	
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set		³⁰ Sacks Cement
17-1/2"		13-3/8",54.5#, J-55		387' MD		350 sx - surface
12-1/4"		9-5/8",36#, J-55		2470' MD		573 sx- surface
8-1/2"		5-1/2",20#, P-110		10797' MD		2882 sx- surface
8-1/2"		2-7/8",6.5#, L-80		4388' MD		NA

V. Well Test Data

³¹ Date New Oil 9/2/2022	³² Gas Delivery Date 8/31/2022	³³ Test Date 8/31/2022	³⁴ Test Length 24 hr	³⁵ Tbg. Pressure 400	³⁶ Csg. Pressure 1180
³⁷ Choke Size 64/64	³⁸ Oil 0	³⁹ Water 120	⁴⁰ Gas 211		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: <i>Kayla White</i>	OIL CONSERVATION DIVISION Approved by: <i>PATRICIA MARTINEZ</i>
Printed name: Kayla White	Title: <i>PETROLEUM SPECIALIST</i>
Title: Environmental Engineer	Approval Date: <i>3/20/2024</i>
E-mail Address: KWhite@cdhconsult.com	
Date: 9/29/2022	Phone: 720-768-3575



ENDURING RESOURCES IV LLC

July 20, 2022

Re: GREATER LYBROOK UNIT 794H-30-045-35821

Pursuant to NMOCD rule 19.15.7.16(C) request is herein made to keep all data and accompanying attachments contained in form C-105 confidential.

Sincerely,

A handwritten signature in blue ink, appearing to read "Heather Huntington".

Heather Huntington
Permitting Technician
Enduring Resources, LLC.
hhuntington@enduringresources.com

District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION

1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

AS-DRILLED WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-35821	² Pool Code 98157	³ Pool Name LYBROOK MANCOS W
⁴ Property Code 332891	⁵ Property Name GREATER LYBROOK UNIT	⁶ Well Number 794H
⁷ GRID No. 372286	⁸ Operator Name ENDURING RESOURCES, LLC	⁹ Elevation 6534'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	28	23N	9W		181	NORTH	2397	WEST	SAN JUAN


¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	20	23N	9W		246	NORTH	1281	EAST	SAN JUAN

¹² Dedicated Acres
440.00
W/2 NW/4, SE/4 NW/4
N/2 SW/4, SE/4 SW/4
W/2 SE/4 - Section 21
N/2 NE/4, SE/4 NE/4 - Section 20

¹³ Joint or Infill
¹⁴ Consolidation Code
¹⁵ Order No.
R-22081

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION
UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A
NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

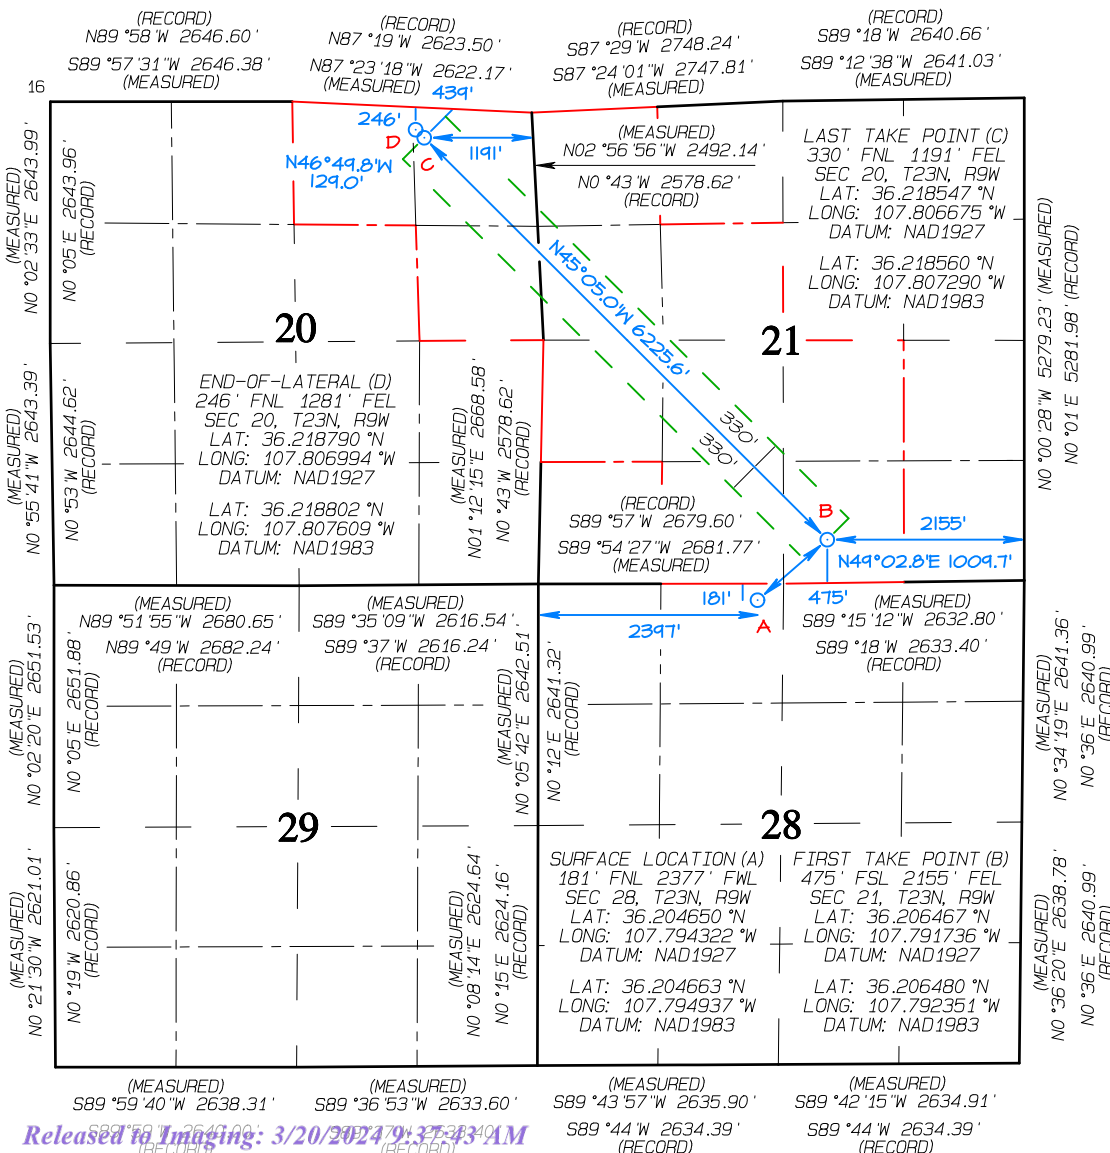

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature Heather Huntington Date 7/18/22
Printed Name
E-mail Address hhuntington@enduringresources.com

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date Revised: JULY 15, 2022
Survey Date: OCTOBER 2, 2015

Signature and Seal of Professional Surveyor



JASON C. EDWARDS
Certificate Number 15269

District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION

1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

AS-DRILLED WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-35821	² Pool Code 98157	³ Pool Name LYBROOK MANCOS W
⁴ Property Code 332891	⁵ Property Name GREATER LYBROOK UNIT	⁶ Well Number 794H
⁷ GRID No. 372286	⁸ Operator Name ENDURING RESOURCES, LLC	⁹ Elevation 6534'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	28	23N	9W		181	NORTH	2397	WEST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	20	23N	9W		246	NORTH	1281	EAST	SAN JUAN

¹² Dedicated Acres 440.00	W/2 NW/4, SE/4 NW/4 N/2 SW/4, SE/4 SW/4 W/2 SE/4 - Section 21 N/2 NE/4, SE/4 NE/4 - Section 20	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-22081
--	---	-------------------------------	----------------------------------	---

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION
UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A
NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

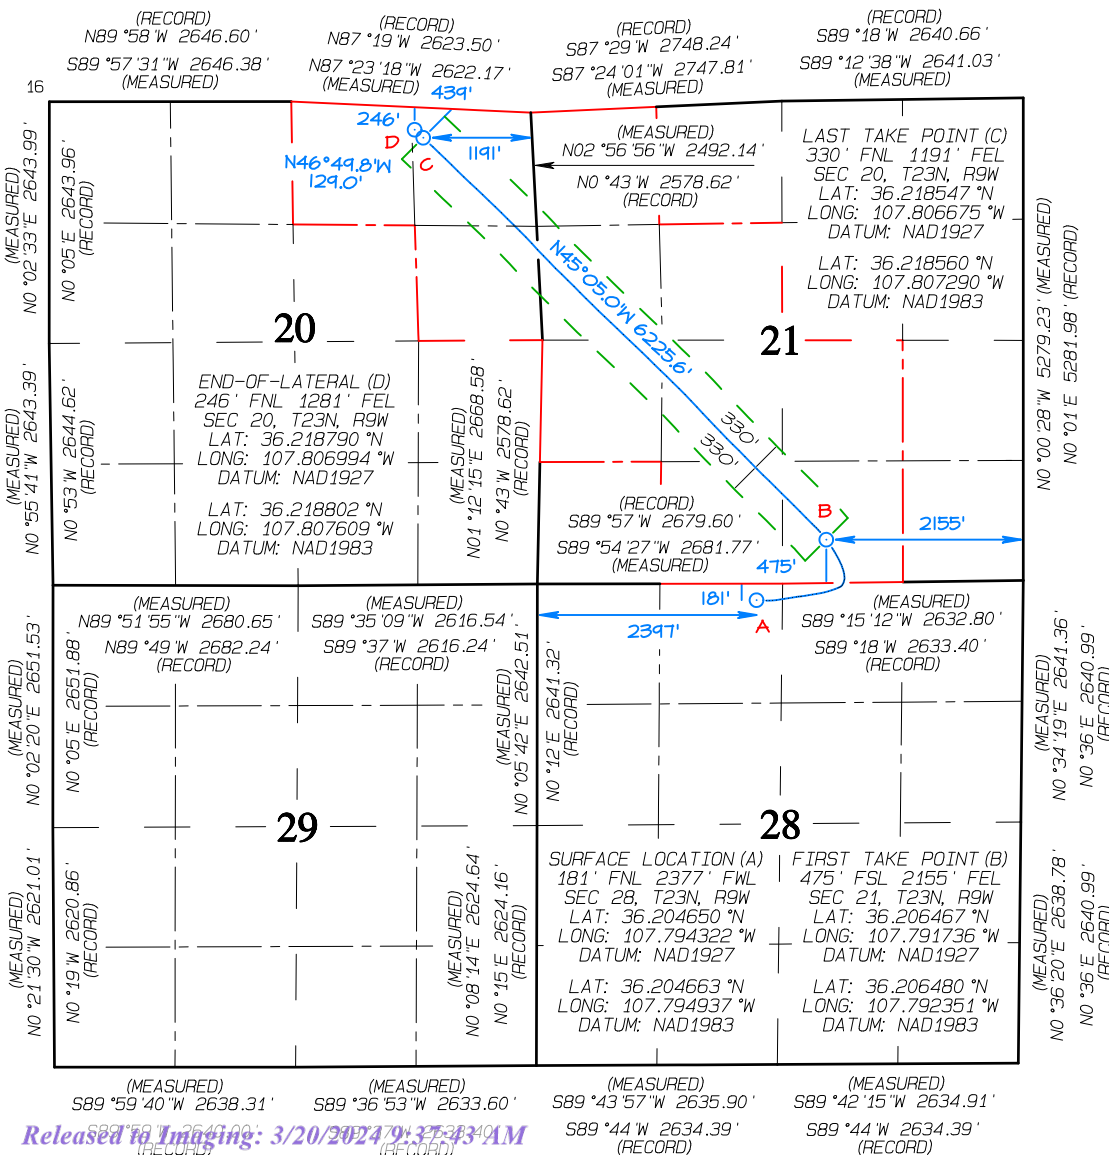

¹⁷ OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: Heather Huntington Date: 7/18/22
Printed Name: Heather Huntington
E-mail Address: hhuntington@enduringresources.com

¹⁸ SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date Revised: JULY 15, 2022
Survey Date: OCTOBER 2, 2015

Signature and Seal of Professional Surveyor



JASON C. EDWARDS
Certificate Number 15269

District I
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION
1220 South St. Francis Drive
Santa Fe, NM 87505

☐ AMENDED REPORT

AS-DRILLED WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-35821	² Pool Code 98157	³ Pool Name LYBROOK MANCOS W
⁴ Property Code 332891	⁵ Property Name GREATER LYBROOK UNIT	⁶ Well Number 794H
⁷ GRID No. 372286	⁸ Operator Name ENDURING RESOURCES, LLC	⁹ Elevation 6534'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	28	23N	9W		181	NORTH	2397	WEST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	20	23N	9W		246	NORTH	1281	EAST	SAN JUAN

¹² Dedicated Acres 440.00	W/2 NW/4, SE/4 NW/4 N/2 SW/4, SE/4 SW/4 W/2 SE/4 - Section 21 N/2 NE/4, SE/4 NE/4 - Section 20	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-22081
--	---	-------------------------------	----------------------------------	---

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION
UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A
NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

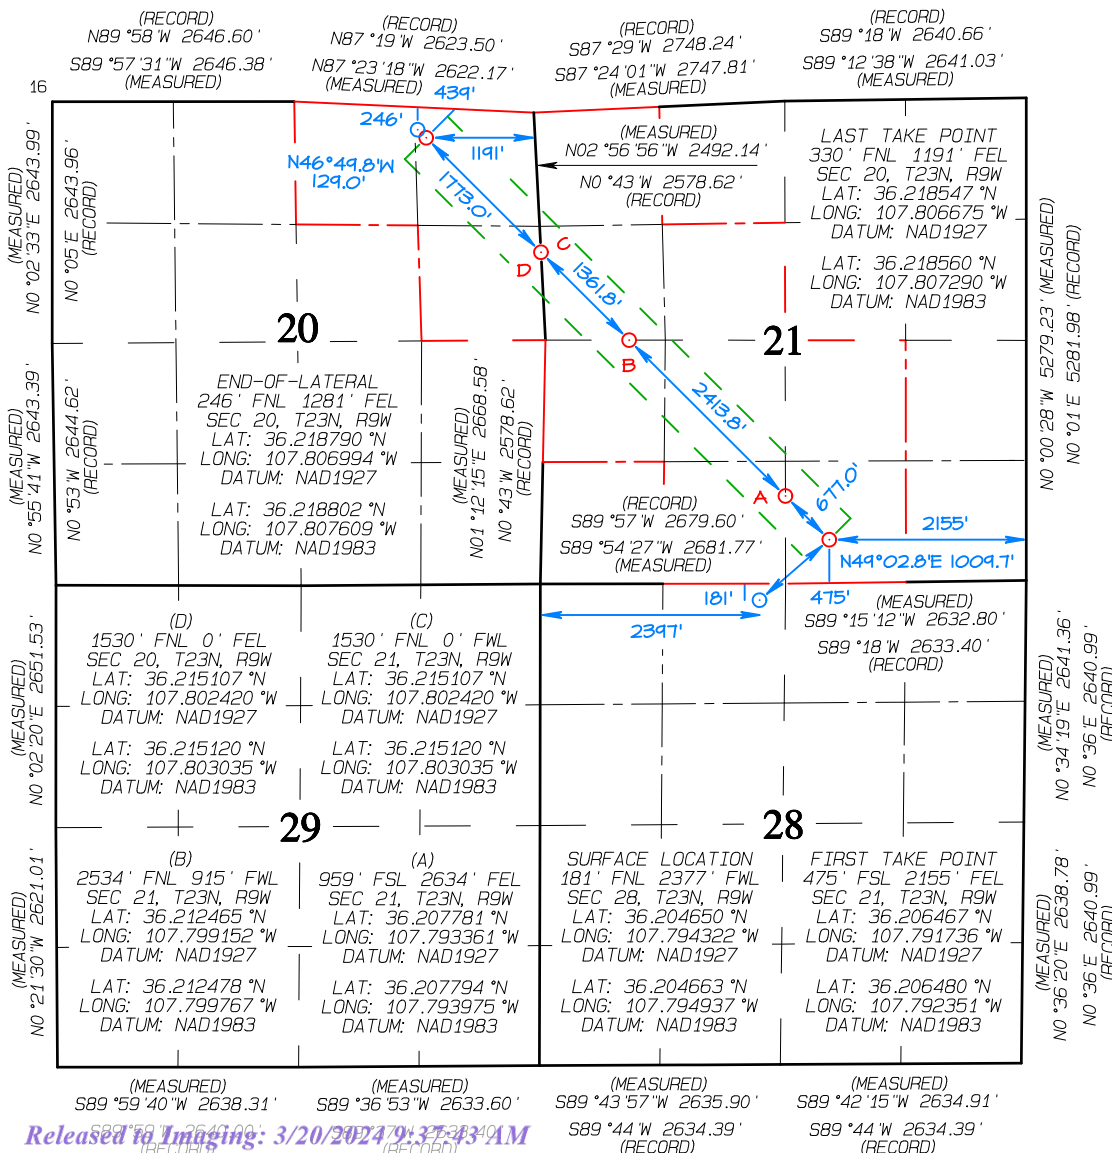

17 OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: Heather Huntington Date: 7/18/22
Printed Name: Heather Huntington
E-mail Address: hhuntington@enduringresources.com

18 SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date Revised: JULY 15, 2022
Survey Date: OCTOBER 2, 2015

Signature and Seal of Professional Surveyor



JASON C. EDWARDS
Certificate Number 15269



Well: Kimbeto Wash Unit 794H
Site: Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)
Project: San Juan County, New Mexico NAD83 NM W
Design: rev2
Rig: Ensign 773

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Kimbeto 794 FTP 547 FSL 2191 FEL r2	4027.00	734.16	726.33	1894531.274	2735145.728	36.206679000	-107.792474000
Kimbeto 794 LTP 317 FNL 1202 FEL r1	4057.00	5070.69	-3656.98	1898867.797	2730762.432	36.218596000	-107.807328000



Azimuths to Grid North
True North: -0.02°
Magnetic North: 8.70°

Magnetic Field
Strength: 49195.1nT
Dip Angle: 62.71°
Date: 5/22/2022
Model: IGRF2020

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Western Zone
System Datum: Mean Sea Level
Depth Reference: RKB=6534+28 @ 6562.00ft (Ensign 773)
Surface location:
Northing Easting Latitude Longitude
1893797.112 2734419.400 36.204663000 -107.794937000



Total Corr (M=>G): To convert a Magnetic Direction to a Grid Direction, Add 8.70°

ANNOTATIONS SURVEYS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Vsect	Annotation
405.00	1.01	211.530	404.98	-3.04	-1.87	-0.81	MWD surveys
2460.00	25.57	82.449	2358.70	41.73	477.86	-310.35	9 5/8" Csg @ 2460 MD 2358.70 TVD
4445.62	69.56	322.793	3997.00	661.76	762.63	-76.73	FTP Cms @ 4445.62 MD 3997.00 TVD
10678.00	88.62	313.323	4073.78	5057.59	-3645.86	6148.83	LTP @ 10678 MD 4073.78 TVD
10721.00	88.57	313.140	4074.84	5087.03	-3677.18	6191.80	Survey @ 10721.00 MD 4074.84 TVD
10798.00	88.57	313.140	4076.76	5139.67	-3733.35	6268.75	330 perp @ 10798 MD 4076.76 TVD
10807.00	88.57	313.140	4076.99	5145.82	-3739.91	6277.74	Survey Proj. to 10807 MD 4076.99 TVD 245 FSL 1278 FEL

CASING DETAILS

TVD	MD	Name
350.00	350.01	13 3/8" Casing
2332.00	2430.38	9 5/8" Casing

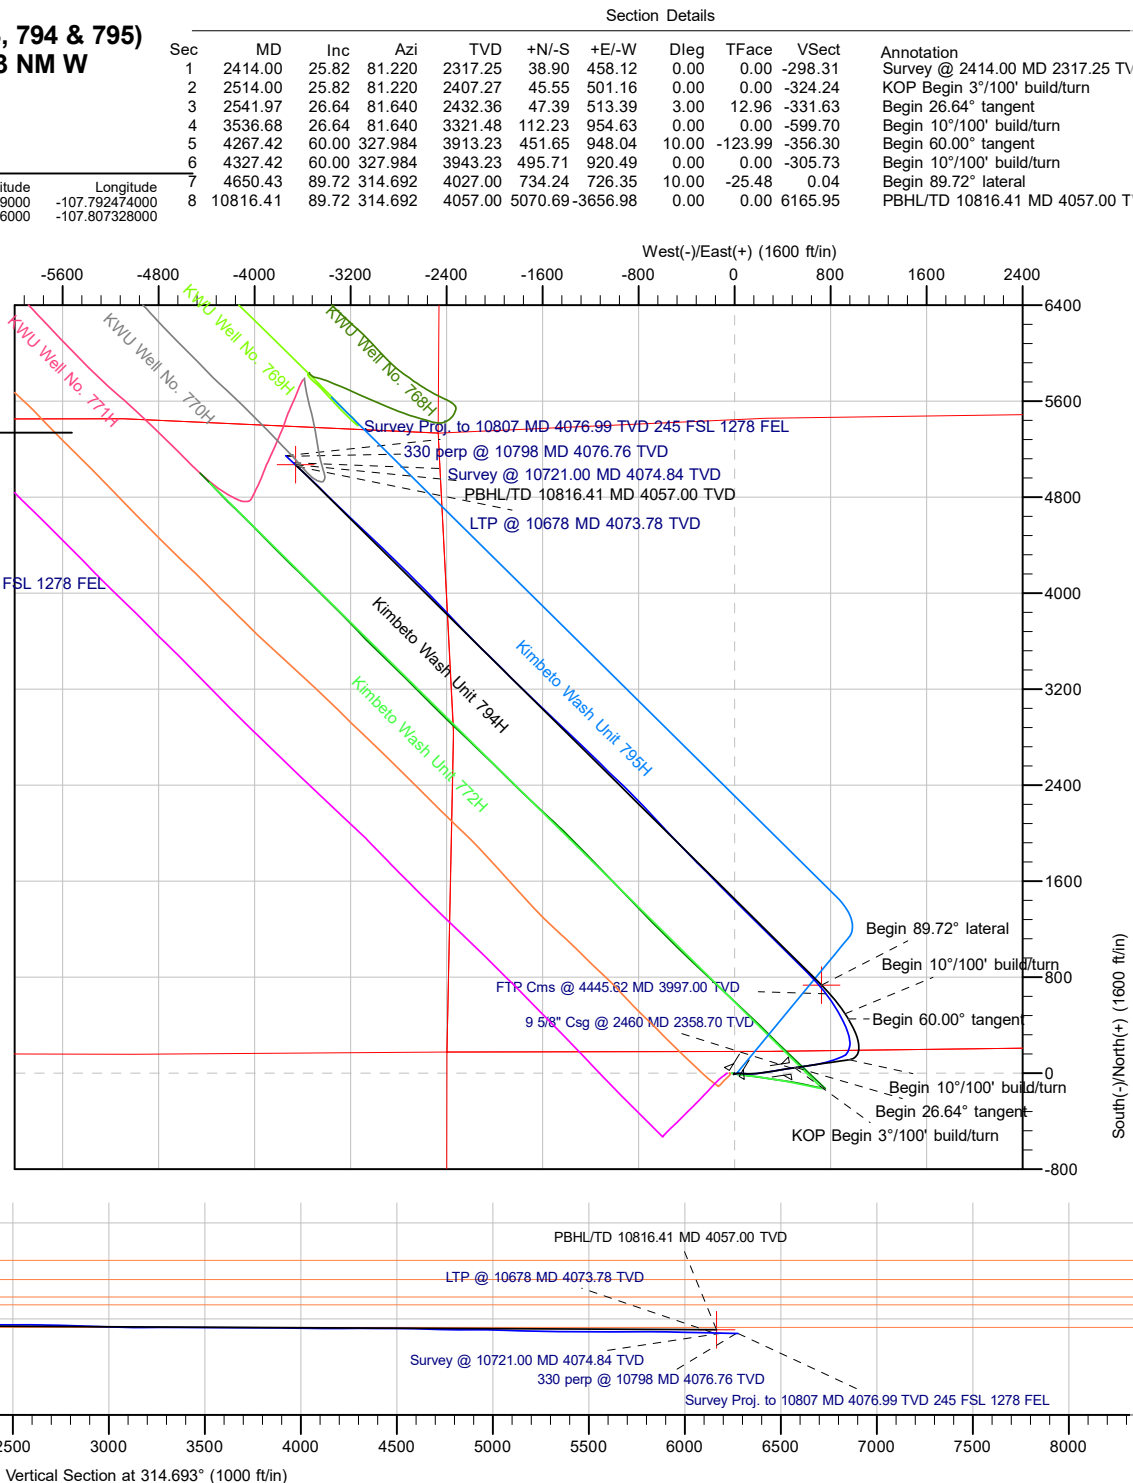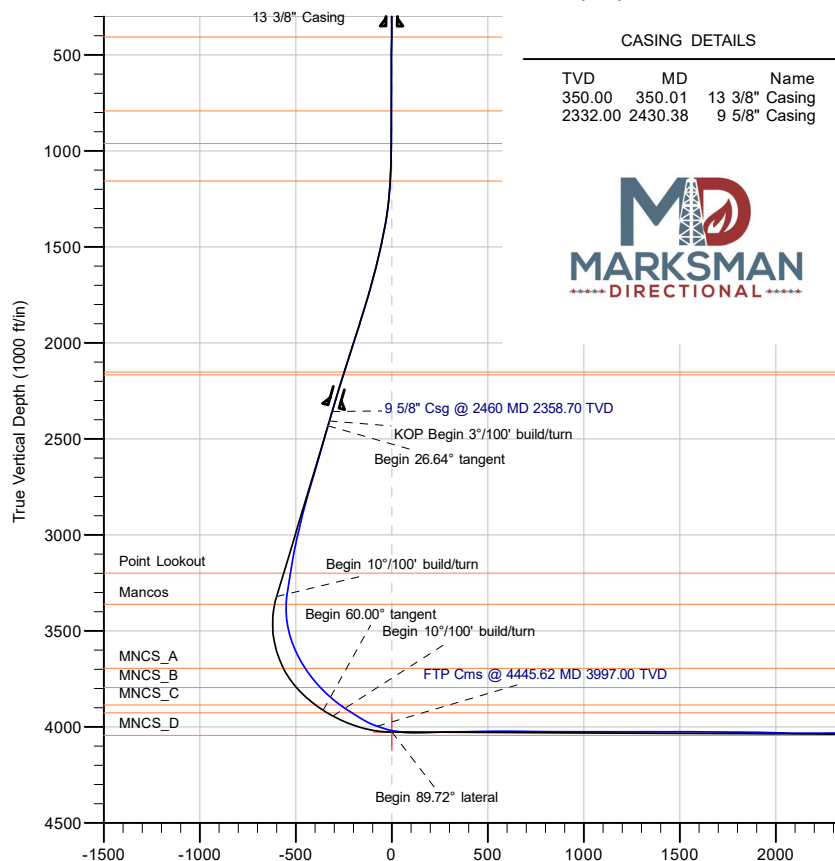



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Kimbeto Wash Unit 794H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Site:	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)	MD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Well:	Kimbeto Wash Unit 794H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Feb2822

Project	San Juan County, New Mexico NAD83 NM W		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)		
Site Position:		Northing:	1,893,797.104 usft
From:	Lat/Long	Easting:	2,734,399.634 usft
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "
		Latitude:	36.204663000
		Longitude:	-107.795004000

Well	Kimbeto Wash Unit 794H, Surf loc: 181 FNL 2397 FWL Section 28-T23N-R09W					
Well Position	+N/-S	0.00 ft	Northing:	1,893,797.112 usft	Latitude:	36.204663000
	+E/-W	0.00 ft	Easting:	2,734,419.400 usft	Longitude:	-107.794937000
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	6,534.00 ft
Grid Convergence:		0.02 °				

Wellbore	Original Hole				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	5/22/2022	8.72	62.71	49,195.09788727

Design	Surveys Original Hole				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00	314.693	

Survey Program	Date	5/27/2022			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
405.00	2,414.00	MWD int (Original Hole)	MWD	OWSG MWD - Standard	
2,491.00	10,721.00	MWD (Original Hole)	MWD	OWSG MWD - Standard	
10,807.00	10,807.00	Projection (Original Hole)	MWD	OWSG MWD - Standard	

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00	0.00
405.00	1.01	211.530	404.98	-3.04	-1.87	-0.81	0.25	0.25	0.00
MWD surveys									
496.00	1.54	213.020	495.96	-4.75	-2.95	-1.24	0.58	0.58	1.64
587.00	1.09	231.640	586.93	-6.31	-4.30	-1.39	0.68	-0.49	20.46
679.00	0.82	220.740	678.92	-7.36	-5.41	-1.33	0.35	-0.29	-11.85
770.00	0.79	202.570	769.91	-8.43	-6.08	-1.61	0.28	-0.03	-19.97



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Kimbeto Wash Unit 794H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Site:	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)	MD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Well:	Kimbeto Wash Unit 794H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Feb2822

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
861.00	0.44	230.970	860.91	-9.23	-6.59	-1.80	0.50	-0.38	31.21
950.00	0.38	150.500	949.90	-9.70	-6.71	-2.05	0.60	-0.07	-90.42
1,041.00	2.44	71.870	1,040.87	-9.36	-4.72	-3.23	2.63	2.26	-86.41
1,135.00	6.03	73.610	1,134.60	-7.34	1.92	-6.53	3.82	3.82	1.85
1,230.00	9.78	74.400	1,228.68	-3.76	14.48	-12.94	3.95	3.95	0.83
1,324.00	12.74	84.210	1,320.87	-0.57	32.49	-23.50	3.74	3.15	10.44
1,418.00	14.19	96.950	1,412.31	-0.92	54.24	-39.21	3.50	1.54	13.55
1,513.00	15.60	94.900	1,504.11	-3.42	78.53	-58.23	1.58	1.48	-2.16
1,608.00	18.47	92.370	1,594.94	-5.13	106.30	-79.18	3.12	3.02	-2.66
1,702.00	21.34	89.000	1,683.31	-5.45	138.29	-102.14	3.29	3.05	-3.59
1,796.00	24.78	85.560	1,769.79	-3.63	175.04	-126.98	3.93	3.66	-3.66
1,891.00	25.88	82.120	1,855.66	0.76	215.43	-152.61	1.93	1.16	-3.62
1,985.00	28.57	81.200	1,939.24	7.01	257.97	-178.46	2.90	2.86	-0.98
2,078.00	29.13	80.590	2,020.70	14.11	302.28	-204.96	0.68	0.60	-0.66
2,173.00	29.45	80.850	2,103.56	21.61	348.15	-232.30	0.36	0.34	0.27
2,267.00	27.95	80.820	2,186.00	28.80	392.71	-258.92	1.60	-1.60	-0.03
2,361.00	26.34	81.490	2,269.65	35.40	435.08	-284.40	1.74	-1.71	0.71
2,414.00	25.82	81.220	2,317.25	38.90	458.12	-298.31	1.01	-0.98	-0.51
2,460.00	25.57	82.449	2,358.70	41.73	477.86	-310.35	1.28	-0.54	2.67
9 5/8" Csg @ 2460 MD 2358.70 TVD									
2,491.00	25.41	83.290	2,386.69	43.39	491.10	-318.60	1.28	-0.52	2.71
2,585.00	25.54	81.890	2,471.55	48.60	531.19	-343.43	0.66	0.14	-1.49
2,680.00	24.65	81.310	2,557.58	54.49	571.05	-367.63	0.97	-0.94	-0.61
2,775.00	27.47	80.590	2,642.91	61.06	612.26	-392.30	2.99	2.97	-0.76
2,869.00	27.16	79.870	2,726.43	68.38	654.77	-417.37	0.48	-0.33	-0.77
2,984.00	25.91	78.720	2,829.32	77.91	705.25	-446.55	1.18	-1.09	-1.00
3,079.00	24.74	78.320	2,915.18	86.00	745.07	-469.18	1.24	-1.23	-0.42
3,174.00	26.20	72.020	3,000.96	96.50	784.49	-489.82	3.24	1.54	-6.63
3,268.00	24.23	70.860	3,086.00	109.23	822.46	-507.85	2.16	-2.10	-1.23
3,362.00	21.66	69.340	3,172.56	121.68	856.92	-523.59	2.81	-2.73	-1.62
3,457.00	20.67	67.960	3,261.15	134.16	888.86	-537.53	1.17	-1.04	-1.45
3,488.00	20.94	69.230	3,290.13	138.17	899.12	-541.99	1.70	0.87	4.10
3,519.00	20.91	64.470	3,319.09	142.52	909.29	-546.16	5.48	-0.10	-15.35
3,551.00	21.12	56.390	3,348.97	148.18	919.24	-549.26	9.07	0.66	-25.25
3,582.00	21.34	46.720	3,377.87	155.14	928.00	-550.60	11.31	0.71	-31.19
3,614.00	22.10	36.220	3,407.61	163.99	935.80	-549.92	12.36	2.38	-32.81
3,645.00	23.44	28.690	3,436.20	174.10	942.21	-547.36	10.34	4.32	-24.29
3,677.00	25.71	24.550	3,465.30	186.00	948.15	-543.21	8.90	7.09	-12.94
3,709.00	27.13	19.410	3,493.96	199.20	953.46	-537.70	8.41	4.44	-16.06
3,740.00	27.71	14.720	3,521.48	212.84	957.64	-531.08	7.21	1.87	-15.13
3,771.00	28.76	7.860	3,548.80	227.20	960.49	-523.01	11.00	3.39	-22.13
3,803.00	30.09	2.120	3,576.68	242.85	961.84	-512.96	9.74	4.16	-17.94
3,834.00	31.38	356.590	3,603.33	258.67	961.65	-501.70	10.02	4.16	-17.84



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Kimbeto Wash Unit 794H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Site:	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)	MD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Well:	Kimbeto Wash Unit 794H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Feb2822

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
3,866.00	32.63	352.210	3,630.47	275.54	959.99	-488.65	8.24	3.91	-13.69
3,897.00	34.60	348.350	3,656.29	292.45	957.08	-474.69	9.37	6.35	-12.45
3,929.00	36.12	345.710	3,682.38	310.49	952.91	-459.04	6.73	4.75	-8.25
3,960.00	38.35	343.910	3,707.06	328.58	947.99	-442.82	8.01	7.19	-5.81
3,992.00	40.37	341.310	3,731.81	347.94	941.92	-424.88	8.15	6.31	-8.13
4,023.00	41.87	339.410	3,755.16	367.14	935.06	-406.51	6.30	4.84	-6.13
4,055.00	43.66	336.640	3,778.65	387.28	926.92	-386.56	8.11	5.59	-8.66
4,086.00	45.87	335.260	3,800.66	407.21	918.02	-366.22	7.79	7.13	-4.45
4,118.00	47.85	333.390	3,822.54	428.25	907.90	-344.22	7.51	6.19	-5.84
4,149.00	49.56	333.060	3,843.00	449.04	897.41	-322.14	5.57	5.52	-1.06
4,181.00	51.66	332.130	3,863.31	471.00	886.03	-298.61	6.94	6.56	-2.91
4,212.00	53.92	331.020	3,882.05	492.70	874.27	-274.98	7.83	7.29	-3.58
4,244.00	57.29	329.180	3,900.13	515.59	861.10	-249.53	11.55	10.53	-5.75
4,275.00	58.25	327.830	3,916.66	537.94	847.40	-224.07	4.81	3.10	-4.35
4,307.00	57.80	327.430	3,933.61	560.87	832.87	-197.61	1.76	-1.41	-1.25
4,338.00	58.70	326.850	3,949.92	583.01	818.57	-171.87	3.31	2.90	-1.87
4,369.00	61.82	325.190	3,965.30	605.33	803.52	-145.48	11.09	10.06	-5.35
4,400.00	64.66	324.400	3,979.25	627.94	787.56	-118.23	9.44	9.16	-2.55
4,432.00	68.08	323.300	3,992.08	651.61	770.27	-89.29	11.14	10.69	-3.44
4,445.62	69.56	322.793	3,997.00	661.76	762.63	-76.73	11.41	10.86	-3.72
FTP Cms @ 4445.62 MD 3997.00 TVD									
4,463.00	71.45	322.160	4,002.80	674.75	752.66	-60.50	11.41	10.88	-3.64
4,494.00	74.78	321.540	4,011.80	698.07	734.33	-31.07	10.91	10.74	-2.00
4,526.00	78.22	320.340	4,019.27	722.23	714.73	-0.14	11.35	10.75	-3.75
4,557.00	81.13	318.950	4,024.83	745.46	694.98	30.24	10.37	9.39	-4.48
4,589.00	83.66	317.600	4,029.06	769.13	673.87	61.89	8.94	7.91	-4.22
4,620.00	87.45	315.460	4,031.46	791.56	652.61	92.77	14.03	12.23	-6.90
4,651.00	90.71	314.870	4,031.96	813.53	630.76	123.77	10.69	10.52	-1.90
4,683.00	91.54	314.650	4,031.33	836.06	608.04	155.76	2.68	2.59	-0.69
4,777.00	92.04	314.610	4,028.40	902.07	541.18	249.71	0.53	0.53	-0.04
4,872.00	90.68	315.650	4,026.14	969.37	474.18	344.68	1.80	-1.43	1.09
4,966.00	91.17	315.120	4,024.63	1,036.28	408.17	438.66	0.77	0.52	-0.56
5,061.00	90.09	315.060	4,023.58	1,103.55	341.10	533.65	1.14	-1.14	-0.06
5,156.00	89.74	314.350	4,023.72	1,170.38	273.59	628.65	0.83	-0.37	-0.75
5,250.00	90.07	315.160	4,023.88	1,236.56	206.83	722.65	0.93	0.35	0.86
5,344.00	89.35	314.170	4,024.35	1,302.64	139.98	816.65	1.30	-0.77	-1.05
5,439.00	88.63	312.950	4,026.03	1,368.09	71.15	911.61	1.49	-0.76	-1.28
5,532.00	90.66	316.250	4,026.60	1,433.38	4.95	1,004.59	4.17	2.18	3.55
5,627.00	90.52	316.140	4,025.63	1,501.94	-60.81	1,099.55	0.19	-0.15	-0.12
5,722.00	90.13	315.500	4,025.09	1,570.06	-127.01	1,194.53	0.79	-0.41	-0.67
5,816.00	90.00	315.610	4,024.98	1,637.17	-192.84	1,288.52	0.18	-0.14	0.12
5,911.00	88.96	313.570	4,025.84	1,703.86	-260.48	1,383.51	2.41	-1.09	-2.15
6,005.00	90.27	316.390	4,026.47	1,770.29	-326.96	1,477.50	3.31	1.39	3.00



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Kimbeto Wash Unit 794H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Site:	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)	MD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Well:	Kimbeto Wash Unit 794H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Feb2822

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
6,100.00	90.11	316.170	4,026.16	1,838.95	-392.62	1,572.46	0.29	-0.17	-0.23
6,194.00	89.89	316.010	4,026.16	1,906.67	-457.81	1,666.43	0.29	-0.23	-0.17
6,288.00	89.53	315.770	4,026.64	1,974.16	-523.24	1,760.41	0.46	-0.38	-0.26
6,383.00	89.06	317.500	4,027.80	2,043.22	-588.46	1,855.34	1.89	-0.49	1.82
6,477.00	88.70	317.160	4,029.64	2,112.32	-652.16	1,949.23	0.53	-0.38	-0.36
6,572.00	88.02	317.260	4,032.36	2,182.01	-716.67	2,044.09	0.72	-0.72	0.11
6,666.00	90.31	314.980	4,033.73	2,249.75	-781.81	2,138.04	3.44	2.44	-2.43
6,761.00	90.39	314.690	4,033.15	2,316.73	-849.18	2,233.04	0.32	0.08	-0.31
6,855.00	90.37	314.190	4,032.53	2,382.54	-916.29	2,327.04	0.53	-0.02	-0.53
6,949.00	90.42	314.230	4,031.88	2,448.09	-983.67	2,421.03	0.07	0.05	0.04
7,044.00	90.42	313.940	4,031.18	2,514.18	-1,051.90	2,516.02	0.31	0.00	-0.31
7,137.00	89.15	314.860	4,031.53	2,579.24	-1,118.35	2,609.02	1.69	-1.37	0.99
7,232.00	88.97	314.960	4,033.09	2,646.30	-1,185.62	2,704.01	0.22	-0.19	0.11
7,326.00	88.39	313.710	4,035.26	2,711.98	-1,252.83	2,797.98	1.47	-0.62	-1.33
7,420.00	88.15	313.640	4,038.09	2,776.86	-1,320.79	2,891.92	0.27	-0.26	-0.07
7,514.00	88.18	313.790	4,041.10	2,841.79	-1,388.70	2,985.86	0.16	0.03	0.16
7,608.00	87.56	313.130	4,044.60	2,906.40	-1,456.88	3,079.77	0.96	-0.66	-0.70
7,703.00	90.77	313.710	4,045.98	2,971.68	-1,525.86	3,174.72	3.43	3.38	0.61
7,797.00	90.59	314.090	4,044.87	3,036.86	-1,593.59	3,268.71	0.45	-0.19	0.40
7,891.00	89.58	312.450	4,044.73	3,101.29	-1,662.03	3,362.67	2.05	-1.07	-1.74
7,986.00	89.58	314.740	4,045.42	3,166.79	-1,730.83	3,457.65	2.41	0.00	2.41
8,080.00	89.98	314.690	4,045.78	3,232.92	-1,797.63	3,551.65	0.43	0.43	-0.05
8,174.00	89.44	314.630	4,046.26	3,298.99	-1,864.49	3,645.64	0.58	-0.57	-0.06
8,268.00	89.57	314.960	4,047.07	3,365.22	-1,931.19	3,739.64	0.38	0.14	0.35
8,362.00	90.15	315.480	4,047.30	3,431.94	-1,997.40	3,833.64	0.83	0.62	0.55
8,456.00	89.26	314.410	4,047.78	3,498.35	-2,063.93	3,927.63	1.48	-0.95	-1.14
8,551.00	89.11	314.120	4,049.14	3,564.65	-2,131.95	4,022.62	0.34	-0.16	-0.31
8,645.00	89.66	315.060	4,050.15	3,630.63	-2,198.89	4,116.61	1.16	0.59	1.00
8,739.00	90.39	315.850	4,050.10	3,697.63	-2,264.83	4,210.60	1.14	0.78	0.84
8,834.00	89.94	316.350	4,049.83	3,766.08	-2,330.70	4,305.57	0.71	-0.47	0.53
8,927.00	89.39	316.480	4,050.37	3,833.44	-2,394.82	4,398.53	0.61	-0.59	0.14
9,022.00	90.33	318.140	4,050.61	3,903.27	-2,459.23	4,493.42	2.01	0.99	1.75
9,116.00	88.43	315.470	4,051.62	3,971.78	-2,523.55	4,587.34	3.49	-2.02	-2.84
9,210.00	87.66	315.060	4,054.83	4,038.52	-2,589.68	4,681.28	0.93	-0.82	-0.44
9,304.00	89.91	314.600	4,056.82	4,104.77	-2,656.32	4,775.25	2.44	2.39	-0.49
9,399.00	89.86	315.020	4,057.01	4,171.72	-2,723.72	4,870.25	0.45	-0.05	0.44
9,493.00	89.18	313.770	4,057.80	4,237.48	-2,790.88	4,964.25	1.51	-0.72	-1.33
9,588.00	88.75	313.940	4,059.52	4,303.29	-2,859.37	5,059.22	0.49	-0.45	0.18
9,683.00	88.41	314.010	4,061.87	4,369.23	-2,927.72	5,154.18	0.37	-0.36	0.07
9,777.00	87.80	314.160	4,064.98	4,434.59	-2,995.20	5,248.13	0.67	-0.65	0.16
9,872.00	89.34	313.040	4,067.35	4,500.08	-3,063.97	5,343.08	2.00	1.62	-1.18
9,966.00	89.25	312.270	4,068.51	4,563.77	-3,133.10	5,437.01	0.82	-0.10	-0.82



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Kimbeto Wash Unit 794H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Site:	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)	MD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Well:	Kimbeto Wash Unit 794H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Feb2822

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,061.00	90.71	314.430	4,068.54	4,628.98	-3,202.18	5,531.97	2.74	1.54	2.27
10,155.00	90.54	314.590	4,067.52	4,694.87	-3,269.21	5,625.97	0.25	-0.18	0.17
10,249.00	90.01	314.800	4,067.06	4,760.98	-3,336.03	5,719.97	0.61	-0.56	0.22
10,343.00	89.75	313.900	4,067.26	4,826.69	-3,403.24	5,813.96	1.00	-0.28	-0.96
10,438.00	89.06	313.520	4,068.25	4,892.33	-3,471.91	5,908.94	0.83	-0.73	-0.40
10,533.00	88.51	313.590	4,070.26	4,957.78	-3,540.74	6,003.90	0.58	-0.58	0.07
10,627.00	88.67	313.540	4,072.58	5,022.54	-3,608.83	6,097.86	0.18	0.17	-0.05
10,678.00	88.62	313.323	4,073.78	5,057.59	-3,645.86	6,148.83	0.44	-0.11	-0.43
LTP @ 10678 MD 4073.78 TVD									
10,721.00	88.57	313.140	4,074.84	5,087.03	-3,677.18	6,191.80	0.44	-0.11	-0.43
Survey @ 10721.00 MD 4074.84 TVD									
10,798.00	88.57	313.140	4,076.76	5,139.67	-3,733.35	6,268.75	0.00	0.00	0.00
330 perp @ 10798 MD 4076.76 TVD									
10,807.00	88.57	313.140	4,076.99	5,145.82	-3,739.91	6,277.74	0.00	0.00	0.00
Survey Proj. to 10807 MD 4076.99 TVD 245 FSL 1278 FEL									

Design Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
405.00	404.98	-3.04	-1.87	MWD surveys
2,460.00	2,358.70	41.73	477.86	9 5/8" Csg @ 2460 MD 2358.70 TVD
4,445.62	3,997.00	661.76	762.63	FTP Cms @ 4445.62 MD 3997.00 TVD
10,678.00	4,073.78	5,057.59	-3,645.86	LTP @ 10678 MD 4073.78 TVD
10,721.00	4,074.84	5,087.03	-3,677.18	Survey @ 10721.00 MD 4074.84 TVD
10,798.00	4,076.76	5,139.67	-3,733.35	330 perp @ 10798 MD 4076.76 TVD
10,807.00	4,076.99	5,145.82	-3,739.91	Survey Proj. to 10807 MD 4076.99 TVD 245 FSL 1278 FEL



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Kimbeto Wash Unit 794H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Site:	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)	MD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Well:	Kimbeto Wash Unit 794H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Feb2822

Project	San Juan County, New Mexico NAD83 NM W		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)				
Site Position:		Northing:	1,893,797.104 usft	Latitude:	36.204663000
From:	Lat/Long	Easting:	2,734,399.634 usft	Longitude:	-107.795004000
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "	Grid Convergence:	0.02 °

Well	Kimbeto Wash Unit 794H, Surf loc: 181 FNL 2397 FWL Section 28-T23N-R09W					
Well Position	+N/-S	0.00 ft	Northing:	1,893,797.112 usft	Latitude:	36.204663000
	+E/-W	0.00 ft	Easting:	2,734,419.400 usft	Longitude:	-107.794937000
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	6,534.00 ft

Wellbore	Original Hole				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	5/22/2022	8.72	62.71	49,195.09788727

Design	Surveys Original Hole				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00		314.693

Survey Program	Date	5/27/2022			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
405.00	2,414.00	MWD int (Original Hole)	MWD	OWSG MWD - Standard	
2,491.00	10,721.00	MWD (Original Hole)	MWD	OWSG MWD - Standard	
10,807.00	10,807.00	Projection (Original Hole)	MWD	OWSG MWD - Standard	

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.00	0.00	0.000	0.00	0.00	0.00	1,893,797.112	2,734,419.400	36.204663000	-107.794937000
405.00	1.01	211.530	404.98	-3.04	-1.87	1,893,794.070	2,734,417.534	36.204654644	-107.794943331
MWD surveys									
496.00	1.54	213.020	495.96	-4.75	-2.95	1,893,792.361	2,734,416.448	36.204649950	-107.794947014
587.00	1.09	231.640	586.93	-6.31	-4.30	1,893,790.798	2,734,415.103	36.204645660	-107.794951575
679.00	0.82	220.740	678.92	-7.36	-5.41	1,893,789.756	2,734,413.987	36.204642799	-107.794955358
770.00	0.79	202.570	769.91	-8.43	-6.08	1,893,788.684	2,734,413.321	36.204639853	-107.794957616
861.00	0.44	230.970	860.91	-9.23	-6.59	1,893,787.884	2,734,412.809	36.204637657	-107.794959354
950.00	0.38	150.500	949.90	-9.70	-6.71	1,893,787.412	2,734,412.689	36.204636361	-107.794959761



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Kimbeto Wash Unit 794H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Site:	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)	MD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Well:	Kimbeto Wash Unit 794H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Feb2822

Survey									
Measured			Vertical			Map	Map		
Depth	Inclination	Azimuth	Depth	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(usft)	(usft)		
1,041.00	2.44	71.870	1,040.87	-9.36	-4.72	1,893,787.753	2,734,414.679	36.204637293	-107.794953016
1,135.00	6.03	73.610	1,134.60	-7.34	1.92	1,893,789.769	2,734,421.319	36.204642825	-107.794930505
1,230.00	9.78	74.400	1,228.68	-3.76	14.48	1,893,793.348	2,734,433.882	36.204652644	-107.794887917
1,324.00	12.74	84.210	1,320.87	-0.57	32.49	1,893,796.542	2,734,451.889	36.204661397	-107.794826877
1,418.00	14.19	96.950	1,412.31	-0.92	54.24	1,893,796.193	2,734,473.644	36.204660416	-107.794753138
1,513.00	15.60	94.900	1,504.11	-3.42	78.53	1,893,793.693	2,734,497.931	36.204653521	-107.794670819
1,608.00	18.47	92.370	1,594.94	-5.13	106.30	1,893,791.979	2,734,525.699	36.204648783	-107.794576697
1,702.00	21.34	89.000	1,683.31	-5.45	138.29	1,893,791.662	2,734,557.685	36.204647876	-107.794468279
1,796.00	24.78	85.560	1,769.79	-3.63	175.04	1,893,793.486	2,734,594.439	36.204652846	-107.794343697
1,891.00	25.88	82.120	1,855.66	0.76	215.43	1,893,797.870	2,734,634.829	36.204664845	-107.794206786
1,985.00	28.57	81.200	1,939.24	7.01	257.97	1,893,804.122	2,734,677.370	36.204681974	-107.794062579
2,078.00	29.13	80.590	2,020.70	14.11	302.28	1,893,811.226	2,734,721.678	36.204701437	-107.793912385
2,173.00	29.45	80.850	2,103.56	21.61	348.15	1,893,818.720	2,734,767.546	36.204721974	-107.793756899
2,267.00	27.95	80.820	2,186.00	28.80	392.71	1,893,825.909	2,734,812.110	36.204741674	-107.793605838
2,361.00	26.34	81.490	2,269.65	35.40	435.08	1,893,832.510	2,734,854.483	36.204759759	-107.793462199
2,414.00	25.82	81.220	2,317.25	38.90	458.12	1,893,836.012	2,734,877.519	36.204769353	-107.793384114
2,460.00	25.57	82.449	2,358.70	41.73	477.86	1,893,838.846	2,734,897.260	36.204777115	-107.793317193
9 5/8" Csg @ 2460 MD 2358.70 TVD									
2,491.00	25.41	83.290	2,386.69	43.39	491.10	1,893,840.502	2,734,910.498	36.204781650	-107.793272320
2,585.00	25.54	81.890	2,471.55	48.60	531.19	1,893,845.717	2,734,950.589	36.204795931	-107.793136422
2,680.00	24.65	81.310	2,557.58	54.49	571.05	1,893,851.599	2,734,990.448	36.204812045	-107.793001309
2,775.00	27.47	80.590	2,642.91	61.06	612.26	1,893,858.176	2,735,031.656	36.204830065	-107.792861621
2,869.00	27.16	79.870	2,726.43	68.38	654.77	1,893,865.495	2,735,074.164	36.204850120	-107.792717523
2,984.00	25.91	78.720	2,829.32	77.91	705.25	1,893,875.026	2,735,124.645	36.204876246	-107.792546402
3,079.00	24.74	78.320	2,915.18	86.00	745.07	1,893,883.110	2,735,164.468	36.204898409	-107.792411406
3,174.00	26.20	72.020	3,000.96	96.50	784.49	1,893,893.611	2,735,203.892	36.204927209	-107.792277760
3,268.00	24.23	70.860	3,086.00	109.23	822.46	1,893,906.342	2,735,241.856	36.204962138	-107.792149059
3,362.00	21.66	69.340	3,172.56	121.68	856.92	1,893,918.789	2,735,276.316	36.204996292	-107.792032234
3,457.00	20.67	67.960	3,261.15	134.16	888.86	1,893,931.267	2,735,308.263	36.205030532	-107.791923928
3,488.00	20.94	69.230	3,290.13	138.17	899.12	1,893,935.285	2,735,318.514	36.205041557	-107.791889175
3,519.00	20.91	64.470	3,319.09	142.52	909.29	1,893,939.634	2,735,328.686	36.205053492	-107.791854690
3,551.00	21.12	56.390	3,348.97	148.18	919.24	1,893,945.287	2,735,338.643	36.205069011	-107.791820934
3,582.00	21.34	46.720	3,377.87	155.14	928.00	1,893,952.248	2,735,347.403	36.205088122	-107.791791229
3,614.00	22.10	36.220	3,407.61	163.99	935.80	1,893,961.099	2,735,355.202	36.205112429	-107.791764782
3,645.00	23.44	28.690	3,436.20	174.10	942.21	1,893,971.215	2,735,361.609	36.205140211	-107.791743048
3,677.00	25.71	24.550	3,465.30	186.00	948.15	1,893,983.114	2,735,367.550	36.205172892	-107.791722895
3,709.00	27.13	19.410	3,493.96	199.20	953.46	1,893,996.312	2,735,372.859	36.205209141	-107.791704878
3,740.00	27.71	14.720	3,521.48	212.84	957.64	1,894,009.951	2,735,377.040	36.205246604	-107.791690687
3,771.00	28.76	7.860	3,548.80	227.20	960.49	1,894,024.314	2,735,379.892	36.205286056	-107.791680999
3,803.00	30.09	2.120	3,576.68	242.85	961.84	1,894,039.960	2,735,381.242	36.205329036	-107.791676400
3,834.00	31.38	356.590	3,603.33	258.67	961.65	1,894,055.786	2,735,381.049	36.205372512	-107.791677030
3,866.00	32.63	352.210	3,630.47	275.54	959.99	1,894,072.653	2,735,379.384	36.205418851	-107.791682650
3,897.00	34.60	348.350	3,656.29	292.45	957.08	1,894,089.558	2,735,376.473	36.205465292	-107.791692492
3,929.00	36.12	345.710	3,682.38	310.49	952.91	1,894,107.598	2,735,372.310	36.205514856	-107.791706577
3,960.00	38.35	343.910	3,707.06	328.58	947.99	1,894,125.696	2,735,367.389	36.205564577	-107.791723233
3,992.00	40.37	341.310	3,731.81	347.94	941.92	1,894,145.054	2,735,361.316	36.205617765	-107.791743791
4,023.00	41.87	339.410	3,755.16	367.14	935.06	1,894,164.251	2,735,354.459	36.205670508	-107.791767003
4,055.00	43.66	336.640	3,778.65	387.28	926.92	1,894,184.392	2,735,346.323	36.205725847	-107.791794554
4,086.00	45.87	335.260	3,800.66	407.21	918.02	1,894,204.323	2,735,337.422	36.205780609	-107.791824694
4,118.00	47.85	333.390	3,822.54	428.25	907.90	1,894,225.362	2,735,327.302	36.205838417	-107.791858969
4,149.00	49.56	333.060	3,843.00	449.04	897.41	1,894,246.154	2,735,316.809	36.205895548	-107.791894506
4,181.00	51.66	332.130	3,863.31	471.00	886.03	1,894,268.107	2,735,305.424	36.205955867	-107.791933065
4,212.00	53.92	331.020	3,882.05	492.70	874.27	1,894,289.816	2,735,293.670	36.206015518	-107.791972876
4,244.00	57.29	329.180	3,900.13	515.59	861.10	1,894,312.697	2,735,280.502	36.206078391	-107.792017475



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Kimbeto Wash Unit 794H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Site:	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)	MD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Well:	Kimbeto Wash Unit 794H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Feb2822

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
4,275.00	58.25	327.830	3,916.66	537.94	847.40	1,894,335.055	2,735,266.802	36.206139827	-107.792063883
4,307.00	57.80	327.430	3,933.61	560.87	832.87	1,894,357.982	2,735,252.269	36.206202826	-107.792113110
4,338.00	58.70	326.850	3,949.92	583.01	818.57	1,894,380.124	2,735,237.966	36.206263670	-107.792161562
4,369.00	61.82	325.190	3,965.30	605.33	803.52	1,894,402.437	2,735,222.920	36.206324984	-107.792212531
4,400.00	64.66	324.400	3,979.25	627.94	787.56	1,894,425.050	2,735,206.962	36.206387123	-107.792266590
4,432.00	68.08	323.300	3,992.08	651.61	770.27	1,894,448.717	2,735,189.668	36.206452157	-107.792325177
4,445.62	69.56	322.793	3,997.00	661.76	762.63	1,894,458.868	2,735,182.031	36.206480051	-107.792351048
FTP Cms @ 4445.62 MD 3997.00 TVD									
4,463.00	71.45	322.160	4,002.80	674.75	752.66	1,894,471.858	2,735,172.054	36.206515749	-107.792384849
4,494.00	74.78	321.540	4,011.80	698.07	734.33	1,894,495.181	2,735,153.732	36.206579840	-107.792446921
4,526.00	78.22	320.340	4,019.27	722.23	714.73	1,894,519.336	2,735,134.126	36.206646220	-107.792513343
4,557.00	81.13	318.950	4,024.83	745.46	694.98	1,894,542.573	2,735,114.380	36.206710077	-107.792580245
4,589.00	83.66	317.600	4,029.06	769.13	673.87	1,894,566.243	2,735,093.271	36.206775124	-107.792651764
4,620.00	87.45	315.460	4,031.46	791.56	652.61	1,894,588.667	2,735,072.012	36.206836749	-107.792723794
4,651.00	90.71	314.870	4,031.96	813.53	630.76	1,894,610.644	2,735,050.160	36.206897148	-107.792797831
4,683.00	91.54	314.650	4,031.33	836.06	608.04	1,894,633.172	2,735,027.443	36.206959060	-107.792874804
4,777.00	92.04	314.610	4,028.40	902.07	541.18	1,894,699.177	2,734,960.580	36.207140458	-107.793101355
4,872.00	90.68	315.650	4,026.14	969.37	474.18	1,894,766.483	2,734,893.579	36.207325431	-107.793328374
4,966.00	91.17	315.120	4,024.63	1,036.28	408.17	1,894,833.386	2,734,827.569	36.207509297	-107.793552037
5,061.00	90.09	315.060	4,023.58	1,103.55	341.10	1,894,900.662	2,734,760.504	36.207694184	-107.793779273
5,156.00	89.74	314.350	4,023.72	1,170.38	273.59	1,894,967.489	2,734,692.985	36.207877842	-107.794008052
5,250.00	90.07	315.160	4,023.88	1,236.56	206.83	1,895,033.672	2,734,626.234	36.208059725	-107.794234229
5,344.00	89.35	314.170	4,024.35	1,302.64	139.98	1,895,099.748	2,734,559.381	36.208241317	-107.794460754
5,439.00	88.63	312.950	4,026.03	1,368.09	71.15	1,895,165.202	2,734,490.552	36.208421201	-107.794693979
5,532.00	90.66	316.250	4,026.60	1,433.38	4.95	1,895,230.488	2,734,424.347	36.208600622	-107.794918307
5,627.00	90.52	316.140	4,025.63	1,501.94	-60.81	1,895,299.046	2,734,358.591	36.208789028	-107.795141112
5,722.00	90.13	315.500	4,025.09	1,570.06	-127.01	1,895,367.174	2,734,292.386	36.208976253	-107.795365442
5,816.00	90.00	315.610	4,024.98	1,637.17	-192.84	1,895,434.283	2,734,226.565	36.209160677	-107.795588471
5,911.00	88.96	313.570	4,025.84	1,703.86	-260.48	1,895,500.968	2,734,158.919	36.209343941	-107.795817691
6,005.00	90.27	316.390	4,026.47	1,770.29	-326.96	1,895,567.403	2,734,092.437	36.209526516	-107.796042962
6,100.00	90.11	316.170	4,026.16	1,838.95	-392.62	1,895,636.062	2,734,026.780	36.209715196	-107.796265437
6,194.00	89.89	316.010	4,026.16	1,906.67	-457.81	1,895,703.782	2,733,961.589	36.209901298	-107.796486336
6,288.00	89.53	315.770	4,026.64	1,974.16	-523.24	1,895,771.273	2,733,896.162	36.210086772	-107.796708033
6,383.00	89.06	317.500	4,027.80	2,043.22	-588.46	1,895,840.329	2,733,830.939	36.210276543	-107.796929041
6,477.00	88.70	317.160	4,029.64	2,112.32	-652.16	1,895,909.431	2,733,767.241	36.210466438	-107.797144880
6,572.00	88.02	317.260	4,032.36	2,182.01	-716.67	1,895,979.118	2,733,702.733	36.210657940	-107.797363463
6,666.00	90.31	314.980	4,033.73	2,249.75	-781.81	1,896,046.855	2,733,637.592	36.210844088	-107.797584196
6,761.00	90.39	314.690	4,033.15	2,316.73	-849.18	1,896,113.835	2,733,570.225	36.211028157	-107.797812477
6,855.00	90.37	314.190	4,032.53	2,382.54	-916.29	1,896,179.649	2,733,503.112	36.211209020	-107.798039898
6,949.00	90.42	314.230	4,031.88	2,448.09	-983.67	1,896,245.192	2,733,435.736	36.211389142	-107.798268215
7,044.00	90.42	313.940	4,031.18	2,514.18	-1,051.90	1,896,311.284	2,733,367.499	36.211570770	-107.798499450
7,137.00	89.15	314.860	4,031.53	2,579.24	-1,118.35	1,896,376.350	2,733,301.055	36.211749578	-107.798724607
7,232.00	88.97	314.960	4,033.09	2,646.30	-1,185.62	1,896,443.411	2,733,233.784	36.211933865	-107.798952569
7,326.00	88.39	313.710	4,035.26	2,711.98	-1,252.83	1,896,509.084	2,733,166.569	36.212114341	-107.799180343
7,420.00	88.15	313.640	4,038.09	2,776.86	-1,320.79	1,896,573.967	2,733,098.613	36.212292648	-107.799410631
7,514.00	88.18	313.790	4,041.10	2,841.79	-1,388.70	1,896,638.895	2,733,030.706	36.212471074	-107.799640753
7,608.00	87.56	313.130	4,044.60	2,906.40	-1,456.88	1,896,703.507	2,732,962.523	36.212648635	-107.799871811
7,703.00	90.77	313.710	4,045.98	2,971.68	-1,525.86	1,896,768.788	2,732,893.539	36.212828036	-107.800105589
7,797.00	90.59	314.090	4,044.87	3,036.86	-1,593.59	1,896,833.963	2,732,825.812	36.213007141	-107.800335103
7,891.00	89.58	312.450	4,044.73	3,101.29	-1,662.03	1,896,898.391	2,732,757.371	36.213184194	-107.800567040
7,986.00	89.58	314.740	4,045.42	3,166.79	-1,730.83	1,896,963.893	2,732,688.575	36.213364197	-107.800800179
8,080.00	89.98	314.690	4,045.78	3,232.92	-1,797.63	1,897,030.029	2,732,621.778	36.213545940	-107.801026544
8,174.00	89.44	314.630	4,046.26	3,298.99	-1,864.49	1,897,096.100	2,732,554.918	36.213727505	-107.801253124
8,268.00	89.57	314.960	4,047.07	3,365.22	-1,931.19	1,897,162.327	2,732,488.216	36.213909498	-107.801479171



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Kimbeto Wash Unit 794H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Site:	Kimbeto Wash 772 Pad (772, 774, 793, 794 & 795)	MD Reference:	RKB=6534+28 @ 6562.00ft (Ensign 773)
Well:	Kimbeto Wash Unit 794H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	Surveys Original Hole	Database:	DB_Feb2822

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
8,362.00	90.15	315.480	4,047.30	3,431.94	-1,997.40	1,897,229.049	2,732,422.004	36.214092849	-107.801703553
8,456.00	89.26	314.410	4,047.78	3,498.35	-2,063.93	1,897,295.450	2,732,355.475	36.214275320	-107.801929013
8,551.00	89.11	314.120	4,049.14	3,564.65	-2,131.95	1,897,361.751	2,732,287.451	36.214457515	-107.802159543
8,645.00	89.66	315.060	4,050.15	3,630.63	-2,198.89	1,897,427.737	2,732,220.514	36.214638843	-107.802386388
8,739.00	90.39	315.850	4,050.10	3,697.63	-2,264.83	1,897,494.730	2,732,154.577	36.214822936	-107.802609844
8,834.00	89.94	316.350	4,049.83	3,766.08	-2,330.70	1,897,563.181	2,732,088.704	36.215011036	-107.802833080
8,927.00	89.39	316.480	4,050.37	3,833.44	-2,394.82	1,897,630.545	2,732,024.589	36.215196145	-107.803050362
9,022.00	90.33	318.140	4,050.61	3,903.27	-2,459.23	1,897,700.369	2,731,960.179	36.215388014	-107.803268640
9,116.00	88.43	315.470	4,051.62	3,971.78	-2,523.55	1,897,768.885	2,731,895.851	36.215576287	-107.803486646
9,210.00	87.66	315.060	4,054.83	4,038.52	-2,589.68	1,897,835.620	2,731,829.730	36.215759671	-107.803710729
9,304.00	89.91	314.600	4,056.82	4,104.77	-2,656.32	1,897,901.871	2,731,763.085	36.215941724	-107.803936593
9,399.00	89.86	315.020	4,057.01	4,171.72	-2,723.72	1,897,968.822	2,731,695.688	36.216125703	-107.804165006
9,493.00	89.18	313.770	4,057.80	4,237.48	-2,790.88	1,898,034.581	2,731,628.526	36.216306403	-107.804392624
9,588.00	88.75	313.940	4,059.52	4,303.29	-2,859.37	1,898,100.389	2,731,560.033	36.216487240	-107.804624754
9,683.00	88.41	314.010	4,061.87	4,369.23	-2,927.72	1,898,166.331	2,731,491.688	36.216668445	-107.804856384
9,777.00	87.80	314.160	4,064.98	4,434.59	-2,995.20	1,898,231.693	2,731,424.205	36.216848055	-107.805085096
9,872.00	89.34	313.040	4,067.35	4,500.08	-3,063.97	1,898,297.183	2,731,355.433	36.217028017	-107.805318176
9,966.00	89.25	312.270	4,068.51	4,563.77	-3,133.10	1,898,360.871	2,731,286.307	36.217203027	-107.805552460
10,061.00	90.71	314.430	4,068.54	4,628.98	-3,202.18	1,898,426.078	2,731,217.231	36.217382212	-107.805786571
10,155.00	90.54	314.590	4,067.52	4,694.87	-3,269.21	1,898,491.971	2,731,150.201	36.217563278	-107.806013749
10,249.00	90.01	314.800	4,067.06	4,760.98	-3,336.03	1,898,558.083	2,731,083.382	36.217744946	-107.806240215
10,343.00	89.75	313.900	4,067.26	4,826.69	-3,403.24	1,898,623.792	2,731,016.165	36.217925505	-107.806468028
10,438.00	89.06	313.520	4,068.25	4,892.33	-3,471.91	1,898,689.433	2,730,947.499	36.218105881	-107.806700755
10,533.00	88.51	313.590	4,070.26	4,957.78	-3,540.74	1,898,754.878	2,730,878.667	36.218285716	-107.806934047
10,627.00	88.67	313.540	4,072.58	5,022.54	-3,608.83	1,898,819.641	2,730,810.576	36.218463676	-107.807164827
10,678.00	88.62	313.323	4,073.78	5,057.59	-3,645.86	1,898,854.693	2,730,773.551	36.218559994	-107.807290319
LTP @ 10678 MD 4073.78 TVD									
10,721.00	88.57	313.140	4,074.84	5,087.03	-3,677.18	1,898,884.137	2,730,742.231	36.218640902	-107.807396473
Survey @ 10721.00 MD 4074.84 TVD									
10,798.00	88.57	313.140	4,076.76	5,139.67	-3,733.35	1,898,936.771	2,730,686.062	36.218785536	-107.807586846
330 perp @ 10798 MD 4076.76 TVD									
10,807.00	88.57	313.140	4,076.99	5,145.82	-3,739.91	1,898,942.924	2,730,679.497	36.218802441	-107.807609097
Survey Proj. to 10807 MD 4076.99 TVD 245 FSL 1278 FEL									

Design Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates			
		+N/-S (ft)	+E/-W (ft)	Comment	
405.00	404.98	-3.04	-1.87	MWD surveys	
2,460.00	2,358.70	41.73	477.86	9 5/8" Csg @ 2460 MD 2358.70 TVD	
4,445.62	3,997.00	661.76	762.63	FTP Cms @ 4445.62 MD 3997.00 TVD	
10,678.00	4,073.78	5,057.59	-3,645.86	LTP @ 10678 MD 4073.78 TVD	
10,721.00	4,074.84	5,087.03	-3,677.18	Survey @ 10721.00 MD 4074.84 TVD	
10,798.00	4,076.76	5,139.67	-3,733.35	330 perp @ 10798 MD 4076.76 TVD	
10,807.00	4,076.99	5,145.82	-3,739.91	Survey Proj. to 10807 MD 4076.99 TVD 245 FSL 1278 FEL	

Well Name: GREATER LYBROOK UNIT	Well Location: T23N / R9W / SEC 28 / NENW / 36.204663 / -107.795004	County or Parish/State: SAN JUAN / NM
Well Number: 794H	Type of Well: OIL WELL	Allottee or Tribe Name: EASTERN NAVAJO
Lease Number: NOG14031939, NOG14041965	Unit or CA Name: Greater Lybrook	Unit or CA Number: NMNM144419X
US Well Number: 3004535821	Well Status: Drilling Well	Operator: ENDURING RESOURCES LLC

Subsequent Report

Sundry ID: 2695416

Type of Submission: Subsequent Report

Type of Action: Hydraulic Fracturing

Date Sundry Submitted: 09/29/2022

Time Sundry Submitted: 09:11

Date Operation Actually Began: 06/29/2022

Actual Procedure: 6/29/2022 thru 7/13/2022- Pre frac site set up, MIRU, Pressure test 7/14/2022 thru 7/31/2022- 24 hour Frac Ops. 26 total stages, total holes 1092. Perfed w 0.31” holes with SFT-NE45B, FRP-48H, CSA-2400, SCI-28H, & 8,346,010 lbs total proppant 8/8/2022 thru 8/10/2022 – Drilling out operations 8/10/2022 - tubing landed at 4,388’ MD

SR Attachments

Actual Procedure

5_completion_GREATER_LYBROOK_UNIT_794H_20220929091140.pdf

Well Name: GREATER LYBROOK UNIT	Well Location: T23N / R9W / SEC 28 / NENW / 36.204663 / -107.795004	County or Parish/State: SAN JUAN / NM
Well Number: 794H	Type of Well: OIL WELL	Allottee or Tribe Name: EASTERN NAVAJO
Lease Number: N0G14031939, N0G14041965	Unit or CA Name: Greater Lybrook	Unit or CA Number: NMNM144419X
US Well Number: 3004535821	Well Status: Drilling Well	Operator: ENDURING RESOURCES LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: KAYLA WHITE	Signed on: SEP 29, 2022 09:11 AM
Name: ENDURING RESOURCES LLC	
Title: Staff Engineer	
Street Address: 9446 CLERMONT ST	
City: THORNTON	State: CO
Phone: (720) 768-3575	
Email address: KWHITE@CDHCONSULT.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647742	BLM POC Email Address: krennick@blm.gov
Disposition: Accepted	Disposition Date: 09/30/2022
Signature: Kenneth Rennick	

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

FORM APPROVED

OMB NO. 1004-

0137

Expires: January 31, 2018

5. Lease Serial No.

N0-G-1404-1965

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.

NMNM135255A

8. Lease Name and Well No.

Greater Lybrook Unit 794H

9. API Well No.

30-045-35821

10. Field and Pool or Exploratory

Lybrook Mancos W

11. Sec., T., R., M., on Block and

Survey or Area
Sec 28 T23N R9W

12. County or Parish

San Juan

13. State

NM

17. Elevations (DF, RKB, RT, GL)*

6562' KB

1a. Type of Well ☒ Oil Well ☐ Well ☐ Dry ☐ Other
b. Type of Completion ☒ New Well ☐ Work Over ☐ Deepen ☐ Plug Back ☐ Diff. Zones ☐ Hydraulic Fracturing
☐ Other: _____

2. Name of Operator

Enduring Resources IV LLC

3. Address

200 Energy Court Farmington NM 87402

3a. Phone No. (Include area code)

505-636-9743

4. Location of Well (Report location clearly and in accordance with Federal requirements) *

At surface

SHL: 181' FNL & 2397' FWL, Sec 28 T23N, R9W

BHL: 246' FNL & 1281' FEL, Sec 20 T23N, R9W

At top prod. interval reported below At total depth

14. Date Spudded

3/27/2022

15. Date T.D. Reached

5/28/2022

16. Date Completed 8/31/2022

☐ D & A

☒ Ready to Prod.

18. Total Depth: **10,797' MD**

4077' TVD

19. Plug Back T.D.: **10,684' MD**

4074' TVD

20. Depth Bridge Plug Set:

MD

TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)

22. Was well cored?

☒ No

☐ Yes (Submit analysis)

Was DST run?

☒ No

☐ Yes (Submit report)

Directional Survey?

☐ No

☒ Yes (Submit copy)

Form 3160-4

(June 2015)

UNITED STATES

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
17-1/2"	13-3/8", J-55	54.5	0	387' MD		350	86.6	surface	
12-1/4"	9-5/8", J-55	36	0	2470' MD		573	200	surface	
8-1/2"	5-1/2", P-110	20	0	10797' MD		2882	519	surface	

24. Tubing Record

Size	Dept Set (MD)	Packer Dept (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8", 6.5#, L-80	4388'	4320'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
Gallup MNCS_A	3688' TVD	4494' TVD	4,456' – 10,670' MD	.31	1092	

26. Perforation Record

27. Acid, Fracture, Treatment, Cement Squeeze, Post hydraulic fracturing chemical disclosures on FracFocus.org

Depth Interval	Amount, Type of Material and Date of Chemical Disclosure upload on FracFocus.org
4,456' – 10,670' MD	26 total stages, total holes 1092. Perfed w 0.31" holes with SFT-NE45B, FRP-48H, CSA-2400, SCI-28H, & 8,346,010 lbs total proppant

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
8/31/2022	8/31/2022	24 hr	➡	0	211	120			Flowing
Choke Size	Tbg. Press.	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
64/64"	400	1180	➡					Producing	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			➡						

Choke Size	Tbg. Press. Flwg.	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status
------------	-------------------	-------------	------------------	---------	---------	-----------	---------------	-------------

*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API.	Gas Gravity	Production Method
---------------------	-----------	--------------	----------------------	---------	---------	-----------	------------------------	-------------	-------------------

Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status
------------	----------------------	-------------	------------------	---------	---------	-----------	---------------	-------------

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API.	Gas Gravity	Production Method
---------------------	-----------	--------------	----------------------	---------	---------	-----------	------------------------	-------------	-------------------

Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status
------------	----------------------	-------------	------------------	---------	---------	-----------	---------------	-------------

28. Disposition of Gas (Solid, used for fuel, vented, etc.)

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, fl and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
OJAM	87'				
KRLD	172'				
FRLD	404'				
PCCF	793'				
CLFH	2151'				
MENF	2166'				
PNLK	3203'				
MNCS	3688'				

32. Additional remarks (include plugging procedure).

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- ☐ Electrical/Mechanical Logs (1 full set req'd.)
 ☐ Geologic Report
 ☐ DST Report
 ☒ Directional Survey
- ☐ Sundry Notice for plugging and cement verification
 ☐ Core Analysis
 ☐ Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions) *

Name (please print) Kayla White

Title Environmental Engineer

Signature Kayla White

Date: 9/28/2022


WellView

Well Name: GREATER LYBROOK UNIT 794H

API/UWI 30-045-35821	Surface Legal Location (UNIT C) NE/4 NW/4, SECTION 28, T23...	Field Name CHACO	License #	State/Province New Mexico	Well Configuration Type Horizontal
Original KB Elevation (ft) 6,562.00	KB-Tubing Head Distance (ft)	Spud Date 3/27/2022 13:00	Rig Release Date	PBTD (All) (ftKB)	Total Depth All (TVD) (ftKB) Original Hole - 4,077.0

Most Recent Job

Job Category Completion/Workover	Primary Job Type Initial Completion	Secondary Job Type Initial Completion	Start Date 6/1/2022	End Date
-------------------------------------	--	--	------------------------	----------

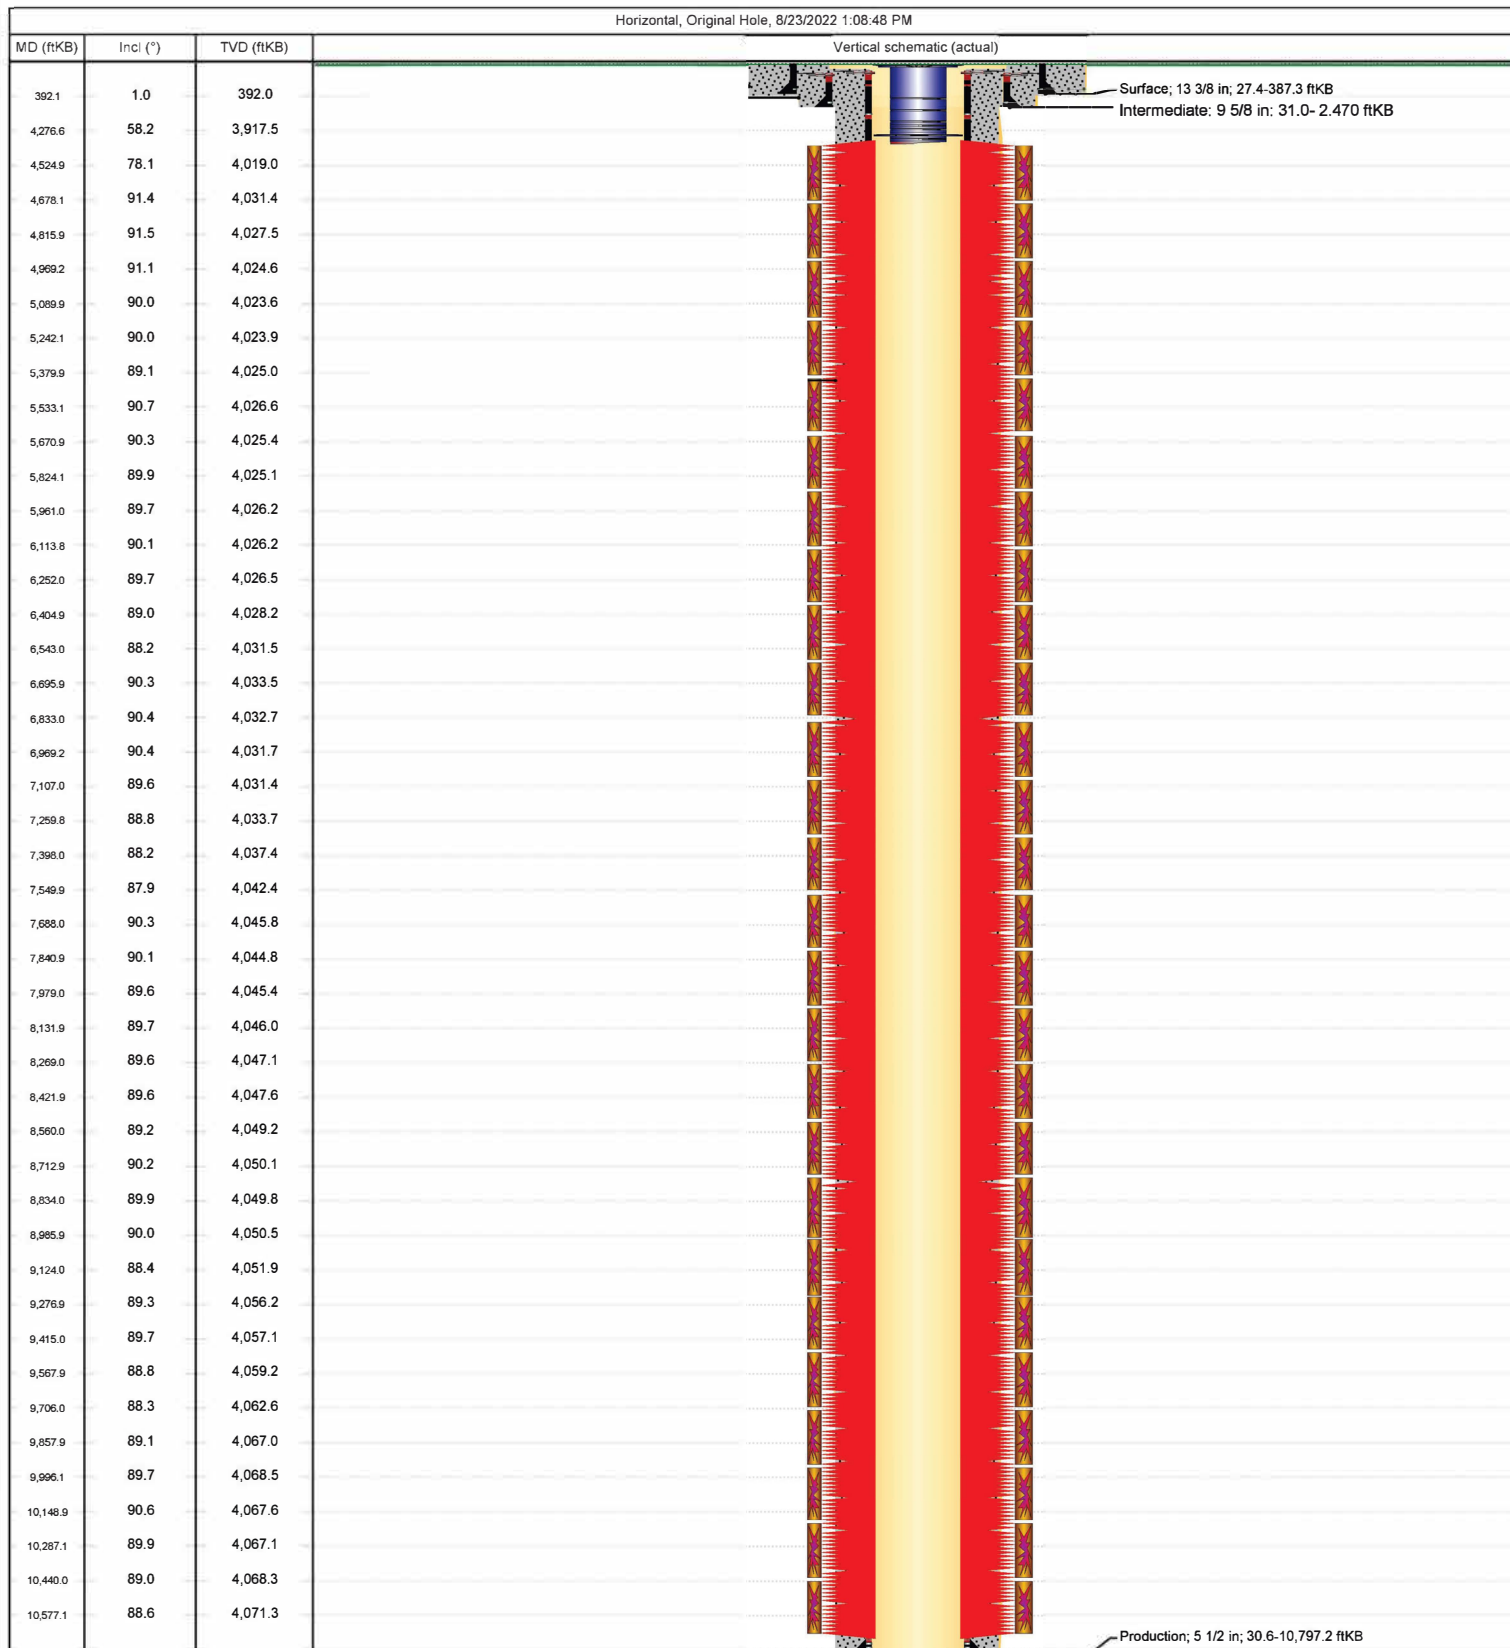

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 150977

ACKNOWLEDGMENTS

Operator: ENDURING RESOURCES, LLC 6300 S Syracuse Way Centennial, CO 80111	OGRID: 372286
	Action Number: 150977
	Action Type: [C-104] Tight Hole Completion Packet (C-104CT)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 150977

CONDITIONS

Operator: ENDURING RESOURCES, LLC 6300 S Syracuse Way Centennial, CO 80111	OGRID: 372286
	Action Number: 150977
	Action Type: [C-104] Tight Hole Completion Packet (C-104CT)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 within 10 days of BLM approval.	3/20/2024
plmartinez	In the future please indicate Perforation Ranges on the Hydraulic Frac. Sundry.	3/20/2024