

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-104
Revised August 1, 2011

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address Enduring Resources IV LLC. 200 Energy Court Farmington NM 87401		² OGRID Number 372286	
		³ Reason for Filing Code/ Effective Date NW	
⁴ API Number 30-045-38322	⁵ Pool Name BASIN MANCOS		⁶ Pool Code 97232
⁷ Property Code 321253	⁸ Property Name RODEO UNIT		⁹ Well Number 503H

II. ¹⁰ Surface Location

Ul or lot no. H	Section 25	Township 23N	Range 9W	Lot Idn	Feet from the 1461'	North/South Line NORTH	Feet from the 425'	East/West line EAST	County SAN JUAN
--------------------	---------------	-----------------	-------------	---------	------------------------	---------------------------	-----------------------	------------------------	--------------------

¹¹ Bottom Hole Location

UL or lot no. B	Section 29	Township 23N	Range 8W	Lot Idn	Feet from the 386'	North/South line NORTH	Feet from the 1906'	East/West line EAST	County SAN JUAN
¹² Lse Code F	¹³ Producing Method Code		¹⁴ Gas Connection Date 2/4/2024		¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date	

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address							²⁰ O/G/W	
248440	WESTERN REFINING COMPANY, LLC165							O	
373888	HARVEST FOUR CORNERS. LLC							G	

IV. Well Completion Data

²¹ Spud Date 10/9/2023	²² Ready Date 2/4/2024	²³ TD 13,975' MD 4923' TVD	²⁴ PBTD 13,857' MD 4921' TVD	²⁵ Perforations 5420 -13841' MD 4877'-4920' TVD	²⁶ DHC, MC R-14313
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	
17-1/2"		13-3/8",54.5#, J-55		377' MD	
12-1/4"		9-5/8",36#, J-55		3,021' MD	
8-1/2"		5-1/2",17#, P-110		13,964 MD	
		2-7/8", 6.5#, J-55		5,404' MD	
				NA	

V. Well Test Data

³¹ Date New Oil 2/8/24	³² Gas Delivery Date 2/4/24	³³ Test Date 2/9/24	³⁴ Test Length 24	³⁵ Tbg. Pressure 89	³⁶ Csg. Pressure 724
³⁷ Choke Size 64"/64"	³⁸ Oil 45 bbls	³⁹ Water 432	⁴⁰ Gas 1089 Mcf		⁴¹ Test Method F
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: <i>Heather Huntington</i> Printed name: Heather Huntington Title: Permitting Technician E-mail Address: hhuntington@enduringresources.com Date: 3/12/24			OIL CONSERVATION DIVISION		
			Approved by: <i>PATRICIA MARTINEZ</i>		
			Title: <i>PETROLEUM SPECIALIST</i>		
			Approval Date: <i>5/15/2024</i>		
Phone: 505-636-9751					



ENDURING RESOURCES IV LLC

January 8, 2024

Re: *RODEO UNIT 503H-30-045-38322*

Pursuant to NMOCD rule 19.15.7.16(C) request is herein made to keep all data and accompanying attachments contained in form C-105 confidential.

Sincerely,

A handwritten signature in blue ink, appearing to read "Heather Huntington".

Heather Huntington
Permitting Technician
Enduring Resources, LLC.
hhuntington@enduringresources.com

AS-DRILLED WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-38322	² Pool Code 97232	³ Pool Name BASIN MANCOS
⁴ Property Code 321253	⁵ Property Name RODEO UNIT	⁶ Well Number 503H
⁷ GRID No. 372286	⁸ Operator Name ENDURING RESOURCES, LLC	⁹ Elevation 6883'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	25	23N	9W		1461	NORTH	425	EAST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	29	23N	8W		386	NORTH	1906	EAST	SAN JUAN

¹² Dedicated Acres 640.97	N/2 - Section 29 N/2 - Section 30	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-14313
---	--------------------------------------	-------------------------------	----------------------------------	------------------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

17 OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature Date
Heather Huntington 1/8/24
Printed Name
hhuntington@enduringresources.com
E-mail Address

18 SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
Date Revised: JANUARY 7, 2024
Survey Date: SEPTEMBER 15, 2021
Signature and Seal of Professional Surveyor

JASON C. EDWARDS
Certificate Number 15269

SURFACE LOCATION (A)
1461' FNL 425' FEL
SEC 25, T23N, R9W

LAT 36.201051°N
LONG -107.732966°W
DATUM: NAD1983

1671.0'

FIRST TAKE POINT (B)
400' FNL 100' FWL
SEC 30, T23N, R8W

LAT 36.203956°N
LONG -107.731188°W
DATUM: NAD1983

8492.7'


LAST TAKE POINT (C)
391' FNL 2008' FEL
SEC 29, T23N, R8W

LAT 36.204043°N
LONG -107.702405°W
DATUM: NAD1983

102.6'

END-OF-LATERAL (D)
386' FNL 1906' FEL
SEC 29, T23N, R8W

LAT 36.204054°N
LONG -107.702057°W
DATUM: NAD1983

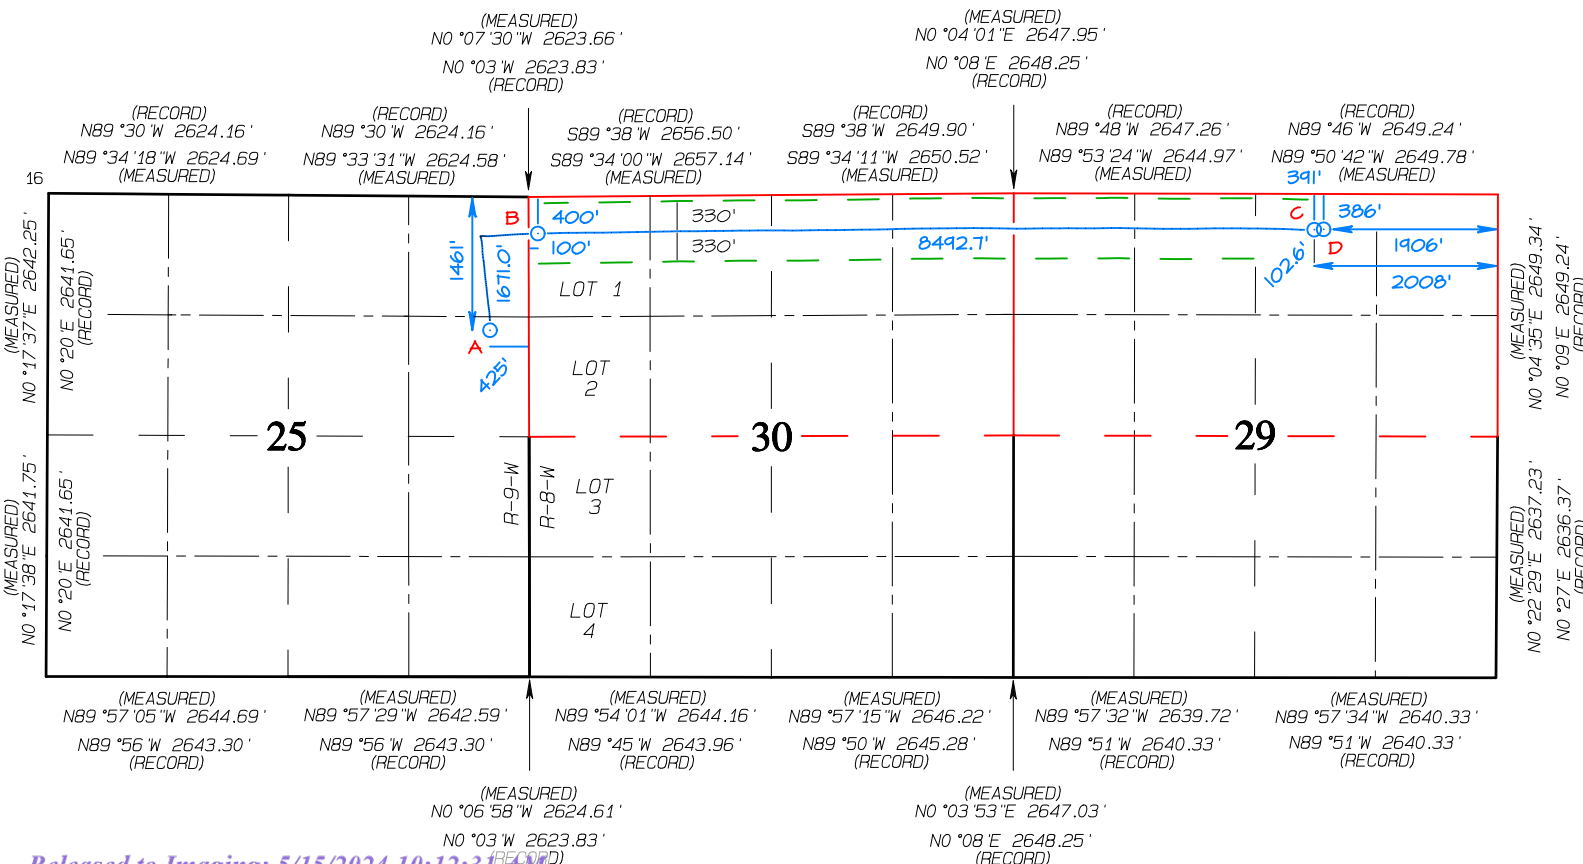

AS-DRILLED WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code	³ Pool Name
		97232	BASIN MANCOS
⁴ Property Code	⁵ Property Name		⁶ Well Number
321253	RODEO UNIT		503H
⁷ GRID No.	⁸ Operator Name		⁹ Elevation
372286	ENDURING RESOURCES, LLC		6883'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	25	23N	9W		1461	NORTH	425	EAST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	29	23N	8W		386	NORTH	1906	EAST	SAN JUAN


¹² Dedicated Acres	N/2 - Section 29 N/2 - Section 30	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
640.97				R-14313

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

17 OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.
 1/8/24
Signature Date
Heather Huntington
Printed Name
hhuntington@enduringresources.com
E-mail Address

18 SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
Date Revised: JANUARY 7, 2024
Survey Date: SEPTEMBER 15, 2021
Signature and Seal of Professional Surveyor

Jason C. Edwards
Certificate Number 15269

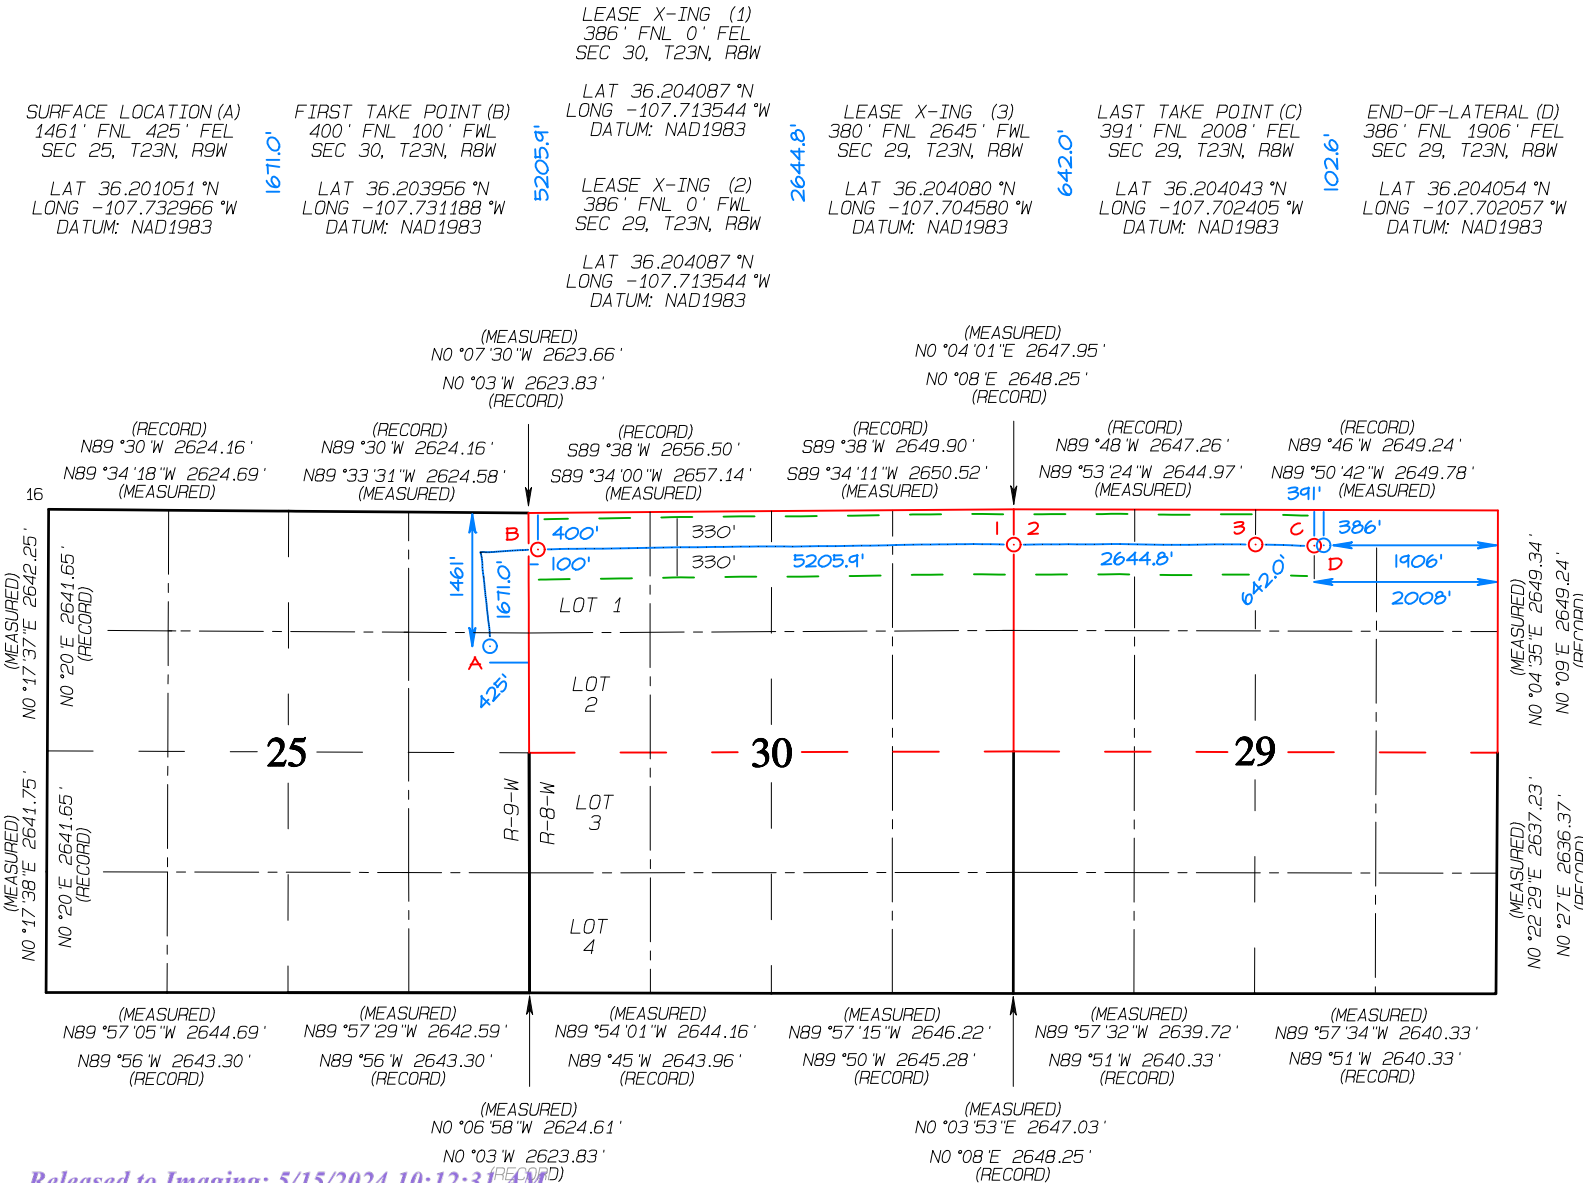



Well: Rodeo Unit #503H
Site: Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)
Project: San Juan County, New Mexico NAD83 NM W
Design: rev2 RKB=25 ft
Rig: Aztec 1000

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Rodeo 503 FTP 380 FNL 100 FWL r2	4883.38	1078.05	522.55	1893573.395	2753226.078	36.204011000	-107.731191000
Rodeo 503 VS=0	4886.00	1076.03	-4.03	1893571.376	2752699.495	36.204006965	-107.732975886
Rodeo 503 LTP 380 FNL 1977 FEL r2	4931.00	1110.86	9046.37	1893606.209	2761749.876	36.204073000	-107.702299000

Geodetic System: US State Plane 1983

Datum: North American Datum 1983

Ellipsoid: GRS 1980

Zone: New Mexico Western Zone


System Datum: Mean Sea Level

Depth Reference: RKB=6883+25 @ 6908.00ft (Aztec 1000)

Surface location:

Northing	Easting	Latitude	Longitude
1892495.348	2752703.525	36.201051000	-107.732966000

Total Corr (M=>G): To convert a Magnetic Direction to a Grid Direction, Add 8.47°



Azimuths to Grid North
True North: -0.06°
Magnetic North: 8.47°

Magnetic Field
Strength: 49043.0nT
Dip Angle: 62.67°
Date: 11/28/2023
Model: IGRF2020

Section Details



Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Annotation
1	0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00	
2	497.00	0.00	0.000	497.00	0.00	0.00	0.00	0.00	0.00	KOP Begin 3°/100' build
3	1152.21	19.66	354.707	1139.43	110.82	-10.27	3.00	354.71	-9.85	Begin 19.66° tangent
4	3701.99	19.66	354.707	3540.63	964.84	-89.39	0.00	0.00	-85.77	Begin 3°/100' drop
5	4357.19	0.00	0.000	4183.06	1075.66	-99.66	3.00	180.00	-95.62	Begin vertical hold
6	4459.80	0.00	0.000	4285.67	1075.66	-99.66	0.00	0.00	-95.62	Begin 10°/100' build
7	5059.80	60.00	89.779	4781.87	1076.76	186.82	10.00	89.78	190.86	Begin 60.00° tangent
8	5119.80	60.00	89.779	4811.87	1076.97	238.78	0.00	0.00	242.82	Begin 10°/100' build
9	5416.96	89.72	89.779	4888.62	1078.06	522.41	10.00	0.00	526.45	Begin 89.72° lateral
10	13941.09	89.72	89.779	4931.00	1110.86	9046.37	0.00	0.00	9050.47	PBHL

ANNOTATIONS SURVEYS

MD	Inc	Azi	TVD	+N/-S	+E/-W	VSec	Annotation
450.00	0.90	264.160	449.98	-0.35	-3.45	-3.45	MWD surveys
2986.40	20.16	353.662	2859.85	735.59	-67.42	-64.66	9 5/8" Casing shoe @ 2986.40 MD 2859.95 TVD
5204.71	70.01	87.519	4832.00	1051.52	355.53	359.47	FTP @ 5204.71 MD 4832.00 TVD
5378.00	82.56	88.331	4872.13	1057.89	523.57	527.54	400 FNL 100 FWL @ 5378.00 MD 4872.13 TVD
13872.40	89.21	88.082	4920.80	1099.72	9015.26	9019.32	LTP @ 13872.40 MD 4920.80 TVD
13913.00	88.89	87.520	4921.47	1101.28	9055.82	9059.89	Survey @ 13913.00 MD 4921.47 TVD
13975.00	88.89	87.520	4922.67	1103.96	9117.75	9121.83	Survey proj. to 13975 MD 4922.67 TVD 387 FNL 1906 FEL

CASING DETAILS

TVD	MD	Name
347.00	347.00	13 3/8" Csg
2821.00	2937.83	9 5/8" Csg

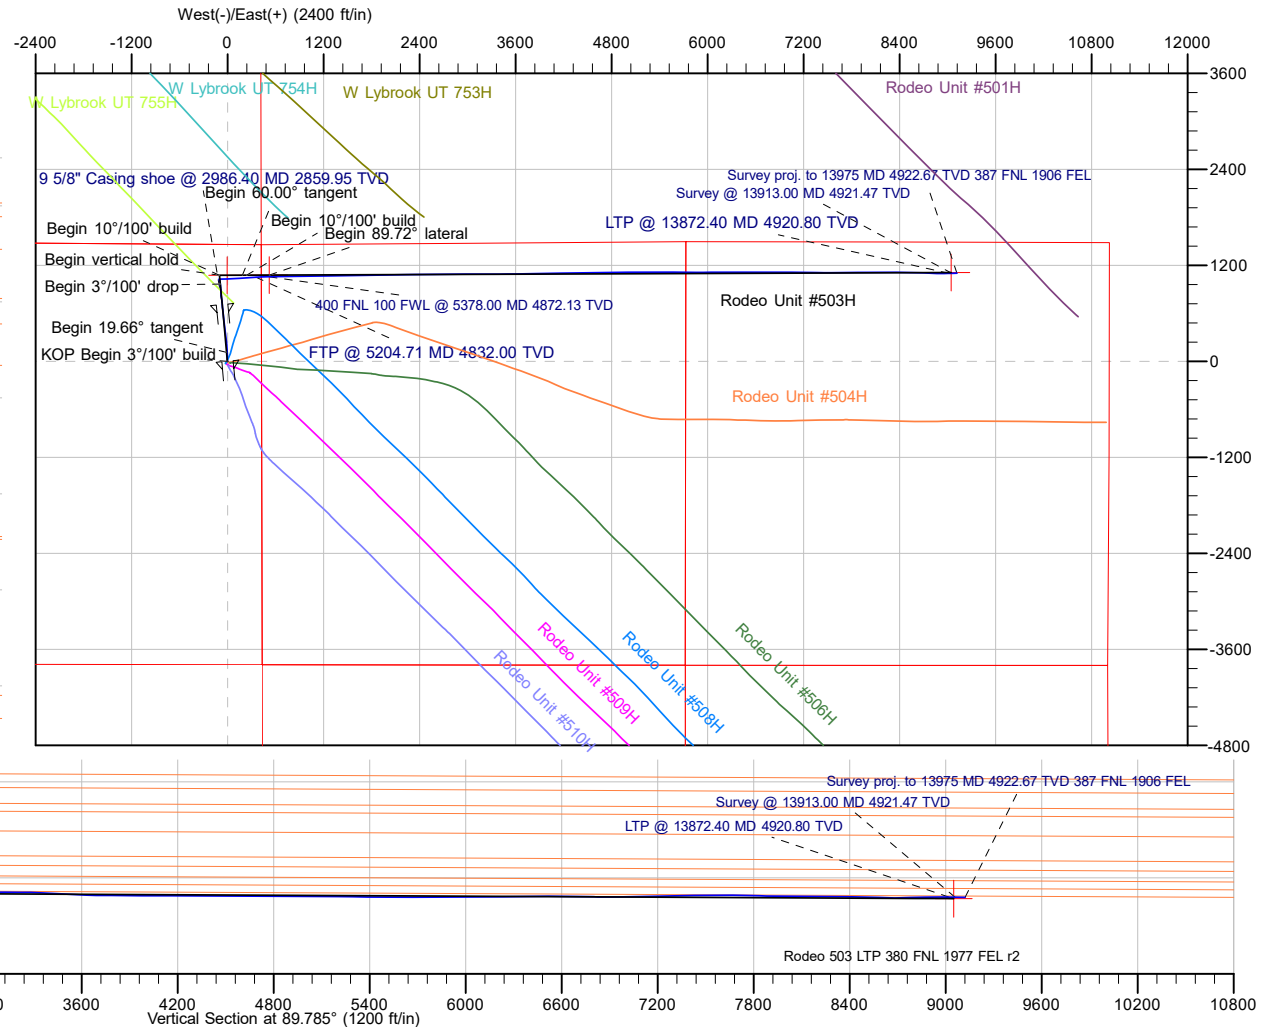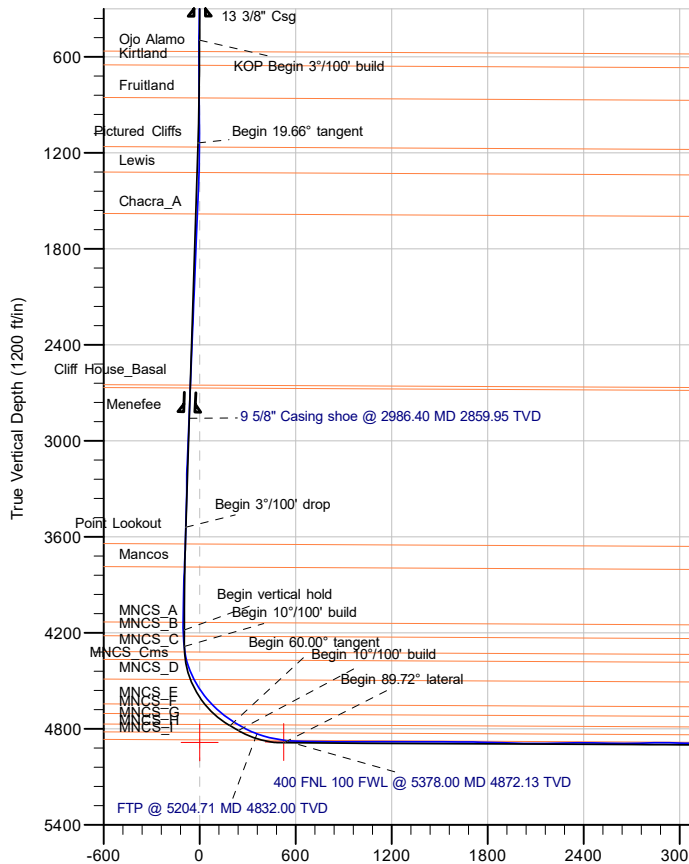



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Project	San Juan County, New Mexico NAD83 NM W		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)		
Site Position:		Northing:	1,892,465.480 usft
From:	Lat/Long	Easting:	2,752,685.264 usft
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "
		Latitude:	36.200969000
		Longitude:	-107.733028000

Well	Rodeo Unit #503H, Surf loc: 1461 FNL 425 FEL Section 25-T23N-R09W					
Well Position	+N/-S	0.00 ft	Northing:	1,892,495.349 usft	Latitude:	36.201051000
	+E/-W	0.00 ft	Easting:	2,752,703.525 usft	Longitude:	-107.732966000
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	6,883.00 ft
Grid Convergence:		0.06 °				

Wellbore	Original Hole				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	11/28/2023	8.53	62.67	49,043.04895002

Design	MWD surveys				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00	89.785	

Survey Program	Date	1/3/2024			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
8.00	2,854.00	MWD int (Original Hole)	MWD	OWSG MWD - Standard	
2,917.00	13,913.00	MWD (Original Hole)	MWD	OWSG MWD - Standard	
13,975.00	13,975.00	Projection (Original Hole)	MWD	OWSG MWD - Standard	

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.000	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8.00	0.00	0.000	8.00	0.00	0.00	0.00	0.00	0.00	0.00
450.00	0.90	264.160	449.98	-0.35	-3.45	-3.45	0.20	0.20	0.00
480.00	0.91	272.730	479.98	-0.37	-3.93	-3.93	0.45	0.03	28.57
538.00	1.05	340.430	537.97	0.16	-4.56	-4.56	1.89	0.24	116.72
599.00	2.08	359.070	598.95	1.79	-4.77	-4.76	1.86	1.69	30.56
659.00	3.51	4.290	658.88	4.71	-4.65	-4.63	2.42	2.38	8.70



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
719.00	5.05	6.110	718.71	9.17	-4.23	-4.20	2.58	2.57	3.03	
780.00	6.79	6.170	779.38	15.42	-3.56	-3.50	2.85	2.85	0.10	
840.00	8.56	6.380	838.84	23.39	-2.68	-2.59	2.95	2.95	0.35	
899.00	10.75	4.820	897.00	33.24	-1.73	-1.60	3.74	3.71	-2.64	
958.00	13.04	0.870	954.73	45.38	-1.17	-1.00	4.12	3.88	-6.69	
1,024.00	15.34	0.050	1,018.71	61.55	-1.05	-0.81	3.50	3.48	-1.24	
1,087.00	17.30	359.980	1,079.17	79.26	-1.04	-0.74	3.11	3.11	-0.11	
1,150.00	19.21	358.920	1,139.00	98.99	-1.24	-0.87	3.08	3.03	-1.68	
1,213.00	19.63	357.890	1,198.41	119.93	-1.82	-1.37	0.86	0.67	-1.63	
1,276.00	19.74	356.930	1,257.73	141.12	-2.78	-2.25	0.54	0.17	-1.52	
1,339.00	20.00	356.400	1,316.98	162.50	-4.03	-3.42	0.50	0.41	-0.84	
1,402.00	19.50	354.260	1,376.28	183.72	-5.76	-5.07	1.40	-0.79	-3.40	
1,465.00	18.89	352.370	1,435.77	204.29	-8.16	-7.40	1.38	-0.97	-3.00	
1,528.00	18.88	351.830	1,495.38	224.48	-10.97	-10.12	0.28	-0.02	-0.86	
1,591.00	18.89	352.370	1,554.99	244.68	-13.77	-12.85	0.28	0.02	0.86	
1,655.00	19.32	352.520	1,615.47	265.45	-16.52	-15.53	0.68	0.67	0.23	
1,718.00	20.40	353.830	1,674.72	286.70	-19.06	-17.98	1.85	1.71	2.08	
1,781.00	20.71	354.370	1,733.71	308.70	-21.33	-20.17	0.58	0.49	0.86	
1,844.00	20.44	353.510	1,792.69	330.72	-23.67	-22.43	0.64	-0.43	-1.37	
1,907.00	20.23	353.300	1,851.76	352.46	-26.18	-24.86	0.35	-0.33	-0.33	
1,970.00	20.14	353.110	1,910.89	374.05	-28.76	-27.35	0.18	-0.14	-0.30	
2,032.00	20.24	352.880	1,969.08	395.29	-31.37	-29.88	0.21	0.16	-0.37	
2,096.00	21.06	354.750	2,028.97	417.72	-33.79	-32.22	1.64	1.28	2.92	
2,159.00	21.32	354.620	2,087.71	440.40	-35.90	-34.25	0.42	0.41	-0.21	
2,222.00	21.56	354.300	2,146.35	463.32	-38.12	-36.38	0.42	0.38	-0.51	
2,285.00	21.54	353.580	2,204.95	486.33	-40.57	-38.74	0.42	-0.03	-1.14	
2,348.00	21.70	352.930	2,263.52	509.38	-43.29	-41.38	0.46	0.25	-1.03	
2,411.00	22.00	353.200	2,321.99	532.66	-46.12	-44.12	0.50	0.48	0.43	
2,474.00	21.77	353.050	2,380.45	555.97	-48.93	-46.85	0.38	-0.37	-0.24	
2,538.00	21.14	354.130	2,440.02	579.23	-51.55	-49.38	1.16	-0.98	1.69	
2,601.00	21.51	354.310	2,498.70	602.03	-53.86	-51.60	0.60	0.59	0.29	
2,664.00	21.19	354.640	2,557.38	624.86	-56.07	-53.72	0.54	-0.51	0.52	
2,727.00	20.30	354.320	2,616.29	647.07	-58.21	-55.78	1.42	-1.41	-0.51	
2,790.00	20.06	354.170	2,675.43	668.69	-60.39	-57.88	0.39	-0.38	-0.24	
2,854.00	19.96	354.150	2,735.56	690.48	-62.62	-60.03	0.16	-0.16	-0.03	
2,917.00	20.01	353.960	2,794.77	711.89	-64.85	-62.18	0.13	0.08	-0.30	
3,041.00	20.28	353.430	2,911.18	754.34	-69.54	-66.71	0.26	0.22	-0.43	
3,072.00	20.24	350.620	2,940.27	764.97	-71.03	-68.16	3.14	-0.13	-9.06	
3,167.00	19.82	353.270	3,029.52	797.18	-75.59	-72.60	1.05	-0.44	2.79	
3,261.00	19.02	351.660	3,118.17	828.16	-79.68	-76.58	1.02	-0.85	-1.71	
3,356.00	20.15	358.180	3,207.69	859.83	-82.45	-79.22	2.59	1.19	6.86	
3,450.00	20.04	357.700	3,295.96	892.11	-83.61	-80.26	0.21	-0.12	-0.51	
3,544.00	16.71	355.430	3,385.16	921.68	-85.33	-81.87	3.62	-3.54	-2.41	



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
3,639.00	13.66	353.380	3,476.83	946.44	-87.72	-84.16	3.26	-3.21	-2.16
3,733.00	11.17	351.660	3,568.63	966.48	-90.32	-86.69	2.68	-2.65	-1.83
3,827.00	10.64	348.990	3,660.93	984.01	-93.29	-89.60	0.78	-0.56	-2.84
3,922.00	10.48	348.850	3,754.32	1,001.09	-96.64	-92.88	0.17	-0.17	-0.15
4,016.00	7.24	339.900	3,847.19	1,015.05	-100.33	-96.52	3.74	-3.45	-9.52
4,110.00	3.82	336.880	3,940.74	1,023.49	-103.60	-99.75	3.65	-3.64	-3.21
4,205.00	0.98	318.770	4,035.65	1,027.02	-105.37	-101.52	3.06	-2.99	-19.06
4,299.00	0.64	274.830	4,129.64	1,027.66	-106.43	-102.57	0.73	-0.36	-46.74
4,394.00	2.94	87.140	4,224.61	1,027.83	-104.52	-100.66	3.76	2.42	181.38
4,425.00	2.89	89.720	4,255.57	1,027.87	-102.95	-99.09	0.45	-0.16	8.32
4,456.00	4.93	86.840	4,286.49	1,027.95	-100.84	-96.98	6.61	6.58	-9.29
4,488.00	8.97	86.150	4,318.25	1,028.19	-96.97	-93.11	12.63	12.63	-2.16
4,519.00	12.54	83.840	4,348.70	1,028.72	-91.21	-87.35	11.60	11.52	-7.45
4,551.00	16.00	85.850	4,379.71	1,029.41	-83.36	-79.49	10.92	10.81	6.28
4,582.00	18.64	89.520	4,409.30	1,029.76	-74.14	-70.28	9.21	8.52	11.84
4,613.00	22.04	93.210	4,438.36	1,029.48	-63.38	-59.51	11.72	10.97	11.90
4,645.00	25.04	92.660	4,467.70	1,028.83	-50.61	-46.75	9.40	9.38	-1.72
4,676.00	27.78	91.020	4,495.46	1,028.39	-36.83	-32.97	9.15	8.84	-5.29
4,708.00	30.67	88.680	4,523.39	1,028.45	-21.21	-17.36	9.71	9.03	-7.31
4,739.00	33.78	87.740	4,549.61	1,028.97	-4.69	-0.83	10.16	10.03	-3.03
4,771.00	35.98	87.230	4,575.86	1,029.78	13.59	17.45	6.94	6.88	-1.59
4,802.00	38.24	86.730	4,600.58	1,030.76	32.26	36.13	7.35	7.29	-1.61
4,833.00	40.93	86.110	4,624.47	1,032.00	51.98	55.85	8.77	8.68	-2.00
4,865.00	44.57	85.640	4,647.96	1,033.56	73.64	77.51	11.42	11.38	-1.47
4,896.00	46.94	85.680	4,669.59	1,035.24	95.78	99.66	7.65	7.65	0.13
4,927.00	49.09	86.060	4,690.32	1,036.90	118.76	122.65	7.00	6.94	1.23
4,959.00	51.22	85.790	4,710.83	1,038.65	143.27	147.16	6.69	6.66	-0.84
4,990.00	54.16	86.300	4,729.61	1,040.35	167.86	171.76	9.57	9.48	1.65
5,021.00	57.03	86.400	4,747.13	1,041.98	193.38	197.29	9.26	9.26	0.32
5,053.00	58.82	86.420	4,764.12	1,043.67	220.44	224.36	5.59	5.59	0.06
5,084.00	59.02	86.280	4,780.12	1,045.36	246.94	250.86	0.75	0.65	-0.45
5,115.00	61.50	86.330	4,795.50	1,047.10	273.80	277.73	8.00	8.00	0.16
5,147.00	64.75	86.580	4,809.96	1,048.86	302.28	306.22	10.18	10.16	0.78
5,178.00	67.90	87.260	4,822.41	1,050.39	330.63	334.57	10.36	10.16	2.19
5,210.00	70.43	87.570	4,833.79	1,051.73	360.51	364.45	7.96	7.91	0.97
5,241.00	72.38	87.640	4,843.68	1,052.96	389.86	393.81	6.29	6.29	0.23
5,273.00	74.87	87.690	4,852.70	1,054.21	420.53	424.49	7.78	7.78	0.16
5,304.00	77.91	87.740	4,859.99	1,055.41	450.64	454.59	9.81	9.81	0.16
5,336.00	80.65	88.000	4,865.94	1,056.58	482.05	486.01	8.60	8.56	0.81
5,367.00	81.92	88.300	4,870.64	1,057.57	512.68	516.64	4.21	4.10	0.97
5,399.00	83.77	88.390	4,874.63	1,058.49	544.41	548.38	5.79	5.78	0.28
5,430.00	86.66	88.870	4,877.21	1,059.22	575.29	579.26	9.45	9.32	1.55



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,461.00	88.49	89.710	4,878.52	1,059.61	606.26	610.23	6.49	5.90	2.71
5,524.00	88.99	88.710	4,879.91	1,060.48	669.24	673.21	1.77	0.79	-1.59
5,619.00	89.60	88.400	4,881.08	1,062.87	764.20	768.19	0.72	0.64	-0.33
5,713.00	89.61	89.010	4,881.73	1,065.00	858.18	862.17	0.65	0.01	0.65
5,807.00	89.77	89.690	4,882.23	1,066.06	952.17	956.16	0.74	0.17	0.72
5,901.00	90.00	89.650	4,882.42	1,066.60	1,046.17	1,050.16	0.25	0.24	-0.04
5,996.00	90.21	89.940	4,882.25	1,066.94	1,141.16	1,145.16	0.38	0.22	0.31
6,090.00	89.51	88.980	4,882.48	1,067.83	1,235.16	1,239.16	1.26	-0.74	-1.02
6,185.00	90.11	89.160	4,882.79	1,069.37	1,330.15	1,334.15	0.66	0.63	0.19
6,279.00	90.48	89.040	4,882.31	1,070.85	1,424.13	1,428.14	0.41	0.39	-0.13
6,373.00	89.19	89.350	4,882.58	1,072.17	1,518.12	1,522.13	1.41	-1.37	0.33
6,468.00	89.60	89.170	4,883.58	1,073.40	1,613.11	1,617.12	0.47	0.43	-0.19
6,562.00	89.96	88.840	4,883.94	1,075.03	1,707.09	1,711.11	0.52	0.38	-0.35
6,657.00	88.45	88.870	4,885.26	1,076.93	1,802.06	1,806.09	1.59	-1.59	0.03
6,750.00	88.10	88.450	4,888.06	1,079.10	1,894.99	1,899.03	0.59	-0.38	-0.45
6,844.00	88.39	88.410	4,890.94	1,081.67	1,988.91	1,992.96	0.31	0.31	-0.04
6,939.00	89.98	90.140	4,892.29	1,082.88	2,083.89	2,087.94	2.47	1.67	1.82
7,033.00	91.14	90.140	4,891.37	1,082.65	2,177.88	2,181.93	1.23	1.23	0.00
7,128.00	90.85	89.480	4,889.72	1,082.96	2,272.87	2,276.92	0.76	-0.31	-0.69
7,222.00	90.11	89.080	4,888.94	1,084.14	2,366.86	2,370.91	0.89	-0.79	-0.43
7,316.00	89.67	89.360	4,889.12	1,085.42	2,460.85	2,464.90	0.55	-0.47	0.30
7,410.00	89.04	88.810	4,890.17	1,086.92	2,554.83	2,558.89	0.89	-0.67	-0.59
7,504.00	89.62	88.960	4,891.27	1,088.75	2,648.80	2,652.87	0.64	0.62	0.16
7,599.00	91.09	89.620	4,890.68	1,089.93	2,743.79	2,747.86	1.70	1.55	0.69
7,693.00	91.64	89.720	4,888.45	1,090.47	2,837.76	2,841.83	0.59	0.59	0.11
7,787.00	88.60	89.670	4,888.25	1,090.97	2,931.75	2,935.82	3.23	-3.23	-0.05
7,882.00	89.18	90.060	4,890.09	1,091.19	3,026.73	3,030.80	0.74	0.61	0.41
7,977.00	89.58	89.970	4,891.12	1,091.17	3,121.73	3,125.80	0.43	0.42	-0.09
8,071.00	90.21	90.230	4,891.29	1,091.01	3,215.72	3,219.80	0.73	0.67	0.28
8,165.00	87.43	90.430	4,893.22	1,090.46	3,309.69	3,313.76	2.97	-2.96	0.21
8,260.00	86.93	89.050	4,897.90	1,090.90	3,404.58	3,408.64	1.54	-0.53	-1.45
8,355.00	87.21	89.070	4,902.76	1,092.45	3,499.44	3,503.51	0.30	0.29	0.02
8,449.00	86.92	88.610	4,907.57	1,094.35	3,593.30	3,597.38	0.58	-0.31	-0.49
8,542.00	89.48	90.160	4,910.49	1,095.35	3,686.23	3,690.32	3.22	2.75	1.67
8,637.00	89.29	89.500	4,911.51	1,095.63	3,781.23	3,785.31	0.72	-0.20	-0.69
8,732.00	89.33	89.010	4,912.65	1,096.87	3,876.21	3,880.30	0.52	0.04	-0.52
8,826.00	89.74	89.150	4,913.42	1,098.37	3,970.20	3,974.29	0.46	0.44	0.15
8,920.00	89.98	89.150	4,913.65	1,099.77	4,064.19	4,068.28	0.26	0.26	0.00
9,014.00	90.13	89.270	4,913.56	1,101.07	4,158.18	4,162.28	0.20	0.16	0.13
9,108.00	90.27	89.090	4,913.23	1,102.41	4,252.17	4,256.27	0.24	0.15	-0.19
9,202.00	90.21	88.940	4,912.83	1,104.03	4,346.15	4,350.26	0.17	-0.06	-0.16
9,296.00	89.23	87.900	4,913.29	1,106.62	4,440.11	4,444.23	1.52	-1.04	-1.11
9,390.00	89.07	88.960	4,914.69	1,109.19	4,534.07	4,538.20	1.14	-0.17	1.13



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
9,484.00	89.30	89.040	4,916.02	1,110.83	4,628.04	4,632.18	0.26	0.24	0.09
9,579.00	90.17	89.940	4,916.46	1,111.68	4,723.03	4,727.17	1.32	0.92	0.95
9,673.00	90.23	89.750	4,916.14	1,111.93	4,817.03	4,821.17	0.21	0.06	-0.20
9,767.00	89.02	88.520	4,916.75	1,113.35	4,911.02	4,915.16	1.84	-1.29	-1.31
9,862.00	90.10	89.860	4,917.48	1,114.70	5,006.00	5,010.15	1.81	1.14	1.41
9,956.00	89.97	89.520	4,917.42	1,115.20	5,100.00	5,104.15	0.39	-0.14	-0.36
10,051.00	89.39	88.610	4,917.95	1,116.75	5,194.98	5,199.14	1.14	-0.61	-0.96
10,145.00	88.91	90.720	4,919.35	1,117.30	5,288.97	5,293.12	2.30	-0.51	2.24
10,239.00	89.14	90.500	4,920.95	1,116.30	5,382.95	5,387.10	0.34	0.24	-0.23
10,333.00	89.88	90.810	4,921.75	1,115.23	5,476.94	5,481.08	0.85	0.79	0.33
10,428.00	90.26	90.900	4,921.64	1,113.81	5,571.93	5,576.07	0.41	0.40	0.09
10,522.00	90.31	90.850	4,921.17	1,112.38	5,665.91	5,670.05	0.08	0.05	-0.05
10,616.00	90.11	90.580	4,920.82	1,111.20	5,759.91	5,764.04	0.36	-0.21	-0.29
10,711.00	89.11	89.130	4,921.47	1,111.44	5,854.90	5,859.03	1.85	-1.05	-1.53
10,805.00	89.64	89.090	4,922.50	1,112.90	5,948.88	5,953.02	0.57	0.56	-0.04
10,899.00	90.99	89.810	4,921.98	1,113.81	6,042.87	6,047.01	1.63	1.44	0.77
10,993.00	90.90	89.810	4,920.43	1,114.12	6,136.86	6,141.00	0.10	-0.10	0.00
11,087.00	90.87	89.570	4,918.98	1,114.63	6,230.85	6,234.99	0.26	-0.03	-0.26
11,182.00	91.09	89.380	4,917.35	1,115.50	6,325.83	6,329.97	0.31	0.23	-0.20
11,276.00	90.77	91.210	4,915.83	1,115.01	6,419.81	6,423.95	1.98	-0.34	1.95
11,370.00	89.50	89.970	4,915.60	1,114.04	6,513.80	6,517.94	1.89	-1.35	-1.32
11,465.00	89.49	89.500	4,916.44	1,114.48	6,608.80	6,612.93	0.49	-0.01	-0.49
11,559.00	88.94	89.060	4,917.73	1,115.66	6,702.78	6,706.92	0.75	-0.59	-0.47
11,654.00	88.47	88.360	4,919.88	1,117.80	6,797.73	6,801.88	0.89	-0.49	-0.74
11,748.00	90.39	91.300	4,920.81	1,118.08	6,891.71	6,895.86	3.74	2.04	3.13
11,842.00	90.87	91.600	4,919.78	1,115.70	6,985.68	6,989.81	0.60	0.51	0.32
11,937.00	90.83	91.130	4,918.37	1,113.44	7,080.64	7,084.77	0.50	-0.04	-0.49
12,031.00	90.49	90.540	4,917.29	1,112.07	7,174.62	7,178.75	0.72	-0.36	-0.63
12,125.00	92.00	91.160	4,915.24	1,110.68	7,268.59	7,272.70	1.74	1.61	0.66
12,219.00	92.54	90.750	4,911.52	1,109.11	7,362.50	7,366.61	0.72	0.57	-0.44
12,313.00	89.98	90.140	4,909.45	1,108.38	7,456.47	7,460.57	2.80	-2.72	-0.65
12,407.00	90.20	90.160	4,909.31	1,108.13	7,550.47	7,554.57	0.24	0.23	0.02
12,501.00	89.08	89.190	4,909.90	1,108.67	7,644.46	7,648.57	1.58	-1.19	-1.03
12,595.00	89.53	89.050	4,911.04	1,110.11	7,738.44	7,742.55	0.50	0.48	-0.15
12,689.00	87.65	88.720	4,913.35	1,111.94	7,832.39	7,836.51	2.03	-2.00	-0.35
12,783.00	89.17	89.340	4,915.96	1,113.53	7,926.34	7,930.46	1.75	1.62	0.66
12,877.00	90.68	89.980	4,916.08	1,114.09	8,020.33	8,024.46	1.74	1.61	0.68
12,971.00	88.80	90.320	4,916.51	1,113.84	8,114.33	8,118.45	2.03	-2.00	0.36
13,065.00	89.00	90.280	4,918.31	1,113.35	8,208.31	8,212.43	0.22	0.21	-0.04
13,159.00	89.53	90.340	4,919.52	1,112.84	8,302.30	8,306.42	0.57	0.56	0.06
13,253.00	90.31	90.140	4,919.65	1,112.45	8,396.30	8,400.41	0.86	0.83	-0.21
13,347.00	87.53	91.150	4,921.42	1,111.39	8,490.26	8,494.37	3.15	-2.96	1.07



Survey Report



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
13,441.00	88.36	91.400	4,924.79	1,109.30	8,584.18	8,588.28	0.92	0.88	0.27	
13,535.00	90.07	91.840	4,926.08	1,106.64	8,678.13	8,682.22	1.88	1.82	0.47	
13,629.00	91.52	92.470	4,924.78	1,103.11	8,772.05	8,776.13	1.68	1.54	0.67	
13,724.00	92.15	92.270	4,921.73	1,099.18	8,866.92	8,870.98	0.70	0.66	-0.21	
13,819.00	89.63	88.820	4,920.26	1,098.28	8,961.88	8,965.94	4.50	-2.65	-3.63	
13,913.00	88.89	87.520	4,921.47	1,101.28	9,055.82	9,059.89	1.59	-0.79	-1.38	
13,975.00	88.89	87.520	4,922.67	1,103.96	9,117.75	9,121.83	0.00	0.00	0.00	

Design Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates			
		+N/-S (ft)	+E/-W (ft)	Comment	
450.00	449.98	-0.35	-3.45	MWD surveys	
2,986.40	2,859.95	735.59	-67.42	9 5/8" Casing shoe @ 2986.40 MD 2859.95 TVD	
5,204.71	4,832.00	1,051.52	355.53	FTP @ 5204.71 MD 4832.00 TVD	
5,378.00	4,872.13	1,057.89	523.57	400 FNL 100 FWL @ 5378.00 MD 4872.13 TVD	
13,872.40	4,920.80	1,099.72	9,015.26	LTP @ 13872.40 MD 4920.80 TVD	
13,913.00	4,921.47	1,101.28	9,055.82	Survey @ 13913.00 MD 4921.47 TVD	
13,975.00	4,922.67	1,103.96	9,117.75	Survey proj. to 13975 MD 4922.67 TVD 387 FNL 1906 FEL	



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Project	San Juan County, New Mexico NAD83 NM W		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)				
Site Position:		Northing:	1,892,465.480 usft	Latitude:	36.200969000
From:	Lat/Long	Easting:	2,752,685.264 usft	Longitude:	-107.733028000
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "	Grid Convergence:	0.06 °

Well	Rodeo Unit #503H, Surf loc: 1461 FNL 425 FEL Section 25-T23N-R09W					
Well Position	+N/-S	0.00 ft	Northing:	1,892,495.349 usft	Latitude:	36.201051000
	+E/-W	0.00 ft	Easting:	2,752,703.525 usft	Longitude:	-107.732966000
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	6,883.00 ft

Wellbore	Original Hole				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	11/28/2023	8.53	62.67	49,043.04895002

Design	MWD surveys				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00	89.785	

Survey Program	Date	1/3/2024			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
8.00	2,854.00	MWD int (Original Hole)	MWD	OWSG MWD - Standard	
2,917.00	13,913.00	MWD (Original Hole)	MWD	OWSG MWD - Standard	
13,975.00	13,975.00	Projection (Original Hole)	MWD	OWSG MWD - Standard	

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude	
0.00	0.00	0.000	0.00	0.00	0.00	1,892,495.349	2,752,703.525	36.201051000	-107.732966000	
8.00	0.00	0.000	8.00	0.00	0.00	1,892,495.349	2,752,703.525	36.201051000	-107.732966000	
450.00	0.90	264.160	449.98	-0.35	-3.45	1,892,494.995	2,752,700.072	36.201050039	-107.732977706	
480.00	0.91	272.730	479.98	-0.37	-3.93	1,892,494.983	2,752,699.600	36.201050006	-107.732979307	
538.00	1.05	340.430	537.97	0.16	-4.56	1,892,495.505	2,752,698.962	36.201051444	-107.732981468	
599.00	2.08	359.070	598.95	1.79	-4.77	1,892,497.139	2,752,698.756	36.201055932	-107.732982158	
659.00	3.51	4.290	658.88	4.71	-4.65	1,892,500.059	2,752,698.876	36.201063954	-107.732981742	
719.00	5.05	6.110	718.71	9.17	-4.23	1,892,504.517	2,752,699.295	36.201076198	-107.732980308	
780.00	6.79	6.170	779.38	15.42	-3.56	1,892,510.772	2,752,699.968	36.201093380	-107.732978003	



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
840.00	8.56	6.380	838.84	23.39	-2.68	1,892,518.737	2,752,700.845	36.201115257	-107.732975001
899.00	10.75	4.820	897.00	33.24	-1.73	1,892,528.585	2,752,701.796	36.201142307	-107.732971745
958.00	13.04	0.870	954.73	45.38	-1.17	1,892,540.725	2,752,702.359	36.201175656	-107.732969793
1,024.00	15.34	0.050	1,018.71	61.55	-1.05	1,892,556.902	2,752,702.480	36.201220096	-107.732969327
1,087.00	17.30	359.980	1,079.17	79.26	-1.04	1,892,574.604	2,752,702.484	36.201268726	-107.732969251
1,150.00	19.21	358.920	1,139.00	98.99	-1.24	1,892,594.336	2,752,702.285	36.201322931	-107.732969855
1,213.00	19.63	357.890	1,198.41	119.93	-1.82	1,892,615.274	2,752,701.700	36.201380451	-107.732971765
1,276.00	19.74	356.930	1,257.73	141.12	-2.78	1,892,636.473	2,752,700.741	36.201438690	-107.732974942
1,339.00	20.00	356.400	1,316.98	162.50	-4.03	1,892,657.849	2,752,699.495	36.201497416	-107.732979092
1,402.00	19.50	354.260	1,376.28	183.72	-5.76	1,892,679.064	2,752,697.767	36.201555701	-107.732984875
1,465.00	18.89	352.370	1,435.77	204.29	-8.16	1,892,699.634	2,752,695.361	36.201612217	-107.732992957
1,528.00	18.88	351.830	1,495.38	224.48	-10.97	1,892,719.832	2,752,692.558	36.201667709	-107.733002385
1,591.00	18.89	352.370	1,554.99	244.68	-13.77	1,892,740.029	2,752,689.756	36.201723201	-107.733011814
1,655.00	19.32	352.520	1,615.47	265.45	-16.52	1,892,760.795	2,752,687.002	36.201780253	-107.733021075
1,718.00	20.40	353.830	1,674.72	286.70	-19.06	1,892,782.045	2,752,684.465	36.201838636	-107.733029599
1,781.00	20.71	354.370	1,733.71	308.70	-21.33	1,892,804.047	2,752,682.192	36.201899085	-107.733037226
1,844.00	20.44	353.510	1,792.69	330.72	-23.67	1,892,826.063	2,752,679.856	36.201959572	-107.733045067
1,907.00	20.23	353.300	1,851.76	352.46	-26.18	1,892,847.811	2,752,677.342	36.202019324	-107.733053513
1,970.00	20.14	353.110	1,910.89	374.05	-28.76	1,892,869.397	2,752,674.770	36.202078628	-107.733062155
2,032.00	20.24	352.880	1,969.08	395.29	-31.37	1,892,890.635	2,752,672.160	36.202136980	-107.733070926
2,096.00	21.06	354.750	2,028.97	417.72	-33.79	1,892,913.072	2,752,669.735	36.202198622	-107.733079065
2,159.00	21.32	354.620	2,087.71	440.40	-35.90	1,892,935.746	2,752,667.626	36.202260916	-107.733086136
2,222.00	21.56	354.300	2,146.35	463.32	-38.12	1,892,958.666	2,752,665.402	36.202323887	-107.733093592
2,285.00	21.54	353.580	2,204.95	486.33	-40.57	1,892,981.677	2,752,662.960	36.202387108	-107.733101791
2,348.00	21.70	352.930	2,263.52	509.38	-43.29	1,893,004.728	2,752,660.233	36.202450439	-107.733110953
2,411.00	22.00	353.200	2,321.99	532.66	-46.12	1,893,028.004	2,752,657.402	36.202514388	-107.733120466
2,474.00	21.77	353.050	2,380.45	555.97	-48.93	1,893,051.318	2,752,654.591	36.202578441	-107.733129912
2,538.00	21.14	354.130	2,440.02	579.23	-51.55	1,893,074.579	2,752,651.975	36.202642350	-107.733138699
2,601.00	21.51	354.310	2,498.70	602.03	-53.86	1,893,097.373	2,752,649.668	36.202704974	-107.733146438
2,664.00	21.19	354.640	2,557.38	624.86	-56.07	1,893,120.203	2,752,647.459	36.202767695	-107.733153845
2,727.00	20.30	354.320	2,616.29	647.07	-58.21	1,893,142.414	2,752,645.314	36.202828718	-107.733161039
2,790.00	20.06	354.170	2,675.43	668.69	-60.39	1,893,164.038	2,752,643.135	36.202888126	-107.733168349
2,854.00	19.96	354.150	2,735.56	690.48	-62.62	1,893,185.824	2,752,640.906	36.202947981	-107.733175826
2,917.00	20.01	353.960	2,794.77	711.89	-64.85	1,893,207.240	2,752,638.676	36.203006819	-107.733183310
3,041.00	20.28	353.430	2,911.18	754.34	-69.54	1,893,249.686	2,752,633.985	36.203123436	-107.733199062
3,072.00	20.24	350.620	2,940.27	764.97	-71.03	1,893,260.314	2,752,632.497	36.203152636	-107.733204071
3,167.00	19.82	353.270	3,029.52	797.18	-75.59	1,893,292.522	2,752,627.931	36.203241129	-107.733219434
3,261.00	19.02	351.660	3,118.17	828.16	-79.68	1,893,323.505	2,752,623.841	36.203326252	-107.733233186
3,356.00	20.15	358.180	3,207.69	859.83	-82.45	1,893,355.180	2,752,621.076	36.203413276	-107.733242449
3,450.00	20.04	357.700	3,295.96	892.11	-83.61	1,893,387.455	2,752,619.915	36.203501942	-107.733246270
3,544.00	16.71	355.430	3,385.16	921.68	-85.33	1,893,417.028	2,752,618.192	36.203583185	-107.733252009
3,639.00	13.66	353.380	3,476.83	946.44	-87.72	1,893,441.791	2,752,615.810	36.203651218	-107.733259996
3,733.00	11.17	351.660	3,568.63	966.48	-90.32	1,893,461.828	2,752,613.209	36.203706270	-107.733268741
3,827.00	10.64	348.990	3,660.93	984.01	-93.29	1,893,479.355	2,752,610.231	36.203754426	-107.733278774
3,922.00	10.48	348.850	3,754.32	1,001.09	-96.64	1,893,496.441	2,752,606.885	36.203801372	-107.733290054
4,016.00	7.24	339.900	3,847.19	1,015.05	-100.33	1,893,510.395	2,752,603.196	36.203839716	-107.733302513
4,110.00	3.82	336.880	3,940.74	1,023.49	-103.60	1,893,518.840	2,752,599.929	36.203862924	-107.733313554
4,205.00	0.98	318.770	4,035.65	1,027.02	-105.37	1,893,522.362	2,752,598.151	36.203872605	-107.733319569
4,299.00	0.64	274.830	4,129.64	1,027.66	-106.43	1,893,523.011	2,752,597.098	36.203874390	-107.733323136
4,394.00	2.94	87.140	4,224.61	1,027.83	-104.52	1,893,523.177	2,752,599.003	36.203874841	-107.733316678
4,425.00	2.89	89.720	4,255.57	1,027.87	-102.95	1,893,523.220	2,752,600.579	36.203874956	-107.733311337
4,456.00	4.93	86.840	4,286.49	1,027.95	-100.84	1,893,523.298	2,752,602.691	36.203875163	-107.733304179
4,488.00	8.97	86.150	4,318.25	1,028.19	-96.97	1,893,523.541	2,752,606.554	36.203875820	-107.733291083
4,519.00	12.54	83.840	4,348.70	1,028.72	-91.21	1,893,524.065	2,752,612.313	36.203877242	-107.733271560



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
4,551.00	16.00	85.850	4,379.71	1,029.41	-83.36	1,893,524.757	2,752,620.168	36.203879121	-107.733244933
4,582.00	18.64	89.520	4,409.30	1,029.76	-74.14	1,893,525.107	2,752,629.385	36.203880059	-107.733213690
4,613.00	22.04	93.210	4,438.36	1,029.48	-63.38	1,893,524.823	2,752,640.150	36.203879247	-107.733177203
4,645.00	25.04	92.660	4,467.70	1,028.83	-50.61	1,893,524.172	2,752,652.912	36.203877424	-107.733133947
4,676.00	27.78	91.020	4,495.46	1,028.39	-36.83	1,893,523.739	2,752,666.691	36.203876195	-107.733087244
4,708.00	30.67	88.680	4,523.39	1,028.45	-21.21	1,893,523.795	2,752,682.311	36.203876302	-107.733034302
4,739.00	33.78	87.740	4,549.61	1,028.97	-4.69	1,893,524.317	2,752,698.830	36.203877690	-107.732978305
4,771.00	35.98	87.230	4,575.86	1,029.78	13.59	1,893,525.122	2,752,717.111	36.203879850	-107.732916340
4,802.00	38.24	86.730	4,600.58	1,030.76	32.26	1,893,526.109	2,752,735.787	36.203882509	-107.732853032
4,833.00	40.93	86.110	4,624.47	1,032.00	51.98	1,893,527.346	2,752,755.500	36.203885849	-107.732786209
4,865.00	44.57	85.640	4,647.96	1,033.56	73.64	1,893,528.911	2,752,777.162	36.203890088	-107.732712782
4,896.00	46.94	85.680	4,669.59	1,035.24	95.78	1,893,530.591	2,752,799.304	36.203894640	-107.732637724
4,927.00	49.09	86.060	4,690.32	1,036.90	118.76	1,893,532.249	2,752,822.285	36.203899130	-107.732559821
4,959.00	51.22	85.790	4,710.83	1,038.65	143.27	1,893,533.996	2,752,846.791	36.203903858	-107.732476753
4,990.00	54.16	86.300	4,729.61	1,040.35	167.86	1,893,535.694	2,752,871.386	36.203908453	-107.732393381
5,021.00	57.03	86.400	4,747.13	1,041.98	193.38	1,893,537.322	2,752,896.908	36.203912852	-107.732306866
5,053.00	58.82	86.420	4,764.12	1,043.67	220.44	1,893,539.020	2,752,923.969	36.203917438	-107.732215136
5,084.00	59.02	86.280	4,780.12	1,045.36	246.94	1,893,540.710	2,752,950.465	36.203922006	-107.732125320
5,115.00	61.50	86.330	4,795.50	1,047.10	273.80	1,893,542.444	2,752,977.324	36.203926693	-107.732034275
5,147.00	64.75	86.580	4,809.96	1,048.86	302.28	1,893,544.208	2,753,005.809	36.203931457	-107.731937716
5,178.00	67.90	87.260	4,822.41	1,050.39	330.63	1,893,545.732	2,753,034.155	36.203935560	-107.731841630
5,210.00	70.43	87.570	4,833.79	1,051.73	360.51	1,893,547.080	2,753,064.030	36.203939177	-107.731740364
5,241.00	72.38	87.640	4,843.68	1,052.96	389.86	1,893,548.307	2,753,093.384	36.203942465	-107.731640861
5,273.00	74.87	87.690	4,852.70	1,054.21	420.53	1,893,549.558	2,753,124.058	36.203945812	-107.731536885
5,304.00	77.91	87.740	4,859.99	1,055.41	450.64	1,893,550.759	2,753,154.160	36.203949025	-107.731434849
5,336.00	80.65	88.000	4,865.94	1,056.58	482.05	1,893,551.927	2,753,185.577	36.203952143	-107.731328356
5,367.00	81.92	88.300	4,870.64	1,057.57	512.68	1,893,552.916	2,753,216.202	36.203954772	-107.731224546
5,399.00	83.77	88.390	4,874.63	1,058.49	544.41	1,893,553.833	2,753,247.938	36.203957199	-107.731116972
5,430.00	86.66	88.870	4,877.21	1,059.22	575.29	1,893,554.571	2,753,278.818	36.203959137	-107.731012301
5,461.00	88.49	89.710	4,878.52	1,059.61	606.26	1,893,554.955	2,753,309.786	36.203960101	-107.730907331
5,524.00	88.99	88.710	4,879.91	1,060.48	669.24	1,893,555.823	2,753,372.764	36.203962304	-107.730693862
5,619.00	89.60	88.400	4,881.08	1,062.87	764.20	1,893,558.219	2,753,467.726	36.203968608	-107.730371975
5,713.00	89.61	89.010	4,881.73	1,065.00	858.18	1,893,560.343	2,753,561.699	36.203974170	-107.730953441
5,807.00	89.77	89.690	4,882.23	1,066.06	952.17	1,893,561.410	2,753,655.691	36.203976824	-107.729734847
5,901.00	90.00	89.650	4,882.42	1,066.60	1,046.17	1,893,561.951	2,753,749.689	36.203978035	-107.729416234
5,996.00	90.21	89.940	4,882.25	1,066.94	1,141.16	1,893,562.291	2,753,844.688	36.203978688	-107.729094229
6,090.00	89.51	88.980	4,882.48	1,067.83	1,235.16	1,893,563.177	2,753,938.681	36.203980844	-107.728775629
6,185.00	90.11	89.160	4,882.79	1,069.37	1,330.15	1,893,564.719	2,754,033.668	36.203984798	-107.728453663
6,279.00	90.48	89.040	4,882.31	1,070.85	1,424.13	1,893,566.195	2,754,127.654	36.203988575	-107.728135084
6,373.00	89.19	89.350	4,882.58	1,072.17	1,518.12	1,893,567.516	2,754,221.642	36.203991922	-107.727816502
6,468.00	89.60	89.170	4,883.58	1,073.40	1,613.11	1,893,568.743	2,754,316.629	36.203995008	-107.727494536
6,562.00	89.96	88.840	4,883.94	1,075.03	1,707.09	1,893,570.375	2,754,410.613	36.203999210	-107.727175964
6,657.00	88.45	88.870	4,885.26	1,076.93	1,802.06	1,893,572.273	2,754,505.582	36.204004138	-107.726854055
6,750.00	88.10	88.450	4,888.06	1,079.10	1,894.99	1,893,574.447	2,754,598.514	36.204009829	-107.726539050
6,844.00	88.39	88.410	4,890.94	1,081.67	1,988.91	1,893,577.021	2,754,692.435	36.204016617	-107.726220692
6,939.00	89.98	90.140	4,892.29	1,082.88	2,083.89	1,893,578.223	2,754,787.411	36.204019629	-107.725898761
7,033.00	91.14	90.140	4,891.37	1,082.65	2,177.88	1,893,577.993	2,754,881.404	36.204018712	-107.725580167
7,128.00	90.85	89.480	4,889.72	1,082.96	2,272.87	1,893,578.308	2,754,976.388	36.204019287	-107.725258211
7,222.00	90.11	89.080	4,888.94	1,084.14	2,366.86	1,893,579.489	2,755,070.377	36.204022243	-107.724939628
7,316.00	89.67	89.360	4,889.12	1,085.42	2,460.85	1,893,580.769	2,755,164.367	36.204025470	-107.724621037
7,410.00	89.04	88.810	4,890.17	1,086.92	2,554.83	1,893,582.270	2,755,258.348	36.204029303	-107.724302478
7,504.00	89.62	88.960	4,891.27	1,088.75	2,648.80	1,893,584.099	2,755,352.323	36.204034037	-107.723983937
7,599.00	91.09	89.620	4,890.68	1,089.93	2,743.79	1,893,585.276	2,755,447.311	36.204036976	-107.723661967
7,693.00	91.64	89.720	4,888.45	1,090.47	2,837.76	1,893,585.817	2,755,541.282	36.204038171	-107.723343445



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
7,787.00	88.60	89.670	4,888.25	1,090.97	2,931.75	1,893,586.317	2,755,635.269	36.204039252	-107.723024868
7,882.00	89.18	90.060	4,890.09	1,091.19	3,026.73	1,893,586.541	2,755,730.250	36.204039570	-107.722702923
7,977.00	89.58	89.970	4,891.12	1,091.17	3,121.73	1,893,586.516	2,755,825.245	36.204039203	-107.722380936
8,071.00	90.21	90.230	4,891.29	1,091.01	3,215.72	1,893,586.352	2,755,919.243	36.204038457	-107.722062322
8,165.00	87.43	90.430	4,893.22	1,090.46	3,309.69	1,893,585.811	2,756,013.213	36.204036674	-107.721743811
8,260.00	86.93	89.050	4,897.90	1,090.90	3,404.58	1,893,586.241	2,756,108.094	36.204037556	-107.721422205
8,355.00	87.21	89.070	4,902.76	1,092.45	3,499.44	1,893,587.798	2,756,202.956	36.204041530	-107.721100656
8,449.00	86.92	88.610	4,907.57	1,094.35	3,593.30	1,893,589.698	2,756,296.813	36.204046452	-107.720782516
8,542.00	89.48	90.160	4,910.49	1,095.35	3,686.23	1,893,590.695	2,756,389.751	36.204048894	-107.720467494
8,637.00	89.29	89.500	4,911.51	1,095.63	3,781.23	1,893,590.977	2,756,484.745	36.204049364	-107.720145507
8,732.00	89.33	89.010	4,912.65	1,096.87	3,876.21	1,893,592.212	2,756,579.729	36.204052452	-107.719823547
8,826.00	89.74	89.150	4,913.42	1,098.37	3,970.20	1,893,593.721	2,756,673.714	36.204056295	-107.719504976
8,920.00	89.98	89.150	4,913.65	1,099.77	4,064.19	1,893,595.116	2,756,767.703	36.204059823	-107.719186389
9,014.00	90.13	89.270	4,913.56	1,101.07	4,158.18	1,893,596.412	2,756,861.694	36.204063079	-107.718867798
9,108.00	90.27	89.090	4,913.23	1,102.41	4,252.17	1,893,597.757	2,756,955.683	36.204066469	-107.718549210
9,202.00	90.21	88.940	4,912.83	1,104.03	4,346.15	1,893,599.373	2,757,049.668	36.204070602	-107.718230636
9,296.00	89.23	87.900	4,913.29	1,106.62	4,440.11	1,893,601.965	2,757,143.629	36.204077415	-107.717912141
9,390.00	89.07	88.960	4,914.69	1,109.19	4,534.07	1,893,604.540	2,757,237.581	36.204084182	-107.717593673
9,484.00	89.30	89.040	4,916.02	1,110.83	4,628.04	1,893,606.180	2,757,331.557	36.204088380	-107.717275130
9,579.00	90.17	89.940	4,916.46	1,111.68	4,723.03	1,893,607.026	2,757,426.551	36.204090390	-107.716953142
9,673.00	90.23	89.750	4,916.14	1,111.93	4,817.03	1,893,607.280	2,757,520.549	36.204090778	-107.716634526
9,767.00	89.02	88.520	4,916.75	1,113.35	4,911.02	1,893,608.699	2,757,614.533	36.204094365	-107.716315958
9,862.00	90.10	89.860	4,917.48	1,114.70	5,006.00	1,893,610.042	2,757,709.517	36.204097739	-107.715993999
9,956.00	89.97	89.520	4,917.42	1,115.20	5,100.00	1,893,610.550	2,757,803.515	36.204098823	-107.715675385
10,051.00	89.39	88.610	4,917.95	1,116.75	5,194.98	1,893,612.100	2,757,898.499	36.204102764	-107.715353424
10,145.00	88.91	90.720	4,919.35	1,117.30	5,288.97	1,893,612.650	2,757,992.482	36.204103960	-107.715034864
10,239.00	89.14	90.500	4,920.95	1,116.30	5,382.95	1,893,611.649	2,758,086.462	36.204100896	-107.714716315
10,333.00	89.88	90.810	4,921.75	1,115.23	5,476.94	1,893,610.575	2,758,180.452	36.204097628	-107.714397737
10,428.00	90.26	90.900	4,921.64	1,113.81	5,571.93	1,893,609.157	2,758,275.441	36.204093413	-107.714075772
10,522.00	90.31	90.850	4,921.17	1,112.38	5,665.91	1,893,607.722	2,758,369.429	36.204089152	-107.713757202
10,616.00	90.11	90.580	4,920.82	1,111.20	5,759.91	1,893,606.549	2,758,463.420	36.204085611	-107.713438617
10,711.00	89.11	89.130	4,921.47	1,111.44	5,854.90	1,893,606.789	2,758,558.414	36.204085948	-107.713116630
10,805.00	89.64	89.090	4,922.50	1,112.90	5,948.88	1,893,608.249	2,758,652.396	36.204089638	-107.712798065
10,899.00	90.99	89.810	4,921.98	1,113.81	6,042.87	1,893,609.151	2,758,746.388	36.204091796	-107.712479473
10,993.00	90.90	89.810	4,920.43	1,114.12	6,136.86	1,893,609.463	2,758,840.374	36.204092330	-107.712160899
11,087.00	90.87	89.570	4,918.98	1,114.63	6,230.85	1,893,609.972	2,758,934.361	36.204093404	-107.711842322
11,182.00	91.09	89.380	4,917.35	1,115.50	6,325.83	1,893,610.842	2,759,029.343	36.204095468	-107.711520372
11,276.00	90.77	91.210	4,915.83	1,115.01	6,419.81	1,893,610.358	2,759,123.325	36.204093814	-107.711201817
11,370.00	89.50	89.970	4,915.60	1,114.04	6,513.80	1,893,609.390	2,759,217.316	36.204090829	-107.710883234
11,465.00	89.49	89.500	4,916.44	1,114.48	6,608.80	1,893,609.830	2,759,312.311	36.204091706	-107.710561242
11,559.00	88.94	89.060	4,917.73	1,115.66	6,702.78	1,893,611.011	2,759,406.294	36.204094624	-107.710242677
11,654.00	88.47	88.360	4,919.88	1,117.80	6,797.73	1,893,613.149	2,759,501.244	36.204100166	-107.709920827
11,748.00	90.39	91.300	4,920.81	1,118.08	6,891.71	1,893,613.427	2,759,595.224	36.204100602	-107.709602276
11,842.00	90.87	91.600	4,919.78	1,115.70	6,985.68	1,893,611.049	2,759,689.188	36.204093738	-107.709283791
11,937.00	90.83	91.130	4,918.37	1,113.44	7,080.64	1,893,608.786	2,759,784.150	36.204087188	-107.708961922
12,031.00	90.49	90.540	4,917.29	1,112.07	7,174.62	1,893,607.416	2,759,878.133	36.204083094	-107.708643367
12,125.00	92.00	91.160	4,915.24	1,110.68	7,268.59	1,893,606.022	2,759,972.097	36.204078932	-107.708324877
12,219.00	92.54	90.750	4,911.52	1,109.11	7,362.50	1,893,604.457	2,760,066.010	36.204074299	-107.708006562
12,313.00	89.98	90.140	4,909.45	1,108.38	7,456.47	1,893,603.727	2,760,159.976	36.204071961	-107.707688063
12,407.00	90.20	90.160	4,909.31	1,108.13	7,550.47	1,893,603.481	2,760,253.975	36.204070950	-107.707369448
12,501.00	89.08	89.190	4,909.90	1,108.67	7,644.46	1,893,604.014	2,760,347.969	36.204072079	-107.707050849
12,595.00	89.53	89.050	4,911.04	1,110.11	7,738.44	1,893,605.458	2,760,441.950	36.204075708	-107.706732287
12,689.00	87.65	88.720	4,913.35	1,111.94	7,832.39	1,893,607.286	2,760,535.900	36.204080393	-107.706413833
12,783.00	89.17	89.340	4,915.96	1,113.53	7,926.34	1,893,608.877	2,760,629.847	36.204084424	-107.706095388



Survey Report - Geographic



Company:	Enduring Resources LLC	Local Co-ordinate Reference:	Well Rodeo Unit #503H
Project:	San Juan County, New Mexico NAD83 NM W	TVD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Site:	Rodeo Unit (500, 501, 503, 504, 506, 508, 509&510)	MD Reference:	RKB=6883+25 @ 6908.00ft (Aztec 1000)
Well:	Rodeo Unit #503H	North Reference:	Grid
Wellbore:	Original Hole	Survey Calculation Method:	Minimum Curvature
Design:	MWD surveys	Database:	DT_Aug2923v16

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
12,877.00	90.68	89.980	4,916.08	1,114.09	8,020.33	1,893,609.434	2,760,723.841	36.204085617	-107.705776785
12,971.00	88.80	90.320	4,916.51	1,113.84	8,114.33	1,893,609.188	2,760,817.836	36.204084602	-107.705458187
13,065.00	89.00	90.280	4,918.31	1,113.35	8,208.31	1,893,608.696	2,760,911.817	36.204082909	-107.705139636
13,159.00	89.53	90.340	4,919.52	1,112.84	8,302.30	1,893,608.188	2,761,005.807	36.204081170	-107.704821053
13,253.00	90.31	90.140	4,919.65	1,112.45	8,396.30	1,893,607.794	2,761,099.805	36.204079746	-107.704502443
13,347.00	87.53	91.150	4,921.42	1,111.39	8,490.26	1,893,606.736	2,761,193.772	36.204076498	-107.704183942
13,441.00	88.36	91.400	4,924.79	1,109.30	8,584.18	1,893,604.646	2,761,287.687	36.204070412	-107.703865621
13,535.00	90.07	91.840	4,926.08	1,106.64	8,678.13	1,893,601.989	2,761,381.637	36.204062767	-107.703547186
13,629.00	91.52	92.470	4,924.78	1,103.11	8,772.05	1,893,598.455	2,761,475.558	36.204052713	-107.703228851
13,724.00	92.15	92.270	4,921.73	1,099.18	8,866.92	1,893,594.528	2,761,570.427	36.204041577	-107.702907304
13,819.00	89.63	88.820	4,920.26	1,098.28	8,961.88	1,893,593.626	2,761,665.390	36.204038747	-107.702585429
13,913.00	88.89	87.520	4,921.47	1,101.28	9,055.82	1,893,596.627	2,761,759.331	36.204046644	-107.702266997
13,975.00	88.89	87.520	4,922.67	1,103.96	9,117.75	1,893,599.310	2,761,821.261	36.204053782	-107.702057069

Design Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
450.00	449.98	-0.35	-3.45	MWD surveys
2,986.40	2,859.95	735.59	-67.42	9 5/8" Casing shoe @ 2986.40 MD 2859.95 TVD
5,204.71	4,832.00	1,051.52	355.53	FTP @ 5204.71 MD 4832.00 TVD
5,378.00	4,872.13	1,057.89	523.57	400 FNL 100 FWL @ 5378.00 MD 4872.13 TVD
13,872.40	4,920.80	1,099.72	9,015.26	LTP @ 13872.40 MD 4920.80 TVD
13,913.00	4,921.47	1,101.28	9,055.82	Survey @ 13913.00 MD 4921.47 TVD
13,975.00	4,922.67	1,103.96	9,117.75	Survey proj. to 13975 MD 4922.67 TVD 387 FNL 1906 FEL

WELL NAME: **RODEO UNIT 503H**

OBJECTIVE: **Drill, complete, and equip single lateral in the Mancos-I formation**

API Number: **30-045-38322**

AFE Number: **DV03104**

ER Well Number: **NM08364.01**

State: **New Mexico**

County: **San Juan**

Surface Elev.: **6,883** ft ASL (GL) **6,908** ft ASL (KB)

Surface Location: **25-23N-09W** Sec-Twn- Rng **1,461** ft FNL **425** ft FEL

BH Location: **29-23N-08W** Sec-Twn- Rng **380** ft FNL **1977** ft FEL

Driving Directions: **FROM THE INTERSECTION OF US HWY 550 & US HWY 64 IN BLOOMFIELD, NM:**
South on US Hwy 550 for 37.8 miles to MM 113.5; Right (Southwest) on CR #7890 for 0.8 miles to fork; Left (South) remaining on CR #7890 for 1.3 miles to 4-way intersection; Left (Southeast) remaining on CR #7890 for 0.6 miles to fork; Right (Southwest) remaining on CR #7890 for 0.5 miles to access road; Left (Southeast) on access road for 0.4 miles to the RODEO UNIT 508H PAD (WELLS: 508H, 509H, 510H (DRILLED); 503H, 504H, 506H (PLANNED)). The planned wells are parallel to the existing wells at a distance of 35'. The 503H is closest to the location entrance and the existing facilities and directly across from the 508H well.

QUICK REFERENCE	
Sur TD (MD)	377 ft
Int TD (MD)	3,021 ft
KOP (MD)	4,460 ft
KOP (TVD)	4,286 ft
Target (TVD)	4,889 ft
Curve BUR	10 °/100 ft
POE (MD)	5,418 ft
TD (MD)	13,975 ft
Lat Len (ft)	8,523 ft

WELL CONSTRUCTION SUMMARY:

	Hole (in)	TD MD (ft)	Csg (in)	Csg (lb/ft)	Csg (grade)	Csg (conn)	Csg Top (ft)	Csg Bot (ft)
Surface	17.500	377	13.375	54.5	J-55	BTC	0	377
Intermediate	12.250	3,021	9.625	36.0	J-55	LTC	0	3,021
Production	8.500	13,965	5.500	17.0	P-110	LTC	0	13,965

CEMENT PROPERTIES SUMMARY:

	Type	Wt (ppg)	Yd (cuft/sk)	Wtr (gal/sk)	Hole Cap. (cuft/ft)	% Excess	TOC (ft MD)	Total (sx)
Surface	Type III	14.6	1.39	6.686	0.6946	100%	0	372
Inter. (Lead)	10 Type III:P	12.5	2.14	12.05	0.3627	70%	0	578
Inter. (Tail)	Type III	14.6	1.38	6.64	0.3132	20%	2,378	149
Prod. (Lead)	Type III	12.4	2.360	13.4	0.2691	65%	0	525
Prod. (Tail)	G:POZ blend	13.3	1.560	7.7	0.2291	10%	2,956	1,606

COMPLETION / PRODUCTION SUMMARY:

Perf, Plug & Frac 35 stages:2 spf. 0.31” diameter from 5420’ to 13841’ MD Total of 980 open holes

Production: Produce through production tubing via gas-lift into permanent production and storage facilities

TOPS	TVD	MD
Ojo Alamo	560	560
Kirtland	654	655
Fruitland	848	850
Pictured Cliffs	1159	1171
Lewis	1315	1337
Chacra	1581	1618
Cliff House	2644	2757
Menefee	2669	2784
Point Lookout	3650	3816
Mancos	3793	3962
Gallup (MNCS_A)	4139	4308

Well Name: RODEO UNIT	Well Location: T23N / R9W / SEC 25 / SENE / 36.201051 / -107.732966	County or Parish/State: SAN JUAN / NM
Well Number: 503H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM120377	Unit or CA Name: WEST LYBROOK EXPLORATORY UNIT	Unit or CA Number: NMNM135216X
US Well Number: 3004538322	Well Status: Drilling Well	Operator: ENDURING RESOURCES LLC

Subsequent Report

Sundry ID: 2774559

Type of Submission: Subsequent Report

Date Sundry Submitted: 02/12/2024

Date Operation Actually Began: 01/05/2024

Type of Action: Hydraulic Fracturing

Time Sundry Submitted: 08:56

Actual Procedure: This is a revised sundry from original sundry 2774322. The As pumped fluid was corrected to 140,033 bbls. 1/5/24: NU BOPE. Full function PT L750 H9500 (30min), all tests good & recorded on chart. 1/6/24: Open well, increase pressure, Frac Sleeve opened at 6386 psi. 1/7/24 to 1/16/24: Perf, Plug & Frac 35 stages:2 spf. 0.31" diameter from 5420' to 13841' MD (4880' to 4922' TVD). Total of 980 open holes. As pumped: 140,033 bbls of fluid. 10,957,983 lbs of proppant. 1/19/24: MIRU AWS 812. NU BOP. Full function PT to L400 H4900 (30min) test good & recorded on chart. 1/20/24 to 1/24/24: TIH. Drill out plugs. TOH. 1/25/24: RIH with production string. Land 162 jts of 2.875" 6.5# J55 STC tubing. EOT: 5404'. Seven GLVs set at 1379' – 1945' – 2510' – 3042' – 3541' – 4074' – 4573'. POH. ND BOPE. NU production tree & PT to 10k (30min) test good & recorded on chart. Turn well over to production. Rig released on 1/25/24. Sundry ID: 2774322 Page1

Received by OCD: 5/14/2024 11:42:30 AM

Page 19 of 30

Well Name: RODEO UNIT	Well Location: T23N / R9W / SEC 25 / SENE / 36.201051 / -107.732966	County or Parish/State: SAN JUAN / NM
Well Number: 503H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM120377	Unit or CA Name: WEST LYBROOK EXPLORATORY UNIT	Unit or CA Number: NMNM135216X
US Well Number: 3004538322	Well Status: Drilling Well	Operator: ENDURING RESOURCES LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: HEATHER HUNTINGTON

Signed on: FEB 12, 2024 08:54 AM

Name: ENDURING RESOURCES LLC

Title: Permitting Technician

Street Address: 200 Energy Court

City: FarmingtonState: NM

Phone: (505) 636-9751

Email address: HHUNTINGTON@ENDURINGRESOURCES.COM

Field

Representative Name:

Street Address:

City:State:Zip:

Phone:

Email address:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Completion Print

03/12/2024

Operator Name ENDURING RESOURCES LLC SHL SENE Sec 25 23N 9W	Well Name RODEO UNIT	Well Number 503H	US Well Number 3004538322
	County SAN JUAN	State NM	Lease Number(s) NMNM120377
Well Type OIL WELL	Well Status Producing Oil Well	Agreement Name	Agreement Number(s) NMNM136328A
Allottee/Tribe Name	Well Pad Name RODEO UNIT 508	Well Pad Number 503H 504H 506H	APD ID 10400084206

Section 1 - General

Well Completion Report Id: 91239**Submission Date:** 03-05-2024**BLM Office:** Farmington Field Office**User:** HEATHER HUNTINGTON**Title:** Permitting Technician**Federal/Indian:** FEDERAL**Lease Number:** NMNM120377**Lease Acres:****Agreement in place?:** YES**Federal or Indian Agreement:** FEDERAL**Agreement Number:****Agreement Name:**

Additional Information

AMENDED TO ADD THE PBTD DATA

Keep this Well Completion Report confidential?: YES**APD Operator:** ENDURING
RESOURCES LLC

Section 2 - Well

Field/Pool or Exploratory:**Pool Name:** LYBROOK MANCOS W**Field Name:** BASIN MANCOS**Well Type:** OIL WELL**Spud Date:** 10-09-2023**Date Total Measured Depth Reached:** 01-01-2024**Drill & Abandon or Ready To Produce:** READY TO PRODUCE**Well Class:** HORIZONTAL

Operator Name ENDURING RESOURCES LLC SHL SENE Sec 25 23N 9W	Well Name RODEO UNIT	Well Number 503H	US Well Number 3004538322
	County SAN JUAN	State NM	Lease Number(s) NMNM120377
Well Type OIL WELL	Well Status Producing Oil Well	Agreement Name	Agreement Number(s) NMNM136328A
Allottee/Tribe Name	Well Pad Name RODEO UNIT 508	Well Pad Number 503H 504H 506H	APD ID 10400084206

Section 3 - Geologic

Formation Name	Lithology	Describe Lithology	Elevation	TVD	MD	Mineral Resources	Describe Mineral
NACIMIENTO	SANDSTONE, SHALE		6883	0	0	USEABLE WATER	
OJO ALAMO	SANDSTONE, SHALE		6348	560	560	USEABLE WATER	
KIRTLAND	COAL, SHALE		6254	654	655	COAL, NATURAL GAS	
FRUITLAND	COAL		6060	848	850	COAL	
PICTURED CLIFFS	SANDSTONE, SHALE		5749	1159	1171	NATURAL GAS	
LEWIS	SHALE		5593	1315	1337	NATURAL GAS	
CHACRA	SANDSTONE, SHALE		5327	1581	1618	NATURAL GAS	
CLIFFHOUSE	SANDSTONE		4264	2644	2757	NATURAL GAS	
MENEFEE	COAL, SANDSTONE, SHALE		4239	2669	2784	NATURAL GAS	
POINT LOOKOUT	SANDSTONE, SHALE		3258	3650	3816	NATURAL GAS	
MANCOS	SHALE		3115	3793	3962	NATURAL GAS, OIL	
GALLUP	SHALE		2769	4139	4308	NATURAL GAS, OIL	

Completion and Completed

Operator Name ENDURING RESOURCES LLC SHL SENE Sec 25 23N 9W	Well Name RODEO UNIT	Well Number 503H	US Well Number 3004538322
	County SAN JUAN	State NM	Lease Number(s) NMNM120377
Well Type OIL WELL	Well Status Producing Oil Well	Agreement Name	Agreement Number(s) NMNM136328A
Allottee/Tribe Name	Well Pad Name RODEO UNIT 508	Well Pad Number 503H 504H 506H	APD ID 10400084206

Completion Data

Wellbore Code	Completion Code	Interval Number	Case Number	Lease Number	Well Completion Type	Describe Well Completion Type	Completion Status	Date Completed	Date First Produced	Formation	Interval Top (MD)	Interval Bottom (MD)	Interval Perforated?	Perforation Size	Number of Holes	Status of Interval
00	S1	1	NMNM136328A	NMNM120377	NEW		POW	01-25-2024	02-04-2024	GALLUP	5420	13841	Y	.31	980	OPEN

Treatment Data

Wellbore Code	Completion Code	Interval Number	Interval Treated?	Treatment Type	Tottle Fluid (bbbls)	Total Proppant (lbs)	Treatment Remarks
00	S1	1	Y	FRAC	140033	10957983	Chemical disclosure uploaded to FracFocus on 2/2/24

Production Data

Wellbore Code	Completion Code	Interval Number	API Oil Gravity	Gas Gravity	Production Method	Describe Production	Disposition of Gas	Describe Disposition
00	S1	1			GAS LIFT		SOLD	

Operator Name ENDURING RESOURCES LLC SHL SENE Sec 25 23N 9W	Well Name RODEO UNIT	Well Number 503H	US Well Number 3004538322
	County SAN JUAN	State NM	Lease Number(s) NMNM120377
Well Type OIL WELL	Well Status Producing Oil Well	Agreement Name	Agreement Number(s) NMNM136328A
Allottee/Tribe Name	Well Pad Name RODEO UNIT 508	Well Pad Number 503H 504H 506H	APD ID 10400084206

Test Data

Wellbore Code	Completion Code	Interval Number	Test Date	Hours Tested	24-Hour Rate Oil (bbls)	24-Hour Rate Gas (MCF)	24-Hour Rate Water(BWPD)	Gas-Oil Ratio (SCF/Bbl)	Choke Size	Tubing Pressure	Tubing Pressure Shut-In (psi)	Casing Pressure (psi)
00	S1	1	02/09/2024	24	45	1089	432	24200	64/64	89		724

Well Location

Survey Type: RECTANGULAR

Survey Number: 15269

Datum: NAD83

Vertical Datum: NAVD88

Reference Datum: GL

	State	Meridian	County	Latitude	Longitude	Elevation (MSL)	MD (ft)	TVD (ft)	Lease Type	Lease Number	Plug TVD (ft)	Plug MD (ft)	Plug Type	NS-Foot	NS-Indicator	EW-Foot	EW-Indicator	Township	Range	Section	Aliquot/Lot/Tract
SHL	NEW MEXICO	NEW MEXICO PRINCIPAL	SAN JUAN	36.201051	-107.732966	6883	N/A	N/A	INDIAN	NMNM036949				1461	FNL	425	FEL	23N	9W	25	SENE
KOP Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SAN JUAN	36.201051	-107.732966	6506	377	377	INDIAN	NMNM036949				1461	FNL	425	FEL	23N	9W	25	SENE
PPP Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SAN JUAN	36.204087	-107.713544	1962	13857	4921	INDIAN	NOG13121851				386	FNL	0	FWL	23N	8W	29	NWNW
PPP Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SAN JUAN	36.203956	-107.731188	1962	13857	4921	FEDERAL	NMNM120377				400	FNL	100	FWL	23N	8W	30	Lot 1

Operator Name ENDURING RESOURCES LLC SHL SENE Sec 25 23N 9W	Well Name RODEO UNIT	Well Number 503H	US Well Number 3004538322
	County SAN JUAN	State NM	Lease Number(s) NMNM120377
Well Type OIL WELL	Well Status Producing Oil Well	Agreement Name	Agreement Number(s) NMNM136328A
Allottee/Tribe Name	Well Pad Name RODEO UNIT 508	Well Pad Number 503H 504H 506H	APD ID 10400084206

	State	Meridian	County	Latitude	Longitude	Elevation (MSL)	MD (ft)	TVD (ft)	Lease Type	Lease Number	Plug TVD (ft)	Plug MD (ft)	Plug Type	NS-Foot	NS-Indicator	EW-Foot	EW-Indicator	Township	Range	Section	Aliquot/Lot/Tract
EXIT Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SAN JUAN	36.204043	- 107.702405	6883	0	0	INDIAN	NOG13121855				391	FNL	2008	FEL	23N	8W	29	NWNE
BHL Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SAN JUAN	36.204054	- 107.702057	1960	13975	4923	INDIAN	NOG13121855	4921	13857		386	FNL	1906	FEL	23N	8W	29	NWNE

Casing, Liner and Tubing

Casing and Liner

Wellbore Code	Casing String Type	Hole Size	Top Setting Depth (MD)	Bottom Setting Depth (MD)	Casing Size	Wt(lbs/ft)	Casing Grade	Describe Other Casing Grade	Joint	Other Joint	Amount Pulled (ft)
00	SURFACE	17.5	0	377	13.375	54.5	J-55		BUTT		
00	INTERMEDIATE	12.25	0	3021	9.625	36	J-55		LT&C		

Operator Name
ENDURING RESOURCES
LLC
SHL SENE Sec 25 23N 9W

Well Name RODEO UNIT

Well Status Producing Oil
Well

Well Type OIL WELL

Allottee/Tribe Name

Well Number 503H

County SAN JUAN

Well Pad Name RODEO
UNIT 508

State NM

Agreement Name

Well Pad Number 503H
504H 506H

US Well Number 3004538322

Lease Number(s)
NMNM120377

Agreement Number(s)
NMNM136328A

APD ID 10400084206

Casing and Liner

Wellbore Code	Casing String Type	Hole Size	Top Setting Depth (MD)	Bottom Setting Depth (MD)	Casing Size	Wt(lbs/ft)	Casing Grade	Describe Other Casing Grade	Joint	Other Joint	Amount Pulled (ft)
00	PRODUCT ION	8.5	0	13964	5.5	17	P-110		LT&C		

Cementing

Wellbore Code	Casing String Type	Stage Tool Depth	Cement Lead Type	Cement Lead Qty (sks)	Cement Lead Yield (cu.ft/sks)	Cement Lead Top (MD)	Cement Tail Type	Cement Tail Qty (sks)	Cement Tail Yield(cu.ft/sks)	Cement Tail Top (MD)	Total (Lead + Tail) Cement Slurry Volume
00	SURFACE		Type III	372	1.38	0					91.4
00	INTERME DIATE		Type III: POZ Blend	578	2.14	0	Type III	149	1.38	2378	256.9
00	PRODUCT ION		Type III	525	2.36	0	Class G:POZ Blend	1606	1.56	2956	666.9

Tubing

Wellbore Code	Tubing Size	Describe Other	Tubing Setting Depth (MD/ft)	Packer Depth (MD/ft)	Tubing Weight	Tubing Grade	Describe Other	Tubing Coupling	Describe Other
00	2.875		5404		6	J-55		ST&C	

Operator Name ENDURING RESOURCES LLC SHL SENE Sec 25 23N 9W	Well Name RODEO UNIT	Well Number 503H	US Well Number 3004538322
	County SAN JUAN	State NM	Lease Number(s) NMNM120377
Well Type OIL WELL	Well Status Producing Oil Well	Agreement Name	Agreement Number(s) NMNM136328A
Allottee/Tribe Name	Well Pad Name RODEO UNIT 508	Well Pad Number 503H 504H 506H	APD ID 10400084206

Logs

Wellbore Code	Log Upload	Was Well Cored?	Was DST Run?	Directional Survey?	Geologic Report	Wellbore Diagram
00	NO	NO	NO	YES	NO	YES

Operator

I hereby certify that the foregoing and attached information is complete and correct as determined from all available records. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Well Completion Reports through this system satisfies regulations requiring a submission of Form 3160-4 or a Well Completion Report.

Name: ENDURING RESOURCES LLC

Signed By: HEATHER HUNTINGTON **Title:** Permitting Technician **Signed on:** 03/05/2024

Street Address: 200 Energy Court

City: Farmington **State:** NM **Zip:** 87401

Phone: (505)636-9751

Email address: HHUNTINGTON@ENDURINGRESOURCES.COM

Field

Representative Name:

Street Address:

City: **State:** **Zip:**

Phone: **Extension:**

Email address:

Attachments

Operator Name ENDURING RESOURCES LLC SHL SENE Sec 25 23N 9W	Well Name RODEO UNIT	Well Number 503H	US Well Number 3004538322
	County SAN JUAN	State NM	Lease Number(s) NMNM120377
Well Type OIL WELL	Well Status Producing Oil Well	Agreement Name	Agreement Number(s) NMNM136328A
Allottee/Tribe Name	Well Pad Name RODEO UNIT 508	Well Pad Number 503H 504H 506H	APD ID 10400084206

Rodeo_unit__503H_PVA_final_1_3_24_20240221150421.pdf

RODU_503H_WBD_02212024_20240221150522.pdf

Rodeo_Unit__503H_As_Drilled_C_102_Plat___SIGNED_20240221165027.pdf

From: blm-afmss-notifications@blm.gov
To: [Heather Huntington](#)
Subject: Well Name: RODEO UNIT, Well Number: 503H, Notification of Well Completion Acceptance
Date: Thursday, March 7, 2024 1:45:06 PM

The Bureau of Land Management

Notice of Acceptance for Well Completion Report

- Operator Name: **ENDURING RESOURCES LLC**
- Well Name: **RODEO UNIT**
- Well Number: **503H**
- US Well Number: **3004538322**
- Well Completion Report Id: **WCR2024030791239**

This notification is automatically generated. Please do not reply to this message as this account is not monitored.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 344212

ACKNOWLEDGMENTS

Operator: ENDURING RESOURCES, LLC 6300 S Syracuse Way Centennial, CO 80111	OGRID: 372286
	Action Number: 344212
	Action Type: [C-104] Tight Hole Completion Packet (C-104CT)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 344212

CONDITIONS

Operator: ENDURING RESOURCES, LLC 6300 S Syracuse Way Centennial, CO 80111	OGRID: 372286
	Action Number: 344212
	Action Type: [C-104] Tight Hole Completion Packet (C-104CT)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	None	5/15/2024