

Submit a Copy To Appropriate District

Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-005-62976
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator Hanson Operating Company, Inc.		6. State Oil & Gas Lease No. VB-233
3. Address of Operator P.O. Box 1515 Roswell, NM 88202-1515		7. Lease Name or Unit Agreement Name Carl ANO State
4. Well Location Unit Letter M : 330 feet from the S line and 990 feet from the W line Section 1 Township 8S Range 27E NMPM County Chaves		8. Well Number #4
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,967' GR		9. OGRID Number 009974
		10. Pool name or Wildcat Acme, San Andres, Southeast

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
DOWNHOLE COMMINGLE <input type="checkbox"/>	P AND A <input type="checkbox"/>
CLOSED-LOOP SYSTEM <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>
OTHER: <input type="checkbox"/>	OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

JMR Services, LLC plugged this well on behalf of Hanson Operating Company, Inc from 04/11/2025-05/07/2025
Please see the attached P&A Subsequent Report.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Abigail Anderson TITLE P&A Engineer DATE 05/09/2025

Type or print name Abigail Anderson E-mail address: aanderson@jmrservices.com PHONE: 432-889-4673

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____

Conditions of Approval (if any):

**P&A Subsequent Report
Hanson Operating Co, Inc
Carl ANO State #4
30-005-62976**

Note: All cement is Class C mixed at 14.8 ppg, yield 1.32 cu ft / sx. Cement volumes are based on inside capacities + 50' excess and outside capacities + 100% excess.

04/11/25 MIRU plugging equipment.

04/14/25 NU BOP. Repaired wellhead.

04/15/25 RIH w/ guage ring to 2,150'. Set 5 ½" CIBP @ 2,100'. Circulated hole w/ 60 bbls 10# MLF. Pressure tested csg, held 0 psi. Isolated holes from 200' to surface. RU wireline & ran CBL from 2,100' to surface. TOC @ 958'.

04/16/25 Spotted 65 sxs class C cmt @ 2,100-1,458'. WOC & tagged @ 1,350'. Perf'd @ 940' per Robert Trujillo w/ NMOCD's request.


04/17/25 ND BOP. Sqz'd 400 sxs class C cmt @ 940' circulated to surface. RDMO.

05/07/25 Moved in backhoe & welder. Cut off wellhead & verified cmt at surface. Installed an above ground DHM. Dug up anchors, backfill cellar, cleaned location, & moved off.

Hanson Operating			PLUGGED	
Author:	Abby @ JMR	Well No.	#4	
Well Name	Carl ANO State	API #:	30-005-62976	
Field/Pool	Acme; San Andres, SE	Location:	Sec 1, T8S, R27E	
County	Chaves		330FSL & 990' FWL	
State	NM	GL:	3967	
Spud Date	7/31/1993			

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8	J55	24#	452	12 1/4	250	0
Prod Csg	5 1/2	J55	15.5#	2,192	7 7/8	250	958' CBL

Formation	Top
Yates	462
7 Rivers	550
Queen	908
San Andres	1540

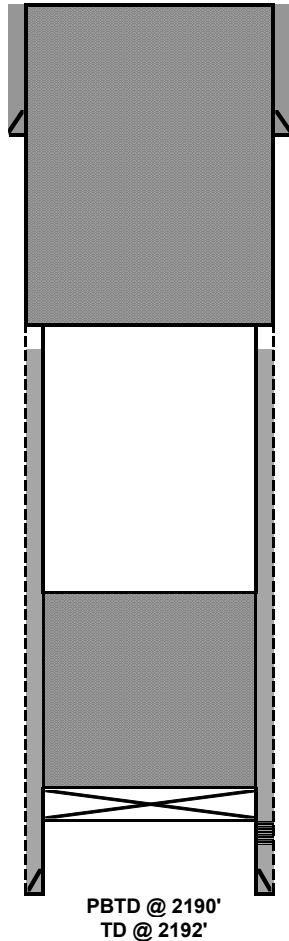

8 5/8 24# CSG @ 452
Hole Size: 12 1/4

Plug #2: Perf'd @ 940'. Sqz'd 400 sxs class C cmt @ 940' circulated to surface.

Plug #1: Set 5 1/2" CIBP @ 2,100'. Spotted 65 sxs class C cmt @ 2,100-1,458'. WOC & tagged @ 1,350'.

Perfs @ 2151-2174'

5 1/2 15.5# CSG @ 2,192
Hole Size: 7 7/8

PBTD @ 2190'
TD @ 2192'

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 470661

CONDITIONS

Operator: JMR SERVICES, LLC 4706 Green Tree Blvd. Midland, TX 79707	OGRID: 372464
	Action Number: 470661
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
gcordero	Clean Location in accordance with 19.15.25.10 NMAC.	7/25/2025
gcordero	Submit C-103Q within one year of plugging.	7/25/2025