Form 3160-5		OCD Hobbs				
(August 2007) DE	UNITED STATE EPARTMENT OF THE I UREAU OF LAND MANA	NTERIOR	S OCD	OMB N Expires:	APPROVED O. 1004-0135 July 31, 2010	
SUNDRY	NOTICES AND REPORTS ON WELLS MAY		2 2014	5. Lease Serial No. NMLC032545A		
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.			6. If Indian, Allottee c	r Tribe Name		
SUBMIT IN TRIPLICATE - Other instructions on reverse side.			 If Unit or CA/Agreement, Name and/or No. 8910138170 			
1. Type of Well □ Gas Well ☑ Other:/ INJECTION				8. Well Name and No. MLMU 96		
2. Name of Operator OXY USA INCORPORATED	DAVID STEWART wart@oxy.com		9. API Well No. 30-025-10907-0)0-S1		
3a. Address HOUSTON, TX 77210-4294		3b. Phone No. (include area code) Ph: 432-685-5717 Fx: 432-685-5742		10. Field and Pool, or Exploratory LANGLIE		
4. Location of Well (Footage, Sec., T	., R., M., or Survey Description	1	. <u>.</u> .	11. County or Parish,	and State	
Sec 31 T23S R37E NWSE 1979FSL 1980FEL		÷		LEA COUNTY,	NM	
12. CHECK APPI	ROPRIATE BOX(ES) TO	O INDICATE NATURE OF N	IOTICE, RI	EPORT, OR OTHE	R DATA	
TYPE OF SUBMISSION	TYPE OF ACTION					
Notice of Intent	□ Acidize	Deepen	Product	ion (Start/Resume)	Water Shut-Off	
Notice of Intent	Alter Casing	Fracture Treat	🗖 Reclama	ation	Well Integrity	
Subsequent Report	🗖 Casing Repair	New Construction	🗖 Recomp	lete	Other ·	
Final Abandonment Notice	🗖 Change Plans	Plug and Abandon	_	arily Abandon		
· · ·	Convert to Injection	Plug Back	U Water D	visposal		
determined that the site is ready for fi TD-3618' OH-3447-3618'		ed only after all requirements, includin		· • • • •	·	
ID-3010 OR-3447-3010						
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx,	0sx, 12-1/4" hole, TOC-S 8-3/4" hole, TOC-1860'- ⁻	urf-Circ TS		SEE ATTACI		
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RiH & set CIBP @ 3397' Ma 2. M&P 35sx cmt @ 2800-265 3. Perf @ 1240', sgz 50sx cmt	8-3/4" hole, TOC-1860'- ⁻ &P 55sx cmt to 3150' WC Ю' WOC-Tag 2350 t to 1125' WOC-Tag	TS DC-Tag		CONDITION	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RIH & set CIBP @ 3397' M 2. M&P 35sx cmt @ 2800-265	8-3/4" hole, TOC-1860'- ⁻ &P 55sx cmt to 3150' WC Ю' WOC-Tag 2350 t to 1125' WOC-Tag	TS DC-Tag		CONDITION RECLAMATIC	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RiH & set CIBP @ 3397' Mo 2. M&P 35sx cmt @ 2800-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt	8-3/4" hole, TOC-1860'- ⁻ &P 55sx cmt to 3150' WC Ю' WOC-Tag 2350 t to 1125' WOC-Tag	TS DC-Tag		CONDITION RECLAMATIC	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RiH & set CIBP @ 3397' Mo 2. M&P 35sx cmt @ 2800-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt	8-3/4" hole, TOC-1860'- ⁷ &P 55sx cmt to 3150' WC O' WOC-Tag 2850 t to 1125' WOC-Tag t to surface	IS)C-Tag - 2720	Information	CONDITION RECLAMATIC ATT,	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RIH & set CIBP @ 3397' M 2. M&P 35sx cmt @ 2000-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt 10# MLF between plugs	8-3/4" hole, TOC-1860'- &P 55sx cmt to 3150' WC HO' WOC-Tag 2355 to 1125' WOC-Tag t to surface true and correct. Electronic Submission # For OXY US mitted to AFMSS for proce	TS DC-Tag 2720 242112 verified by the BLM Well A INCORPORATED, sent to the ssing by JEN VIFER MASON on 0	Hobbs	CONDITION RECLAMATI(ATT, System 14JAM0052SE)	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RiH & set CIBP @ 3397' M. 2. M&P 35sx cmt @ 2000-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt 10# MLF between plugs	8-3/4" hole, TOC-1860'- &P 55sx cmt to 3150' WC 60' WOC-Tag 2355 to 1125' WOC-Tag t to surface true and correct. Electronic Submission # For OXY US mitted to AFMSS for proce	TS DC-Tag 2720 242112 verified by the BLM Well A INCORPORATED, sent to the ssing by JEN VIFER MASON on 0	Hobbs 05/07/2014 (GULATORY	CONDITION RECLAMATI(ATT, System 14JAM0052SE)	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RIH & set CIBP @ 3397' Mi 2. M&P 35sx cmt @ 2000-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt 10# MLF between plugs 14. I hereby certify that the foregoing is Name(<i>Printed/Typed</i>) DAVID S	8-3/4" hole, TOC-1860'- &P 55sx cmt to 3150' WC O' WOC-Tag 2355 to 1125' WOC-Tag to surface Electronic Submission # For OXY US mitted to AFMSS for proce TEWART	TS DC-Tag - 2720 242112 verified by the BLM Well A INCORPORATED, sent to the ssing by JENNIFER MASON on (Title SR. REG	Hobbs 05/07/2014 (GULATORY	CONDITION RECLAMATIC ATT, System 14JAM0052SE) ADVISOR	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RiH & set CIBP @ 3397' M 2. M&P 35sx cmt @ 2000-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt 10# MLF between plugs 14. I hereby certify that the foregoing is Name(<i>Printed/Typed</i>) DAVID S ⁻ Signature (Electronic S	8-3/4" hole, TOC-1860'- &P 55sx cmt to 3150' WC O' WOC-Tag 2355 to 1125' WOC-Tag to surface Electronic Submission # For OXY US mitted to AFMSS for proce TEWART	TS DC-Tag - 2720 242112 verified by the BLM Well SA INCORPORATED, sent to the ssing by JEN VIFER MASON on O Title SR. REG Date 04/14/20 DR FEDERAL OR STATE C	Hobbs 05/07/2014 (GULATORY	CONDITION RECLAMATIC ATT, System 14JAM0052SE) ADVISOR	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RIH & set CIBP @ 3397' Mi 2. M&P 35sx cmt @ 2000-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt 10# MLF between plugs 14. I hereby certify that the foregoing is Name(<i>Printed/Typed</i>) DAVID S	8-3/4" hole, TOC-1860'- &P 55sx cmt to 3150' WC O' WOC-Tag 235 to 1125' WOC-Tag to surface true and correct. Electronic Submission # For OXY US mitted to AFMSS for proce TEWART Submission) THIS SPACE FO A Approval of this notice does itable title to those rights in the	TS DC-Tag 242112 verified by the BLM Well SA INCORPORATED, sent to the ssing by JEN VIFER MASON on O Title SR. REG Date 04/14/20 DR FEDERAL OR STATE O Title SCA	Hobbs 05/07/2014 (GULATORY 014 DFFICE US	CONDITION RECLAMATIC ATT, System 14JAM0052SE) ADVISOR	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RiH & set CIBP @ 3397' M. 2. M&P 35sx cmt @ 2000-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt 10# MLF between plugs 14. I hereby certify that the foregoing is 14. I hereby certify that the foregoing is Comm Name (<i>Printed/Typed</i>) DAVID S ⁻ Signature (Electronic S Signature (Electronic S Conditions of approved, if any, are attached certify that the applicant holds legal or equ	8-3/4" hole, TOC-1860'- &P 55sx cmt to 3150' WC O' WOC-Tag 235 to 1125' WOC-Tag to surface true and correct. Electronic Submission # For OXY US mitted to AFMSS for proce TEWART Submission) THIS SPACE FC d. Approval of this notice does nitable title to those rights in the let operations thereon. U.S.C. Section 1212, make it a	TS DC-Tag 242112 verified by the BLM Well A INCORPORATED, sent to the ssing by JEN NIFER MASON on O Title SR. REG Date 04/14/20 DR FEDERAL OR STATE O Title STATE O Date 04/14/20 DR FEDERAL OR STATE O Title	Hobbs 05/07/2014 (GULATORY 014 DFFICE US	CONDITION RECLAMATI(ATT, System 14JAM0052SE) ADVISOR	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RIH & set CIBP @ 3397' M 2. M&P 35sx cmt @ 2000-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt 10# MLF between plugs 14. I hereby certify that the foregoing is Com Name(<i>Printed/Typed</i>) DAVID S ⁻ Signature (Electronic S Signature (Electronic S Approved By Conditions of approved, if any, are attached certify that the applicant holds legal or equ which would entitle the applicant to condu Title (8 U.S.C Section 1001 and Title 43 States any false, fictitious or fraudulent s	8-3/4" hole, TOC-1860'- &P 55sx cmt to 3150' WC O' WOC-Tag 2355 to 1125' WOC-Tag to surface true and correct. Electronic Submission # For OXY US mitted to AFMSS for proce TEWART Submission) THIS SPACE FC Approval of this notice does nitable title to those rights in the tot operations thereon. U.S.C. Section 1212, make it a statements or representations as	TS DC-Tag 242112 verified by the BLM Well A INCORPORATED, sent to the ssing by JEN VIFER MASON on 0 Title SR. REG Date 04/14/20 DR FEDERAL OR STATE C 	Hobbs 05/07/2014 (GULATORY 014 DFFICE US	CONDITION RECLAMATI(ATT, System 14JAM0052SE) ADVISOR SE	S OF APPROVA	
9-5/8" 36# csg @ 1189' w/ 700 7" 20# csg @ 3447' w/ 525sx, 1. RIH & set CIBP @ 3397' M 2. M&P 35sx cmt @ 2000-265 3. Perf @ 1240', sqz 50sx cmt 4. Perf @ 300', sqz 120sx cmt 10# MLF between plugs 14. I hereby certify that the foregoing is Com Name(<i>Printed/Typed</i>) DAVID S ⁻ Signature (Electronic S Signature (Electronic S Approved By Conditions of approved, if any, are attached certify that the applicant holds legal or equ which would entitle the applicant to condu Title (8 U.S.C Section 1001 and Title 43 States any false, fictitious or fraudulent s	8-3/4" hole, TOC-1860'- &P 55sx cmt to 3150' WC O' WOC-Tag 2355 to 1125' WOC-Tag to surface true and correct. Electronic Submission # For OXY US mitted to AFMSS for proce TEWART Submission) THIS SPACE FC A. Approval of this notice does nitable title to those rights in the tot operations thereon. U.S.C. Section 1212, make it a statements or representations as ISED ** BLM REVISEI	TS DC-Tag 242112 verified by the BLM Well A INCORPORATED, sent to the ssing by JEN NIFER MASON on O Title SR. REG Date 04/14/20 DR FEDERAL OR STATE O Title STATE O Date 04/14/20 DR FEDERAL OR STATE O Title	Hobbs 05/07/2014 (GULATORY 014 DFFICE US willfully to ma REVISED	CONDITION RECLAMATI(ATT, System 14JAM0052SE) ADVISOR SE	S OF APPROVA	

Additional data for EC transaction #242112 that would not fit on the form

32. Additional remarks, continued

Above ground steel tanks will be utilized.

An Intent to P&A had been approved 7/13/12, but the had been returned to injection at that time.


OXY USA WTP LP - Proposed Myers Langlie Mattix Unit #96 API No. 30-025-10907

120sx @ 300'-Surface

50sx @ 1240-1125' WOC-Tag

35sx @ 2800-2650' WOC-Tag

CIBP @ 3397' w/ 55sx to 3150' WOC-Tag



12-1/4" hole @ 1189' 9-5/8" csg @ 1189' 🦈 w/ 700sx-TOC-Surf-Circ -

Anhy 1168 T/salt 119-1 B/salt 2800

fates 2920

8-3/4" hole @ 3618' 7" csg @ 3447'----w/ 525sx-TOC-1860'-TS


OH @ 3447-3618' 🧹

V TD-3618'

OXY USA WTP LP - Current Myers Langlie Mattix Unit #96 API No. 30-025-10907

2-3/8" tbg w/ pkr @ 3379'

13

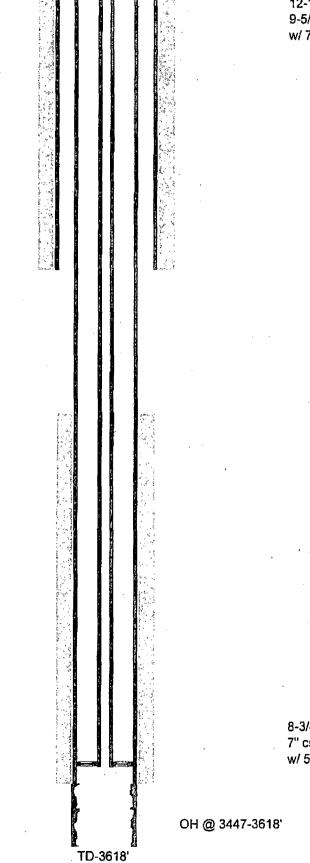

12-1/4" hole @ 1189' 9-5/8" csg @ 1189' w/ 700sx-TOC-Surf-Circ

8-3/4" hole @ 3618' 7" csg @ 3447' w/ 525sx-TOC-1860'-TS

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. In lieu of a cement plug in a cased hole, a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement. The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged</u>.

8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration conditions of approval will be developed and furnished to you.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Interim Reclamation Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses.

Interim reclamation consists of minimizing the footprint of disturbance by reclaiming all portions of the well site not needed for production operations. The portions of the cleared well site not needed for operational and safety purposes are recontoured to a final or intermediate contour that blends with the surrounding topography as much as possible. Sufficient level area remains for setup of a workover rig and to park equipment. Topsoil is respread over areas not needed for all-weather operations. Production facilities should be clustered to maximize the opportunity for interim reclamation. In order to inspect and operate the well or complete workover operations, it may be necessary to drive, park, and operate on restored, interim vegetation within the previously disturbed area. This is generally acceptable provided damage is repaired and reclaimed following use.

To reduce final reclamation costs; maintain healthy, biologically active topsoil; and to minimize habitat, visual, and forage loss during the life of the well, all salvaged topsoil should be spread over the area of interim reclamation, rather than stockpiled.

- The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). Interim reclamation is to be completed within 6 months of well completion.
- 3. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with interim reclamation as per approved APD or Sundry Notice. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.
- 4. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 5. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Environmental Protection Specialist 575-234-5909 (Office), 575-361-2648 (Cell)

Linda Denniston Environmental Protection Specialist 575-234-5974

Jennifer Van Curen Environmental Protection Specialist 575-234-5905

Mike Burton Environmental Protection Specialist 575-234-2226

Jeffery Robertson Natural Resource Specialist

Solomon Hughes Natural Resource Specialist 575-234-5951

Douglas Hoag Civil Engineering Technician 575-234-5979