

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87416
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

HOBBS OCD
DEC 01 2017
RECEIVED

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-40575
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Percussion Petroleum		6. State Oil & Gas Lease No. VB-2048-0001
3. Address of Operator 919 Milam St., Ste. 2475 Houston, TX 77002		7. Lease Name or Unit Agreement Name Kemnitz 17 State
4. Well Location Unit Letter J : 2309 feet from the South line and 1700 feet from the East line Section 17 Township 16S Range 33E NMPM County Lea		8. Well Number 1
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4254' RKB		9. OGRID Number 013742.371755
		10. Pool name or Wildcat Sanmal North Upper Penn

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUEN	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK	INT TO PA ☒
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPN	P&A NR ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB	P&A R ☐
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU. POOH Prod Equipment
2. Set CIBP @ 10,469'. Circ hole w/ MLF. Cap w/ 25 sxs cmt @ 10,469'-10,369' Pressure test csg
3. Spot 25 sxs cmt @ 8115' - 8015' - Tag. (DV Tool) Class 'H'
4. Spot 25 sxs cmt @ 4639' - 4539' - Tag. (Shoe)
5. Spot 25 sxs cmt @ 2762' - 2662'
6. Spot 25 sxs cmt @ 1346' - 1246' - Tag.
7. Spot 40 sxs cmt @ 350' - 3'.

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

Spud Date: **06/24/2012**

Rig Release Date: **08/05/2012**

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE  TITLE Agent DATE 11/29/17

Type or print name Greg Bryant E-mail address: greg.bryant@basicenergyservices.com PHONE: (432) 563-3365

For State Use Only

APPROVED BY:  TITLE Petroleum Engr. Specialist DATE 12/04/2017
Conditions of Approval (if any):

PROPOSED WELLBORE DIAGRAM

LEASE: <u>Kemnitz 17 State</u>	WELL: <u>1</u>	FIELD: <u>Sanmai North</u>	API: <u>30-025-40575</u>
LOC: <u>2309' FSL & 1700' FEL</u>	SEC: <u>17</u>	BLK: <u>T16S R33E</u>	Reservoir: <u>Seamen C (Cisco)</u>
SVY:	GL: <u>4238'</u>	CTY/ST: <u>Lea County, NM</u>	SPUD: <u>6/24/2012</u>
CURRENT STATUS: <u>Producing</u>	KB: <u>4254'</u>	DF: <u>4253'</u>	TD DATE: <u>8/1/2012</u>
			COMP. DATE: _____

FRESH WATER
DEPTH:

HOLE SIZE: 17-1/2"
SURF CSG & SIZE: 13-3/8" 54.5# J55
SET @: 1296'
SXS CMT: 1240
CIRC: 10 Bbls
TOC AT: Surf
TOC BY: Circ

COMMENTS:

*****GEOLOGY*****

TOPS OF ALL ZONES
PRODUCTIVE OF HYDRO-
CARBONS:

TBG: 2-3/8" N-80 4.7#
JTS:
SN:
TAC:
ROD SIZE:


HOLE SIZE: 12-1/4"
INT. CSG & SIZE: 8-5/8" 32# J55
SET @: 4589'
SXS CMT: 2090
CIRC: 443 sxs
TOC AT: Surf
TOC BY: Circ

CURRENT PERFS:

PKR:
TYPE:

SQUEEZE JOBS:

OH ID:
COTD:
PBTID: 10,928'
TD: 11,639'

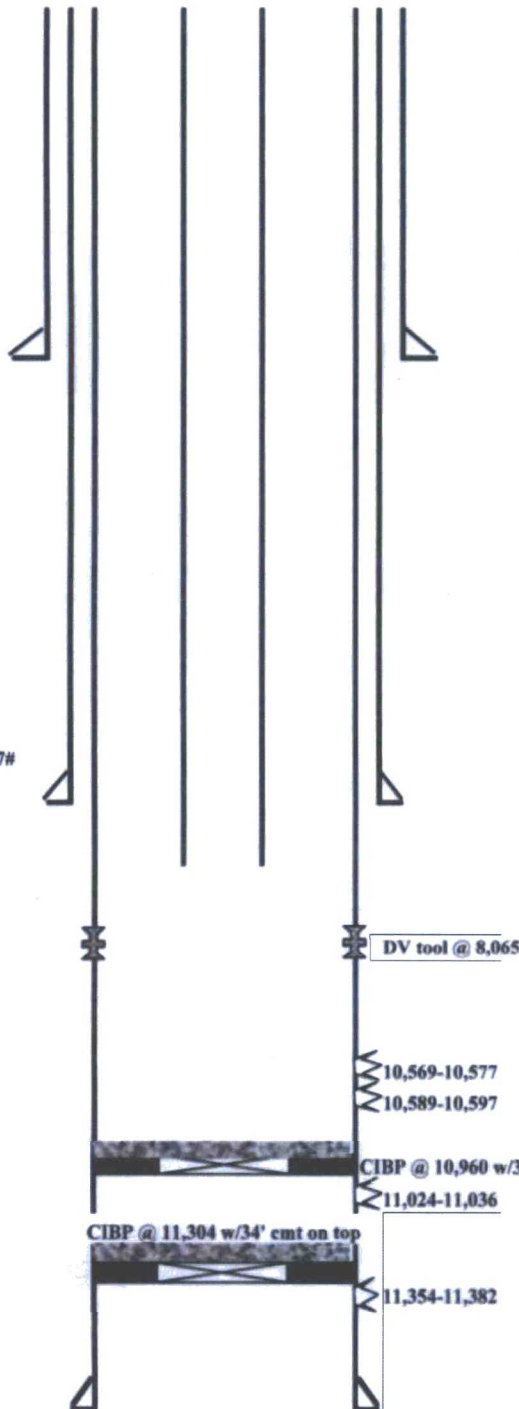

OPEN HOLE:

LINER:

HOLE SIZE: 7-7/8"
PROD. CSG & SIZE: 5-1/2" 17# N80 & P110
SET @: 11639'
SXS CMT: 1400 1st stg, 1450 2nd stg.
CIRC: 384 sx 1st stg, 162 sx 2nd stg
TOC AT: Surf
TOC BY: Circ

BY: TS
11/19/2015

Kemnitz 17 State #1

County, ST	Lea County, NM
Sec-Twn-Rng	17-16S-33E
Footage	2309' FSL and 1700' FEL
Survey	

RKB	4254'
GL	4238'

Hole Size	17-1/2"
TOC	surf
Method	circ returns

Csg Depth	1296'
Size	13-3/8"
Weight	54.5ppf
Grade	J55
Connections	
Cement	1240sx

Hole Size	12-1/4"
TOC	surf
Method	circ returns

Csg Depth	4589'
Size	8-5/8"
Weight	32ppf
Grade	J55
Connections	
Cement	2090sx

Well History

Spot 40sx cmt on top (3'-350')

Spot 25sx cmt on top (1246'-1346') - tag

Spot 25sx cmt on top (2762'-2662') - tag

Spot 25sx cmt on top (4539'-4639') - tag

Perforations

[illegible]DV Tool
at 8065'

Hole Size	7-7/8"
TOC	surf
Method	circ returns

Csg Depth	11639'
Size	5-1/2"
Weight	17ppf
Grade	N80/P110
Connections	
Cement	2850sx

(1: 1400sx, 2: 1450sx)

Last Update	9/20/2017
By	MM

PBTD	10928'
TD MD	11639'
TD TVD	11639'

