Sundry Print Report

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: RESOLUTE 12 FED COM Well Location: T25S / R32E / SEC 12 / County or Parish/State:

SWSW /

Well Number: 729H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM110835 Unit or CA Name: Unit or CA Number:

US Well Number: 3002548367 Well Status: Approved Application for Operator: EOG RESOURCES

Permit to Drill INCORPORATED

Notice of Intent

Type of Submission: Notice of Intent

Type of Action Other

Date Sundry Submitted: 05/21/2021 Time Sundry Submitted: 06:54

Date proposed operation will begin: 06/06/2021

Procedure Description: EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes: Change name from #745H to #729H. Change BHL to T-25-S, R-32-E, Sec 1, 100' FNL, 430' FWL, Lea Co., N.M. Change target formation to Wolfcamp U2.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Wellhead_9.675_x_7.625_x_5.5_in_csg_20210521065433.pdf

Resolute_12_Fed_Com_729H_Sundry_Info___Rev_Name__BHL__tgt_5.12.2021_20210521065432.pdf

See_previously_attached_Drill_Plan_20210521065432.pdf

Resolute_12_Fed_Com_729H_Wall_Plot_20210521065432.pdf

10_M_Choke_Manifold_20210521065432.pdf

 $Resolute_12_Fed_Com_729H_Planning_Report_20210521065432.pdf$

EOG_BLM_10M_Annular_Variance___9.625_in_20210521065432.pdf

Co_Flex_Hose_Test_Chart_20210521065431.pdf

7.625in_29.70_P110HC_FXL_20210521065431.pdf

5.500in_20.00_VST_P110EC_VAM_SFC_20210521065431.pdf

ceived by OCD: 6/17/2021 1:07:52 PM
Well Name: RESOLUTE 12 FED COM Well Location: T25S / R32E / SEC 12 / County or Parish/State:

SWSW /

Well Number: 729H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM110835 Unit or CA Name: Unit or CA Number:

US Well Number: 3002548367 Well Status: Approved Application for Operator: EOG RESOURCES

Permit to Drill INCORPORATED

Page 2 o

10_M_BOP_Diagram_9.625_in_20210521065431.pdf

Co_Flex_Hose_Certification_20210521065431.pdf

5.500in_20.00_VST_P110EC_DWC_C_IS_MS_Spec_Sheet_20210521065431.pdf

RESOLUTE_12_FED_COM_729H_C102_20210521065417.pdf

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: STAR HARRELL Signed on: MAY 21, 2021 06:54 AM

Name: EOG RESOURCES INCORPORATED

Title: Regulatory Specialist

Street Address: 5509 CHAMPIONS DRIVE

City: MIDLAND State: TX

Phone: (432) 848-9161

Email address: STAR_HARRELL@EOGRESOURCES.COM

Field Representative

Representative Name: Eric Brorman

Street Address: 5509 Champions Drive

City: Midland State: TX Zip: 79706

Phone: (432)556-1276

Email address: eric_brorman@eogresources.com

BLM Point of Contact

BLM POC Name: CHRISTOPHER WALLS

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752342234 **BLM POC Email Address:** cwalls@blm.gov

Disposition: Approved **Disposition Date:** 06/17/2021

Signature: Chris Walls

County

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

Fast/West line

WELL LOCATION AND ACREAGE DEDICATION PLAT


	¹ API Number 30-025-48367		² Pool Code 98180		
Ì				operty Name E 12 FED COM	⁶ Well Number 729H
	⁷ OGRID №. 7377			perator Name COURCES, INC.	⁹ Elevation 3484'

¹⁰Surface Location

North/South line

M	12	25-S	32-E		776'	SOUTH	394'	WEST	LEA	
	11Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
4	1	25-S	32-E	_	100'	NORTH	430'	WEST	LEA	
12Dedicated Acres	¹³ Joint or l	Infill 14Co	onsolidation Cod	de ¹⁵ Ord	er No.					
640.63										

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

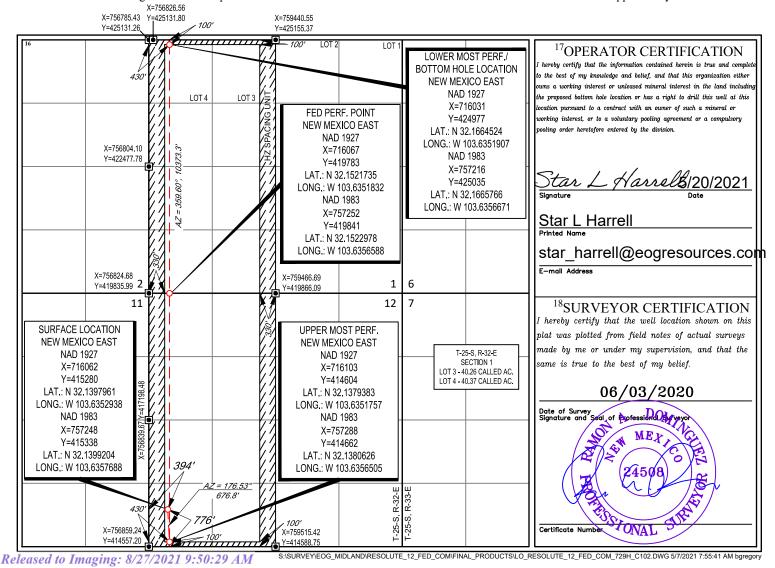



Resolute 12 Fed Com 729H

Revised Permit Information 05/12/2021:

Well Name: Resolute 12 Fed Com 729H

Location: SHL: 776' FSL & 394' FWL, Section 12, T-25-S, R-32-E, Lea Co., N.M. BHL: 100' FNL & 430' FWL, Section 1, T-25-S, R-32-E, Lea Co., N.M.

Casing Program:

Hole		Csg				DFmin	DFmin	DFmin
Size	Interval	OD	Weight	Grade	Conn	Collapse	Burst	Tension
12.25"	0' - 1,100'	9.625"	36#	J-55	LTC	1.125	1.25	1.6
8.75"	0' - 11,220'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.6
6.75"	0' - 10,720'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6
6.75"	10,720' - 11,220'	5.5"	20#	P-110EC	VAM SFC	1.125	1.25	1.6
6.75"	11,220' - 22,762'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4 hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

Cementing Program:

		Wt.	Yld	Slurry Description		
Depth	No. Sacks	ppg	Ft3/sk	Sidily Description		
1,100' 9-5/8''	13.3 1.73 Cello-Flake (TOC @ Surface)		Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello-Flake (TOC @ Surface)			
	80	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 900')		
11,220' 7-5/8''	470	14.2 1.11 1st Stage (Tail): Class C + 0.6% Halad Microbond (TOC @ 7,220')		1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 7,220')		
	1230	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)		
22,762' 5-1/2''	1020	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,720')		



Resolute 12 Fed Com 729H

Additive	Purpose		
Bentonite Gel	Lightweight/Lost circulation prevention		
Calcium Chloride	Accelerator		
Cello-flake	Lost circulation prevention		
Sodium Metasilicate	Accelerator		
MagOx	Expansive agent		
Pre-Mag-M	Expansive agent		
Sodium Chloride	Accelerator		
FL-62	Fluid loss control		
Halad-344	Fluid loss control		
Halad-9	Fluid loss control		
HR-601	Retarder		
Microbond	Expansive Agent		

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,420') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 1,234 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,100'	Fresh - Gel	8.6-8.8	28-34	N/c
1,100' – 11,220'	Brine	10.0-10.2	28-34	N/c
11,220' – 12,067'	Oil Base	8.7-9.4	58-68	N/c - 6
12,067' – 22,762'	Oil Base	10.0-14.0	58-68	4 - 6



Resolute 12 Fed Com 729H

776' FSL 394' FWL **Revised Wellbore**

KB: 3509' GL: 3484'

Section 12

T-25-S, R-32-E

API: 30-025-48367

Bit Size: 12-1/4" 9-5/8", 36#, J-55, LTC, 0' - 1,100" Bit Size: 8-3/4" 7-5/8", 29.7#, HCP-110, FXL, 0' -11,220' TOC: 10,720' Bit Size: 6-3/4" Lateral: 22,762' MD, 12,500' TVD 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 0' -**Upper Most Perf:** 100' FSL & 430' FWL Sec. 12 10,720' **Lower Most Perf:** 5-1/2", 20#, P-110EC, VAM SFC, @ 10,720' -100' FNL & 430' FWL Sec. 1 BH Location: 100' FNL & 430' FWL Sec. 1 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 11,220' -T-25-S R-32-E 22,762' KOP: 12,067'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 32588

CONDITIONS

Operator:	OGRID:		
EOG RESOURCES INC	7377		
P.O. Box 2267	Action Number:		
Midland, TX 79702	32588		
	Action Type:		
	[C-103] NOI Change of Plans (C-103A)		

CONDITIONS

Created By	Condition	Condition Date
pkautz	None	8/27/2021