

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural ResourcesForm C-104
Revised August 1, 2011

District II

811 S. First St., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☒ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 05/27/2022
⁴ API Number 30 - 015-48877	⁵ Pool Name PURPLE SAGE WOLFCAMP	⁶ Pool Code 98220
⁷ Property Code: 329988	⁸ Property Name: TAILS CC 10-3 FEDERAL COM	⁹ Well Number: 38H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
B	15	24S	29E		340	NORTH	1880	EAST	EDDY

¹¹ Bottom Hole Location

FTP- 107' FSL 2351' FWL LTP- 234' FNL 2332' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L3	3	24S	29E		44	NORTH	2329	WEST	EDDY
¹² Lse Code F	¹³ Producing Method Code : P		¹⁴ Gas Connection Date: 05/24/22		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 12/28/21	²² Ready Date 05/27/2022	²³ TD 20695'M 10072'V	²⁴ PBTD 20648'M 10070'V	²⁵ Perforations 10203-20503'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
14-3/4"		10-3/4"		485'	515
9-7/8"		7-5/8"		9571'	2497
6-3/4"		5-1/2"		20675'	866
		2-3/8" tbg		9684'	na

V. Well Test Data

³¹ Date New Oil 05/24/22	³² Gas Delivery Date 05/24/22	³³ Test Date 06/21/22	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 2045
³⁷ Choke Size 128/128	³⁸ Oil 4282	³⁹ Water 7778	⁴⁰ Gas 6944		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:
Janalyn_mendiola@oxy.com

Date: 08/24/2022 Phone: 432-685-5936

OIL CONSERVATION DIVISION

Approved by:



Title: Petroleum Engineer

Approval Date: 09/16/2022

COA: File 3160-4 Completion Report within 10 days to NMOCD after BLM approval.

1625 N. French Dr., Hobbs, NM 88240
 Phone: (575) 393-6161 Fax: (575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone: (575) 748-1283 Fax: (575) 748-9720
District III
 1000 Rio Brazos Road, Aztec, NM 87410
 Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505
 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
 Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Revised August 1, 2011
 Submit one copy to appropriate
 District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-48877	² Pool Code 98220	³ Pool Name PURPLE SAGE; WOLFCAMP
⁴ Property Code 329988	Property Name TAILS CC 10_3 FED COM	⁶ Well Number 38H
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC	⁹ Elevation 2938'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	15	24S	29E		340	NORTH	1880	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L 3	3	24S	29E		44	NORTH	2329	WEST	EDDY

¹² Dedicated Acres 1278.62	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. NSL-8251
---	-------------------------------	----------------------------------	--

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 652903.76' / Y: 456331.32' B - X: 655544.67' / Y: 456330.90' C - X: 655569.82' / Y: 453685.20' D - X: 655595.06' / Y: 451030.27' E - X: 655608.14' / Y: 448375.24' F - X: 655621.54' / Y: 445720.16' G - X: 652967.76' / Y: 445724.10' H - X: 650312.09' / Y: 445726.24' I - X: 650298.13' / Y: 448381.95' J - X: 650284.73' / Y: 451033.82' K - X: 650273.76' / Y: 453689.39' L - X: 650262.85' / Y: 456331.74'	CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 611720.17' / Y: 456272.14' B - X: 614361.07' / Y: 456271.72' C - X: 614386.15' / Y: 453626.09' D - X: 614411.31' / Y: 450971.20' E - X: 614424.32' / Y: 448316.23' F - X: 614437.66' / Y: 445661.21' G - X: 611783.88' / Y: 445665.15' H - X: 609128.23' / Y: 445667.29' I - X: 609114.33' / Y: 448322.94' J - X: 609101.00' / Y: 450974.76' K - X: 609090.10' / Y: 453630.27' L - X: 609079.26' / Y: 456272.56'	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by this division. Signature: Date: 05/25/2022 Printed Name: JANA MENDIOLA E-mail Address: janalyn_mendiola@oxy.com
	BOTTOM HOLE LOCATION 44' FNL 2329' FWL, SECTION 3 20695' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 652592.15' / Y: 456287.86' LAT: 32.25389805N / LON: 103.97343929W NAD 27, SPCS NM EAST X: 611408.55' / Y: 456228.69' LAT: 32.25377561N / LON: 103.97294966W	LAST TAKE POINT 234' FNL 2332' FWL, SECTION 3 20503' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 652596.01' / Y: 456096.88' LAT: 32.25337305N / LON: 103.97342889W NAD 27, SPCS NM EAST X: 611412.40' / Y: 456037.72' LAT: 32.25325060N / LON: 103.97293928W	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. Date of Survey: MAY 24, 2022 Signature and Seal of Professional Surveyor: Certificate Number: DAVID W. MYERS 11403
	FIRST TAKE POINT 107' FSL 2351' FWL, SECTION 10 10203' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 652662.41' / Y: 445831.44' LAT: 32.22515431N / LON: 103.97332538W NAD 27, SPCS NM EAST X: 611478.54' / Y: 445772.48' LAT: 32.22503154N / LON: 103.97283679W	KICK OFF POINT 225' FNL 2503' FWL, SECTION 15 9597' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 652816.58' / Y: 445498.89' LAT: 32.22423876N / LON: 103.97283044W NAD 27, SPCS NM EAST X: 611632.70' / Y: 445493.94' LAT: 32.22411598N / LON: 103.97234190W	SURFACE HOLE LOCATION 340' FNL 1880' FWL, SECTION 15 0' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 653742.90' / Y: 445382.90' LAT: 32.22391134N / LON: 103.96983622W NAD 27, SPCS NM EAST X: 612559.01' / Y: 445323.95' LAT: 32.22378855N / LON: 103.96934777W
	SHEET 1 OF 1 JOB No. R4155_012 REV 0 WM 5/24/2022		

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99978625 Convergence Angle: 00°11'10.650012"





OXY



Borehole:	Well:	Field:	Structure:
Tails CC 10_3 Federal Com 38H	Tails CC 10_3 Federal Com 38H	NM Eddy County (NAD 83)	Oxy Tails CC 10_3 Federal Com Pad_Citadel 2

Gravity & Magnetic Parameters				Surface Location				Miscellaneous	
Model: IFR1	Dip: 59.951°	Date: 17-Mar-2022		Lat: N 32 13 26.08	Northing: 445382.9RUS	Grid Conv: 0.1938°		Slot: Tails CC 10_3 Federal Com 38H	TVD Ref: RKB(2861.8ft above MSL)
MagDec: 6.8°	FS: 47606.8nT	Gravity FS: 998.471mg (9.80665 Based)		Lon: W 103 58 11.41	Easting: 653742.9RUS	Scale Factor: 0.99992356		Plan: Oxy Tails CC 10_3 Federal Com 38H Gyro+MWD 0' to 20695MD	

Critical Points								
Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)S(-)	E(+)W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00
First Gyro Survey	94.58	0.20	85.20	94.58	0.00	0.01	0.12	0.28
RUSTLER	190.80	0.24	77.17	190.80	0.01	0.06	0.50	0.34
Last Gyro Survey	462.89	0.40	28.03	462.89	0.88	0.98	0.94	0.23
First SLB Survey	577.00	0.12	271.35	577.00	1.22	1.33	1.01	0.41
SALADO	582.80	0.12	271.38	582.80	1.22	1.34	1.00	0.02
CASTLE	1517.81	0.05	274.46	1517.80	1.21	1.21	-0.12	0.13
LAMAR	2992.83	0.35	122.55	2992.80	-2.26	-1.92	3.34	0.29
BELL CANYON	3003.83	0.32	122.72	3003.80	-2.30	-1.96	3.39	0.29
CHERRY CANYON	3842.35	5.49	318.21	3841.80	11.37	10.84	-5.58	1.32
BRUSHY CANYON	5116.52	9.27	267.50	5101.80	57.00	37.77	-186.15	0.27
BONE SPRING	6748.34	9.91	270.50	6710.80	106.22	59.10	-454.49	0.47
BONE SPRING 1ST	7777.64	9.09	270.13	7725.80	149.77	85.34	-621.68	1.69
BONE SPRING 2ND	8579.60	9.75	263.91	8516.80	173.50	95.41	-753.08	1.40
Actual KOP	9597.00	12.74	276.68	9518.62	212.05	115.99	-926.32	2.23
BONE SPRING 3RD	9663.05	21.38	304.53	9581.80	221.51	123.69	-943.53	17.67
100' FSL Crossing	10193.00	53.86	353.08	9968.11	550.80	440.51	-1079.54	3.15
Wolfcamp Y Intersection	10255.76	54.61	355.34	10004.80	601.72	491.17	-1084.67	3.15
100' FNL Crossing	20636.00	87.32	358.93	10069.32	10907.64	10846.89	-1149.66	1.17
Final MWD	20665.00	87.37	358.93	10070.67	10936.51	10875.85	-1150.28	1.17
Proj to TD	20695.00	87.37	358.93	10072.04	10966.37	10905.82	-1150.84	0.00

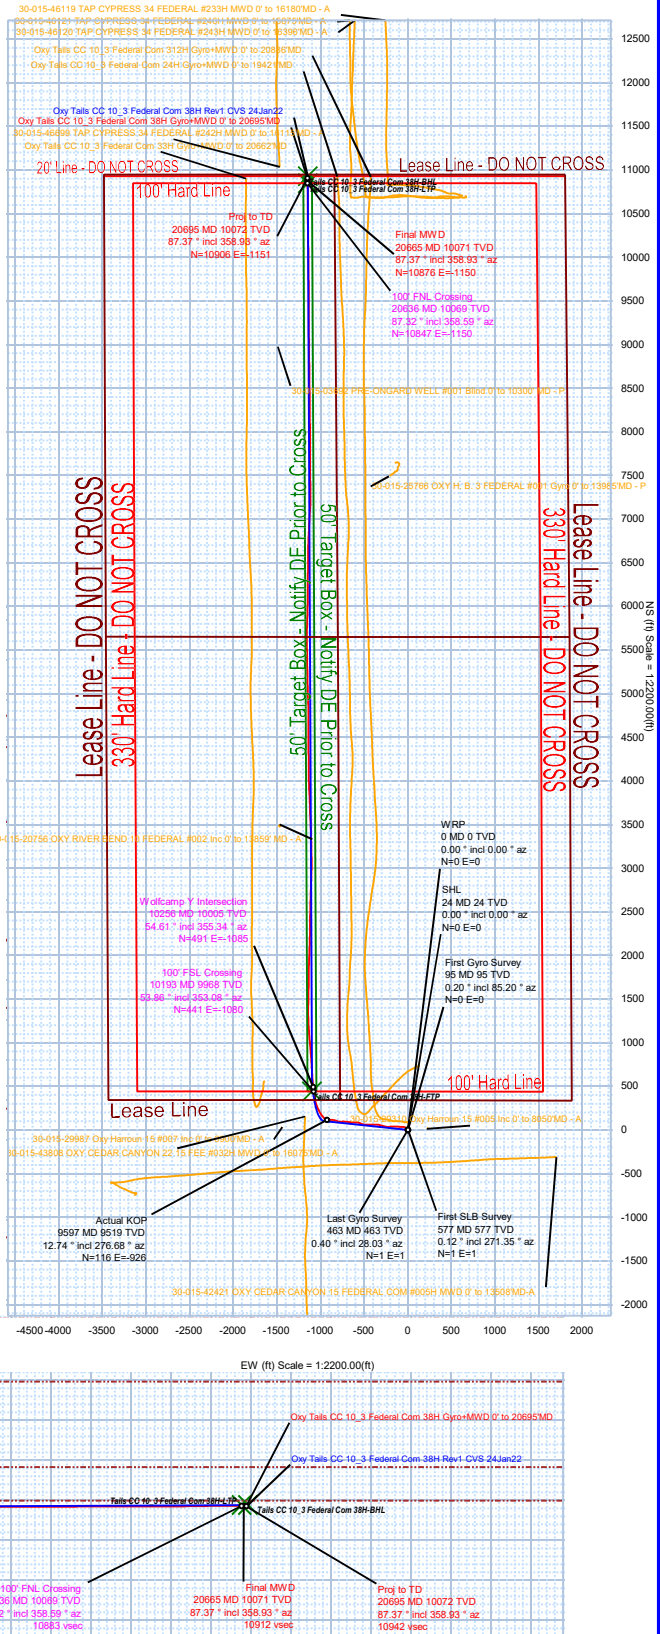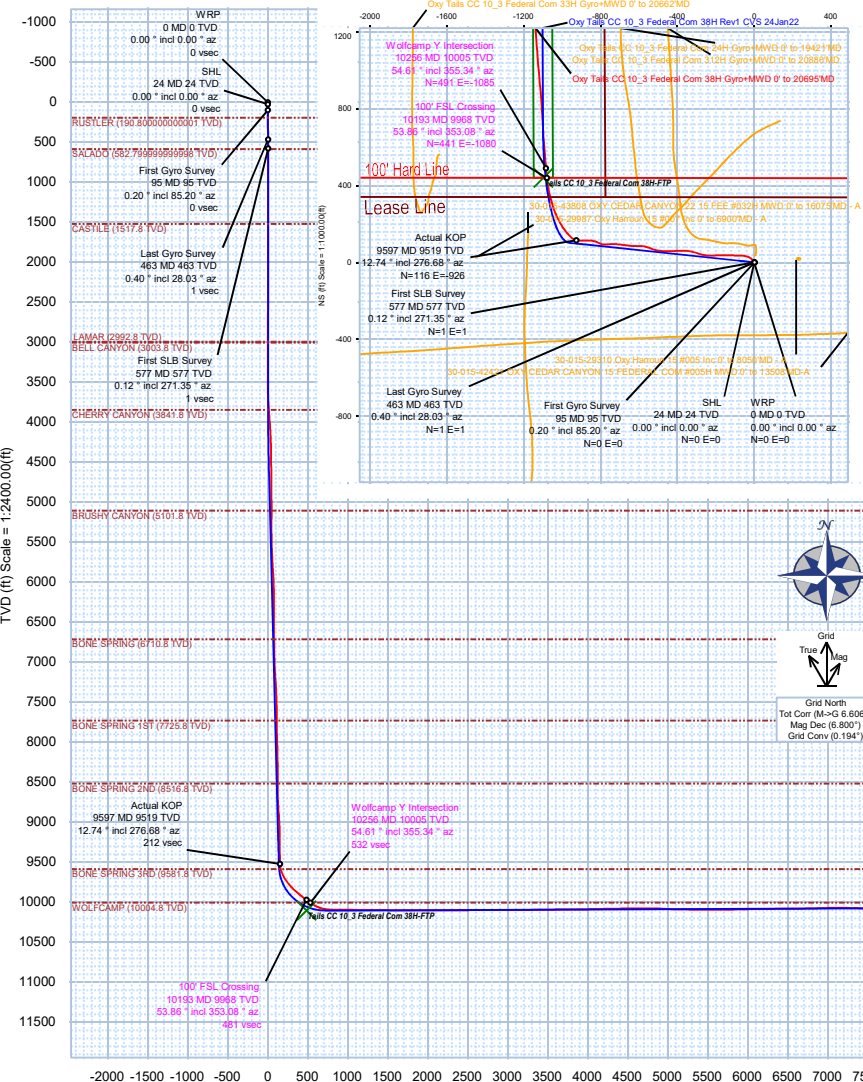

Schlumberger

Oxy Tails CC 10_3 Federal Com 38H Gyro+MWD 0' to 20695' MD Survey

Geodetic Report

(Def Survey)



Report Date: April 21, 2022 - 12:24 PM
Client: OXY
Field: NM Eddy County (NAD 83)
Structure / Slot: Oxy Tails CC 10_3 Federal Com Pad_Citadel 2 / Tails CC 10_3 Federal Com 38H
Well: Tails CC 10_3 Federal Com 38H
Borehole: Tails CC 10_3 Federal Com 38H
UWI / API#: Unknown / Unknown
Survey Name: Oxy Tails CC 10_3 Federal Com 38H Gyro+MWD 0' to 20695' MD
Survey Date: January 24, 2022
Tort / AHD / DDI / ERD Ratio: 260.562' / 11806.818 ft / 6.800 / 1.169
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 13' 26.08083", W 103° 58' 11.41039"
Location Grid N/E Y/X: N 445382.900 NUS, E 653742.900 NUS
CRS Grid Convergence Angle: 0.1938
Grid Scale Factor: 0.99992356
Version / Patch: 2.10.829.1

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 354.008 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 2961.800 ft above MSL
Seabed / Ground Elevation: 2937.800 ft above MSL
Magnetic Declination: 6.800 °
Total Gravity Field Strength: 998.4714mgN (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47606.800 nT
Magnetic Dip Angle: 59.951 °
Declination Date: March 17, 2022
Magnetic Declination Model: IFR1
North Reference: Grid North
Grid Convergence Used: 0.1900 °
Total Corr Mag North-Grid North: 6.6100 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSECE (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	445382.90	653742.90	N 32 13 26.08	W 103 58 11.41
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00	0.00	0.00	445382.90	653742.90	N 32 13 26.08	W 103 58 11.41
First Gyro Survey	94.58	0.20	85.20	94.58	0.00	0.01	0.12	0.28	0.12	85.20	445382.91	653743.02	N 32 13 26.08	W 103 58 11.41
	185.16	0.25	80.38	185.16	0.01	0.06	0.48	0.06	0.48	83.21	445382.96	653743.38	N 32 13 26.08	W 103 58 11.40
	273.95	0.21	358.13	273.95	0.18	0.25	0.66	0.34	0.71	69.16	445383.15	653743.56	N 32 13 26.08	W 103 58 11.40
	368.34	0.18	26.88	368.34	0.48	0.56	0.72	0.11	0.91	52.37	445383.46	653743.62	N 32 13 26.09	W 103 58 11.40
Last Gyro Survey	462.89	0.40	28.03	462.89	0.88	0.98	0.94	0.23	1.36	43.93	445383.88	653743.84	N 32 13 26.09	W 103 58 11.40
First SLB Survey	577.00	0.12	271.35	577.00	1.22	1.33	1.01	0.41	1.68	37.17	445384.23	653743.91	N 32 13 26.09	W 103 58 11.40
	670.00	0.14	271.82	670.00	1.25	1.34	0.80	0.02	1.56	30.86	445384.24	653743.70	N 32 13 26.09	W 103 58 11.40
	763.00	0.01	262.97	763.00	1.27	1.34	0.68	0.14	1.51	26.83	445384.24	653743.58	N 32 13 26.09	W 103 58 11.40
	940.00	0.03	176.98	940.00	1.22	1.30	0.67	0.02	1.46	27.24	445384.19	653743.57	N 32 13 26.09	W 103 58 11.40
	1033.00	0.14	242.26	1033.00	1.15	1.22	0.57	0.14	1.34	24.98	445384.12	653743.47	N 32 13 26.09	W 103 58 11.40
	1127.00	0.09	289.51	1127.00	1.14	1.19	0.40	0.11	1.25	18.43	445384.09	653743.30	N 32 13 26.09	W 103 58 11.41
	1220.00	0.09	248.86	1220.00	1.15	1.19	0.26	0.07	1.22	12.32	445384.09	653743.16	N 32 13 26.09	W 103 58 11.41
	1313.00	0.07	285.07	1313.00	1.16	1.18	0.16	0.06	1.18	6.61	445384.08	653743.04	N 32 13 26.09	W 103 58 11.41
	1408.00	0.08	275.74	1408.00	1.19	1.20	0.01	0.02	1.20	0.68	445384.10	653742.91	N 32 13 26.09	W 103 58 11.41
	1502.00	0.07	273.38	1501.99	1.21	1.21	-0.11	0.01	1.21	354.87	445384.11	653742.79	N 32 13 26.09	W 103 58 11.41
	1596.00	0.05	86.94	1595.99	1.22	1.21	-0.12	0.13	1.22	354.13	445384.11	653742.78	N 32 13 26.09	W 103 58 11.41
	1691.00	0.12	202.95	1690.99	1.13	1.12	-0.12	0.16	1.13	353.80	445384.02	653742.78	N 32 13 26.09	W 103 58 11.41
	1786.00	0.05	9.88	1785.99	1.08	1.07	-0.15	0.18	1.08	351.84	445383.97	653742.75	N 32 13 26.09	W 103 58 11.41
	1881.00	0.07	31.89	1880.99	1.17	1.16	-0.12	0.03	1.17	354.30	445384.06	653742.78	N 32 13 26.09	W 103 58 11.41
	1976.00	0.07	341.13	1975.99	1.27	1.27	-0.10	0.06	1.27	355.30	445384.17	653742.80	N 32 13 26.09	W 103 58 11.41
	2071.00	0.07	321.45	2070.99	1.38	1.37	-0.16	0.03	1.38	353.36	445384.27	653742.74	N 32 13 26.09	W 103 58 11.41
	2165.00	0.21	269.23	2164.99	1.44	1.41	-0.37	0.19	1.46	345.41	445384.31	653742.53	N 32 13 26.09	W 103 58 11.41
	2260.00	0.07	82.75	2259.99	1.46	1.41	-0.48	0.29	1.50	341.13	445384.31	653742.42	N 32 13 26.09	W 103 58 11.42
	2355.00	0.18	127.27	2354.99	1.36	1.33	-0.31	0.15	1.37	347.01	445384.23	653742.59	N 32 13 26.09	W 103 58 11.41
	2450.00	0.04	113.88	2449.99	1.24	1.23	-0.16	0.15	1.24	352.66	445384.13	653742.74	N 32 13 26.09	W 103 58 11.41
	2545.00	0.31	171.84	2544.99	0.96	0.96	-0.09	0.31	0.96	354.56	445383.86	653742.81	N 32 13 26.09	W 103 58 11.41
	2639.00	0.42	30.84	2638.99	0.37	0.37	0.46	0.34	0.46	340.48	445383.86	653742.81	N 32 13 26.09	W 103 58 11.41
	2734.00	0.74	139.01	2733.99	-0.48	-0.39	0.92	0.23	1.00	112.92	445382.51	653743.82	N 32 13 26.08	W 103 58 11.40
	2829.00	0.77	114.72	2828.98	-1.31	-1.12	1.90	0.34	2.21	120.46	445381.78	653744.80	N 32 13 26.07	W 103 58 11.39
	2923.00	0.56	121.90	2922.97	-1.92	-1.63	2.87	0.24	3.30	119.56	445381.27	653745.77	N 32 13 26.06	W 103 58 11.38
	3018.00	0.28	123.01	3017.97	-2.35	-2.00	3.46	0.29	3.99	120.03	445380.90	653746.36	N 32 13 26.06	W 103 58 11.37
	3113.00	0.12	349.60	3112.97	-2.40	-2.03	3.63	0.39	4.16	119.16	445380.87	653746.53	N 32 13 26.06	W 103 58 11.37
	3207.00	0.04	239.29	3206.97	-2.31	-1.95	3.59	0.15	4.08	118.49	445380.95	653746.49	N 32 13 26.06	W 103 58 11.37
	3302.00	0.06	8.08	3301.97	-2.28	-1.92	3.57	0.10	4.05	118.23	445380.96	653746.47	N 32 13 26.06	W 103 58 11.37
	3397.00	0.03	203.21	3396.97	-2.25	-1.89	3.56	0.09	4.03	117.92	445381.01	653746.46	N 32 13 26.06	W 103 58 11.37
	3492.00	0.07	123.42	3491.97	-2.31	-1.94	3.60	0.07	4.09	118.35	445380.96	653746.50	N 32 13 26.06	W 103 58 11.37
	3586.00	1.05	342.55	3585.96	-1.50	-1.15	3.39	1.18	3.58	108.78	445381.75	653746.29	N 32 13 26.07	W 103 58 11.37
	3681.00	2.71	327.07	3680.91	1.35	1.56	1.91	1.81	2.47	50.72	445384.46	653744.81	N 32 13 26.10	W 103 58 11.39
	3776.00	4.64	320.42	3775.71	6.56	6.41	-1.76	2.08	6.65	344.65	445389.31	653741.14	N 32 13 26.14	W 103 58 11.43
	3871.00	5.86	317.46	3870.31	13.66	12.94	-7.49	1.32	14.95	329.96	445395.84	653735.41	N 32 13 26.21	W 103 58 11.50
	3966.00	6.24	307.39	3964.78	21.10	19.65	-14.87	1.18	24.64	322.89	445402.55	653728.03	N 32 13 26.28	W 103 58 11.58
	4060.00	6.84	300.24	4058.17	27.92	25.57	-23.76	1.07	34.91	170.10	445408.47	653719.14	N 32 13 26.33	W 103 58 11.69
	4155.00	7.79	289.68	4152.40	34.05	30.59	-34.71	1.73	46.27	311.39	445413.49	653708.19	N 32 13 26.38	W 103 58 11.81
	4250.00	8.87	280.83	4246.40	38.96	34.14	-47.97	1.76	58.88	305.44	445417.03	653694.93	N 32 13 26.42	W 103 58 11.97
	4344.00	10.13	273.61	4339.11	42.43	36.02	-63.34	1.84	72.86	299.63	445418.92	653679.57	N 32 13 26.44	W 103 58 12.15
	4439.00	8.79	269.84	4432.82	44.57	36.52	-78.94	1.55	86.98	294.83	445419.42	653663.97	N 32 13 26.44	W 103 58 12.33
	4534.00	9.00	271.17	4526.68	46.23	36.66	-93.62	1.31	100.54	291.38	445419.55	653649.28	N 32 13 26.45	W 103 58 12.50
	4629.00	9.04	271.86	4620.50	48.18	37.05	-108.51	1.12	114.66	288.85	445419.95	653634.40	N 32 13 26.45	W 103 58 12.67
	4723.00	9.12	272.33	4713.33	50.26	37.59	-123.34	0.95	128.94	286.95	445420.49	653619.57	N 32 13 26.46	W 103 58 12.84
	4818.00	9.25	270.87	4807.11	52.26	38.01	-138.49	0.28	143.62	285.35	445420.91	653604.42	N 32 13 26.46	W 103 58 13.02
	4913.00	9.03	269.65	4900.90	53.91	38.08	-153.58	0.31	158.24	283.93	445420.98	653589.33	N 32 13 26.46	W 103 58 13.20
	5007.00	9.25	270.50	4993.71	55.49	38.11	-168.52	0.27	172.77	282.74	445421.00	653574.40	N 32 13 26.46	W 103 58 13.37
	5102.00	9.29	267.72	5087.47	56.85	37.87	-183.81	0.47	187.67	281.64	445420.76	653559.10	N 32 13 26.46	W 103 58 13.55
	5197.00	9.18	266.25	5181.24	57.64	37.07	-199.04	0.27	202.46	280.55	445419.95	653543.88	N 32 13 26.45	W 103 58 13.73
	5292.00	9.05	265.91	5275.04	58.19	36.04	-214.05	0.15	217.06	279.56	445418.94	653528.87	N 32 13 26.44	W 103 58 13.90
	5386.00	9.03	270.38	5367.87	59.25	35.56	-228.80	0.75	231.55	278.83	445418.46	653514.12	N 32 13 26.44	W 103 58 14.07
	5481.00	8.99	275.04	5461.70	61.50	36.26	-243.65	0.77	246.33	278.46	445419.16	653499.27	N 32 13 26.45	W 103 58 14.25
	5576.00	8.75	280.11	5555.57	64.92	38.18	-258.16	0.86	260.97	278.41	445421.08	653484.76	N 32 13 26.47	W 103 58 14.41
	5670.00	9.15	284.20	5648.42	69.48	41.27	-272.44	0.80	275.55	278.61	445424.17	653470.48	N 32 13 26.50	W 103 58 14.58
	5765.00	8.89	286.99	5742.25	74.96	45.27	-286.79	0.54	290.34	278.97	445428.16	653456.14	N 32 13 26.54	W 103 58 14.75
	5860.00	10.31	288.94	5835.91	81.41	50.17	-301.85	1.53	305.99	279.44	445433.07	653441.08	N 32 13 26.59	W 103 58 14.92
	5954.00	9.99	284.47	5928.44	87.80	54.94	-317.70	0.90	322.41	279.81	445437.84	653425.23	N 32 13 26.64	W 103 58 15.11
	6049.00	10.02	28											

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (%/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Actual KOP	9270.00	9.16	268.98	9197.64	203.43	113.84	-864.15	0.60	871.62	277.50	445496.73	652878.81	N 32 13 27.24	W 103 58 21.47
	9394.00	10.45	271.10	9298.26	205.13	115.31	-880.16	1.42	887.50	277.37	445496.76	652862.81	N 32 13 27.24	W 103 58 21.65
	9459.00	11.17	271.73	9383.58	207.43	114.31	-897.97	0.77	905.22	277.25	445497.20	652845.00	N 32 13 27.24	W 103 58 21.86
	9554.00	12.10	273.35	9476.62	210.28	115.17	-917.11	1.04	924.31	277.16	445498.06	652825.86	N 32 13 27.25	W 103 58 22.08
	9597.00	12.74	276.68	9518.62	212.05	115.99	-926.32	2.23	933.55	277.14	445498.88	652816.65	N 32 13 27.26	W 103 58 22.19
	9692.00	25.91	310.49	9608.32	229.53	130.79	-952.70	17.67	961.63	277.82	445513.68	652790.28	N 32 13 27.41	W 103 58 22.50
	9786.00	35.44	323.09	9689.15	267.93	166.03	-984.79	12.18	998.69	279.57	445548.92	652758.19	N 32 13 27.76	W 103 58 22.87
	9881.00	41.68	331.76	9763.46	320.88	215.97	-1016.33	8.68	1039.02	282.00	445559.85	652726.65	N 32 13 28.25	W 103 58 23.23
	9976.00	46.86	340.08	9851.63	383.74	276.36	-1043.06	8.04	1079.07	284.84	445659.24	652699.90	N 32 13 28.85	W 103 58 23.54
	10071.00	51.17	347.04	9894.09	454.09	344.99	-1063.18	7.28	1117.75	287.98	445727.86	652679.81	N 32 13 29.53	W 103 58 23.77
100' FSL Crossing	10166.00	53.55	352.10	9952.13	529.04	418.93	-1076.74	4.90	1155.36	291.26	445801.80	652666.25	N 32 13 30.26	W 103 58 23.93
	10193.00	53.86	353.08	9968.11	550.80	440.51	-1079.54	3.15	1165.96	292.20	445823.38	652663.44	N 32 13 30.48	W 103 58 23.96
	10255.76	54.61	355.34	10004.80	601.72	491.17	-1084.67	3.15	1190.70	294.36	445874.03	652658.32	N 32 13 30.98	W 103 58 24.02
	10261.00	54.67	355.53	10007.83	605.99	495.43	-1085.01	3.15	1192.77	294.54	445878.29	652657.98	N 32 13 31.02	W 103 58 24.02
	10355.00	64.82	355.13	10055.13	687.06	576.25	-1091.63	10.80	1234.39	297.83	445959.10	652651.36	N 32 13 31.82	W 103 58 24.10
	10450.00	90.64	356.29	10083.25	777.44	686.43	-1098.35	16.69	1284.72	301.25	446049.27	652644.64	N 32 13 32.71	W 103 58 24.17
	10545.00	90.26	356.75	10090.77	871.94	760.84	-1104.09	10.14	1340.86	304.57	446143.68	652638.90	N 32 13 33.65	W 103 58 24.23
	10600.00	90.46	356.15	10090.43	926.89	815.73	-1107.50	1.15	1375.49	306.37	446198.57	652635.49	N 32 13 34.19	W 103 58 24.27
	10665.00	89.62	355.60	10090.38	991.85	880.57	-1112.17	1.54	1418.56	308.37	446263.40	652630.82	N 32 13 34.83	W 103 58 24.32
	10759.00	88.11	354.70	10092.24	1085.81	974.21	-1120.12	1.87	1484.50	311.01	446357.03	652622.87	N 32 13 35.76	W 103 58 24.41
Wolfcamp Y Intersection	10853.00	89.50	355.37	10094.20	1179.77	1067.83	-1128.25	1.64	1553.45	313.42	446450.65	652614.74	N 32 13 36.68	W 103 58 24.50
	10947.00	89.29	355.98	10095.20	1273.73	1161.56	-1135.34	0.69	1624.26	315.65	446543.47	652607.65	N 32 13 37.61	W 103 58 24.58
	11042.00	89.21	356.21	10096.58	1368.48	1256.12	-1140.15	1.69	1699.63	317.76	446639.23	652592.84	N 32 13 38.54	W 103 58 24.64
	11136.00	89.84	0.23	10096.58	1462.19	1350.41	-1141.43	2.16	1768.18	319.79	446733.20	652601.56	N 32 13 39.48	W 103 58 24.64
	11231.00	89.37	0.97	10097.23	1556.55	1445.40	-1140.44	0.92	1841.14	321.73	446828.19	652602.55	N 32 13 40.42	W 103 58 24.63
	11326.00	89.38	1.02	10098.27	1650.84	1540.38	-1138.79	0.05	1915.62	323.52	446923.16	652604.20	N 32 13 41.36	W 103 58 24.61
	11421.00	90.13	1.00	10098.67	1745.13	1635.37	-1137.11	0.79	1991.84	325.19	447018.14	652605.88	N 32 13 42.30	W 103 58 24.58
	11515.00	89.61	0.48	10098.89	1838.48	1729.36	-1135.90	0.78	2069.04	326.70	447112.12	652607.09	N 32 13 43.23	W 103 58 24.57
	11610.00	89.95	0.85	10099.25	1932.84	1824.35	-1134.80	0.53	2148.49	328.12	447207.11	652608.19	N 32 13 44.17	W 103 58 24.55
	11705.00	90.23	2.21	10099.10	2027.02	1919.31	-1132.26	1.46	2228.40	329.46	447302.06	652610.73	N 32 13 45.11	W 103 58 24.52
	11799.00	90.38	2.25	10098.60	2120.06	2013.32	-1126.60	0.17	2308.00	330.73	447395.98	652614.39	N 32 13 46.04	W 103 58 24.51
	11894.00	89.73	1.48	10098.51	2214.16	2108.19	-1125.51	1.06	2389.82	331.90	447490.92	652617.48	N 32 13 46.98	W 103 58 24.43
	11989.00	90.39	2.13	10098.41	2308.28	2203.14	-1122.52	0.98	2472.62	333.00	447585.87	652620.47	N 32 13 47.92	W 103 58 24.39
	12084.00	88.93	0.24	10098.98	2402.53	2298.11	-1120.55	2.51	2556.75	334.01	447680.83	652622.43	N 32 13 48.86	W 103 58 24.36
	12179.00	90.67	0.64	10099.31	2496.93	2393.10	-1119.82	1.88	2642.15	334.92	447775.82	652623.16	N 32 13 49.80	W 103 58 24.35
	12273.00	91.50	0.99	10097.53	2590.25	2487.08	-1118.49	0.96	2727.01	335.79	447869.78	652624.50	N 32 13 50.73	W 103 58 24.33
	12368.00	91.48	1.48	10095.61	2684.47	2582.03	-1116.44	0.89	2813.07	336.62	447964.73	652626.55	N 32 13 51.67	W 103 58 24.31
	12463.00	90.25	2.15	10094.73	2778.59	2676.96	-1113.43	0.92	2899.30	337.42	448059.66	652629.56	N 32 13 52.61	W 103 58 24.27
	12558.00	90.06	1.91	10094.48	2872.66	2771.92	-1110.07	0.32	2985.93	338.18	448154.60	652632.92	N 32 13 53.55	W 103 58 24.22
	12653.00	90.53	1.90	10093.99	2966.75	2866.87	-1106.91	0.49	3073.14	338.89	448249.54	652636.08	N 32 13 54.49	W 103 58 24.18
	12747.00	89.08	1.14	10094.31	3059.94	2960.83	-1104.41	1.74	3160.10	339.54	448343.50	652638.57	N 32 13 55.42	W 103 58 24.15
	12842.00	89.83	359.87	10095.21	3154.33	3055.82	-1103.58	1.55	3248.99	340.14	448438.48	652639.41	N 32 13 56.36	W 103 58 24.14
	12937.00	90.16	358.99	10095.22	3248.90	3150.81	-1104.52	0.99	3338.80	340.68	448533.47	652638.46	N 32 13 57.30	W 103 58 24.14
	13032.00	91.10	358.69	10094.18	3343.56	3245.79	-1106.45	1.04	3429.19	341.18	448628.43	652637.54	N 32 13 58.24	W 103 58 24.16
	13127.00	90.84	358.78	10092.33	3438.22	3340.55	-1108.54	1.00	3519.87	341.64	448723.38	652634.44	N 32 13 59.17	W 103 58 24.18
	13222.00	90.84	358.00	10090.69	3532.92	3435.69	-1111.21	0.88	3610.93	342.08	448818.33	652631.78	N 32 14 0.11	W 103 58 24.21
	13316.00	90.52	357.39	10089.58	3626.72	3529.61	-1114.99	0.73	3701.54	342.47	448912.23	652628.00	N 32 14 1.04	W 103 58 24.25
	13411.00	90.38	357.79	10088.83	3721.53	3624.52	-1118.99	0.45	3793.32	342.84	449007.14	652624.00	N 32 14 1.98	W 103 58 24.29
	13506.00	90.78	358.22	10087.87	3816.30	3719.46	-1122.29	0.62	3885.09	343.21	449102.07	652620.69	N 32 14 2.92	W 103 58 24.33
	13601.00	90.24	357.47	10087.02	3911.08	3814.39	-1125.87	0.97	3977.08	343.58	449196.99	652617.12	N 32 14 3.86	W 103 58 24.37
	13695.00	90.59	357.10	10086.34	4004.52	3908.28	-1130.32	0.54	4068.45	343.87	449290.87	652612.67	N 32 14 4.79	W 103 58 24.42
	13790.00	91.41	409.41	10086.12	4098.14	4002.52	-1134.47	1.48	4161.94	344.18	449384.57	652598.95	N 32 14 5.73	W 103 58 24.46
	13885.00	91.19	359.25	10082.40	4194.34	4098.14	-1135.98	0.94	4252.67	344.51	449480.72	652607.01	N 32 14 6.67	W 103 58 24.47
	13980.00	91.02	359.84	10080.57	4288.88	4193.12	-1136.73	0.65	4344.47	344.83	449575.69	652606.26	N 32 14 7.61	W 103 58 24.48
	14074.00	91.22	359.75	10078.73	4382.38	4287.10	-1137.07	0.23	4435.33	345.15	449669.67	652605.92	N 32 14 8.54	W 103 58 24.48
	14169.0													

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Survey Type:	Def Survey													
Survey Error Model:	ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma													
Survey Program:														
Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey						
	1	0.000	24.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Tails CC 10_3 Federal Com 38H / Oxy Tails CC 10_3 Federal Com 38H Gyro+MWD 0' to 20695'MD						
	1	24.000	24.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Tails CC 10_3 Federal Com 38H / Oxy Tails CC 10_3 Federal Com 38H Gyro+MWD 0' to 20695'MD						
	1	24.000	462.890	Act Stns	26.400	26.400	GYD_GC+DROP+OH	Tails CC 10_3 Federal Com 38H / Oxy Tails CC 10_3 Federal Com Tails CC 10_3 Federal Com 38H /						
	1	462.890	20695.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Oxy Tails CC 10_3 Federal Com 38H Gyro+MWD 0' to 20695'MD						

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Well Name: TAILS CC 10_3 FED COM	Well Location: T24S / R29E / SEC 15 / NWNE /	County or Parish/State: /
Well Number: 38H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM81616	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548877	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2689042

Type of Submission: Subsequent Report

Date Sundry Submitted: 08/24/2022

Date Operation Actually Began: 05/03/2022

Type of Action: Workover Operations

Time Sundry Submitted: 03:14

Actual Procedure: RUPU 05/03/22, RIH & clean out to PBTD @ 20648', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 20503-10203 Total 1462 holes. Frac in 43 stages w/ 211651BBL Produced Water + 225225BBL Brackish Water (> 1,000 mg/I TDS and 10,000 mg/I TDS) w/ 25598588# sand, RD Liberty 05/19/22. Well ready to produce 05/27/22. 08/09/22 RIH with 2-3/8" L80 tbg & gas lift set @ 9684', RD 08/10/22. Formation Tops for this completion are as follows: RUSTLER 208'M 208'V SALADO 515'M 515'V CASTILE 1429'M 1429'V DELAWARE 3005'M 3005'V BELL CANYON 3040'M 3040'V CHERRY CANYON 3861'M 3860'V BRUSHY CANYON 5121'M 5107'V BONE SPRING 6736'M 6699'V 1ST BONE SPRING 7803'M 7750'V 2ND BONE SPRING 8629'M 8565'V 3RD BONE SPRING 9724'M 9636'V WOLFCAMP 10206'M 9976'V

Well Name: TAILS CC 10_3 FED COM	Well Location: T24S / R29E / SEC 15 / NWNE /	County or Parish/State: /
Well Number: 38H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM81616	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001548877	Well Status: Drilling Well	Operator: OXY USA INCORPORATED


Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JANA MENDIOLA	Signed on: AUG 24, 2022 03:14 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Coordinator	
Street Address: PO BOX 50250	
City: Midland	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017													
WELL COMPLETION OR RECOMPLETION REPORT AND LOG							1. WELL API NO. 30-015-48877											
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)							2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN											
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER							3. State Oil & Gas Lease No.											
8. Name of Operator: OXY USA INC.						9. OGRID: 16696												
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710						11. Pool name or Wildcat PURPLE SAGE WOLFCAMP												
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County								
Surface:	B	15	24S	29E		340	NORTH	1880	EAST	EDDY								
BH:	L3	3	24S	29E		44	NORTH	2329	WEST	EDDY								
13. Date Spudded 12/28/21	14. Date T.D. Reached 04/19/2022		15. Date Rig Released 04/24/2022		16. Date Completed (Ready to Produce) 05/27/2022		17. Elevations (DF and RKB, RT, GR, etc.) 2938' GL											
18. Total Measured Depth of Well 20695'M 10072'V			19. Plug Back Measured Depth 20648'M 10070'V		20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL											
22. Producing Interval(s), of this completion - Top, Bottom, Name 10203-20503' Wolfcamp																		
23. CASING RECORD (Report all strings set in well)																		
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED								
10.75" J55		45.5		485'		14.75"		515sx-surf circ										
7.625" HCL80		26.4		9571'		9.875"		2497sx-surf										
5.5" P110CY		20		20675'		6.75"		866sx-TOC@9071'										
24. LINER RECORD																		
SIZE	TOP	BOTTOM		SACKS CEMENT		SCREEN		25. TUBING RECORD										
								SIZE		DEPTH SET								
								2.375"		9684'								
26. Perforation record (interval, size, and number) 10203-20503' Total 1462 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>DEPTH INTERVAL</th> <th>AMOUNT AND KIND MATERIAL USED</th> </tr> <tr> <td>10203-20503'</td> <td>211651BBL Produced Water + 225225BBL Brackish Water w/ 25598588# sand</td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>					DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED	10203-20503'	211651BBL Produced Water + 225225BBL Brackish Water w/ 25598588# sand				
DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED																	
10203-20503'	211651BBL Produced Water + 225225BBL Brackish Water w/ 25598588# sand																	
28. PRODUCTION																		
Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)				Well Status (Prod. or Shut-in)												
05/24/2022		Gas Lift				Prod.												
Date of Test	Hours Tested	Choke Size	Prod'n For	Oil - Bbl	Gas - MCF	Water - Bbl.	Gas - Oil Ratio											
06/21/2022	24 hrs.	128/128	Test Period	4282	6944	7778	1622											
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)												
	2045		4282	6944	7778													
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD							30. Test Witnessed By											
31. List Attachments WBD																		
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:											
34. If an on-site burial was used at the well, report the exact location of the on-site burial:																		
Latitude _____ Longitude _____ NAD83																		
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief																		
Signature: 			Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>08/24/2022</u>									
E-mail Address: <u>janalyn_mendiola@oxy.com</u>																		

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 208'	T. Bell Canyon 3040'	T. Ojo Alamo	T. Penn A "
T. Salado 515'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1429'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 3005'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3861'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 5121'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs 6736'	T. Todilto	
T. Abo	T. 1 st Bone Springs 7803'	T. Entrada	
T. Wolfcamp 10206'	T. 2 nd Bone Springs 8629'	T. Wingate	
T. Penn	T. 3 rd Bone Springs 9724'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....


No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

OXY USA Inc.
Tails CC 10-3 Federal Com 38H
API No. 30-015-48877

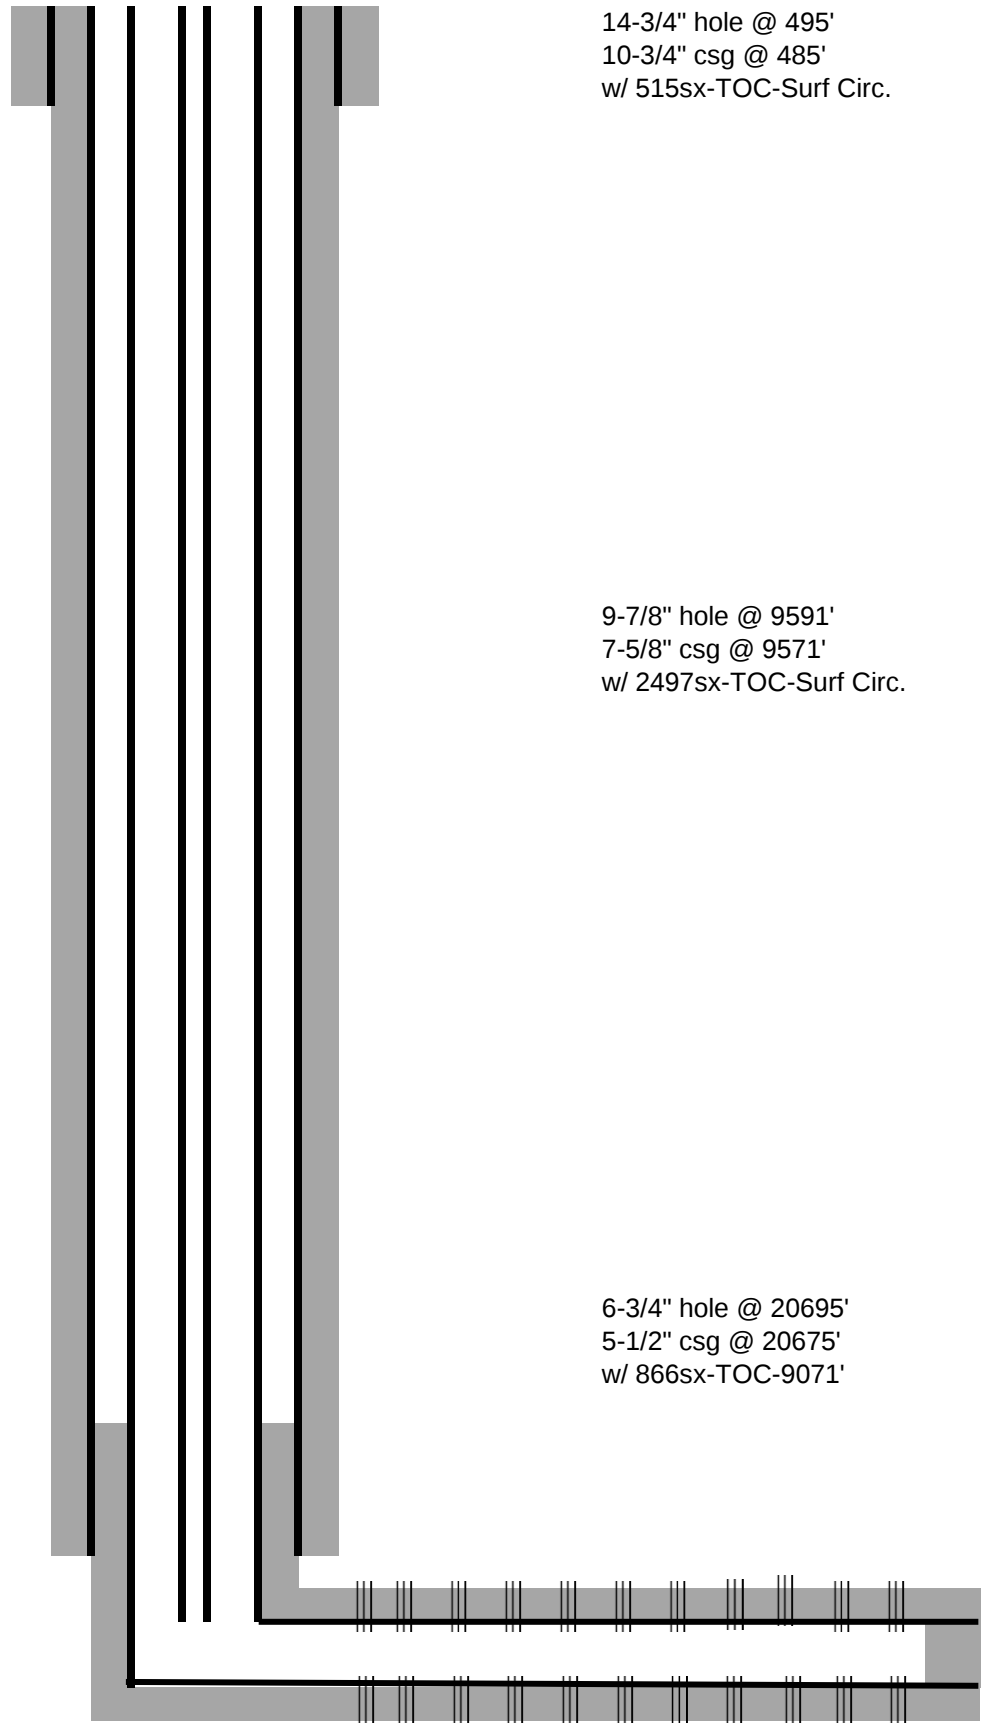

2-3/8" tbg w/ gas lift @ 9684'

Perfs @ 10203-20503'

TD- 20695'M 10072'V

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 138186

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 138186
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 138186

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 138186
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
Ilowe	COA: File 3160-4 Completion Report within 10 days to NMOCD after BLM approval.	9/16/2022