

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural ResourcesForm C-104
Revised August 1, 2011District I

811 S. First St., Artesia, NM 88210

District II

1000 Rio Brazos Rd., Aztec, NM 87410

District III

1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☒ AMENDED REPORT**I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT**

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 01/09/2023
⁴ API Number 30 - 015-46779	⁵ Pool Name PURPLE SAGE WOLFCAMP *NSL-7964	⁶ Pool Code 98220
⁷ Property Code: 327181	⁸ Property Name: DEPTH CC 6-7 FEDERAL COM	⁹ Well Number: 44H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
P	31	23S	29E		25	SOUTH	1004	EAST	EDDY

¹¹ Bottom Hole Location

FTP- 474' FNL 335' FEL LTP- 434' FSL 352' FEL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	7	24S	29E		287	SOUTH	352	EAST	EDDY
¹² Lse Code F	¹³ Producing Method Code : F	¹⁴ Gas Connection Date: 1/14/23	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 09/04/22	²² Ready Date 01/09/2023	²³ TD 20944'M 10899'V	²⁴ PBTD 20902'M 10898'V	²⁵ Perforations 11072-20797'	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
17-1/2"	13-3/8"	458'	1150		
12-1/4"	9-5/8"	10266'	3668		
8-3/4" X 8-1/2"	7" X 5-1/2"	20924'	2404		

V. Well Test Data

³¹ Date New Oil 1/14/23	³² Gas Delivery Date 1/14/23	³³ Test Date 2/1/23	³⁴ Test Length 24 hrs	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 3923
³⁷ Choke Size 41/128	³⁸ Oil 2168	³⁹ Water 4787	⁴⁰ Gas 24863		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature:



Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:

Janalyn_mendiola@oxy.com

Date:

04/11/2023

Phone:

432-685-5036

OIL CONSERVATION DIVISION

Approved by:

PATRICIA MARTINEZ

Title: PETROLEUM SPECIALIST

Approval Date: 4/21/2023

1625 N. French Dr., Hobbs, NM 88240
 Phone: (575) 393-6161 Fax: (575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone: (505) 748-1283 Fax: (505) 748-9720
District III
 1000 Rio Brazos Road, Aztec, NM 87410
 Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505
 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
 Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Revised August 1, 2011
 Submit one copy to appropriate
 District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-46779	² Pool Code 98220	³ Pool Name PURPLE SAGE; WOLFCAMP
⁴ Property Code 327181	Property Name DEPTH CC 6_7 FEDERAL COM	
⁷ OGRID No. 16696	⁸ Operator Name OXY USA, INC	⁶ Well Number 44H
		⁹ Elevation 2958'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	31	23S	29E		25	SOUTH	1004	EAST	EDDY
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	7	24S	29E		287	SOUTH	352	EAST	EDDY
¹² Dedicated Acres 639.88	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. NSL-7964						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 639697.30' / Y: 451041.59' B - X: 639723.37' / Y: 445724.09' C - X: 637072.27' / Y: 445724.48' D - X: 637060.77' / Y: 448384.48' E - X: 637049.26' / Y: 451044.98' F - X: 637034.83' / Y: 453707.85' G - X: 637020.43' / Y: 456367.55' H - X: 639670.64' / Y: 456348.63' CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 598513.67' / Y: 450982.59' B - X: 598539.62' / Y: 445665.19' C - X: 595888.56' / Y: 445665.61' D - X: 595877.12' / Y: 448325.57' E - X: 595865.68' / Y: 450986.01' F - X: 595851.32' / Y: 453648.83' G - X: 595836.98' / Y: 456308.47' H - X: 598487.14' / Y: 456289.52' SURFACE HOLE LOCATION 25' FSL 1004' FEL, SECTION 31 0' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 638665.78' / Y: 456380.63' LAT: 32.25427335N / LON: 104.01848775W NAD 27, SPCS NM EAST X: 597482.30' / Y: 456321.53' LAT: 32.25415129N / LON: 104.01799670W KICK OFF POINT 23' FNL 435' FEL, SECTION 6 1031' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 639235.41' / Y: 456329.22' LAT: 32.25412743N / LON: 104.01664558W NAD 27, SPCS NM EAST X: 598051.92' / Y: 456270.11' LAT: 32.25400534N / LON: 104.01615461W FIRST TAKE POINT 474' FNL 335' FEL, SECTION 6 11072' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 639337.77' / Y: 455876.86' LAT: 32.25288311N / LON: 104.01631878W NAD 27, SPCS NM EAST X: 598154.27' / Y: 455817.76' LAT: 32.25276101N / LON: 104.01582787W LAST TAKE POINT 434' FSL 352' FEL, SECTION 7 20797' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 639369.22' / Y: 446157.76' LAT: 32.22616644N / LON: 104.01630986W NAD 27, SPCS NM EAST X: 598185.48' / Y: 446098.85' LAT: 32.22604402N / LON: 104.01581986W BOTTOM HOLE LOCATION 287' FSL 352' FEL, SECTION 7 20944' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 639370.58' / Y: 446011.62' LAT: 32.22576472N / LON: 104.01630684W NAD 27, SPCS NM EAST X: 598186.84' / Y: 445952.72' LAT: 32.22564229N / LON: 104.01581685W	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered into by this division. Signature: Date: 1/9/23 JANA MENDIOLA Printed Name janalyn_mendiola@oxy.com E-mail Address ¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. JANUARY 6, 2023 Date of Survey Signature and Seal of Professional Surveyor: Certificate Number LLOYD P. SHORT 21653
--	--	--

Distances/areas relative to NAD 83 Combined Scale Factor: 0.9997778 Convergence Angle: 00°08'28.5600"

Horizontal Spacing Unit




OXY



Borehole:	Well:	Field:	Structure:
Depth CC 6_7 Federal Com 44H	Depth CC 6_7 Federal Com 44H	NM Eddy County (NAD 83)	Oxy Depth CC 6_7 Federal Com Pad

Gravity & Magnetic Parameters	Surface Location	NAD83 New Mexico State Plane, Eastern Zone, US Feet	Miscellaneous
Model: IFR1 Dip: 59.944° Date: 04-Nov-2022 MagDec: 6.77° FS: 47540.2nT Gravity FS: 998.471mgN (9.80665 Based)	Lat: N 32 15 15.38 Lon: W 104 1 6.56	Northing: 456380.63RUS Easting: 638665.78RUS Grid Conv: 0.168° Scale Fact: 0.99991994	Slot: Depth CC 6_7 Federal Com 44H TVD Ref: RKB(2982.6ft above MSL) Plan: Oxy Depth CC 6_7 Federal Com 44H Gyro+MWD 0' to 20944MD

Critical Points								
Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL	25.00	0.00	0.00	25.00	0.00	0.00	0.00	0.00
First Gyro Survey	90.63	0.32	347.43	90.63	-0.18	0.18	-0.04	0.49
Last Gyro Survey	444.38	0.46	23.89	444.37	0.49	-0.61	-1.76	0.82
First SLB Survey	551.00	0.05	97.34	550.99	0.12	-0.23	-1.54	0.42
Actual KOP	10311.00	14.68	105.33	10261.53	90.15	-51.41	569.63	13.48
100' FNL Crossing	10553.00	27.73	170.42	10487.27	164.45	-123.27	607.99	6.53
Wolfcamp C Intersection	10906.79	59.03	168.49	10744.60	398.91	-355.47	649.00	8.52
330' FSL Crossing	20895.00	89.80	179.57	10898.83	10344.88	-10320.86	704.60	1.03
Final MWD Survey	20911.00	89.84	179.73	10898.88	10360.85	-10336.86	704.70	1.03
Proj to TD	20944.00	89.84	179.73	10898.97	10393.79	-10369.86	704.85	0.00

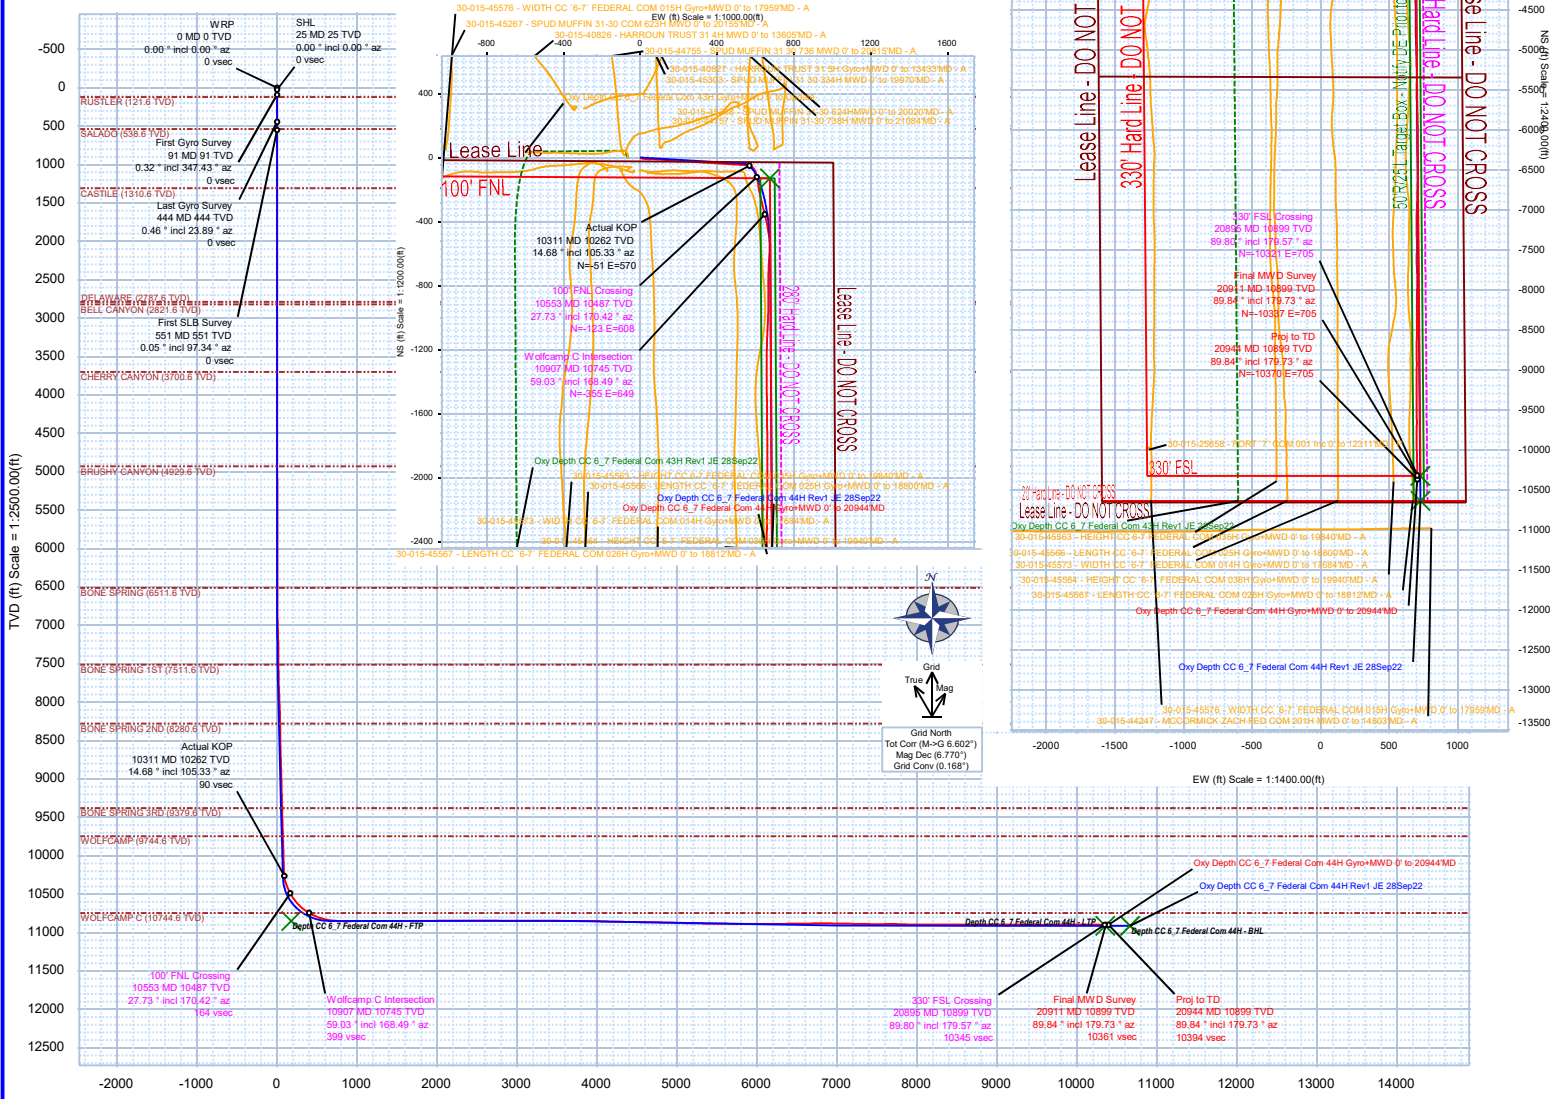

Schlumberger



Oxy Depth CC 6_7 Federal Com 44H Gyro+MWD 0' to 20944'MD Survey Geodetic Report (Def Survey)

Report Date: December 02, 2022 - 08:11 AM Client: OXY Field: NM Eddy County (NAD 83) Structure / Slot: Oxy Depth CC 6_7 Federal Com Pad / Depth CC 6_7 Federal Com 44H Well: Depth CC 6_7 Federal Com 44H Borehole: Depth CC 6_7 Federal Com 44H UWI / API#: Unknown / Unknown Survey Name: Oxy Depth CC 6_7 Federal Com 44H Gyro+MWD 0' to 20944'MD Survey Date: September 28, 2022 Tort / AHD / DDI / ERD Ratio: 223.020 " / 10933.246 ft / 6.671 / 1.003 Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet Location Lat / Long: N 32° 15' 15.38407", W 104° 1' 6.55589" Location Grid N/E Y/X: N 456380.630 RUS, E 638665.780 RUS CRS Grid Convergence Angle: 0.1680 ° Grid Scale Factor: 0.99991994 Version / Patch: 2.10.829.1	Survey / DLS Computation: Minimum Curvature / Lubinski Vertical Section Azimuth: 176.089 ° (Grid North) Vertical Section Origin: 0.000 ft, 0.000 ft TVD Reference Datum: RKB TVD Reference Elevation: 2982.600 ft above MSL Seabed / Ground Elevation: 2957.600 ft above MSL Magnetic Declination: 6.770 ° Total Gravity Field Strength: 998.4714mg (9.80665 Based) Gravity Model: GARM Total Magnetic Field Strength: 47540.200 nT Magnetic Dip Angle: 59.944 ° Declination Date: November 04, 2022 Magnetic Declination Model: IFR1 North Reference: Grid North Grid Convergence Used: 0.1700 ° Total Corr Mag North->Grid North: 6.6000 ° Local Coord Referenced To: Well Head	
---	---	--

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ° '")	Longitude (E/W ° ° '")
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	456380.63	638665.78	N 32 15 15.38	W 104 1 6.56
SHL	25.00	0.00	0.00	25.00	0.00	0.00	0.00	0.00	0.00	0.00	456380.63	638665.78	N 32 15 15.38	W 104 1 6.56
First Gyro Survey	90.63	0.32	347.43	90.63	-0.18	0.18	-0.04	0.49	0.18	347.43	456380.81	638665.74	N 32 15 15.39	W 104 1 6.56
	172.90	0.51	236.86	172.90	-0.23	0.20	-0.40	0.84	0.45	297.11	456380.83	638665.58	N 32 15 15.39	W 104 1 6.56
	255.03	0.64	231.56	255.02	0.21	-0.28	-1.06	0.17	1.10	255.12	456380.35	638664.72	N 32 15 15.38	W 104 1 6.57
	349.88	0.34	231.58	349.87	0.67	-0.79	-1.70	0.32	1.87	245.14	456379.84	638664.08	N 32 15 15.38	W 104 1 6.58
	444.38	0.46	23.89	444.37	0.49	-0.61	-1.76	0.82	1.87	250.81	456380.02	638664.02	N 32 15 15.38	W 104 1 6.58
Last Gyro Survey	551.00	0.05	97.34	550.99	0.12	-0.23	-1.54	0.42	1.56	261.59	456380.40	638664.24	N 32 15 15.38	W 104 1 6.57
First SLB Survey	645.00	0.04	73.13	644.99	0.12	-0.22	-1.47	0.22	1.49	261.35	456380.41	638664.31	N 32 15 15.38	W 104 1 6.57
	753.00	0.17	326.56	752.99	-0.02	-0.08	-1.52	0.17	1.53	267.02	456380.55	638664.26	N 32 15 15.38	W 104 1 6.57
	847.00	0.14	312.79	846.99	-0.23	0.12	-1.69	0.05	1.69	273.91	456380.75	638664.10	N 32 15 15.39	W 104 1 6.58
	941.00	0.10	303.00	940.99	-0.36	0.24	-1.84	0.05	1.85	277.37	456380.87	638663.94	N 32 15 15.39	W 104 1 6.58
	1035.00	0.18	334.18	1034.99	-0.55	0.42	-1.97	0.11	2.01	281.90	456381.05	638663.81	N 32 15 15.39	W 104 1 6.58
	1129.00	0.03	21.64	1128.99	-0.71	0.57	-2.03	0.17	2.11	285.74	456381.20	638663.75	N 32 15 15.39	W 104 1 6.58
	1223.00	0.10	12.24	1222.99	-0.81	0.67	-2.00	0.08	2.11	288.63	456381.30	638663.78	N 32 15 15.39	W 104 1 6.58
	1317.00	0.14	12.09	1316.99	-1.00	0.87	-1.96	0.04	2.14	293.97	456381.50	638663.82	N 32 15 15.39	W 104 1 6.58
	1411.00	0.02	200.37	1410.99	-1.09	0.96	-1.94	0.17	2.17	296.41	456381.59	638663.84	N 32 15 15.39	W 104 1 6.58
	1506.00	0.21	92.03	1505.99	-1.06	0.94	-1.77	0.23	2.01	297.99	456381.57	638664.01	N 32 15 15.39	W 104 1 6.58
	1600.00	0.10	11.82	1599.99	-1.12	1.02	-1.58	0.23	1.88	302.69	456381.65	638664.20	N 32 15 15.39	W 104 1 6.57
	1695.00	0.07	131.35	1694.99	-1.16	1.06	-1.52	0.16	1.85	304.82	456381.69	638664.26	N 32 15 15.39	W 104 1 6.57
	1790.00	0.12	69.58	1789.99	-1.15	1.06	-1.39	0.11	1.74	307.29	456381.69	638664.39	N 32 15 15.39	W 104 1 6.57
	1885.00	0.15	36.19	1884.99	-1.27	1.19	-1.22	0.09	1.70	314.31	456381.82	638664.56	N 32 15 15.40	W 104 1 6.57
	1979.00	0.02	152.11	1978.99	-1.35	1.27	-1.14	0.17	1.71	318.23	456381.90	638664.64	N 32 15 15.40	W 104 1 6.57
	2074.00	0.28	133.90	2073.99	-1.16	1.10	-0.96	0.27	1.46	318.76	456381.73	638664.82	N 32 15 15.39	W 104 1 6.57
	2169.00	0.15	144.71	2168.98	-0.88	0.84	-0.72	0.14	1.11	319.11	456381.47	638665.06	N 32 15 15.39	W 104 1 6.56
	2263.00	0.01	155.20	2262.98	-0.77	0.73	-0.65	0.15	0.98	318.27	456381.36	638665.13	N 32 15 15.39	W 104 1 6.56
	2358.00	0.12	34.38	2357.98	-0.84	0.80	-0.59	0.13	1.00	323.69	456381.43	638665.19	N 32 15 15.39	W 104 1 6.56
	2453.00	0.05	60.83	2452.98	-0.94	0.91	-0.50	0.08	1.03	331.20	456381.54	638665.28	N 32 15 15.39	W 104 1 6.56
	2547.00	0.19	260.45	2546.98	-0.94	0.90	-0.62	0.25	1.09	325.61	456381.53	638665.16	N 32 15 15.39	W 104 1 6.56
	2642.00	0.23	303.95	2641.98	-1.04	0.98	-0.93	0.17	1.35	316.52	456381.61	638664.85	N 32 15 15.39	W 104 1 6.57
	2737.00	0.30	270.53	2736.98	-1.18	1.09	-1.34	0.18	1.72	309.18	456381.72	638664.44	N 32 15 15.39	W 104 1 6.57
	2832.00	0.07	244.12	2831.98	-1.18	1.07	-1.64	0.25	1.95	303.07	456381.70	638664.14	N 32 15 15.39	W 104 1 6.57
	2927.00	0.11	0.79	2926.98	-1.24	1.13	-1.69	0.16	2.03	303.84	456381.76	638664.09	N 32 15 15.40	W 104 1 6.58
	3021.00	0.12	239.02	3020.98	-1.29	1.17	-1.77	0.21	2.12	303.48	456381.80	638664.01	N 32 15 15.40	W 104 1 6.58
	3116.00	0.11	205.87	3115.98	-1.16	1.04	-1.90	0.07	1.16	298.70	456381.87	638663.88	N 32 15 15.39	W 104 1 6.58
	3211.00	0.14	15.32	3210.98	-1.20	1.07	-1.91	0.26	2.18	299.27	456381.70	638663.87	N 32 15 15.39	W 104 1 6.58
	3305.00	0.09	280.17	3304.98	-1.32	1.19	-1.95	0.18	2.28	301.46	456381.82	638663.83	N 32 15 15.40	W 104 1 6.58
	3400.00	0.06	8.70	3399.98	-1.39	1.25	-2.01	0.11	2.37	301.91	456381.88	638663.77	N 32 15 15.40	W 104 1 6.58
	3495.00	0.15	43.98	3494.98	-1.52	1.39	-1.92	0.11	2.37	305.96	456382.02	638663.86	N 32 15 15.40	W 104 1 6.58
	3590.00	0.16	277.57	3589.98	-1.63	1.50	-1.96	0.29	2.47	307.35	456382.13	638663.82	N 32 15 15.40	W 104 1 6.58
	3684.00	0.10	163.33	3683.98	-1.58	1.44	-2.07	0.23	2.52	304.78	456382.07	638663.77	N 32 15 15.40	W 104 1 6.58
	3779.00	0.08	114.23	3778.98	-1.46	1.33	-1.99	0.08	2.39	303.83	456381.96	638663.79	N 32 15 15.40	W 104 1 6.58
	3873.00	0.07	315.50	3872.98	-1.48	1.35	-1.97	0.16	2.38	304.37	456381.98	638663.81	N 32 15 15.40	W 104 1 6.58
	3968.00	0.08	290.42	3967.98	-1.55	1.41	-2.07	0.04	2.51	304.26	456382.04	638663.71	N 32 15 15.40	W 104 1 6.58
	4063.00	0.06	29.17	4062.98	-1.62	1.48	-2.11	0.11	2.57	305.01	456382.11	638663.67	N 32 15 15.40	W 104 1 6.58
	4157.00	0.06	136.85	4156.98	-1.62	1.48	-2.05	0.10	2.53	305.89	456382.11	638663.73	N 32 15 15.40	W 104 1 6.58
	4252.00	0.10	74.90	4251.98	-1.60	1.47	-1.94	0.09	2.43	307.19	456382.10	638663.84	N 32 15 15.40	W 104 1 6.58
	4346.00	0.08	131.78	4345.98	-1.57	1.45	-1.81	0.09	2.32	308.66	456382.08	638663.97	N 32 15 15.40	W 104 1 6.58
	4441.00	0.14	216.73	4440.98	-1.43	1.31	-1.83	0.16	2.25	305.61	456381.94	638663.95	N 32 15 15.40	W 104 1 6.58
	4536.00	0.24	176.86	4535.98	-1.14	1.02	-1.89	0.17	2.14	298.35	456381.65	638663.89	N 32 15 15.39	W 104 1 6.58
	4630.00	0.31	175.80	4629.98	-0.69	0.57	-1.86	0.07	1.94	287.00	456381.20	638663.92	N 32 15 15.39	W 104 1 6.58
	4725.00	0.28	169.23	4724.98	-0.21	0.08	-1.80	0.05	1.84	272.66	456380.71	638663.98	N 32 15 15.38	W 104 1 6.58
	4820.00	0.32	40.43	4819.98	0.06	-0.41	-1.74	0.06	2.95	265.75	456380.22	638664.00	N 32 15 15.38	W 104 1 6.58
	4915.00	0.42	209.79	4914.97	0.84	-0.98	-1.90	0.24	2.14	242.81	456379.65	638663.88	N 32 15 15.37	W 104 1 6.58
	5009.00	0.58	209.06	5008.97	1.53	-1.69	-2.30	0.17	2.86	233.71	456378.94	638663.48	N 32 15 15.37	W 104 1 6.58
	5104.00	0.58	204.43	5103.97	2.36	-2.55	-2.74	0.05	3.74	227.02	456378.08	638663.04	N 32 15 15.36	W 104 1 6.59
	5199.00	0.61	210.88	5198.96	3.20	-3.42	-3.19	0.08	4.68	223.03	456377.21	638662.59	N 32 15 15.35	W 104 1 6.59
	5294.00	0.20	195.33	5293.96	3.77	-4.02	-3.50	0.44	5.33	221.06	456376.61	638662.28	N 32 15 15.34	W 104 1 6.60
	5389.00	0.12	21.91	5388.96	3.94	-4.09	-3.54	0.69	5.20	220.81	456376.54	638662.27	N 32 15 15.34	W 104 1 6.60
	5483.00	0.14	354.81	5482.96	3.54	-3.81	-3.48	0.77	5.22	221.83	456376.74	638662.30	N 32 15 15.35	W 104 1 6.60
	5578.00	0.21	331.66	5577.96	3.37	-3.62	-3.58	0.10	5.09	224.63	456377.01	638662.20	N 32 15 15.35	W 104 1 6.60
	5673.00	0.26	350.52	5672.96	3.00	-3.26	-3.70	0.10	4.93	228.60	456377.37	638662.08	N 32 15 15.35	W 104 1 6.60
	5769.00	0.05	136.79	5768.96	2.81	-3.07	-3.70	0.32	4.81	230.30	456377.56	638662.08	N 32 15 15.35	W 104 1 6.60
	5864.00	0.03	164.81	5863.96	2.87	-3.13	-3.67	0.03	4.82	229.54	456377.50	638662.11	N 32 15 15.35	W 104 1 6.60
	5959.00	0.07	284.77	5958.96	2.88	-3.14	-3.72	0.09	4.86	229.84	456377.49	638662.06	N 32 15 15.35	W 104 1 6.60
	6053.00	0.04	305.95	6052.96	2.83	-3.10	-3.68	0.08	4.87	230.66	456377.54			

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (ft/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Actual KOP	9574.00	10.38	94.50	9539.85	67.09	-38.42	421.58	0.03	423.33	95.21	456342.21	639067.33	N 32 15 14.99	W 104 1 1.65
	9669.00	10.36	94.70	9633.30	69.62	-39.79	438.63	0.04	440.43	95.18	456340.84	639104.37	N 32 15 14.98	W 104 1 1.45
	9764.00	10.38	95.06	9726.75	72.23	-41.25	455.67	0.07	457.53	95.17	456339.38	639121.41	N 32 15 14.96	W 104 1 1.25
	9859.00	10.89	94.50	9820.12	74.88	-42.71	473.14	0.55	475.06	95.16	456337.93	639138.88	N 32 15 14.95	W 104 1 1.05
	9954.00	11.53	93.50	9913.30	77.42	-43.99	491.56	0.70	493.52	95.11	456336.64	639157.30	N 32 15 14.93	W 104 1 0.83
	10049.00	12.33	94.92	10006.25	80.20	-45.44	511.14	0.90	513.16	95.08	456335.19	639176.88	N 32 15 14.92	W 104 1 0.61
	10145.00	12.39	93.58	10100.03	83.11	-46.96	531.63	0.31	533.70	95.05	456333.67	639197.37	N 32 15 14.90	W 104 0 0.37
	10240.00	13.36	94.46	10192.64	86.04	-48.45	552.75	1.04	554.87	95.01	456332.18	639218.48	N 32 15 14.89	W 104 1 0.12
	10310.00	14.67	104.80	10260.56	90.06	-51.35	569.39	4.03	571.70	95.15	456329.29	639235.12	N 32 15 14.86	W 104 0 59.93
	10311.00	14.68	105.33	10261.53	90.15	-51.41	569.63	13.48	571.95	95.16	456329.22	639235.36	N 32 15 14.86	W 104 0 59.92
100' FNL Crossing	10405.00	19.81	145.61	10351.58	107.87	-67.77	590.19	13.48	594.07	96.55	456312.86	639255.93	N 32 15 14.70	W 104 0 59.69
	10500.00	24.51	167.54	10439.69	141.31	-100.37	603.57	9.93	611.86	99.44	456280.27	639269.30	N 32 15 14.37	W 104 0 59.53
	10553.00	27.73	170.42	10487.27	164.45	-123.27	607.99	6.53	620.36	101.46	456267.37	639273.72	N 32 15 14.15	W 104 0 59.48
	10595.00	30.32	172.30	10524.30	184.76	-143.42	611.04	6.53	627.65	103.21	456237.22	639276.77	N 32 15 13.95	W 104 0 59.45
	10690.00	38.26	171.86	10602.42	238.11	-196.38	618.43	8.36	648.86	106.62	456184.26	639284.16	N 32 15 13.42	W 104 0 59.36
	10786.00	47.45	168.97	10672.73	302.98	-260.66	629.43	9.79	681.27	112.50	456119.99	639295.16	N 32 15 12.79	W 104 0 59.24
	10881.00	56.90	167.86	10730.92	377.26	-334.07	644.53	9.99	725.96	117.40	456046.58	639310.25	N 32 15 12.06	W 104 0 59.06
	10906.79	59.03	168.49	10744.60	398.91	-355.47	649.00	8.52	739.98	118.71	456025.19	639314.73	N 32 15 11.85	W 104 0 59.01
	10976.00	64.76	170.07	10777.19	459.50	-415.43	660.33	8.52	780.14	122.18	456056.23	639326.06	N 32 15 11.25	W 104 0 58.88
	11071.00	71.76	174.73	10812.38	547.48	-502.83	671.90	8.66	839.22	126.81	455877.84	639337.63	N 32 15 10.39	W 104 0 58.75
Wolfcamp C Intersection	11166.00	79.61	182.98	10835.89	639.26	-594.70	673.62	11.79	898.57	131.44	455785.98	639339.35	N 32 15 9.48	W 104 0 58.73
	11261.00	85.43	182.42	10848.25	732.79	-688.75	669.19	6.15	960.31	135.83	455691.94	639334.92	N 32 15 8.55	W 104 0 58.79
	11356.00	88.95	179.86	10852.90	827.28	-783.59	667.31	4.58	1029.23	139.58	455597.10	639333.03	N 32 15 7.61	W 104 0 58.81
	11467.00	91.63	179.84	10852.34	938.03	-894.58	667.60	2.41	1116.23	143.27	455486.12	639333.32	N 32 15 6.51	W 104 0 58.81
	11563.00	90.36	181.92	10850.68	1033.67	-990.55	666.12	2.54	1193.69	146.08	455390.17	639331.85	N 32 15 5.56	W 104 0 58.83
	11658.00	92.31	182.31	10852.22	1128.15	-1085.48	662.62	0.45	1271.74	148.60	455295.24	639328.54	N 32 15 4.62	W 104 0 58.86
	11753.00	89.57	180.87	10850.42	1222.71	-1180.44	659.98	1.65	1352.41	150.79	455200.29	639325.71	N 32 15 3.68	W 104 0 58.91
	11848.00	90.32	179.97	10850.51	1317.43	-1275.44	659.28	1.23	1435.76	152.67	455105.30	639325.01	N 32 15 2.74	W 104 0 58.92
	11943.00	90.22	179.87	10850.06	1412.22	-1370.44	659.42	0.15	1520.83	154.30	455010.31	639325.14	N 32 15 1.80	W 104 0 58.92
	12038.00	90.14	179.66	10849.76	1507.02	-1465.43	659.81	0.24	1607.12	155.76	454915.32	639325.53	N 32 15 0.86	W 104 0 58.92
	12133.00	90.05	179.61	10849.61	1601.84	-1560.43	660.41	0.11	1694.43	157.06	454820.33	639326.14	N 32 14 59.92	W 104 0 58.92
	12228.00	90.04	179.58	10849.53	1696.66	-1655.43	661.08	0.03	1782.55	158.23	454725.34	639326.81	N 32 14 58.98	W 104 0 58.91
	12323.00	90.48	179.46	10849.10	1791.49	-1750.42	661.88	0.48	1871.38	159.29	454630.35	639327.61	N 32 14 58.04	W 104 0 58.91
	12418.00	89.92	179.82	10848.77	1886.31	-1845.42	662.48	0.70	1960.73	160.25	454535.36	639328.20	N 32 14 57.10	W 104 0 58.91
	12514.00	90.31	180.31	10848.58	1982.08	-1941.42	662.37	0.65	2051.30	161.16	454439.37	639328.09	N 32 14 56.15	W 104 0 58.91
	12609.00	90.29	180.19	10848.08	2076.83	-2036.42	661.95	0.13	2141.30	161.99	454344.38	639327.68	N 32 14 55.21	W 104 0 58.92
	12704.00	90.17	179.81	10847.60	2171.60	-2131.42	661.95	0.42	2231.84	162.75	454249.39	639327.68	N 32 14 54.27	W 104 0 58.92
	12799.00	90.06	181.05	10847.51	2266.33	-2226.41	661.24	1.31	2322.53	163.46	454154.40	639326.97	N 32 14 53.33	W 104 0 58.93
	12894.00	89.78	180.42	10847.64	2361.02	-2321.40	660.02	0.73	2413.41	164.13	454059.42	639325.75	N 32 14 52.39	W 104 0 58.95
	12989.00	89.84	179.99	10847.95	2455.77	-2416.40	659.68	0.46	2504.83	164.73	453964.43	639325.41	N 32 14 51.45	W 104 0 58.96
	13084.00	90.45	179.66	10847.71	2550.57	-2511.40	659.97	0.73	2596.67	165.28	453869.43	639325.70	N 32 14 50.51	W 104 0 58.96
	13179.00	89.65	179.03	10847.63	2645.41	-2606.39	661.06	1.07	2688.92	165.77	453774.45	639326.78	N 32 14 49.57	W 104 0 58.95
	13274.00	89.63	178.78	10848.23	2740.30	-2701.38	662.87	0.26	2781.52	166.21	453679.48	639328.60	N 32 14 48.63	W 104 0 58.93
	13464.00	89.73	179.37	10849.29	2930.03	-2891.35	665.94	0.31	2967.05	167.03	453489.52	639331.67	N 32 14 46.75	W 104 0 58.90
	13560.00	89.66	178.92	10849.80	3025.90	-2987.33	667.37	0.47	3060.97	167.63	453393.54	639333.10	N 32 14 45.80	W 104 0 58.89
	13655.00	89.69	179.80	10849.51	3120.74	-3082.33	668.43	1.43	3153.97	167.76	453298.56	639334.16	N 32 14 44.86	W 104 0 58.88
	13750.00	88.95	178.82	10849.81	3215.58	-3177.31	669.58	1.10	3247.10	168.10	453203.58	639335.30	N 32 14 43.99	W 104 0 58.87
	13845.00	89.78	179.01	10850.86	3310.46	-3272.29	671.38	0.90	3340.45	168.41	453108.61	639337.10	N 32 14 42.92	W 104 0 58.85
	13940.00	90.04	179.41	10851.01	3405.32	-3367.28	672.69	0.50	3433.81	168.70	453013.63	639338.41	N 32 14 42.05	W 104 0 58.84
	14035.00	89.66	178.96	10851.26	3500.18	-3462.27	674.04	0.62	3527.27	168.98	452918.64	639339.76	N 32 14 41.11	W 104 0 58.83
	14130.00	89.72	179.21	10851.32	3595.05	-3557.26	675.55	0.99	3620.84	169.25	452823.66	639341.28	N 32 14 40.17	W 104 0 58.81
	14225.00	90.90	179.63	10850.35	3689.97	-3652.25	676.35	0.93	3714.35	169.51	452728.68	639342.08	N 32 14 39.23	W 104 0 58.81
	14320.00	90.15	179.47	10849.48	3784.69	-3747.24	676.93	0.88	3807.89	169.76	452633.70	639342.66	N 32 14 38.29	W 104 0 58.80
	14415.00	89.88	179.26	10849.45	3879.53	-3842.24	677.98	0.36	3901.59	169.99	452538.71	639343.71	N 32 14 37.35	W 104 0 58.79
	14510.00	88.60	178.85	10850.71	3974.39	-3937.21	679.55	1.41	3995.43	170.21	452443.74	639345.27	N 32 14 36.41	W 104 0 58.78
	14605.00	86.89	177.69	10854.45	4069.25	-4032.09	682.42	2.17	4089.43	170.39	452348.87	639348.14	N 32 14 35.47	W 104 0 58.75
	14701.00	90.15	178.62	10856.93	4165.14	-4127.99	685.50	3.53	4184.5.					

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Survey Error Model: Survey Program:	ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma													
Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey						
	1	0.000	25.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Depth CC 6.7 Federal Com 44H / Oxy Depth CC 6.7 Federal Com 44H Gyro+MWD 0' to 20944'MD Depth CC 6.7 Federal Com 44H / Oxy Depth CC 6.7 Federal Com 44H Gyro+MWD 0' to 20944'MD						
	1	25.000	25.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Depth CC 6.7 Federal Com 44H / Oxy Depth CC 6.7 Federal Com 44H Gyro+MWD 0' to 20944'MD						
	1	25.000	444.380	Act Stns	26.400	26.400	GYD_GC+DROP+OH	Depth CC 6.7 Federal Com 44H / Oxy Depth CC 6.7 Federal Com 44H Gyro+MWD 0' to 20944'MD						
	1	444.380	7284.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Depth CC 6.7 Federal Com 44H / Oxy Depth CC 6.7 Federal Com 44H Gyro+MWD 0' to 20944'MD						
	1	7284.000	8719.000	Act Stns	26.400	26.400	A009Mb_MWD+IFR1+SAG	Depth CC 6.7 Federal Com 44H / Oxy Depth CC 6.7 Federal Com 44H Gyro+MWD 0' to 20944'MD						
	1	8719.000	20944.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Depth CC 6.7 Federal Com 44H / Oxy Depth CC 6.7 Federal Com 44H Gyro+MWD 0' to 20944'MD						

Well Name: DEPTH CC 6-7 FEDERAL COM	Well Location: T23S / R29E / SEC 31 / SESE / 32.2542733 / -104.0184877	County or Parish/State: EDDY / NM
Well Number: 44H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM117551, NMNM13996	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001546779	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2723070

Type of Submission: Subsequent Report

Date Sundry Submitted: 03/28/2023

Date Operation Actually Began: 12/21/2022

Type of Action: Workover Operations

Time Sundry Submitted: 01:32

Actual Procedure: RUPU 12/21/22, RIH & clean out to PBTD @ 20902', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 11072-20797' Total 1170 holes. Frac in 39 stages w/ 140300BBL Produced Water + 261816BBL Brackish Water (> 1,000 mg/I TDS and 10,000 mg/I TDS) w/ 24074080# sand, RD NexTier 1/4/23. Well ready to produce 1/9/23. OXY USA Inc. requests a tubing exception while continuing to flow back this well. The estimated date of tubing install is 11/30/2023. Formation Tops for this completion are as follows: TOP MD TVD RUSTLER 123 123 SALADO 403 403 CASTILE 1270 1270 DELAWARE 2793 2793 BELL CANYON 2829 2829 CHERRY CANYON 3721 3721 BRUSHY CANYON 4954 4954 BONE SPRING 6500 6500 1ST BONE SPRING 7484 7479 2ND BONE SPRING 8279 8265 3RD BONE SPRING 9449 9417 WOLFCAMP 9799 9761

Received by OCD: 4/12/2023 2:21:54 PM

Page 8 of 14

Well Name: DEPTH CC 6-7 FEDERAL COM	Well Location: T23S / R29E / SEC 31 / SESE / 32.2542733 / -104.0184877	County or Parish/State: EDDY / NM
Well Number: 44H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM117551, NMNM13996	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001546779	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a


Operator Electronic Signature: JANA MENDIOLA	Signed on: MAR 28, 2023 01:30 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Coordinator	
Street Address: PO BOX 50250	
City: Midland	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 04/06/2023
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG								1. WELL API NO. 30-015-46779		
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN		
								3. State Oil & Gas Lease No.		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER								5. Lease Name or Unit Agreement Name DEPTH CC 6-7 FEDERAL COM		
8. Name of Operator: OXY USA INC.								6. Well Number: 44H		
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710								11. Pool name or Wildcat PURPLE SAGE WOLFCAMP		
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	P	31	23S	29E		25	SOUTH	1004	EAST	EDDY
BH:	P	7	24S	29E		287	SOUTH	352	EAST	EDDY
13. Date Spudded 09/04/2022	14. Date T.D. Reached 11/30/2022	15. Date Rig Released 12/03/2022			16. Date Completed (Ready to Produce) 01/09/2023			17. Elevations (DF and RKB, RT, GR, etc.) 2958' GL		
18. Total Measured Depth of Well 20944'M 10899'V			19. Plug Back Measured Depth 20902'M 10898'V			20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL		
22. Producing Interval(s), of this completion - Top, Bottom, Name 11072-20797' WOLFCAMP										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
13.375" J55		54.5		458'		17.5"		1150sx-surf circ		
9.625" HCL80		40		10266'		12.25"		3668sx-surf circ		
7" x 5.5" P110		32#, 20#		20924'		8.75" x 8.5"		2404sx-TOC@9266'		
24. LINER RECORD										
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN		25. TUBING RECORD		SIZE		DEPTH SET
26. Perforation record (interval, size, and number) Perf @ 11072-20797' Total 1170 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						11072-20797'		140300BBL Produced Water + 261816BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 24074080# sand		
28. PRODUCTION										
Date First Production 01/14/2023		Production Method (Flowing, gas lift, pumping - Size and type pump) Flowing				Well Status (Prod. or Shut-in) Prod.				
Date of Test 02/1/2023	Hours Tested 24 hrs.	Choke Size 41/128	Prod'n For Test Period	Oil - Bbl 2168	Gas - MCF 24863	Water - Bbl. 4787	Gas - Oil Ratio 11468			
Flow Tubing Press.	Casing Pressure 3923	Calculated 24-Hour Rate	Oil - Bbl. 2168	Gas - MCF 24863	Water - Bbl. 4787	Oil Gravity - API - (Corr.)				
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD								30. Test Witnessed By		
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>04/11/2023</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 123'	T. Bell Canyon 2829'	T. Ojo Alamo	T. Penn A"
T. Salado 403'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1270'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 2793'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3721'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 4954'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Spring 6500'	T. Todilto	
T. Abo	T. 1 st Bone Spring 7484'	T. Entrada	
T. Wolfcamp 9799'	T. 2 nd Bone Spring 8279'	T. Wingate	
T. Penn	T. 3 rd Bone Spring 9449'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....


No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

OXY USA Inc.
Depth CC 6-7 Federal Com 44H
API No. 30-015-46779

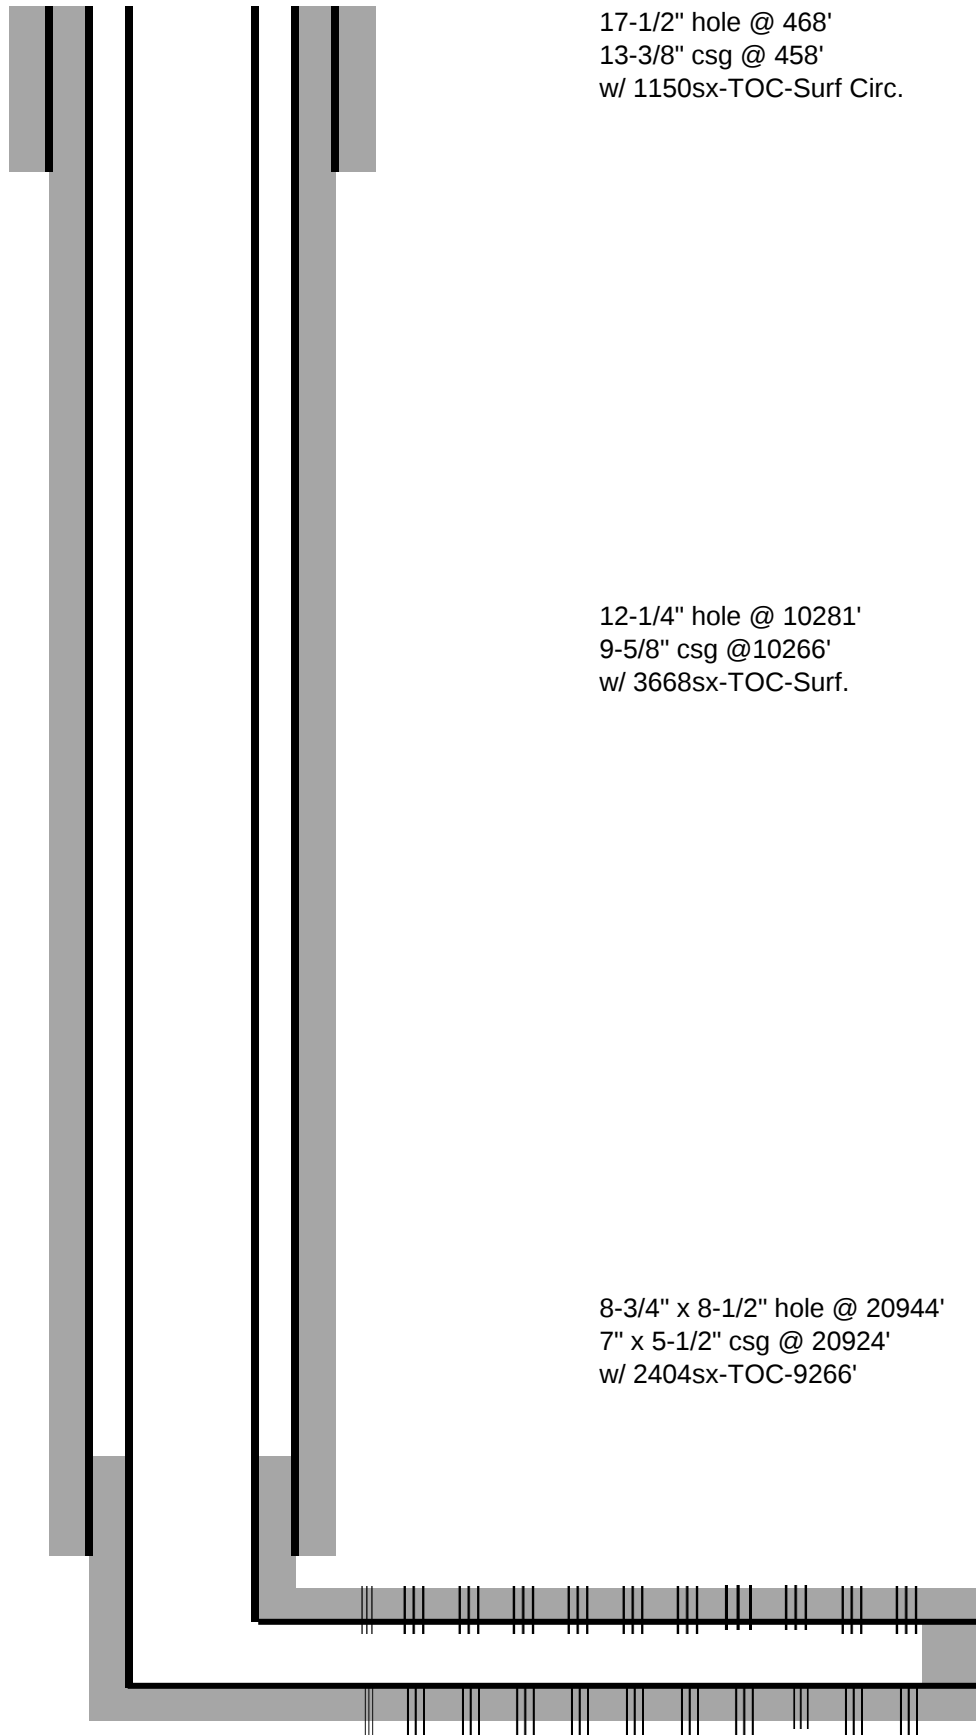

17-1/2" hole @ 468'
13-3/8" csg @ 458'
w/ 1150sx-TOC-Surf Circ.

12-1/4" hole @ 10281'
9-5/8" csg @ 10266'
w/ 3668sx-TOC-Surf.

8-3/4" x 8-1/2" hole @ 20944'
7" x 5-1/2" csg @ 20924'
w/ 2404sx-TOC-9266'

Perfs @ 11072-20797'

TD- 20944'M 10899'V

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 206947

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 206947
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 206947

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 206947
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 Completion Report within 10 days to NMOCD after BLM approval.	4/21/2023