

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address SPUR ENERGY PARTNERS LLC 9655 KATY FREEWAY, SUITE 500 HOUSTON, TX 77024		² OGRID Number 328947
		³ Reason for Filing Code/ Effective Date RT 11/01/2022
⁴ API Number 30 - 025-49373	⁵ Pool Name MALJAMAR; YESO, WEST	⁶ Pool Code 44500
⁷ Property Code 325854	⁸ Property Name HT 18 FEDERAL	⁹ Well Number 12H

II. ¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
4	7	17S	32E		657	SOUTH	842	WEST	LEA

¹¹ Bottom Hole Location FTP: 318' FNL 1170' FWL LTP: 120' FSL 1188' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
4	18	17S	32E		50	SOUTH	1187	WEST	LEA
¹² Lse Code F	¹³ Producing Method Code P	¹⁴ Gas Connection Date 10/15/2022	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
221115	FRONTIER FIELD SERVICES, LLC 4200 EAST SKELLY DRIVE, SUITE 700, TULSA, OK 74135	G
33479	HOLLYFRONTIER REFINING & MARKETING 2828 N. HARWOOD, SUITE 1300, DALLAS, TX 75201	O

IV. Well Completion Data

²¹ Spud Date 06/16/2022	²² Ready Date 11/01/2022	²³ TD 5570'V/10840'M	²⁴ PBTD 5570'V/10795'M	²⁵ Perforations 5923'-10770'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size	²⁹ Depth Set		³⁰ Sacks Cement
17-1/2"		13-3/8" 54.5# J-55 BTC	457'		665 SXS (376 TO SURFACE)
12-1/4"		9-5/8" 36# J-55 BTC	2020'		570 SXS (208 TO SURFACE)
8-3/4"		7" 32# L-80 BK-HT	5158'		1820 SXS (95 TO SURFACE)
8-3/4"		5-1/2" 20# L-80 BK-HT	10840'		1820 SXS (95 TO SURFACE)
		3-1/2" J-55 TBG	5773'		

V. Well Test Data

³¹ Date New Oil	³² Gas Delivery Date	³³ Test Date	³⁴ Test Length	³⁵ Tbg. Pressure	³⁶ Csg. Pressure
³⁷ Choke Size	³⁸ Oil	³⁹ Water	⁴⁰ Gas		⁴¹ Test Method
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: <i>Sarah Chapman</i>			OIL CONSERVATION DIVISION		
Printed name: SARAH CHAPMAN			Approved by: <i>PATRICIA MARTINEZ</i>		
Title: REGULATORY DIRECTOR			Title: <i>PETROLEUM SPECIALIST</i>		
E-mail Address: SCHAPMAN@SPURENERGY.COM			Approval Date: <i>2/7/2024</i>		
Date: 11/01/2022		Phone: 832-930-8613			

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT
AS-DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-49373	² Pool Code 44500	³ Pool Name MALJAMAR; YESO, WEST
⁴ Property Code 325854	⁵ Property Name HT 18 FEDERAL	⁶ Well Number 12H
⁷ OGRID NO. 328947	⁸ Operator Name SPUR ENERGY PARTNERS LLC.	⁹ Elevation 3973'

¹⁰ Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet From the	East/West line	County
4	7	17S	32E		657	SOUTH	842	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
4	18	17S	32E		50	SOUTH	1187	WEST	LEA

¹² Dedicated Acres 160	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. NSL ORDER: 8269
---	-------------------------------	----------------------------------	---

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

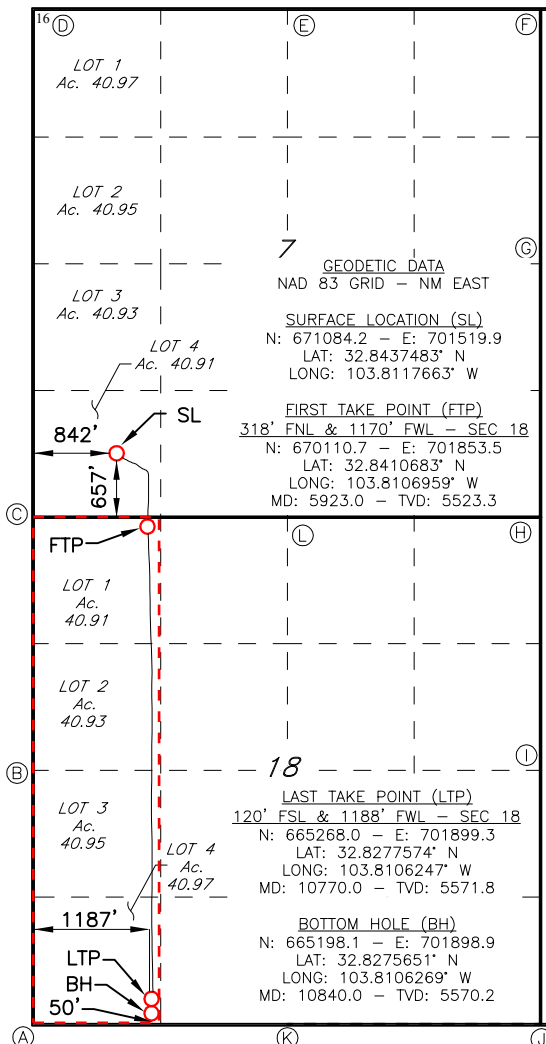¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Sarah Chapman 10/13/2022
Signature Date

SARAH CHAPMAN

Printed Name

SCHAPMAN@SPURENERGY.COM

E-mail Address

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.


10/01/2022

Date of Survey

Signature and Seal of Professional Surveyor

19680

Certificate Number

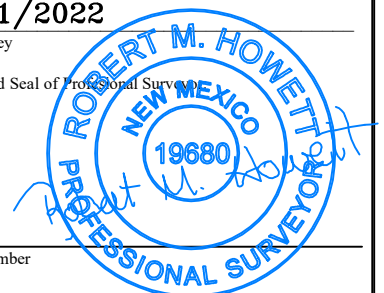

LS20110685AC



I **Larry Wright**, certify that I am employed by **Wellbenders Directional Services**. That I did on the day(s) of **09/02/22** thru **09/09/22** conduct or supervise the taking of a **MWD Survey** from a depth of **477'** to a depth of **10840'**; that the data is true, correct, complete and within the limitations of the tool as set forth by **Wellbenders Directional Services**; that I am authorized and qualified to make this report; that this survey was conducted at the request of **Spur Energy Partners** for the **HT 18 Federal 12H API No. 30-025-49373** in **Lea County, New Mexico**; and that I have reviewed this report and find that it conforms to the principles and procedures as set forth by **Wellbenders Directional Services**.

Larry Wright

*1125 Beach Airport Rd, Conroe, Texas
77301
PH 936-756-3225 FAX 936-756-3248*



Spur Energy Partners, LLC

Lea County, NM (Nad-83/ NME)

HT 18 Federal

#12H

OH

Design: OH

Standard Survey Report

09 September, 2022





Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #12H
Project:	Lea County, NM (Nad-83/ NME)	TVD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Site:	HT 18 Federal	MD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Well:	#12H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	WBDS_SQL_2

Project	Lea County, NM (Nad-83/ NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		HT 18 Federal			
Site Position:		Northing:	671,004.40 usft	Latitude:	32.843528
From:	Map	Easting:	701,576.50 usft	Longitude:	-103.811584
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in	Grid Convergence:	0.283 °

Well	#12H					
Well Position	+N/-S	0.00 usft	Northing:	671,084.20 usft	Latitude:	32.843748
	+E/-W	0.00 usft	Easting:	701,519.90 usft	Longitude:	-103.811767
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,973.00 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	07/19/22	6.578	60.390	47,716.95645740

Design	OH				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	179.67	

Survey Program	Date	09/09/22			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
477.00	1,977.00	SPUDDER (OH)	MWD+IGRF	OWSG MWD + IGRF or WMM	
2,047.00	10,840.00	MWD (OH)	MWD+IGRF	OWSG MWD + IGRF or WMM	

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HT 18 FED 12H: SHL (657' FSL & 842' FWL)									
477.00	1.49	239.55	476.95	-3.14	-5.35	3.11	0.31	0.31	0.00
569.00	2.99	118.17	568.90	-4.88	-4.26	4.86	4.32	1.63	-131.93
658.00	8.00	112.81	657.47	-8.38	3.50	8.40	5.65	5.63	-6.02
747.00	8.40	115.54	745.56	-13.59	15.07	13.67	0.63	0.45	3.07
837.00	5.01	130.66	834.94	-18.98	23.99	19.12	4.22	-3.77	16.80
926.00	5.19	127.05	923.58	-23.94	30.15	24.11	0.41	0.20	-4.06
1,015.00	5.10	124.59	1,012.23	-28.61	36.62	28.82	0.27	-0.10	-2.76
1,105.00	5.41	124.85	1,101.85	-33.31	43.39	33.56	0.35	0.34	0.29



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #12H
Project:	Lea County, NM (Nad-83/ NME)	TVD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Site:	HT 18 Federal	MD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Well:	#12H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	WBDS_SQL_2

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
1,194.00	5.49	124.50	1,190.45	-38.11	50.35	38.40	0.10	0.09	-0.39
1,283.00	5.19	121.78	1,279.06	-42.65	57.28	42.98	0.44	-0.34	-3.06
1,372.00	5.19	123.36	1,367.69	-46.98	64.06	47.35	0.16	0.00	1.78
1,461.00	5.10	121.43	1,456.34	-51.26	70.80	51.66	0.22	-0.10	-2.17
1,550.00	5.19	121.95	1,544.98	-55.45	77.59	55.90	0.11	0.10	0.58
1,640.00	4.88	122.66	1,634.63	-59.67	84.27	60.15	0.35	-0.34	0.79
1,730.00	5.01	118.97	1,724.29	-63.64	90.93	64.16	0.38	0.14	-4.10
1,821.00	4.88	117.47	1,814.96	-67.35	97.84	67.91	0.20	-0.14	-1.65
1,911.00	4.70	117.56	1,904.64	-70.82	104.50	71.42	0.20	-0.20	0.10
1,977.00	4.40	118.70	1,970.43	-73.29	109.12	73.91	0.47	-0.45	1.73
2,047.00	4.18	116.60	2,040.24	-75.72	113.76	76.37	0.39	-0.31	-3.00
2,172.00	4.22	118.18	2,164.90	-79.93	121.88	80.63	0.10	0.03	1.26
2,297.00	5.54	117.92	2,289.45	-84.93	131.27	85.68	1.06	1.06	-0.21
2,424.00	5.10	113.17	2,415.90	-90.02	141.88	90.84	0.49	-0.35	-3.74
2,549.00	4.44	109.13	2,540.47	-93.79	151.56	94.66	0.59	-0.53	-3.23
2,676.00	6.20	115.72	2,666.92	-98.38	162.38	99.31	1.46	1.39	5.19
2,803.00	5.67	110.09	2,793.24	-103.51	174.45	104.51	0.62	-0.42	-4.43
2,928.00	4.92	107.11	2,917.70	-107.21	185.37	108.27	0.64	-0.60	-2.38
3,055.00	4.18	103.41	3,044.30	-109.88	195.08	111.01	0.63	-0.58	-2.91
3,183.00	3.78	127.58	3,172.00	-113.54	202.96	114.71	1.34	-0.31	18.88
3,308.00	3.25	122.84	3,296.76	-117.97	209.20	119.18	0.48	-0.42	-3.79
3,433.00	5.05	126.79	3,421.43	-123.19	216.59	124.44	1.46	1.44	3.16
3,558.00	4.84	127.85	3,545.97	-129.72	225.16	131.02	0.18	-0.17	0.85
3,683.00	4.70	126.00	3,670.53	-135.97	233.46	137.31	0.17	-0.11	-1.48
3,808.00	5.89	122.75	3,795.00	-142.45	243.00	143.84	0.98	0.95	-2.60
3,934.00	5.54	122.05	3,920.37	-149.17	253.59	150.63	0.28	-0.28	-0.56
4,058.00	5.45	120.38	4,043.80	-155.33	263.75	156.84	0.15	-0.07	-1.35
4,185.00	5.27	121.78	4,170.25	-161.45	273.91	163.02	0.18	-0.14	1.10
4,311.00	5.98	111.68	4,295.64	-166.92	284.93	168.56	0.96	0.56	-8.02
4,438.00	5.89	111.76	4,421.96	-171.78	297.13	173.49	0.07	-0.07	0.06
4,563.00	5.80	120.03	4,546.31	-177.32	308.55	179.09	0.68	-0.07	6.62
4,603.74	6.60	128.47	4,586.81	-179.80	312.17	181.60	2.96	1.95	20.72
HT 18 FED 12H: KOP @ 4602.44' MD									
4,626.00	7.08	132.24	4,608.92	-181.52	314.18	183.33	2.96	2.17	16.94
4,689.00	8.22	145.07	4,671.36	-187.83	319.64	189.66	3.25	1.81	20.37
4,752.00	10.33	157.55	4,733.54	-196.74	324.37	198.60	4.61	3.35	19.81
4,815.00	13.85	167.49	4,795.14	-209.33	328.17	211.21	6.47	5.59	15.78
4,878.00	17.54	171.79	4,855.78	-226.09	331.16	227.99	6.14	5.86	6.83
4,941.00	20.79	176.10	4,915.29	-246.65	333.27	248.56	5.62	5.16	6.84
5,004.00	24.88	179.18	4,973.34	-271.07	334.22	272.99	6.76	6.49	4.89
5,067.00	29.32	181.29	5,029.41	-299.75	334.06	301.67	7.21	7.05	3.35
5,129.00	33.36	181.55	5,082.35	-331.98	333.26	333.90	6.52	6.52	0.42
5,193.00	37.19	180.14	5,134.59	-368.93	332.74	370.84	6.12	5.98	-2.20



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #12H
Project:	Lea County, NM (Nad-83/ NME)	TVD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Site:	HT 18 Federal	MD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Well:	#12H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	WBDS_SQL_2

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,255.00	41.45	179.35	5,182.55	-408.21	332.93	410.12	6.92	6.87	-1.27
5,318.00	45.19	179.88	5,228.37	-451.42	333.21	453.33	5.96	5.94	0.84
5,382.00	49.14	181.99	5,271.88	-498.33	332.42	500.24	6.63	6.17	3.30
5,445.00	52.79	183.57	5,311.55	-547.20	330.03	549.09	6.11	5.79	2.51
5,505.00	57.10	182.16	5,346.01	-596.24	327.59	598.12	7.44	7.18	-2.35
5,565.00	63.03	179.97	5,375.94	-648.20	326.65	650.07	10.38	9.88	-3.65
5,595.00	63.38	179.53	5,389.46	-674.98	326.77	676.85	1.75	1.17	-1.47
START TANGENT: 5595' MD									
5,624.00	63.25	179.53	5,402.48	-700.89	326.98	702.76	0.45	-0.45	0.00
5,655.00	63.25	179.44	5,416.44	-728.57	327.23	730.44	0.26	0.00	-0.29
5,684.90	63.30	179.26	5,429.88	-755.27	327.53	757.15	0.56	0.17	-0.60
FINAL FTP: 5684.90' MD									
5,685.00	63.30	179.26	5,429.93	-755.36	327.53	757.24	0.56	0.17	-0.60
5,716.00	63.16	179.09	5,443.89	-783.04	327.93	784.91	0.67	-0.45	-0.55
5,739.48	63.10	179.16	5,454.50	-803.98	328.25	805.85	0.39	-0.28	0.31
HT 18 FED 12H: FTP (100' FNL & 1190' FWL)									
5,745.00	63.08	179.18	5,457.00	-808.90	328.32	810.78	0.39	-0.28	0.31
5,775.00	63.08	178.74	5,470.58	-835.65	328.81	837.53	1.31	0.00	-1.47
END TANGENT: 5775' MD									
5,805.00	64.62	178.12	5,483.81	-862.56	329.55	864.45	5.46	5.13	-2.07
5,866.00	70.55	177.95	5,507.06	-918.90	331.48	920.79	9.72	9.72	-0.28
5,928.00	76.31	177.68	5,524.73	-978.25	333.75	980.16	9.30	9.29	-0.44
6,011.00	80.09	177.77	5,541.70	-1,059.42	336.97	1,061.34	4.56	4.55	0.11
6,059.50	81.78	177.26	5,549.34	-1,107.27	339.05	1,109.21	3.64	3.49	-1.05
HT 18 FED 12H: PLAN LP @ 6061.47' MD									
6,070.00	82.15	177.15	5,550.81	-1,117.65	339.56	1,119.59	3.64	3.49	-1.05
6,129.00	85.71	178.12	5,557.05	-1,176.26	341.97	1,178.21	6.25	6.03	1.64
6,250.00	90.99	179.35	5,560.53	-1,297.14	344.64	1,299.10	4.48	4.36	1.02
6,370.00	90.90	179.26	5,558.55	-1,417.11	346.10	1,419.08	0.11	-0.07	-0.07
6,491.00	90.81	179.09	5,556.74	-1,538.09	347.84	1,540.06	0.16	-0.07	-0.14
6,611.00	90.68	178.82	5,555.18	-1,658.06	350.03	1,660.04	0.25	-0.11	-0.22
6,734.00	90.20	178.38	5,554.24	-1,781.01	353.03	1,783.02	0.53	-0.39	-0.36
6,860.00	89.98	177.95	5,554.04	-1,906.95	357.07	1,908.97	0.38	-0.17	-0.34
6,985.00	89.58	177.68	5,554.52	-2,031.86	361.83	2,033.91	0.39	-0.32	-0.22
7,111.00	89.76	177.95	5,555.25	-2,157.76	366.64	2,159.84	0.26	0.14	0.21
7,237.00	90.24	180.93	5,555.25	-2,283.74	367.87	2,285.82	2.40	0.38	2.37
7,363.00	89.49	180.41	5,555.54	-2,409.73	366.40	2,411.80	0.72	-0.60	-0.41
7,488.00	88.92	179.35	5,557.28	-2,534.72	366.66	2,536.79	0.96	-0.46	-0.85
7,612.00	88.04	179.26	5,560.57	-2,658.66	368.16	2,660.74	0.71	-0.71	-0.07
7,737.00	90.51	180.23	5,562.15	-2,783.64	368.72	2,785.72	2.12	1.98	0.78
7,863.00	89.36	180.32	5,562.29	-2,909.64	368.11	2,911.71	0.92	-0.91	0.07
7,992.00	89.76	180.41	5,563.28	-3,038.63	367.29	3,040.70	0.32	0.31	0.07
8,117.00	90.55	180.32	5,562.94	-3,163.63	366.49	3,165.69	0.64	0.63	-0.07
8,243.00	88.48	180.14	5,564.01	-3,289.62	365.99	3,291.67	1.65	-1.64	-0.14



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #12H
Project:	Lea County, NM (Nad-83/ NME)	TVD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Site:	HT 18 Federal	MD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Well:	#12H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	WBDS_SQL_2

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,368.00	89.23	181.11	5,566.51	-3,414.58	364.62	3,416.62	0.98	0.60	0.78
8,494.00	89.98	180.93	5,567.38	-3,540.56	362.38	3,542.58	0.61	0.60	-0.14
8,620.00	90.51	179.26	5,566.84	-3,666.55	362.17	3,668.58	1.39	0.42	-1.33
8,745.00	91.16	179.18	5,565.02	-3,791.52	363.87	3,793.56	0.52	0.52	-0.06
8,871.00	90.29	178.74	5,563.42	-3,917.49	366.16	3,919.54	0.77	-0.69	-0.35
8,996.00	88.53	179.70	5,564.71	-4,042.47	367.86	4,044.52	1.60	-1.41	0.77
9,121.00	89.36	179.88	5,567.01	-4,167.44	368.32	4,169.50	0.68	0.66	0.14
9,246.00	90.07	179.79	5,567.63	-4,292.44	368.68	4,294.49	0.57	0.57	-0.07
9,372.00	90.64	180.14	5,566.85	-4,418.44	368.76	4,420.49	0.53	0.45	0.28
9,498.00	91.16	180.32	5,564.87	-4,544.42	368.25	4,546.47	0.44	0.41	0.14
9,622.00	89.32	180.49	5,564.35	-4,668.41	367.38	4,670.45	1.49	-1.48	0.14
9,747.00	88.40	179.79	5,566.84	-4,793.38	367.07	4,795.42	0.92	-0.74	-0.56
9,873.00	88.84	179.79	5,569.87	-4,919.35	367.53	4,921.38	0.35	0.35	0.00
9,999.00	89.49	179.53	5,571.71	-5,045.33	368.28	5,047.37	0.56	0.52	-0.21
10,125.00	90.29	179.70	5,571.95	-5,171.33	369.13	5,173.37	0.65	0.63	0.13
10,251.00	88.70	178.47	5,573.06	-5,297.30	371.14	5,299.35	1.60	-1.26	-0.98
10,377.00	89.32	178.56	5,575.24	-5,423.24	374.40	5,425.30	0.50	0.49	0.07
10,502.00	90.02	179.00	5,575.96	-5,548.21	377.06	5,550.29	0.66	0.56	0.35
10,628.00	91.12	179.44	5,574.71	-5,674.19	378.78	5,676.27	0.94	0.87	0.35
10,754.00	91.16	180.05	5,572.20	-5,800.16	379.34	5,802.25	0.49	0.03	0.48
10,780.00	91.38	180.23	5,571.62	-5,826.15	379.28	5,828.24	1.09	0.85	0.69
10,789.86	91.38	180.23	5,571.39	-5,836.01	379.24	5,838.10	0.00	0.00	0.00
HT 18 FED 12H: LTP (100' FSL & 1190' FWL)									
10,789.92	91.38	180.23	5,571.38	-5,836.07	379.24	5,838.16	0.00	0.00	0.00
FINAL LTP: 10789.92' MD									
10,839.84	91.38	180.23	5,570.18	-5,885.97	379.04	5,888.06	0.00	0.00	0.00
HT 18 FED 12H: PBHL (50' FSL & 1190' FWL)									
10,840.00	91.38	180.23	5,570.18	-5,886.13	379.04	5,888.22	0.00	0.00	0.00
Projection to Bit: 10840.00' MD/ 5570.18' TVD - Final Station Closure Distance= 5898.33 /Direction= 176.32 - TD: Latitude									

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FINAL FTP: 100' FNL - actual wellpath hits target center - Point	0.00	0.00	5,429.88	-755.27	327.53	670,328.93	701,847.43	32.841668	-103.810712
FINAL BIT PROJ/TD: - actual wellpath hits target center - Point	0.00	0.00	5,570.18	-5,886.13	379.04	665,198.07	701,898.93	32.827565	-103.810627
FINAL LTP: 100' FSL, - actual wellpath hits target center - Point	0.00	0.00	5,571.38	-5,836.07	379.24	665,248.13	701,899.13	32.827703	-103.810626



Survey Report



Company:	Spur Energy Partners, LLC	Local Co-ordinate Reference:	Well #12H
Project:	Lea County, NM (Nad-83/ NME)	TVD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Site:	HT 18 Federal	MD Reference:	RKB = 20' @ 3993.00usft (AKITA 57)
Well:	#12H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	WBDS_SQL_2

Design Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
5,595.00	5,389.46	-674.98	326.77	START TANGENT: 5595' MD
5,684.90	5,429.88	-755.27	327.53	FINAL FTP: 5684.90' MD
5,775.00	5,470.58	-835.65	328.81	END TANGENT:5775' MD
10,789.92	5,571.38	-5,836.07	379.24	FINAL LTP: 10789.92' MD
10,840.00	5,570.18	-5,886.13	379.04	Projection to Bit: 10840.00' MD/ 5570.18' TVD
10,840.00	5,570.18	-5,886.13	379.04	Final Station Closure Distance= 5898.33 /Direction= 176.32
10,840.00	5,570.18	-5,886.13	379.04	TD: Latitude= 32.827565 / Longitude= -103.810627
10,840.00	5,570.18	-5,886.13	379.04	TD: Y= 665198.07 / X= 701898.94

Checked By: _____

Approved By: _____

Date: _____

Created By: Derek Stephens Date: 7:48, September 09 2022

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Well Name: HT 18 FEDERAL	Well Location: T17S / R32E / SEC 7 / LOT 4 /	County or Parish/State: /
Well Number: 12H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060329	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002549373	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

Subsequent Report

Sundry ID: 2696744

Type of Submission: Subsequent Report Type of Action: Hydraulic Fracturing

Date Sundry Submitted: 10/06/2022 Time Sundry Submitted: 07:25

Date Operation Actually Began: 09/23/2022

Actual Procedure: 09/23/2022 RIH & cleanout to PBTD @ 10795'. RIH & perf from 5923'-10770', total shots 900/ft @ 0.42 shot size. Frac in 25 stages w/ 301622bbl slickwater and 4986964# sand. 10/01/2022 rig down wireline and cleanout. Will file tbg sundry once in hole.

Well Name: HT 18 FEDERAL	Well Location: T17S / R32E / SEC 7 / LOT 4 /	County or Parish/State: /
Well Number: 12H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060329	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002549373	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SARAH CHAPMAN	Signed on: OCT 06, 2022 07:24 AM
Name: SPUR ENERGY PARTNERS LLC	
Title: Regulatory Directory	
Street Address: 9655 KATY FREEWAY, SUITE 500	
City: Houston	State: TX
Phone: (832) 930-8613	
Email address: SCHAPMAN@SPUREPLLC.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: Jonathon W Shepard	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 10/19/2022
Signature: Jonathon Shepard	



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Completion Print

02/21/2023

Operator Name SPUR ENERGY PARTNERS LLC	Well Name HT 18 FEDERAL	Well Number 12H	US Well Number 3002549373
SHL	County	State	Lease Number(s) NMLC060329
Well Type OIL WELL	Well Status Drilling Well	Agreement Name	Agreement Number(s)
Allottee/Tribe Name	Well Pad Name HT 18 FEDERAL	Well Pad Number 11H, 12H, 13H, 14H	ID 10400066910

Section 1 - General

Well Completion Report Id: 87273**Submission Date:** 02-21-2023**BLM Office:** Carlsbad Field Office**User:** SARAH CHAPMAN**Title:** Regulatory Directory**Federal/Indian:** FEDERAL**Lease Number:** NMLC060329**Lease Acres:****Agreement in place?:** NO**Federal or Indian Agreement:****Agreement Number:****Agreement Name:****Keep this Well Completion Report confidential?:** NO**APD Operator:** SPUR ENERGY PARTNERS LLC

Section 2 - Well

Field/Pool or Exploratory:**Pool Name:** GLORIETA-YESO, EAST**Field Name:** FREN**Well Type:** OIL WELL**Spud Date:** 06-16-2022**Date Total Measured Depth Reached:** 09-08-2022**Drill & Abandon or Ready To Produce:** READY TO**Well Class:** HORIZONTAL

Section 3 - Geologic

Formation Name	Lithology	Describe Lithology	Elevation	TVD	MD	Mineral Resources	Describe Mineral
QUATERNARY	DOLOMITE, OTHER	CALICHE	3973	0	0	USEABLE WATER	
RUSTLER	ANHYDRITE, DOLOMITE, SHALE		3613	360	360	OTHER	BRACKISH WATER

Operator Name SPUR ENERGY PARTNERS LLC	Well Name HT 18 FEDERAL	Well Number 12H	US Well Number 3002549373
SHL	County	State	Lease Number(s) NMLC060329
Well Type OIL WELL	Well Status Drilling Well	Agreement Name	Agreement Number(s)
Allottee/Tribe Name	Well Pad Name HT 18 FEDERAL	Well Pad Number 11H, 12H, 13H, 14H	ID 10400066910

Section 3 - Geologic

Formation Name	Lithology	Describe Lithology	Elevation	TVD	MD	Mineral Resources	Describe Mineral
TOP SALT	ANHYDRITE		3443	530	530	OTHER	SALT
BASE OF SALT	ANHYDRITE		2923	1050	1050	OTHER	SALT
TANSILL	DOLOMITE, LIMESTONE		2868	1105	1105	NONE	
YATES	SANDSTONE		2768	1205	1205	NATURAL GAS, OIL	
SEVEN RIVERS	DOLOMITE, SANDSTONE		2478	1495	1495	OIL, USEABLE WATER	
QUEEN	ANHYDRITE, DOLOMITE, SANDSTONE		1878	2095	3000	NATURAL GAS, OIL	
SAN ANDRES	DOLOMITE, LIMESTONE		1143	2830	3000	NATURAL GAS, OIL	
SAN ANDRES LOWER	DOLOMITE, LIMESTONE		188	3785	3950	NATURAL GAS, OIL	
GLORIETA	DOLOMITE, SILTSTONE		-242	4215	4400	NATURAL GAS, OIL	
YESO	DOLOMITE		-327	4300	6000	NATURAL GAS, OIL	

Completion and Completed

Completion Data

Wellbore Code	Completion Code	Interval Number	Case Number	Lease Number	Well Completion Type	Describe Well Completion Type	Completion Status	Date Completed	Date First Produced	Formation	Interval Top (MD)	Interval Bottom (MD)	Interval Perforated?	Perforation Size	Number of Holes	Status of Interval
---------------	-----------------	-----------------	-------------	--------------	----------------------	-------------------------------	-------------------	----------------	---------------------	-----------	-------------------	----------------------	----------------------	------------------	-----------------	--------------------

Operator Name SPUR ENERGY PARTNERS LLC	Well Name HT 18 FEDERAL	Well Number 12H	US Well Number 3002549373
SHL	County	State	Lease Number(s) NMLC060329
Well Type OIL WELL	Well Status Drilling Well	Agreement Name	Agreement Number(s)
Allottee/Tribe Name	Well Pad Name HT 18 FEDERAL	Well Pad Number 11H, 12H, 13H, 14H	ID 10400066910

Completion Data

Wellbore Code	Completion Code	Interval Number	Case Number	Lease Number	Well Completion Type	Describe Well Completion Type	Completion Status	Date Completed	Date First Produced	Formation	Interval Top (MD)	Interval Bottom (MD)	Interval Perforated?	Perforation Size	Number of Holes	Status of Interval
00	X1	1	NMLC060329	NMLC060329	NEW		DRG	10-31-2022	10-31-2022	PADDOCK	5923	10770	Y	.42	900	OPEN

Treatment Data

Wellbore Code	Completion Code	Interval Number	Interval Treated?	Treatment Type	Tottle Fluid (bbls)	Total Proppant (lbs)	Treatment Remarks
00	X1	1	Y	FRAC	301622	4986964	

Production Data

Wellbore Code	Completion Code	Interval Number	API Oil Gravity	Gas Gravity	Production Method	Describe Production	Disposition of Gas	Describe Disposition
00	X1	1			ELECTRIC PUMP SUB-SURFACE		SOLD	

Test Data

Wellbore Code	Completion Code	Interval Number	Test Date	Hours Tested	24-Hour Rate Oil (bbbs)	24-Hour Rate Gas (MCF)	24-Hour Rate Water(BWPD)	Gas-Oil Ratio (SCF/Bbl)	Choke Size	Tubing Pressure	Tubing Pressure Shut-in (psi)	Casing Pressure (psi)

Operator Name SPUR ENERGY PARTNERS LLC	Well Name HT 18 FEDERAL	Well Number 12H	US Well Number 3002549373
SHL	County	State	Lease Number(s) NMLC060329
Well Type OIL WELL	Well Status Drilling Well	Agreement Name	Agreement Number(s)
Allottee/Tribe Name	Well Pad Name HT 18 FEDERAL	Well Pad Number 11H, 12H, 13H, 14H	ID 10400066910

Test Data

Wellbore Code	Completion Code	Interval Number	Test Date	Hours Tested	24-Hour Rate Oil (bbls)	24-Hour Rate Gas (MCF)	24-Hour Rate Water(BWPD)	Gas-Oil Ratio (SCF/Bbl)	Choke Size	Tubing Pressure	Tubing Pressure Shut-In (psi)	Casing Pressure (psi)
00	X1	1	11/13/2022	24	526	595	2447	1131		215		78

Well Location

Survey Type: RECTANGULAR

Survey Number: 19680

Datum: NAD83

Vertical Datum: NAVD88

Reference Datum: GL

	State	Meridian	County	Latitude	Longitude	Elevation (MSL)	Lease Type	Lease Number	Plug TVD (ft)	Plug MD (ft)	Plug Type	NS-Foot	NS-Indicator	EW-Foot	EW-Indicator	Township	Range	Section	Aliquot/L of Tract
SHL	NEW MEXICO	NEW MEXICO PRINCIPAL	LEA	32.847483	-103.8117663	3973	FEDERAL	NMLC060329				657	FSL	842	FWL	17S	32E	7	Lot 4
KOP Wellbore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	LEA	32.844243	-103.812001	-512	FEDERAL	NMLC060329				837	FSL	963	FWL	17S	32E	7	Lot 4
PPP Wellbore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	LEA	32.841683	-103.8106959	-1557	FEDERAL	NMLC060329				318	FNL	1170	FWL	17S	32E	18	Lot 1
PPP Wellbore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	LEA	32.841953	-103.812042	-1547	FEDERAL	NMLC060329				1	FNL	1190	FWL	17S	32E	18	Lot 1
EXIT Wellbore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	LEA	32.8277574	-103.8106247	-1557	FEDERAL	NMLC060329				120	FSL	1188	FWL	17S	32E	18	Lot 4

Operator Name SPUR ENERGY PARTNERS LLC	Well Name HT 18 FEDERAL	Well Number 12H	US Well Number 3002549373
SHL	County	State	Lease Number(s) NMLC060329
Well Type OIL WELL	Well Status Drilling Well	Agreement Name	Agreement Number(s)
Allottee/Tribe Name	Well Pad Name HT 18 FEDERAL	Well Pad Number 11H, 12H, 13H, 14H	ID 10400066910

	State	Meridian	County	Latitude	Longitude	Elevation (MSL)	Lease Type	Lease Number	Plug TVD (ft)	Plug MD (ft)	Plug Type	NS-Foot	NS-Indicator	EW-Foot	EW-Indicator	Township	Range	Section	Aliquot/Lot/Tract
BHL Wellbore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	LEA	32.8275651	-103.8106269	-1597	FEDERAL	NMLC060329	5570	10795		50	FSL	1187	FWL	17S	32E	18	Lot 4

Casing, Liner and Tubing

Casing and Liner

Wellbore Code	Casing String Type	Hole Size	Top Setting Depth (MD)	Bottom Setting Depth (MD)	Casing Size	Wt(lbs/ft)	Casing Grade	Describe Other Casing Grade	Joint	Other Joint	Amount Pulled (ft)
00	SURFACE	17.5	0	457	13.375	54.5	J-55		BUTT		
00	INTERMEDIATE	12.25	0	2020	9.625	36	J-55		BUTT		
00	PRODUCTION	8.75	0	5158	7.0	32	L-80		OTHER	BK-HT	
00	PRODUCTION	8.75	5158	10840	5.5	20	L-80		OTHER	BK-HT	

Operator Name SPUR ENERGY PARTNERS LLC	Well Name HT 18 FEDERAL	Well Number 12H	US Well Number 3002549373
SHL	County	State	Lease Number(s) NMLC060329
Well Type OIL WELL	Well Status Drilling Well	Agreement Name	Agreement Number(s)
Allottee/Tribe Name	Well Pad Name HT 18 FEDERAL	Well Pad Number 11H, 12H, 13H, 14H	ID 10400066910

Cementing

Wellbore Code	Casing String Type	Stage Tool Depth	Cement Lead Type	Cement Lead Qty (sks)	Cement Lead Yield (cu.ft/sks)	Cement Lead Top (MD)	Cement Tail Type	Cement Tail Qty (sks)	Cement Tail Yield(cu.ft/sks)	Cement Tail Top (MD)	Total (Lead + Tail) Cement Slurry Volume
00	SURFACE		Class C Premium Plus	655	2.32	0					270.6
00	INTERMEDIATE		Class C Premium Plus	375	1.84	0	Class C Premium Plus	195	2.32	450	203.5
00	PRODUCTION		Class C Premium Plus Cement	220	2.54	0	Class C Premium Plus	1600	1.81	4750	2461.2
00	PRODUCTION		Class C Premium Plus	220	2.54	0	Class C Premium Plus	1600	1.81	4750	2461.2

Tubing

Wellbore Code	Tubing Size	Describe Other	Tubing Setting Depth (MD/ft)	Packer Depth (MD/ft)	Tubing Weight	Tubing Grade	Describe Other	Tubing Coupling	Describe Other
00	3.5		5773			J-55			

Logs

Wellbore Code	Log Upload	Was Well Cored?	Was DST Run?	Directional Survey?	Geologic Report	Wellbore Diagram
00	YES	NO	NO	YES	NO	YES

Operator Name SPUR ENERGY PARTNERS LLC	Well Name HT 18 FEDERAL	Well Number 12H	US Well Number 3002549373
SHL	County	State	Lease Number(s) NMLC060329
Well Type OIL WELL	Well Status Drilling Well	Agreement Name	Agreement Number(s)
Allottee/Tribe Name	Well Pad Name HT 18 FEDERAL	Well Pad Number 11H, 12H, 13H, 14H	ID 10400066910

Operator

I hereby certify that the foregoing and attached information is complete and correct as determined from all available records. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Well Completion Reports through this system satisfies regulations requiring a submission of Form 3160-4 or a Well Completion Report.

Name: SPUR ENERGY PARTNERS LLC

Signed By: SARAH CHAPMAN **Title:** Regulatory Directory **Signed on:** 02/21/2023

Street Address: 9655 KATY FREEWAY, SUITE 500

City: Houston **State:** TX **Zip:** 77024

Phone: (832)930-8613

Email address: SCHAPMAN@SPUREPLLC.COM

Field

Representative Name:

Street Address:

City: **State:** **Zip:**

Phone: **Extension:**

Email address:

Attachments

- FINAL_HT_18_Federal__12H_5MD_20230201091602.tiff
- HT_18_Fed_12H_Direct_Plan_20230201091613.pdf
- HT_18_Fed_12H_Direct_Plot_20230201091613.pdf
- HT_18_Fed_12H_Direct_Cert_20230201091613.pdf
- Visio_HT_Fed_12H_WBD_20230221094346.pdf

Operator Name SPUR ENERGY PARTNERS LLC	Well Name HT 18 FEDERAL	Well Number 12H	US Well Number 3002549373
SHL	County	State	Lease Number(s) NMLC060329
Well Type OIL WELL	Well Status Drilling Well	Agreement Name	Agreement Number(s)
Allottee/Tribe Name	Well Pad Name HT 18 FEDERAL	Well Pad Number 11H, 12H, 13H, 14H	ID 10400066910

HT_18_Fed_12H_As_Drilled_20230221094355.pdf

HT 18 Federal 12H
Lea County, NM
API# 30-025-49373

SPUD DATE: 6/16/2022
ELEV: 3973' GR, 20' KB

CURRENT WBD

13-3/8" 54.5# J-55 BTC Csg @ 457'
CMT W/ 665 SX 14.8 PPG, 1.33 CUFT/
SK) CLASS C CEMENT
CIRC 89 BBLs TO SURF, TOC @ SURF

TUBING DETAIL
3-1/2" 9.3# J-55 EUE 8RD POLY-LINED TUBING
ESP ASSEMBLY
INTAKE @ 5,715'
PIP SENSOR @ 5,767'
EOT @ 5,773'

9-5/8" 36# J-55 BTC Csg @ 2,020'
CMT W/ 375 SX LEAD (12 PPG, 2.38
CUFT/SK) & 195 SX TAIL (13.5 PPG,
1.73 CUFT/SK) CLASS C CEMENT
CIRC 88 BBLs TO SURF, TOC @ SURF

7" 32# L-80 BK-HT Csg @ 5,822'
5-1/2" 20# L-80 BK-HT Csg @ 10,840'
CMT W/ 220 SX LEAD (11.4 PPG, 2.39
CUFT/SK) & 1600 SX TAIL (13.2 PPG, 1.4
CUFT/SK) CLASS C CEMENT
CIRC 41 BBLs TO SURF, TOC @ SURF


CROSS OVER FROM 7" TO
5-1/2" CSG @ 5,822'

KOP @ 4,602'

TOP PERF @ 5,923'

LOWER PADDOCK COMPLETION
PERF & FRAC IN 25 STAGES F/ 5,923'-10,770'
3-1/8" GUNS, 0.42 EHD, 60 DEG, 6 CLUSTERS/STG,
4 SHOTS/CLUSTER, 600 TOTAL HOLES,
18,117 GALS 15% HCL, 296,672 BBLs FR WATER,
4,520 BBLs TREATED WTR, 2,230,060# 100 MESH,
505,219# 20/40 PREMIUM WHITE, 2,251,685# 40/
70 PERMIAN

BOTTOM PERF @ 10,770'



TD (MD) @ 10,840'
TD (TVD) @ 5,570'
PBTD @ 10,795' MD

Well Name: HT 18 FEDERAL	Well Location: T17S / R32E / SEC 7 / LOT 4 /	County or Parish/State: /
Well Number: 12H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060329	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002549373	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

Subsequent Report

Sundry ID: 2685670

Type of Submission: Subsequent Report

Date Sundry Submitted: 08/04/2022

Date Operation Actually Began: 07/22/2022

Type of Action: Drilling Operations

Time Sundry Submitted: 08:41

Actual Procedure: 7/22/2022 NU BOP, test to 250# low 2500# high, good test. Test 13-3/8" csg to 1500# for 30 minutes, good test. Drill 12-1/4" hole to 2020'. 7/25/2022 RIH & set 9-5/8" 36# J-55 BTC csg @ 2020', pump 40bbl FWS, then cmt w/ 375 sxs class C w/ additives 14.2ppg 2.4 yield followed by 195 sxs class C w/ additives 13.2ppg 1.87 yield. Full returns throughout job, circ 208 sxs to surface. Will test csg and BOP when rig moves back in. 07/26/2022 RD and rig release.

Well Name: HT 18 FEDERAL	Well Location: T17S / R32E / SEC 7 / LOT 4 /	County or Parish/State: /
Well Number: 12H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060329	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002549373	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SARAH CHAPMAN	Signed on: AUG 04, 2022 08:41 AM
Name: SPUR ENERGY PARTNERS LLC	
Title: Regulatory Directory	
Street Address: 9655 KATY FREEWAY, SUITE 500	
City: Houston	State: TX
Phone: (832) 930-8613	
Email address: SCHAPMAN@SPUREPLLC.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: Jonathon W Shepard	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 08/19/2022
Signature: Jonathon Shepard	

Well Name: HT 18 FEDERAL	Well Location: T17S / R32E / SEC 7 / LOT 4 /	County or Parish/State: /
Well Number: 12H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060329	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002549373	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

Subsequent Report

Sundry ID: 2700388

Type of Submission: Subsequent Report	Type of Action: Workover Operations
Date Sundry Submitted: 10/31/2022	Time Sundry Submitted: 07:38
Date Operation Actually Began: 10/28/2022	

Actual Procedure: RIH w/ 3-1/2" J-55 tbg @ 5773'.

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SARAH CHAPMAN	Signed on: OCT 31, 2022 07:38 AM
Name: SPUR ENERGY PARTNERS LLC	
Title: Regulatory Directory	
Street Address: 9655 KATY FREEWAY, SUITE 500	
City: Houston	State: TX
Phone: (832) 930-8613	
Email address: SCHAPMAN@SPUREPLLC.COM	

Field

Representative Name:

Street Address:

City:	State:	Zip:
Phone:		
Email address:		

Received by OCD: 2/6/2024 1:47:42 PM

Page 26 of 28

Well Name: HT 18 FEDERAL	Well Location: T17S / R32E / SEC 7 / LOT 4 /	County or Parish/State: /
Well Number: 12H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMLC060329	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002549373	Well Status: Drilling Well	Operator: SPUR ENERGY PARTNERS LLC

BLM Point of Contact

BLM POC Name: Jonathon W Shepard	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 11/09/2022
Signature: Jonathon Shepard	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 311925

ACKNOWLEDGMENTS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 311925
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 311925

CONDITIONS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 311925
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	None	2/7/2024