

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT Sundry Print Reparty

Well Name: BLOCKER FEDERAL Well Location: T25S / R37E / SEC 13 / County or Parish/State: LEA /

NENW / 32.13664 / -103.117746

Well Number: 01 Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM0766 Unit or CA Name: Unit or CA Number:

US Well Number: 3002511553 **Operator:** J R OIL LIMITED COMPANY

Subsequent Report

Sundry ID: 2829096

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Operation Actually Began: 01/14/2025

Actual Procedure: null

SR Attachments

Actual Procedure

WBD_Blocker_1_FINAL_20250211083517.pdf

 $Plugging_Report_JR_Oil_Blocker_Fed__1_20250211083505.pdf$

Received by OCD: 2/13/2025 11:18:27 AM Well Name: BLOCKER FEDERAL County or Parish/State: LEA Page 2 Well Location: T25S / R37E / SEC 13 /

NENW / 32.13664 / -103.117746

Well Number: 01 Type of Well: OIL WELL Allottee or Tribe Name:

Unit or CA Name: Unit or CA Number: Lease Number: NMNM0766

US Well Number: 3002511553 Operator: J R OIL LIMITED COMPANY

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: MAREN LATIMER Signed on: FEB 11, 2025 08:35 AM

Name: J R OIL LIMITED COMPANY

Title: Operator

Street Address: 5700 W CARLSBAD HWY

City: HOBBS State: NM

Phone: (575) 691-6790

Email address: MLATIMER@RAVENOP.COM

Field

Representative Name: Ian Petersen

Street Address: PO Box 2975

City: Hobbs State: NM **Zip:** 88240

Phone: (432)634-4922

Email address: ian@ddpetro.com

BLM Point of Contact

BLM POC Name: JAMES A AMOS BLM POC Title: Acting Assistant Field Manager

BLM POC Phone: 5752345927 BLM POC Email Address: jamos@blm.gov

Disposition: Accepted Disposition Date: 02/13/2025

Signature: James A Amos

Page 2 of 2

Plugging Report JR Oil Ltd. Co. Blocker Federal #1 API 30-025-11553

1/14/2025 Cleared the location, set matting board and rigged up. Unseated the pump and laid down 134 $\frac{3}{4}$ " rods. SION

Dug out cellar and plumbed surface connection to the pit. Installed BOP. Tubing was stuck. Worked free. POOH with 24 stands and found fluid. Rigged up mud bucket and vac truck. Stood back until 29 stands OOH and found tubing plugged with heavy mud. Laid down 5 joints. Mud cleared up. Pumped 20 bbls fresh down the tubing. POOH with tubing. 48 stands in the derrick. Laid down last single joint that was good. Made gauge ring run and could not get past 2822'. POOH with gauge ring. Botton of junk basket was full of same heavy mud as plugged tubing. Picked up 4 ¾" bit and RIH with 10 stands. SION. Called for swivel to clean out in the morning. SION.

1/16/2025 RIH with tubing and picked up swivel. Cleared from 2822' to 3300'. Lay down swivel and POOH with tubing. Made gauge ring run and set 5.5" CIBP at 3272'. POOH and SION.

1/17/2025 RIH with tubing and tagged CIBP at 3272'. Circulated MLF and spot 25 sx Class C cement on top of CIBP. Did not test casing. It is established that there is a hole in the 5.5" casing that is communicating with the surface head. POOH with tubing and shut down for high winds.

1/20/2025 Tagged cement at 2978'. Picked up packer and isolated hole in casing from 523' to 654'. Laid down packer and ran cement bond log. TOC of 1st stage at 2550'. There is some cement at the DV tool (1014') and is very scattered above.

Called BLM and spoke to Keith Immatty. Changed procedures. Will perforate and attempt to squeeze and 2506'. If there is no injection rate, will perforate again above original perforations and suicide squeeze. Perforate 50' below the DV tool and attempt to squeeze. Spot across the tool if no rate is obtained. Spot cement across the holes in the casing from 523' to 654'. WOC and tag. Perforate at 371' and circulate cement to surface.

Perforated at 2506'. Set packer at 2095' and pressured up on perforations to 1200# and held. Bled down to the truck and repeated to 1500# and held. Released packer and POOH with tubing.

1/21/2025 Re-perforated casing at 2506'. Set packer at 2095' and pressured up to 1500# and held. POOH with packer and perforated suicide hole at 2166'. Set packer at 2226' and pressure up to 1500# and held. No communication above the packer. Called BLM and spoke with Keith Ammatty. Got per mission to spot cement across both sets of perforations and tag above 2096'. Pulled packer and RIH with tubing to 2557'. Spot 55 sx cement and stood back 15 stands. Will tag in the morning.


1/22/2024 Tagged cement at 2029'. Pulled tubing and perforated at 1064'. Set packer and pressured up to 750#. Held. Repeated to 1000#. Held. Pulled packer. RIH with tubing to 1117' and spot 40 sx cement with CaCL. WOC and tagged cement at 761'. POOH with tubing to 720' and spot 354 sx cement across bad casing from 523' to 654'. POOH and SION. Will tag in the morning.

1/23/2025 Tagged cement at 462'. Perforated casing at 371'. Pumped cement down 5 %" casing to perforations and the annulus to surface. Took 132 sx. Rigged down, dug out cellar and removed the wellhead.

1/24/2025 Filled up 5.5" casing with 10 sx cement. Installed marker, removed anchors and cleared location.

IR @IL

Blocker Federal #1

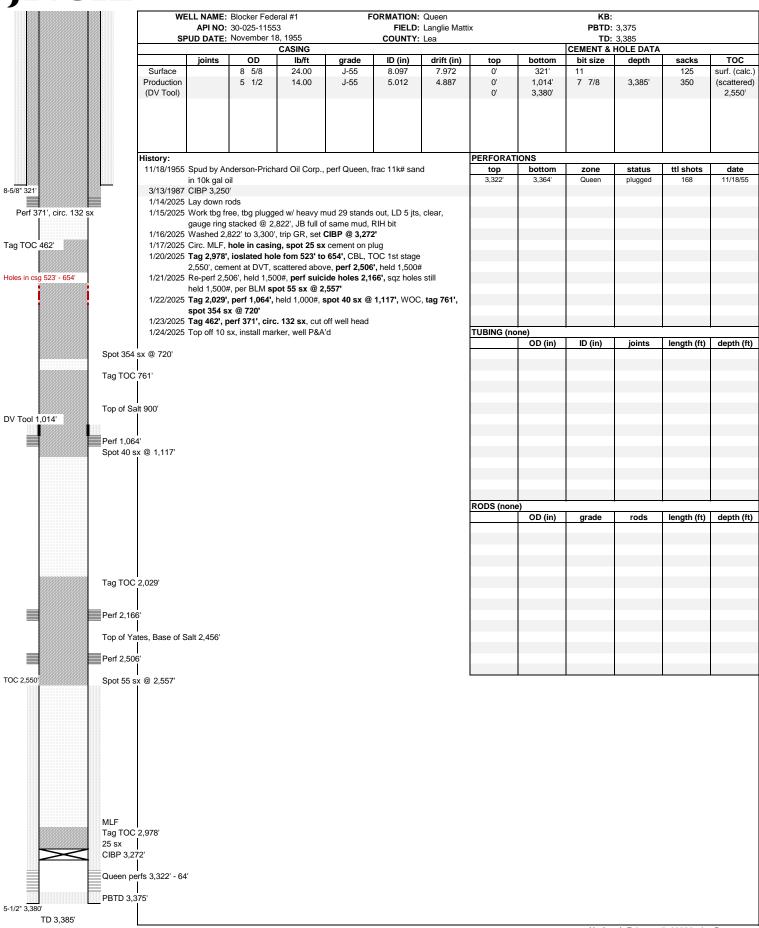

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 431792

CONDITIONS

Operator:	OGRID:	
J R OIL, LTD. CO.	256073	
P.O. Box 53657	Action Number:	
Lubbock, TX 79453	431792	
	Action Type:	
	[C-103] Sub. Plugging (C-103P)	
CONDITIONS		

Created B	y Condition	Condition Date
gcorder	o None	3/26/2025