

Form 3160-5 (June 2019)	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT	FORM APPROVED OMB No. 1004-0137 Expires: October 31, 2021
SUNDRY NOTICES AND REPORTS ON WELLS <i>Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.</i>		5. Lease Serial No. N0G14031948
		6. If Indian, Allottee or Tribe Name EASTERN NAVAJO

SUBMIT IN TRIPLICATE - Other instructions on page 2		7. If Unit of CA/Agreement, Name and/or No. NMNM135216A
1. Type of Well ☒ Oil Well ☐ Gas Well ☐ Other		8. Well Name and No. W LYBROOK UNIT/755H
2. Name of Operator ENDURING RESOURCES LLC		9. API Well No. 3004535816
3a. Address 200 ENERGY COURT, FARMINGTON, NM 8740	3b. Phone No. (include area code) (505) 497-8574	10. Field and Pool or Exploratory Area BASIN MANCOS/LYBROOK MANCOS W
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description) SEC 14/T23N/R9W/NMP		11. Country or Parish, State SAN JUAN/NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA				
TYPE OF SUBMISSION	TYPE OF ACTION			
☐ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☒ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☒ Other
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be perfonned or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

Enduring Resources performed a workover due to plugged tubing and a cleanout. An updated well schematic is attached.

EOT: 5427 MD

Packer Top: None

GLVs: None

Orifice Valve: None

Job Start: 12/5/2024

Job End: 12/10/2024

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed) CHALON LEFEBRE / Ph: (505) 486-2300	Title Regulatory Analyst
Signature (Electronic Submission)	Date 01/23/2025

THE SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by MATTHEW H KADE / Ph: (505) 564-7736 / Accepted	Title Petroleum Engineer	Date 01/23/2025
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office FARMINGTON	

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: NESE / 1867 FSL / 674 FEL / TWSP: 23N / RANGE: 9W / SECTION: 14 / LAT: 36.224787 / LONG: -107.751536 (TVD: 0 feet, MD: 0 feet)

PPP: SWSE / 574 FSL / 1634 FEL / TWSP: 23N / RANGE: 9W / SECTION: 14 / LAT: 36.221234 / LONG: -107.754774 (TVD: 3960 feet, MD: 4299 feet)

PPP: NENE / 574 FNL / 1634 FEL / TWSP: 23N / RANGE: 9W / SECTION: 23 / LAT: 36.221234 / LONG: -107.754774 (TVD: 3960 feet, MD: 4299 feet)

PPP: NWSE / 574 FSL / 1634 FEL / TWSP: 23N / RANGE: 9W / SECTION: 24 / LAT: 36.221234 / LONG: -107.754774 (TVD: 3960 feet, MD: 4299 feet)

BHL: NENE / 697 FNL / 330 FEL / TWSP: 23N / RANGE: 9W / SECTION: 25 / LAT: 36.203148 / LONG: -107.732647 (TVD: 4679 feet, MD: 14812 feet)

CONFIDENTIAL




Wellbore Schematic - Components and Cement

Well Name: W LYBROOK UNIT 755H

API/UWI 30-045-35816		County SAN JUAN		State/Province NEW MEXICO		Surface Legal Location	
Spud Date 8/26/2017		On Production Date		Abandon Date		Ground Elevation (ft) 6,719.01	
						Original KB Elevation (ft) 6,740.01	
						Total Depth (All) (ftKB) Original Hole - 14,903.0	
						PBTD (All) (ftKB) Original Hole - 14,848.3	

Horizontal, Original Hole, 1/10/2025 9:48:46 AM

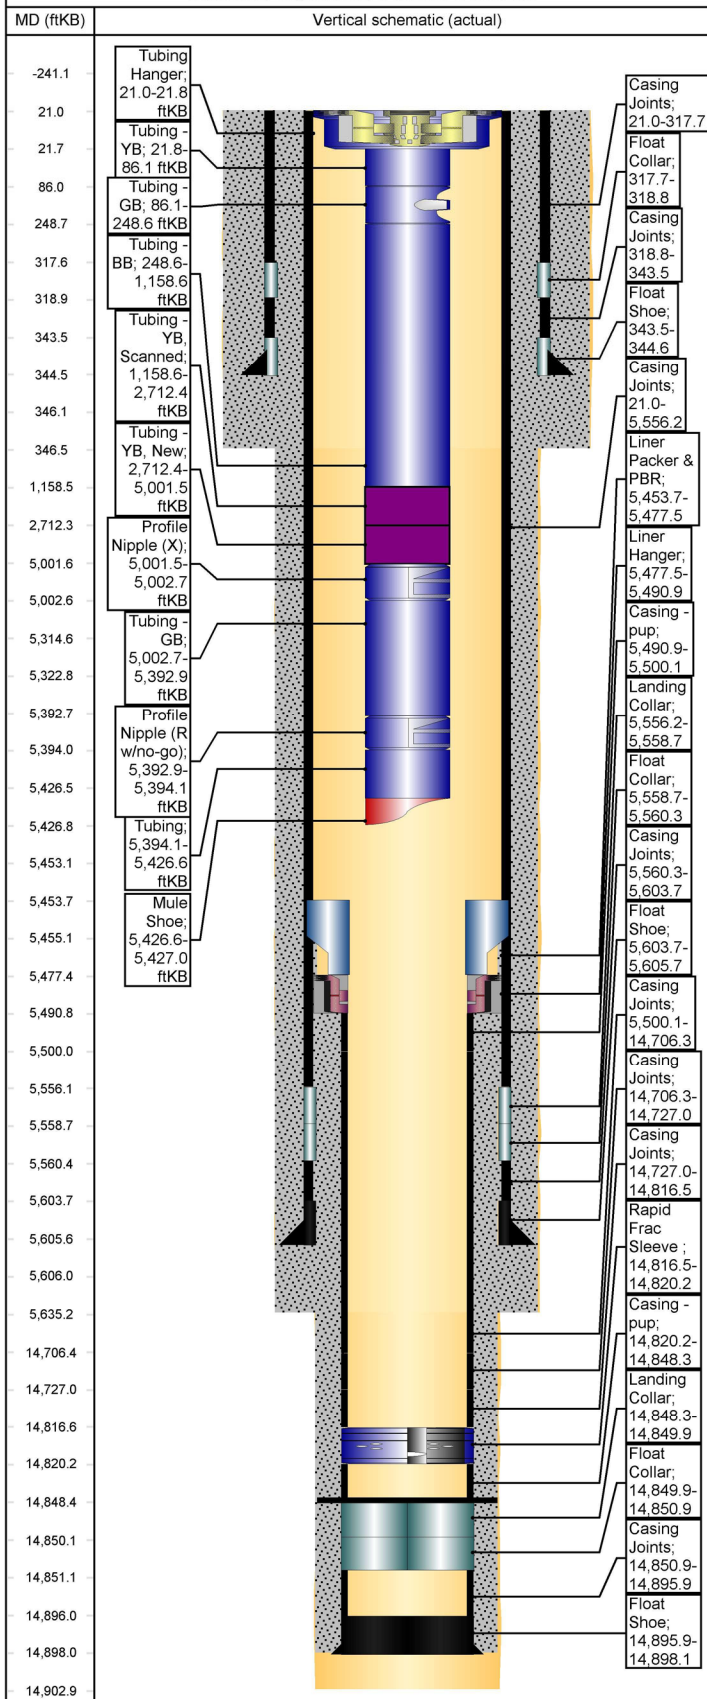

Other Strings

String Description	String Length (ft)	Set Depth (ftKB)	Run Date
--------------------	--------------------	------------------	----------

Other In Hole

Des	String	Top (ftKB)	Btm (ftKB)	Run Date
-----	--------	------------	------------	----------

Rod Strings

<des> on <dtmrun>

Rod Description	String Length (ft)	Set Depth (ftKB)	Run Date
-----------------	--------------------	------------------	----------

Jts	Item Des	OD (in)	Len (ft)	Top (ftKB)	Btm (ftKB)
-----	----------	---------	----------	------------	------------

Tubing Strings

Tubing - Production set at 5,427.0ftKB on 12/10/2024 14:00

Tubing Description	Len (ft)	Set Depth (f...	Run Date	Cut/Pull Date	Depth C...
Tubing - Production	5,405.99	5,427.0	12/10/2024		

Jts	Item Des	OD (in)	Len (ft)	Top (ftKB)	Btm (ftKB)	Grade	Wt (lb/ft)
1	Tubing Hanger	6.36	0.80	21.0	21.8		
2	Tubing - YB	2 7/8	64.32	21.8	86.1	L-80	6.50
5	Tubing - GB	2 7/8	162.49	86.1	248.6	L-80	6.50
28	Tubing - BB	2 7/8	909.99	248.6	1,158.6	L-80	6.50
48	Tubing - YB, Scanned	2 7/8	1,553.82	1,158.6	2,712.4	L-80	6.50
72	Tubing - YB, New	2 7/8	2,289.06	2,712.4	5,001.5	L-80	6.50
1	Profile Nipple (X)	2 7/8	1.20	5,001.5	5,002.7		
12	Tubing - GB	2 7/8	390.20	5,002.7	5,392.9	L-80	6.50
1	Profile Nipple (R w/no-go)	2 7/8	1.20	5,392.9	5,394.1		
1	Tubing	2 7/8	32.51	5,394.1	5,426.6	L-80	6.50
1	Mule Shoe	2 7/8	0.40	5,426.6	5,427.0		

Casing Strings

Tie-Back, 5,453.0ftKB

Casing Description	OD (in)	Wt/Len (lb/ft)	String Grade	Top (ftKB)	Set Depth...	Depth C...	ID (in)
Tie-Back	4 1/2	11.60	P-110	-241.2	5,453.0		4.00

Casing Components

Item Des	Jts	OD (in)	ID (in)	Wt (lb/ft)	Grade	Len (ft)
Casing Joints	128	4 1/2	4.00	11.60	P-110	5,556.00
4-1/2" Gas Lift Mandrel	2	4 1/2	4.00	11.60	P-110	7.90
Casing Joints	3	4 1/2	4.00	11.60	P-110	130.32
Seal Assembly	1	4 1/2	4.00	11.60	P-110	0.00

PRODUCTION LINER #1, 14,898.1ftKB


Casing Description	OD (in)	Wt/Len (lb/ft)	String Grade	Top (ftKB)	Set Depth...	Depth C...	ID (in)
PRODUCTION LINER #1	4 1/2	11.60	P-110	5,453.0	14,898.1		4.00

Casing Components

Item Des	Jts	OD (in)	ID (in)	Wt (lb/ft)	Grade	Len (ft)
Liner Packer & PBR	1	6.36	4.00			23.77
Liner Hanger	1	6.36	4.00			13.38
Casing - pup	1	4 1/2	4.00	11.60	P-110	9.24
Casing Joints	207	4 1/2	4.00	11.60	P-110	9,206.20
Casing Joints	1	4 1/2	4.00	11.60	P-110	20.70
Casing Joints	2	4 1/2	4.00	11.60	P-110	89.47
Rapid Frac Sleeve	1	4 1/2	4.00			3.73
Casing - pup	1	4 1/2	4.00	11.60	P-110	28.07
Landing Collar	1	4 1/2	0.00			1.62
Float Collar	1	4 1/2	0.00			0.98
Casing Joints	1	4 1/2	4.00	11.60	P-110	44.99
Float Shoe	1	4 1/2	0.00			2.24

WellView®**Wellbore Schematic - Components and Cement****Well Name: W LYBROOK UNIT 755H**

Horizontal, Original Hole, 1/10/2025 9:48:48 AM

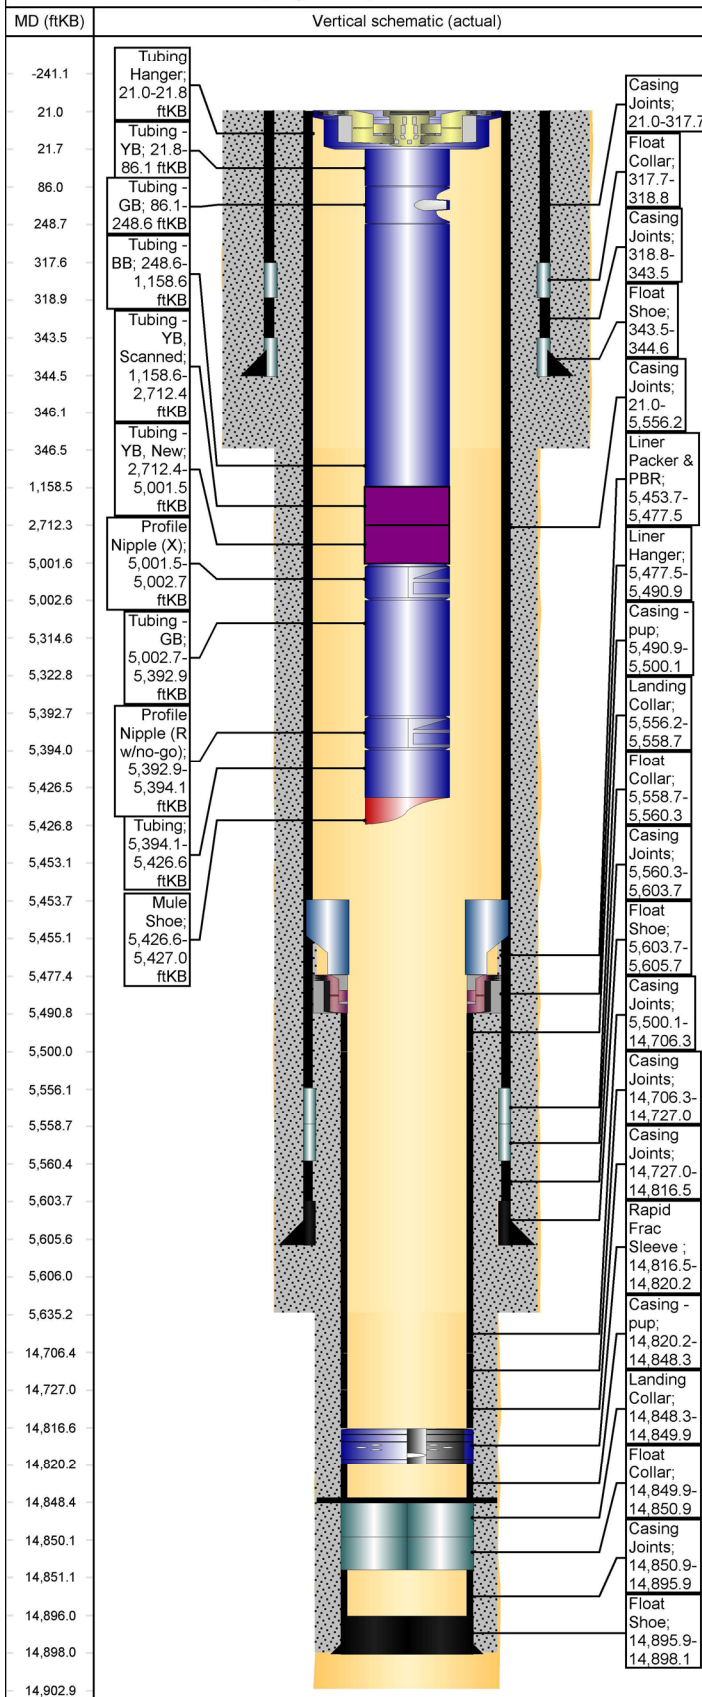**Casing Strings****INTERMEDIATE CASING, 5,605.7ftKB**

Casing Description	OD (in)	Wt/Len (lb/ft)	String Grade	Top (ftKB)	Set Depth...	Depth C...	ID (in)
INTERMEDIATE CASING	7	23.00	J-55	21.0	5,605.7		6.37

Casing Components

Item Des	Jts	OD (in)	ID (in)	Wt (lb/ft)	Grade	Len (ft)
Casing Joints	128	7	6.37	23.00	J-55	5,535.15
Landing Collar	1	7	6.13			2.50
Float Collar	1	7	6.13			1.60
Casing Joints	1	7	6.37	23.00	J-55	43.46
Float Shoe	1	7	6.13			2.00

SURFACE CASING, 344.6ftKB

Casing Description	OD (in)	Wt/Len (lb/ft)	String Grade	Top (ftKB)	Set Depth...	Depth C...	ID (in)
SURFACE CASING	9 5/8	36.00	J-55	21.0	344.6		8.92

Casing Components

Item Des	Jts	OD (in)	ID (in)	Wt (lb/ft)	Grade	Len (ft)
Casing Joints	14	9 5/8	8.92	36.00	J-55	296.67
Float Collar	1	9 5/8	8.75	36.00		1.17
Casing Joints	1	9 5/8	8.92	36.00	J-55	24.65
Float Shoe	1	9 5/8	8.75	36.00		1.10

Cement**SURFACE CASING, Casing, 4/17/2017 13:30**

Description	String	Cementing Start Date	Cementing End Date
SURFACE CASING	SURFACE CASING, 344.6ftKB	4/17/2017 13:30	4/17/2017 14:00

Cement Stages

Stg #	Top (ftKB)	Btm (ftKB)	Com
1	21.0	346.0	

INTERMEDIATE CASING, Casing, 8/28/2017 07:04

Description	String	Cementing Start Date	Cementing End Date
INTERMEDIATE CASING	INTERMEDIATE CASING, 5,605.7ftKB	8/28/2017 07:04	8/28/2017 08:49

Cement Stages

Stg #	Top (ftKB)	Btm (ftKB)	Com
1	21.0	5,606.0	

PRODUCTION LINER #1, Casing, 9/21/2017 19:14

Description	String	Cementing Start Date	Cementing End Date
PRODUCTION LINER #1	PRODUCTION LINER #1, 14,898.1ftKB	9/21/2017 19:14	9/21/2017 21:48

Cement Stages

Stg #	Top (ftKB)	Btm (ftKB)	Com
1	5,455.0	14,898.0	

Wellbores**Original Hole**

Wellbore Name	Parent Wellbore
Original Hole	

Wellbore Sections

Section Des	Size (in)	Act Top (ftKB)	Act Btm (ftKB)
SURFACE	12 1/4	21.0	346.6
INTERMEDIATE	8 3/4	346.6	5,635.0
PRODUCTION	6 1/8	5,635.0	14,903.0




Wellbore Schematic - Components and Cement

Well Name: W LYBROOK UNIT 755H

API/UWI 30-045-35816		County SAN JUAN		State/Province NEW MEXICO		Surface Legal Location	
Spud Date 8/26/2017		On Production Date		Abandon Date		Ground Elevation (ft) 6,719.01	
						Original KB Elevation (ft) 6,740.01	
						Total Depth (All) (ftKB) Original Hole - 14,903.0	
						PBTD (All) (ftKB) Original Hole - 14,848.3	

Horizontal, Original Hole, 1/10/2025 9:48:46 AM

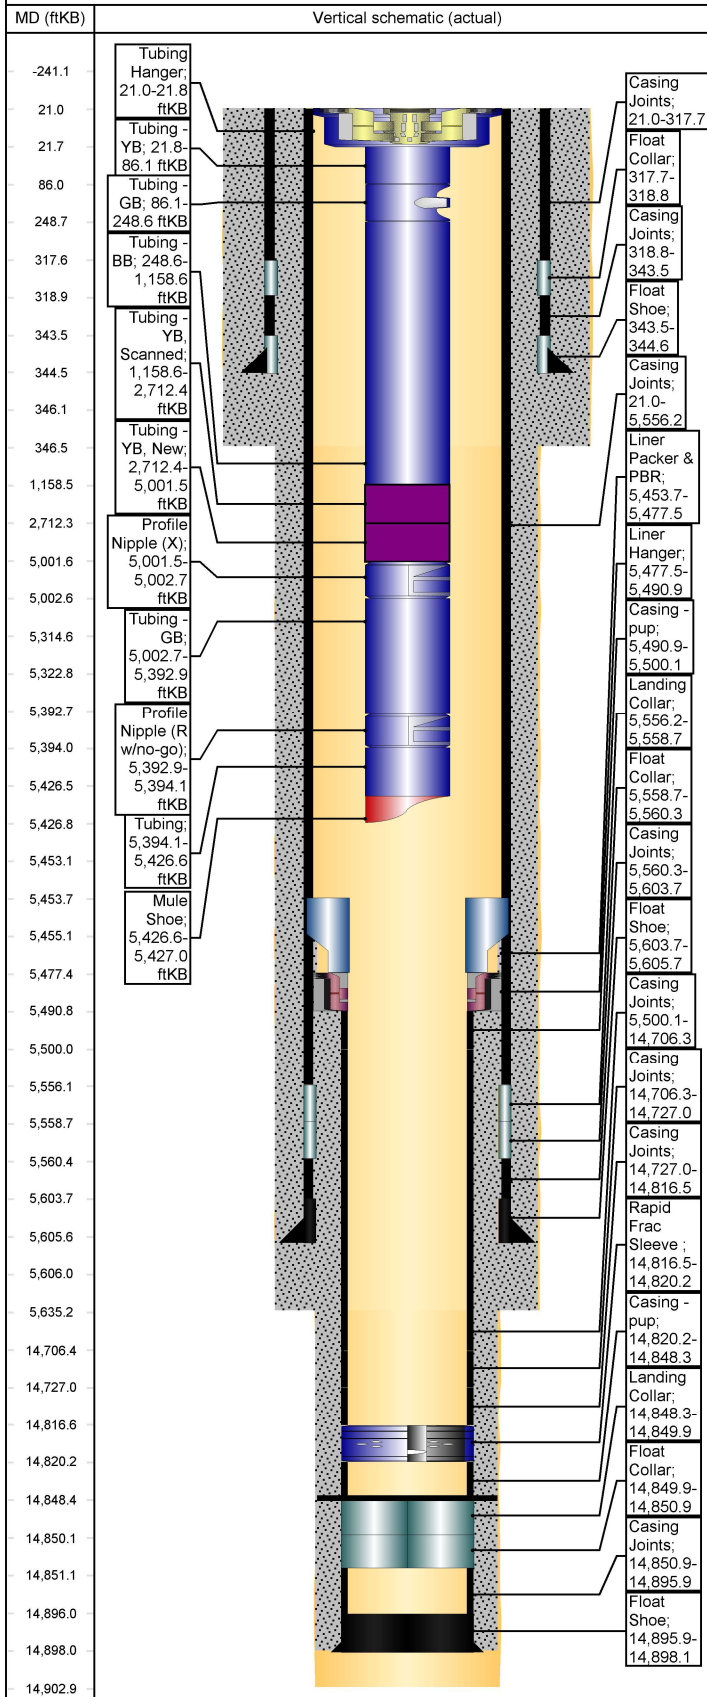

Other Strings

String Description	String Length (ft)	Set Depth (ftKB)	Run Date
--------------------	--------------------	------------------	----------

Other In Hole

Des	String	Top (ftKB)	Btm (ftKB)	Run Date
-----	--------	------------	------------	----------

Rod Strings

<des> on <dtmrun>

Rod Description	String Length (ft)	Set Depth (ftKB)	Run Date
-----------------	--------------------	------------------	----------

Jts	Item Des	OD (in)	Len (ft)	Top (ftKB)	Btm (ftKB)
-----	----------	---------	----------	------------	------------

Tubing Strings

Tubing - Production set at 5,427.0ftKB on 12/10/2024 14:00

Tubing Description	Len (ft)	Set Depth (f...	Run Date	Cut/Pull Date	Depth C...
Tubing - Production	5,405.99	5,427.0	12/10/2024		

Jts	Item Des	OD (in)	Len (ft)	Top (ftKB)	Btm (ftKB)	Grade	Wt (lb/ft)
1	Tubing Hanger	6.36	0.80	21.0	21.8		
2	Tubing - YB	2 7/8	64.32	21.8	86.1	L-80	6.50
5	Tubing - GB	2 7/8	162.49	86.1	248.6	L-80	6.50
28	Tubing - BB	2 7/8	909.99	248.6	1,158.6	L-80	6.50
48	Tubing - YB, Scanned	2 7/8	1,553.82	1,158.6	2,712.4	L-80	6.50
72	Tubing - YB, New	2 7/8	2,289.06	2,712.4	5,001.5	L-80	6.50
1	Profile Nipple (X)	2 7/8	1.20	5,001.5	5,002.7		
12	Tubing - GB	2 7/8	390.20	5,002.7	5,392.9	L-80	6.50
1	Profile Nipple (R w/no-go)	2 7/8	1.20	5,392.9	5,394.1		
1	Tubing	2 7/8	32.51	5,394.1	5,426.6	L-80	6.50
1	Mule Shoe	2 7/8	0.40	5,426.6	5,427.0		

Casing Strings

Tie-Back, 5,453.0ftKB

Casing Description	OD (in)	Wt/Len (lb/ft)	String Grade	Top (ftKB)	Set Depth...	Depth C...	ID (in)
Tie-Back	4 1/2	11.60	P-110	-241.2	5,453.0		4.00

Casing Components

Item Des	Jts	OD (in)	ID (in)	Wt (lb/ft)	Grade	Len (ft)
Casing Joints	128	4 1/2	4.00	11.60	P-110	5,556.00
4-1/2" Gas Lift Mandrel	2	4 1/2	4.00	11.60	P-110	7.90
Casing Joints	3	4 1/2	4.00	11.60	P-110	130.32
Seal Assembly	1	4 1/2	4.00	11.60	P-110	0.00

PRODUCTION LINER #1, 14,898.1ftKB


Casing Description	OD (in)	Wt/Len (lb/ft)	String Grade	Top (ftKB)	Set Depth...	Depth C...	ID (in)
PRODUCTION LINER #1	4 1/2	11.60	P-110	5,453.7	14,898.1		4.00

Casing Components

Item Des	Jts	OD (in)	ID (in)	Wt (lb/ft)	Grade	Len (ft)
Liner Packer & PBR	1	6.36	4.00			23.77
Liner Hanger	1	6.36	4.00			13.38
Casing - pup	1	4 1/2	4.00	11.60	P-110	9.24
Casing Joints	207	4 1/2	4.00	11.60	P-110	9,206.20
Casing Joints	1	4 1/2	4.00	11.60	P-110	20.70
Casing Joints	2	4 1/2	4.00	11.60	P-110	89.47
Rapid Frac Sleeve	1	4 1/2	4.00			3.73
Casing - pup	1	4 1/2	4.00	11.60	P-110	28.07
Landing Collar	1	4 1/2	0.00			1.62
Float Collar	1	4 1/2	0.00			0.98
Casing Joints	1	4 1/2	4.00	11.60	P-110	44.99
Float Shoe	1	4 1/2	0.00			2.24

WellView®**Wellbore Schematic - Components and Cement****Well Name: W LYBROOK UNIT 755H**

Horizontal, Original Hole, 1/10/2025 9:48:48 AM

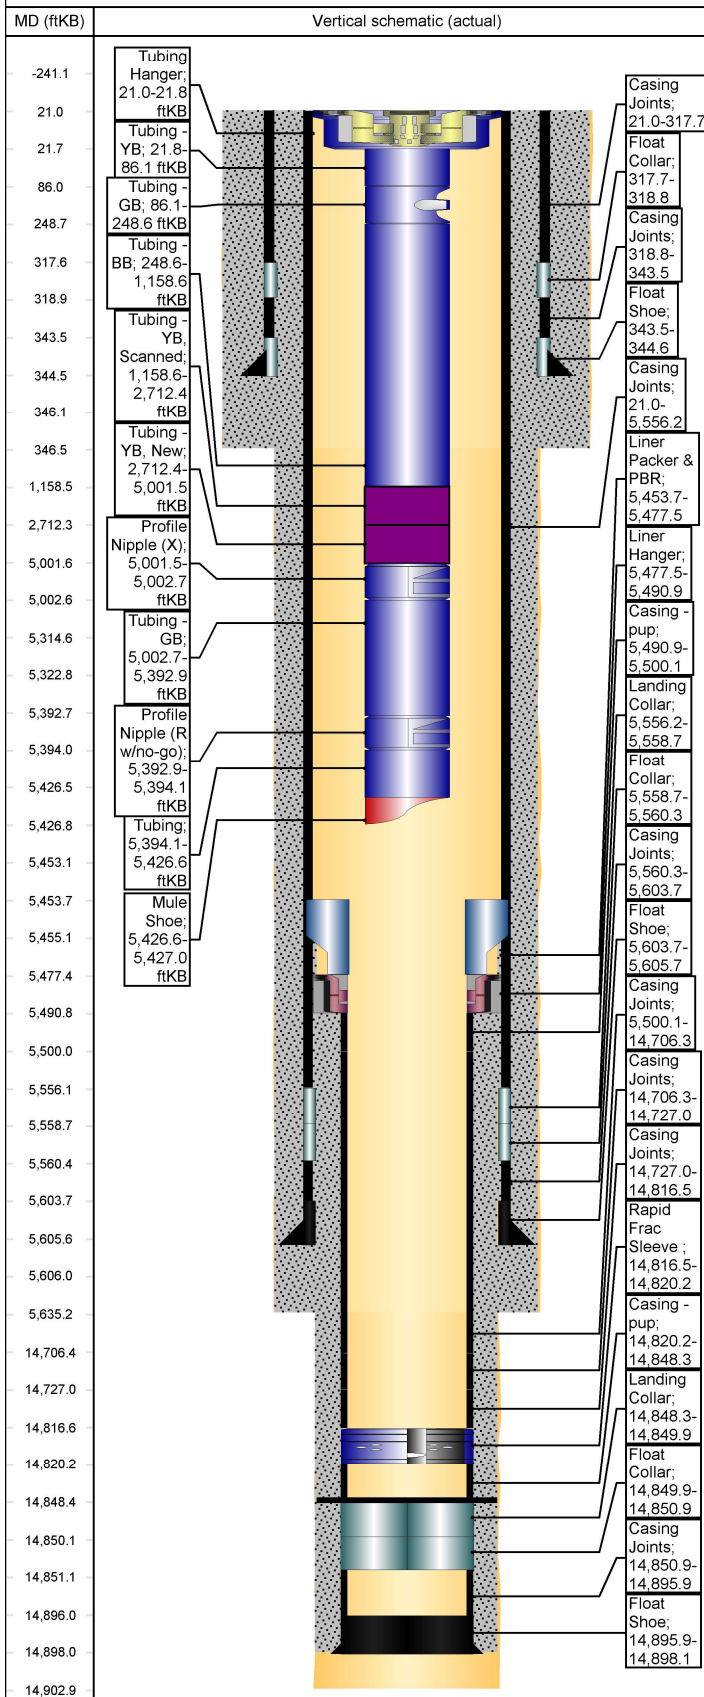**Casing Strings****INTERMEDIATE CASING, 5,605.7ftKB**

Casing Description	OD (in)	Wt/Len (lb/ft)	String Grade	Top (ftKB)	Set Depth...	Depth C...	ID (in)
INTERMEDIATE CASING	7	23.00	J-55	21.0	5,605.7		6.37

Casing Components

Item Des	Jts	OD (in)	ID (in)	Wt (lb/ft)	Grade	Len (ft)
Casing Joints	128	7	6.37	23.00	J-55	5,535.15
Landing Collar	1	7	6.13			2.50
Float Collar	1	7	6.13			1.60
Casing Joints	1	7	6.37	23.00	J-55	43.46
Float Shoe	1	7	6.13			2.00

SURFACE CASING, 344.6ftKB

Casing Description	OD (in)	Wt/Len (lb/ft)	String Grade	Top (ftKB)	Set Depth...	Depth C...	ID (in)
SURFACE CASING	9 5/8	36.00	J-55	21.0	344.6		8.92

Casing Components

Item Des	Jts	OD (in)	ID (in)	Wt (lb/ft)	Grade	Len (ft)
Casing Joints	14	9 5/8	8.92	36.00	J-55	296.67
Float Collar	1	9 5/8	8.75	36.00		1.17
Casing Joints	1	9 5/8	8.92	36.00	J-55	24.65
Float Shoe	1	9 5/8	8.75	36.00		1.10

Cement**SURFACE CASING, Casing, 4/17/2017 13:30**

Description	String	Cementing Start Date	Cementing End Date
SURFACE CASING	SURFACE CASING, 344.6ftKB	4/17/2017 13:30	4/17/2017 14:00

Cement Stages

Stg #	Top (ftKB)	Btm (ftKB)	Com
1	21.0	346.0	

INTERMEDIATE CASING, Casing, 8/28/2017 07:04

Description	String	Cementing Start Date	Cementing End Date
INTERMEDIATE CASING	INTERMEDIATE CASING, 5,605.7ftKB	8/28/2017 07:04	8/28/2017 08:49

Cement Stages

Stg #	Top (ftKB)	Btm (ftKB)	Com
1	21.0	5,606.0	

PRODUCTION LINER #1, Casing, 9/21/2017 19:14

Description	String	Cementing Start Date	Cementing End Date
PRODUCTION LINER #1	PRODUCTION LINER #1, 14,898.1ftKB	9/21/2017 19:14	9/21/2017 21:48

Cement Stages

Stg #	Top (ftKB)	Btm (ftKB)	Com
1	5,455.0	14,898.0	

Wellbores**Original Hole**

Wellbore Name	Parent Wellbore
Original Hole	

Wellbore Sections

Section Des	Size (in)	Act Top (ftKB)	Act Btm (ftKB)
SURFACE	12 1/4	21.0	346.6
INTERMEDIATE	8 3/4	346.6	5,635.0
PRODUCTION	6 1/8	5,635.0	14,903.0

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 507581

CONDITIONS

Operator: ENDURING RESOURCES, LLC 6300 S Syracuse Way Centennial, CO 80111	OGRID: 372286
	Action Number: 507581
	Action Type: [C-103] Sub. Workover (C-103R)

CONDITIONS

Created By	Condition	Condition Date
andrew.fordyce	Accepted for record.	11/18/2025