

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
EXPIRES: NOVEMBER 30, 2000

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1. Type of Well ☒ Oil Well ☐ Gas Well ☐ Dry ☐ Other 2. Type of Completion ☒ New Well ☐ Work Over ☐ Deepen ☐ Plug Back ☐ Diff. Resvr., ☐ Other			5. Lease Serial No. NMNM53218		
3. Name of Operator DEVON ENERGY PRODUCTION COMPANY, LP			6. If Indian, Allottee or Tribe Name		
4. Address 20 North Broadway, Ste 1500 Oklahoma City, OK 73102-8260			7. Unit or CA Agreement Name and No.		
3a. Phone No. (include area code) 405-228-8209			8. Lease Name and Well No. Righthand Canyon 35 Federal 4		
9. API Well No. 30-015-33290			10. Field and Pool, or Exploratory Indian Basin Upper Penn		
11. Sec. T., R., M., on Block and Survey or Area 35 21S 24E			12. County or Parish 13. State Eddy NM		
14. Date Spudded 3/29/2004			15. Date T.D. Reached 4/16/2004		
16. Date Completed 4/16/2004 ☐ D & A ☒ Ready to Prod.			17. Elevations (DR, RKB, RT, GL)* 3912 GL		
8. Total Depth: MD 8,812 TVD 8715			19. Plug Back T.D.: MD 8429 TVI		
20. Depth Bridge Plug Set: MD TVI			21. Type Electric & Other Mechanical Logs Run (Submit copy of each)		
22. Was well cored? ☒ No ☐ Yes (Submit analysis) Was DST run? ☒ No ☐ Yes (Submit report) Directional Survey? ☐ No ☒ Yes (Submit copy)					

EX-HRLA-HNGS

3. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
14 3/4	9 5/8", J55	36	0	1590		1150 sx CI C&H, circ 181		0	
8 3/4	7", J55	23	0	8518		1600 sx CI C, circ 98 sx		0	
			0						

4. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2 7/8"	8026							

5. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
Cisco	7837	8050	7837-7844		15	Producing
			7978-8050		145	Producing

7. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
7837-8050	Acidize w/16,000 gals of HCl

RECEIVED

JUL 20 2004

GOBPARTERIA

8. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
5/15/2004	6/13/2004	24	→	290	688	3487			Pumping
Choke Size	Tbg. Press. Flwg SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	
500		220	→	290	688	3487	2,372		Producing Oil Well

8a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	
			→						

See instructions and spaces for additional data on reverse side)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg SI	Csg. Press	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg SI	Csg. Press	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

See instructions and spaces for additional data on reverse side)

Disposition of Gas (Sold, used for fuel, vented, etc.)

Sold

Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof; Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top Meas. Depth
				Glorieta	2472
				Yeso	2690
				Bone Spring Lime	3750
				Third Bone Spring Sand	7014
				Wolfcamp	7358
				Upper Cisco	7730
				Cisco Reef	7980

Additional remarks (include plugging procedure):

15/04/04 Test casing to 1500 psi -- OK

15/08/04 Perf Cisco Canyon 7837-7844 (7') @ 2 SPF total of 15 perfs; 7978-8050 (72') 2 SPF total of 145 perfs Pump 16000 gals of 20% HCl

15/14/04 TIH w/sub pump and run 151 jts 2 7/8" tbg @ 8026'. Turn well to test.

Circle enclosed attachments:

1. Electrical/Mechanical Logs (1 full set req'd)
2. Geologic Report
3. DST Report
4. Directional Survey
5. Sundry Notice for plugging and cement verification
6. Core Analysis
7. Other

hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (Please print)

Linda Guthrie

Title

Regulatory Specialist

Signature

Linda Guthrie

Date

7/14/2004

8 U.S.C Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Quantum Survey Report

Company: DevonEnergy	Date: 4/16/2004	Time: 08:48:01	Page: 1
Field: Indian Basin	Co-ordinate(NE) Reference:	Site: Right Hand Canyon 35 #4, True Nort	
Site: Right Hand Canyon 35 #4	Vertical (TVD) Reference:	SITE 0.0	
Well: Well #4	Section (VS) Reference:	User (0.00N,0.00E,277.96Azi)	
Wellpath: 1	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Field: Indian Basin
Eddy County, New Mexico
USA

Map System: US State Plane Coordinate System 1927
Geo Datum: NAD27 (Clarke 1866)
Sys Datum: Mean Sea Level

Map Zone: New Mexico, Eastern Zone
Coordinate System: Site Centre
Geomagnetic Model: igrf2000

Site: Right Hand Canyon 35 #4

Site Position:	Northing:	ft	Latitude:
From: Lease Line	Easting:	ft	Longitude:
Position Uncertainty: 0.00 ft			North Reference: True
Ground Level: 0.00 ft			Grid Convergence: -0.07 deg

Well: Well #4	Slot Name:		
Well Position: +N/-S 0.00 ft	Northing: 522752.78 ft	Latitude: 32 26 13.500 N	
+E/-W 0.00 ft	Easting: 456987.82 ft	Longitude: 104 28 21.900 W	
Position Uncertainty: 0.00 ft			

Wellpath: 1	Drilled From: Surface		
Current Datum: SITE	Tie-on Depth: 0.00 ft		
Magnetic Data: 3/17/2004	Above System Datum: Mean Sea Level		
Field Strength: 49526 nT	Declination: 9.04 deg		
Vertical Section: Depth From (TVD)	Mag Dip Angle: 60.46 deg		
ft	+N/-S ft	+E/-W ft	Direction deg
8595.00	0.00	0.00	277.96

Survey: Survey #1	Start Date: 4/12/2004	
Company: Quantum	Engineer: Jeff Shoop	
Tool: MWD,	Tied-to: User Defined	

Survey: Survey #1

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/30m	Build deg/30m	Turn deg/30m	Tool/Comment
5365.00	1.85	277.46	5363.69	74.20	-68.38	78.00	0.000	0.000	0.000	MWD
5410.00	1.70	265.90	5408.67	74.25	-69.77	79.38	0.847	-0.328	-25.284	MWD
5472.00	1.70	271.80	5470.64	74.21	-71.60	81.19	0.278	0.000	9.366	MWD
5535.00	2.20	258.60	5533.60	74.00	-73.72	83.26	1.045	0.781	-20.622	MWD
5597.00	1.80	255.80	5595.57	73.53	-75.83	85.29	0.653	-0.635	-4.445	MWD
5660.00	1.70	258.90	5658.54	73.10	-77.71	87.09	0.215	-0.156	4.843	MWD
5689.00	1.80	254.80	5687.52	72.90	-78.57	87.91	0.544	0.339	-13.915	MWD
5721.00	2.30	254.80	5719.50	72.60	-79.67	88.96	1.538	1.538	0.000	MWD
5784.00	4.00	261.50	5782.41	71.94	-83.07	92.23	2.713	2.656	10.467	MWD
5878.00	5.30	269.80	5876.10	71.44	-90.65	99.67	1.529	1.361	8.691	MWD
5909.00	5.70	265.20	5906.95	71.31	-93.62	102.59	1.889	1.270	-14.605	MWD
6002.00	7.20	278.20	5999.37	71.76	-103.99	112.93	2.206	1.588	13.758	MWD
6033.00	6.90	281.90	6030.13	72.42	-107.74	116.73	1.728	-0.953	11.748	MWD
6096.00	7.70	278.00	6092.62	73.78	-115.62	124.72	1.470	1.250	-6.093	MWD
6189.00	8.70	276.00	6184.67	75.39	-128.78	137.98	1.100	1.058	-2.117	MWD
6221.00	8.80	276.30	6216.30	75.91	-133.62	142.85	0.338	0.308	0.923	MWD
6315.00	10.00	272.80	6309.03	77.10	-148.92	158.17	1.391	1.256	-3.665	MWD
6409.00	10.90	276.10	6401.48	78.44	-165.91	175.18	1.131	0.942	3.455	MWD
6472.00	11.20	273.30	6463.31	79.42	-177.94	187.23	0.960	0.469	-4.374	MWD
6535.00	13.10	274.30	6524.89	80.31	-191.17	200.45	2.986	2.968	1.562	MWD
6630.00	13.90	274.10	6617.27	81.94	-213.29	222.58	0.830	0.829	-0.207	MWD
6661.00	14.30	271.70	6647.33	82.32	-220.83	230.10	2.249	1.270	-7.620	MWD
6722.00	15.00	271.30	6706.35	82.72	-236.25	245.43	1.141	1.129	-0.645	MWD
6754.00	15.20	271.10	6737.25	82.89	-244.59	253.71	0.636	0.615	-0.615	MWD

Quantum Survey Report

Company: DevonEnergy	Date: 4/16/2004	Time: 08:48:01	Page: 2
Field: Indian Basin	Co-ordinate(NE) Reference:	Site: Right Hand Canyon 35 #4, True Nort	
Site: Right Hand Canyon 35 #4	Vertical (TVD) Reference:	SITE 0.0	
Well: Well #4	Section (VS) Reference:	User (0.00N,0.00E,277.96Azi)	
Wellpath: 1	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey: Survey #1

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	VS ft	DLS deg/30m	Build deg/30m	Turn deg/30m	Tool/Comment
6848.00	14.10	271.10	6828.19	83.35	-268.36	277.31	1.152	-1.152	0.000	MWD
6912.00	16.90	273.20	6889.86	84.02	-285.44	294.33	4.391	4.306	3.230	MWD
6943.00	17.00	271.20	6919.51	84.36	-294.47	303.32	1.878	0.318	-6.350	MWD
7006.00	15.60	271.40	6979.97	84.76	-312.15	320.88	2.189	-2.187	0.312	MWD
7068.00	15.40	273.00	7039.72	85.40	-328.70	337.36	0.749	-0.318	2.540	MWD
7132.00	17.00	274.60	7101.18	86.59	-346.52	355.17	2.554	2.461	2.461	MWD
7195.00	16.80	274.60	7161.46	88.06	-364.77	373.45	0.312	-0.312	0.000	MWD
7257.00	16.00	275.20	7220.93	89.56	-382.21	390.93	1.298	-1.270	0.953	MWD
7320.00	15.60	274.50	7281.55	91.01	-399.30	408.06	0.692	-0.625	-1.094	MWD
7383.00	14.70	274.80	7342.36	92.34	-415.72	424.50	1.411	-1.406	0.469	MWD
7415.00	15.10	273.90	7373.29	92.96	-423.92	432.71	1.421	1.230	-2.768	MWD
7446.00	16.10	275.40	7403.14	93.64	-432.23	441.03	3.423	3.175	4.763	MWD
7478.00	15.60	275.40	7433.93	94.47	-440.93	449.76	1.538	-1.538	0.000	MWD
7509.00	14.50	276.80	7463.86	95.32	-448.93	457.81	3.678	-3.493	4.445	MWD
7541.00	13.70	276.60	7494.90	96.23	-456.67	465.60	2.465	-2.461	-0.615	MWD
7573.00	13.90	279.00	7525.98	97.26	-464.24	473.23	1.865	0.615	7.382	MWD
7604.00	13.90	279.00	7556.07	98.43	-471.59	480.68	0.000	0.000	0.000	MWD
7635.00	14.00	276.60	7586.15	99.44	-478.99	488.15	1.864	0.318	-7.620	MWD
7699.00	13.80	275.00	7648.28	101.00	-494.29	503.51	0.666	-0.308	-2.461	MWD
7762.00	14.90	274.20	7709.31	102.25	-509.85	519.10	1.746	1.719	-1.250	MWD
7794.00	14.60	273.60	7740.26	102.80	-517.98	527.23	1.035	-0.923	-1.845	MWD
7825.00	14.50	273.10	7770.27	103.26	-525.75	534.99	0.510	-0.318	-1.588	MWD
7857.00	13.60	272.30	7801.31	103.62	-533.51	542.72	2.832	-2.768	-2.461	MWD
7888.00	12.90	271.50	7831.48	103.86	-540.61	549.79	2.297	-2.223	-2.540	MWD
7919.00	12.20	270.30	7861.74	103.97	-547.35	556.47	2.372	-2.223	-3.810	MWD
7984.00	12.50	267.60	7925.24	103.71	-561.25	570.20	0.985	0.454	-4.088	MWD
8015.00	13.40	268.70	7955.45	103.49	-568.19	577.05	2.963	2.858	3.493	MWD
8076.00	13.60	265.50	8014.76	102.76	-582.41	591.03	1.248	0.323	-5.163	MWD
8168.00	14.70	264.50	8103.97	100.80	-604.81	612.94	1.205	1.177	-1.070	MWD
8199.00	14.90	263.60	8133.94	99.98	-612.68	620.63	0.967	0.635	-2.858	MWD
8262.00	14.80	262.90	8194.84	98.08	-628.72	636.24	0.321	-0.156	-1.094	MWD
8357.00	14.70	262.50	8286.71	95.00	-652.71	659.58	0.148	-0.104	-0.414	MWD
8523.00	15.00	257.90	8447.17	87.75	-694.60	700.06	0.721	0.178	-2.727	MWD


OPERATOR: DEVON ENERGY PROD CO
WELL/LEASE: RIGHT HAND CANYON 35 FED COM #4
COUNTY: EDDY, NM

005-0032

STATE OF NEW MEXICO
DEVIATION REPORT


507	3/4
988	1 1/2
1,658	3/4
2,130	1
2,633	1/2

RECEIVED
JUL 20 2004
OCC-ARTESIA


By: 


STATE OF TEXAS
COUNTY OF MIDLAND

The foregoing instrument was acknowledged before me on this 22nd day of April, 2004, by Steve Moore on behalf of Patterson-UTI Drilling Company LP, LLLP.


Notary Public for Midland County, Texas

My Commission Expires: 8/23/2007



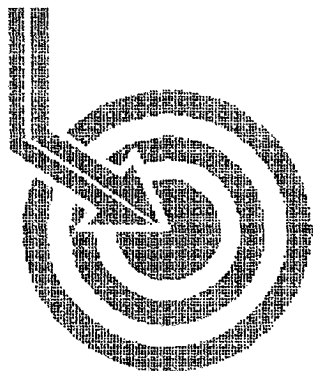

Scientific Drilling

DEVON ENERGY

Field: Indian Basin
Site: Eddy County, NM
Well: Right Hand Canyon 35 Fed. #4
Wellpath: VH - Job #32K0404236
Survey: 04/10/04


RECEIVED
JUL 20 2004
OCD-ARTESIA

This survey is correct to the best of my knowledge
and is supported by actual field data.

Scott Nady.....Company Representative

Notorized this date 6th of May, 2004.

Deborah S. Bynum
Notary Signature
County of Midland
State of Texas





Scientific
Drilling

Scientific Drilling Survey Report

Company: DEVON ENERGY
Field: Indian Basin
Site: Eddy County, NM
Well: Right Hand Canyon 35 Fed. #4
Wellpath: VH - Job #32K0404236

Date: 5/6/2004 Time: 11:41:13 Page: 1
Co-ordinate(N/E) Reference: Site: Eddy County, NM, True North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,277.96Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey: 04/10/04
KSRG 0'-5365'
Company: Scientific Drilling
Tool: Keeper, Keeper Gyro

Start Date: 4/10/2004
Engineer: Gonzales/Stahl
Tied-to: From Surface

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.0	0.00
100.0	0.12	263.89	100.0	0.1	0.0	-0.1	0.12	0.1	263.89
200.0	0.13	266.05	200.0	0.3	0.0	-0.3	0.01	0.3	264.65
300.0	0.23	247.02	300.0	0.6	-0.1	-0.6	0.12	0.6	259.37
400.0	0.35	261.89	400.0	1.1	-0.2	-1.1	0.14	1.1	257.87
500.0	0.20	235.96	500.0	1.5	-0.4	-1.6	0.19	1.6	256.31
600.0	0.26	271.82	600.0	1.8	-0.5	-1.9	0.15	2.0	256.31
700.0	0.43	311.60	700.0	2.4	-0.2	-2.4	0.28	2.4	265.00
800.0	1.05	311.01	800.0	3.5	0.6	-3.4	0.62	3.5	280.61
900.0	1.16	316.70	900.0	5.0	2.0	-4.8	0.16	5.2	292.41
1000.0	1.41	315.97	999.9	6.8	3.6	-6.3	0.25	7.3	299.57
1100.0	1.46	323.67	1099.9	8.6	5.5	-7.9	0.20	9.7	304.72
1200.0	1.61	321.77	1199.9	10.5	7.6	-9.6	0.16	12.2	308.58
1300.0	0.85	323.10	1299.9	12.1	9.3	-10.9	0.76	14.3	310.61
1400.0	0.53	320.27	1399.8	12.9	10.3	-11.6	0.32	15.5	311.49
1500.0	0.62	302.79	1499.8	13.8	10.9	-12.4	0.20	16.5	311.45
1600.0	0.92	300.23	1599.8	15.0	11.6	-13.5	0.30	17.8	310.68
1700.0	0.90	309.77	1699.8	16.4	12.5	-14.8	0.15	19.4	310.22
1800.0	1.20	304.98	1799.8	18.0	13.6	-16.3	0.31	21.2	309.94
1900.0	1.26	311.18	1899.8	19.9	15.0	-18.0	0.15	23.4	309.78
2000.0	1.66	305.78	1999.7	22.1	16.5	-20.0	0.42	25.9	309.62
2100.0	1.45	316.03	2099.7	24.3	18.3	-22.0	0.35	28.6	309.70
2200.0	1.22	318.40	2199.7	26.2	20.0	-23.6	0.24	30.9	310.26
2300.0	1.35	319.93	2299.7	27.8	21.7	-25.1	0.13	33.2	310.86
2400.0	1.21	330.05	2399.6	29.4	23.5	-26.4	0.27	35.3	311.73
2500.0	1.05	332.11	2499.6	30.6	25.2	-27.3	0.17	37.2	312.73
2600.0	1.06	341.33	2599.6	31.5	26.9	-28.0	0.17	38.9	313.83
2700.0	1.12	337.15	2699.6	32.4	28.7	-28.7	0.10	40.6	314.98
2800.0	1.04	348.49	2799.6	33.2	30.5	-29.3	0.23	42.3	316.16
2900.0	1.08	348.83	2899.5	33.8	32.3	-29.6	0.04	43.8	317.46
3000.0	1.27	335.96	2999.5	34.7	34.2	-30.3	0.32	45.7	318.51
3100.0	1.33	339.02	3099.5	35.9	36.3	-31.1	0.09	47.9	319.40
3200.0	1.31	333.58	3199.5	37.1	38.4	-32.1	0.13	50.1	320.16
3300.0	1.46	337.35	3299.4	38.4	40.6	-33.1	0.18	52.4	320.87
3400.0	1.24	355.18	3399.4	39.3	42.9	-33.7	0.47	54.5	321.89
3500.0	1.18	349.28	3499.4	39.8	45.0	-33.9	0.14	56.3	322.97
3600.0	1.21	355.91	3599.4	40.4	47.1	-34.2	0.14	58.2	323.99
3700.0	1.09	355.13	3699.3	40.8	49.1	-34.4	0.12	59.9	324.99
3800.0	1.19	359.26	3799.3	41.2	51.0	-34.4	0.13	61.6	325.98
3900.0	1.26	347.12	3899.3	41.7	53.1	-34.7	0.27	63.5	326.85
4000.0	1.18	343.32	3999.3	42.6	55.2	-35.2	0.11	65.5	327.44
4100.0	1.15	327.24	4099.3	43.6	57.0	-36.1	0.33	67.5	327.68
4200.0	1.36	319.15	4199.2	45.2	58.8	-37.4	0.27	69.7	327.53
4300.0	1.43	311.49	4299.2	47.1	60.5	-39.1	0.20	72.0	327.12
4400.0	1.48	312.52	4399.2	49.2	62.2	-41.0	0.06	74.5	326.61
4500.0	1.62	307.26	4499.1	51.5	63.9	-43.1	0.20	77.1	326.02
4600.0	1.64	307.87	4599.1	54.0	65.7	-45.3	0.03	79.8	325.38
4700.0	1.76	302.99	4699.1	56.6	67.4	-47.8	0.19	82.6	324.67
4800.0	2.00	301.77	4799.0	59.6	69.1	-50.5	0.24	85.6	323.84



Scientific
Drilling

Scientific Drilling Survey Report

Company: DEVON ENERGY	Date: 5/6/2004	Time: 11:41:13	Page: 2
Field: Indian Basin	Co-ordinate(NE) Reference:	Site: Eddy County, NM, True North	
Site: Eddy County, NM	Vertical (TVD) Reference:	SITE 0.0	
Well: Right Hand Canyon 35 Fed. #4	Section (VS) Reference:	Well (0.00N,0.00E,277.96Azi)	
Wellpath: VH - Job #32K0404236	Survey Calculation Method:	Minimum Curvature	Db: Sybase


Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
4900.0	1.97	295.39	4898.9	62.8	70.8	-53.6	0.22	88.8	322.89
5000.0	1.90	287.32	4998.9	66.1	72.0	-56.7	0.28	91.7	321.79
5100.0	1.90	280.69	5098.8	69.4	72.8	-59.9	0.22	94.3	320.56
5200.0	1.86	279.18	5198.8	72.7	73.4	-63.1	0.06	96.8	319.29
5300.0	1.82	277.59	5298.7	75.9	73.9	-66.3	0.06	99.3	318.08
5365.0	1.85	277.39	5363.7	78.0	74.1	-68.4	0.05	100.8	317.31



**Scientific
Drilling**

Field: Indian Basin
Site: Eddy County, NM
Well: Right Hand Canyon 35 Fed. #4
Wellpath: VH - Job #32K0404236
Survey: 04/10/04



Azimuths to True North
Magnetic North: 0.00°

Magnetic Field
Strength: 0nT
Dip Angle: 0.00°
Date: 5/6/2004
Model: Wmm_95

