


UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OPERATOR'S COPY




file

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other
2. Name of Operator
SDX Resources, Inc.
3. Address and Telephone No.
PO Box 5061, Midland, TX 79704 915/685-1761
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
530' FNL 1650' FEL
Sec 26, T17S, R27E, Unit B



FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.
LC-064050

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.
Trigg Federal #1

9. API Well No.
30-015-30956

10. Field and Pool, or Exploratory Area
Red Lake, QN-GB-SA

11. County or Parish, State
Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment
☒ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

MIRU & TOH w/rods & pump. NU BOP. TOH w/2-3/8" tbg. Set CIBP @ 3150' & cap w/appx 4 sx cmt (35'). Perf, acidize & test San Andres 2051' - 2377'. Set CIBP @ 2000'. Circ hole clean w/2% KCL, test csg, BP & BOP to 1000# & TOH. Perf 1 spf: 1694-98, 1717-21, 1725-27, 1734-38 (18 holes). TIH w/pkr & spot acid across perms. Acidize all perms w/3000 gal 15% NEFE acid w/40 balls @ 4 bpm. Flow back acid & swab test zone. Frac well w/40000 gal Viking 25 frac w/65000# 16/30 7 25000# 12/20 Brady sd @ 30 bpm: 1-5 ppg. Clean out well w/2% KCL to PBTD & put well on pump.

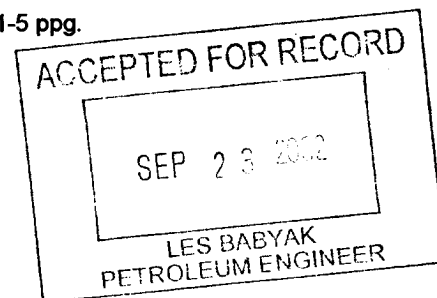

P&A Red Lake G10 yaso, NE
Comp in Red Lake G-6-SA

14. I hereby certify that the foregoing is true and correct

Signed Bonnie Otterwater Title Regulatory Tech

Date 09/10/02

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title _____

Date _____