



PHOENIX
TECHNOLOGY SERVICES

RECEIVED

FEB 27 2014

YPC A
MAIL ROOM

February 19, 2014

Yates Petroleum Corp.
Attn: Regulatory Department
105 South 4th Street
Artesia, NM 88210

NM OIL CONSERVATION
ARTESIA DISTRICT

JUL 09 2014

RECEIVED

Re: Yates Petroleum Corp.
Savannah State Com #3H
Eddy County, NM
API #30-015-41754
Job No. 1410013

Dear Regulatory Department;

Phoenix Technology Services, Inc. has filed the Survey Data Certification, Surveys, and Lease Plat for the above referenced well with the State of New Mexico Oil Conservation Division – District 2 via certified mail. A copy of the filing is attached for your records.

Name of Surveyor	Drain Hole Number	Surveyed Depths		Dates Performed		Type of Survey
		From	To	Start	End	
Craig Petersen	3H	1,934	6,942	01/16/14	01/22/14	MWD

Thank you for the opportunity to be of service. Please contact me if you have any questions or require additional information.

Best Regards,

Kelly Jo Walter

Kelly Jo Walter
Operations Administrator

Phoenix Technology Services SURVEY DATA CERTIFICATION



PHOENIX JOB NUMBER

1410013

OPERATOR

Yates Petroleum Corporation

WELL NAME

Savannah State Com #3H

COUNTY & STATE

Eddy County NM

API WELL NUMBER

30015-41754

PROPOSED DIRECTION

270.45

TIE-IN DATA						
MEASURED	VERTICAL			N-S	E-W	DATA
DEPTH	DEPTH	INCLIN	AZIMUTH	COORD	COORD	SOURCE
1,880 ft	1,879.92 ft	3 ft	299.2 ft	2.11 ft	8.74 ft	Surface

FIRST	FIRST		
SURVEY	SURVEY		
DATE	DEPTH	INCLIN	AZIMUTH
16-Jan-14	1,934 ft	0.4	304.2

SURVEY INSTRUMENT
TYPE
Phoenix MWD

LAST	LAST		
SURVEY	SURVEY		
DATE	DEPTH	INCLIN	AZIMUTH
22-Jan-14	6,942 ft	90.8	270.6

TO THE BEST OF MY KNOWLEDGE I
CERTIFY THIS SURVEY DATA TO BE
TRUE AND CORRECT.

PROJECTED	PROJECTED		
TD SURVEY	TD SURVEY		
DATE	DEPTH	INCLIN	AZIMUTH
22-Jan-14	7,020 ft	90.8	270.6

Craig Petersen

PRINT YOUR NAME ABOVE

Craig Petersen

SIGN YOUR NAME ABOVE

MAGNETIC DECLINATION OR TOTAL GRID

TOTAL CORRECTION USED	
7.82	
DECLINATION OR GRID	GRID

1/22/14

TODAY'S DATE

MWD SUPERVISOR 1

Craig Petersen

DIRECTIONAL DRILLER 1

Brian Terrell

MWD SUPERVISOR 2

Eric Burchinal

DIRECTIONAL DRILLER 2

Dan Wagoner

1805 Brittmore Road

Houston, Texas 77043

(713)3370609 (Voice), (713)337-0599 (Fax)



NM OIL CONSERVATION
ARTESIA DISTRICT

JUL 09 2014

RECEIVED

Yates Petroleum Corp.

Eddy County, NM (NAD83 NME)

Savannah State Com

#3H

WB1/Job #1410013

Survey: Phoenix MWD Survey

Phoenix Final Survey Report

22 January, 2014





Phoenix Technology Services

Phoenix Final Survey Report



Company:	Yates Petroleum Corp.	Local Co-ordinate Reference:	Well #3H
Project:	Eddy County, NM (NAD83 NME)	TVD Reference:	KB @ 3508.50usft (Silver Oak 11)
Site:	Savannah State Com	MD Reference:	KB @ 3508.50usft (Silver Oak 11)
Well:	#3H	North Reference:	Grid
Wellbore:	WB1/Job #1410013	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Silver Oak 11)	Database:	GCR DB

Project	Eddy County, NM (NAD83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Savannah State Com		
Site Position:		Northing:	588,700.00 usft
From:	Map	Easting:	490,358.60 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16"
		Latitude:	32° 37' 5.80038 N
		Longitude:	104° 29' 56.07002 W
		Grid Convergence:	-0.09 °

Well	#3H		
Well Position	+N/-S	0.00 usft	Northing:
	+E/-W	0.00 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
		Latitude:	32° 37' 5.80038 N
		Longitude:	104° 29' 56.07002 W
		Ground Level:	3,490.00 usft

Wellbore	WB1/Job #1410013		
Magnetics	Model Name	Sample Date	Declination
			(°)
	IGRF2010_14	01/15/14	7.72
			Dip Angle
			(°)
			60.33
			Field Strength
			(nT)
			48,492

Design	Surveys (Silver Oak 11)		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
		Tie On Depth:	0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction
			(°)
			270.45

Survey Program	Date 01/22/14		
From	To	Survey (Wellbore)	Tool Name
(usft)	(usft)		
100.00	1,880.00	MS Survey (WB1/Job #1410013)	CB-GYRO-MS
1,934.00	7,020.00	Phoenix MWD Survey (WB1/Job #141001)	MWD
			Description
			Camera based gyro multishot
			MWD - Standard

Survey							
MD	Inc	Azi (azimuth)	TVD	N/S	E/W	V. Sec	DLeg
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(°/100usft)
1,880.00	0.32	299.16	1,879.92	-2.11	-8.74	8.73	0.00
Tie-on to Gyro							
1,934.00	0.40	304.20	1,933.92	-1.93	-9.03	9.02	0.16
First Phoenix MWD Survey							
1,965.00	1.20	275.70	1,964.92	-1.84	-9.44	9.43	2.81
1,996.00	4.60	265.30	1,995.87	-1.91	-11.01	10.99	11.05
2,028.00	8.80	262.40	2,027.65	-2.34	-14.71	14.69	13.16
2,059.00	13.00	263.70	2,058.08	-3.03	-20.53	20.51	13.57
2,090.00	17.40	265.50	2,087.99	-3.78	-28.62	28.59	14.27
2,121.00	22.00	267.10	2,117.17	-4.44	-39.05	39.01	14.94
2,152.00	26.80	267.40	2,145.39	-5.05	-51.84	51.79	15.49



Phoenix Technology Services

Phoenix Final Survey Report



Company:	Yates Petroleum Corp.	Local Co-ordinate Reference:	Well #3H
Project:	Eddy County, NM (NAD83 NME)	TVD Reference:	KB @ 3508.50usft (Silver Oak 11)
Site:	Savannah State Com.	MD Reference:	KB @ 3508.50usft (Silver Oak 11)
Well:	#3H	North Reference:	Grid
Wellbore:	WB1/Job #1410013	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Silver Oak 11)	Database:	GCR DB

Survey								
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)	
2,184.00	31.30	266.60	2,173.36	-5.87	-67.35	67.30	14.11	
2,215.00	35.60	266.00	2,199.22	-6.98	-84.40	84.34	13.91	
2,246.00	39.60	265.70	2,223.77	-8.35	-103.26	103.19	12.92	
2,277.00	43.30	266.20	2,247.01	-9.79	-123.72	123.64	11.98	
2,308.00	46.40	267.00	2,268.98	-11.08	-145.54	145.45	10.16	
2,339.00	49.30	268.00	2,289.78	-12.08	-168.50	168.40	9.66	
2,371.00	52.50	268.90	2,309.96	-12.75	-193.32	193.22	10.24	
2,402.00	55.70	269.40	2,328.14	-13.12	-218.43	218.32	10.40	
2,433.00	58.80	270.00	2,344.90	-13.25	-244.50	244.39	10.13	
2,464.00	62.00	270.50	2,360.22	-13.13	-271.45	271.34	10.42	
2,495.00	64.70	271.70	2,374.12	-12.60	-299.15	299.04	9.37	
2,527.00	67.00	272.70	2,387.21	-11.48	-328.32	328.22	7.73	
2,558.00	69.70	272.90	2,398.65	-10.07	-357.10	357.01	8.73	
2,589.00	71.70	273.20	2,408.89	-8.51	-386.31	386.23	6.52	
2,620.00	74.00	274.00	2,418.03	-6.65	-415.87	415.81	7.82	
2,651.00	76.10	274.60	2,426.03	-4.40	-445.74	445.69	7.03	
2,683.00	77.80	274.30	2,433.25	-1.99	-476.82	476.79	5.39	
2,708.00	80.40	273.20	2,437.98	-0.38	-501.31	501.29	11.26	
2,739.00	83.10	273.00	2,442.43	1.28	-531.94	531.93	8.73	
2,770.00	84.70	272.60	2,445.72	2.78	-562.73	562.73	5.32	
2,801.00	86.10	272.20	2,448.21	4.08	-593.60	593.61	4.70	
2,832.00	87.30	271.80	2,449.99	5.16	-624.53	624.55	4.08	
2,863.00	88.90	271.30	2,451.02	5.99	-655.50	655.53	5.41	
2,957.00	91.50	270.80	2,450.69	7.72	-749.47	749.51	2.82	
3,051.00	91.90	270.90	2,447.91	9.11	-843.42	843.47	0.44	
3,145.00	90.40	270.70	2,446.02	10.42	-937.39	937.44	1.61	
3,239.00	90.20	270.70	2,445.53	11.57	-1,031.38	1,031.44	0.21	
3,332.00	90.50	270.70	2,444.96	12.71	-1,124.37	1,124.44	0.32	
3,425.00	90.70	271.00	2,443.98	14.09	-1,217.36	1,217.43	0.39	
3,519.00	91.30	271.10	2,442.34	15.81	-1,311.33	1,311.41	0.65	
3,613.00	90.20	269.90	2,441.11	16.63	-1,405.31	1,405.40	1.73	
3,706.00	90.20	269.30	2,440.79	15.98	-1,498.31	1,498.39	0.65	
3,800.00	90.90	269.30	2,439.89	14.83	-1,592.30	1,592.37	0.74	
3,893.00	91.10	269.30	2,438.26	13.70	-1,685.28	1,685.33	0.22	
3,987.00	89.90	269.80	2,437.44	12.96	-1,779.27	1,779.32	1.38	
4,081.00	90.20	270.10	2,437.36	12.88	-1,873.27	1,873.31	0.45	
4,174.00	90.20	269.80	2,437.04	12.79	-1,966.27	1,966.31	0.32	
4,268.00	90.50	269.80	2,436.46	12.47	-2,060.27	2,060.30	0.32	
4,361.00	90.60	270.00	2,435.57	12.30	-2,153.26	2,153.29	0.24	
4,455.00	90.90	270.20	2,434.34	12.47	-2,247.25	2,247.28	0.38	
4,548.00	89.40	270.40	2,434.10	12.96	-2,340.25	2,340.28	1.63	
4,642.00	89.50	270.40	2,435.00	13.61	-2,434.24	2,434.27	0.11	
4,735.00	89.60	270.60	2,435.73	14.42	-2,527.24	2,527.27	0.24	
4,829.00	89.60	270.50	2,436.39	15.33	-2,621.23	2,621.27	0.11	



Phoenix Technology Services

Phoenix Final Survey Report



Company:	Yates Petroleum Corp.	Local Co-ordinate Reference:	Well #3H
Project:	Eddy County, NM (NAD83 NME)	TVD Reference:	KB @ 3508.50usft (Silver Oak 11)
Site:	Savannah State Com	MD Reference:	KB @ 3508.50usft (Silver Oak 11)
Well:	#3H	North Reference:	Grid
Wellbore:	WB1/Job #1410013	Survey Calculation Method:	Minimum Curvature
Design:	Surveys (Silver Oak 11)	Database:	GCR DB

Survey							
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)
4,922.00	90.00	271.10	2,436.71	16.62	-2,714.22	2,714.27	0.78
5,016.00	90.20	271.10	2,436.55	18.43	-2,808.20	2,808.26	0.21
5,110.00	90.00	271.30	2,436.38	20.40	-2,902.18	2,902.25	0.30
5,203.00	89.70	271.10	2,436.63	22.34	-2,995.16	2,995.24	0.39
5,297.00	88.80	270.20	2,437.86	23.41	-3,089.14	3,089.23	1.35
5,390.00	89.60	269.70	2,439.15	23.33	-3,182.13	3,182.22	1.01
5,484.00	90.40	269.00	2,439.15	22.26	-3,276.13	3,276.20	1.13
5,578.00	90.30	269.60	2,438.58	21.11	-3,370.12	3,370.18	0.65
5,671.00	90.80	270.30	2,437.69	21.03	-3,463.11	3,463.17	0.92
5,766.00	90.70	271.10	2,436.44	22.19	-3,558.10	3,558.16	0.85
5,859.00	90.70	271.10	2,435.31	23.98	-3,651.07	3,651.15	0.00
5,953.00	90.70	270.80	2,434.16	25.54	-3,745.05	3,745.14	0.32
6,046.00	90.90	271.10	2,432.86	27.08	-3,838.03	3,838.12	0.39
6,140.00	91.10	271.00	2,431.22	28.80	-3,932.00	3,932.10	0.24
6,234.00	91.40	271.40	2,429.17	30.77	-4,025.96	4,026.07	0.53
6,327.00	91.70	271.80	2,426.65	33.37	-4,118.89	4,119.02	0.54
6,420.00	91.20	270.50	2,424.30	35.23	-4,211.83	4,211.98	1.50
6,514.00	89.80	270.00	2,423.48	35.64	-4,305.83	4,305.97	1.58
6,608.00	89.90	269.80	2,423.73	35.48	-4,399.83	4,399.97	0.24
6,702.00	89.70	269.10	2,424.05	34.58	-4,493.82	4,493.95	0.77
6,795.00	90.30	270.30	2,424.05	34.09	-4,586.82	4,586.94	1.44
6,889.00	90.90	271.00	2,423.07	35.15	-4,680.81	4,680.94	0.98
6,942.00	90.80	270.60	2,422.28	35.89	-4,733.79	4,733.93	0.78
Last Phoenix MWD Survey							
7,020.00	90.80	270.60	2,421.19	36.71	-4,811.78	4,811.92	0.00
Projection to TD							

Survey Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,880.00	1,879.92	-2.11	-8.74	Tie-on to Gyro
1,934.00	1,933.92	-1.93	-9.03	First Phoenix MWD Survey
6,942.00	2,422.28	35.89	-4,733.79	Last Phoenix MWD Survey
7,020.00	2,421.19	36.71	-4,811.78	Projection to TD

Checked By: _____ Approved By: _____ Date: _____



Project: Eddy County, NM (NAD83 NME)
Site: Savannah State Com
Well: #3H
Wellbore: WB1/Job #1410013
Design: Plan #3 01-15-14
Rig: Silver Oak 11



Azimuths to Grid North
True North: 0.09°
Magnetic North: 7.81°
Magnetic Field
Strength: 48491.5snT
Dip Angle: 60.33°
Date: 01/15/2014
Model: IGRF2010_14

WELL DETAILS

+N/-S	+E/-W	Northing	Ground Level	Easting	Latitude	Longitude
0.00	0.00	588700.00	3490.00	490358.60	32° 37' 5.80038 N	104° 29' 56.07002 W

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target	Annotation
1	1880.00	0.32	299.16	1879.92	-2.11	-8.74	0.00	0.00	8.73		Tie-on to Gryo
2	1972.50	0.32	299.16	1972.52	-1.86	-9.20	0.00	0.00	9.18		KOP, 12"100' Build
3	2722.76	90.30	270.46	2447.64	3.24	-489.13	12.00	-28.70	489.14		LP, Hold 90.30°, 270.45° Azm
4	7045.93	90.30	270.46	2425.00	37.60	-4812.10	0.00	0.00	4812.25	PBHL-Savannah #3H	TD at 7045.93

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
PBHL-Savannah #3H	2425.00	37.60	-4812.10	588737.60	485546.50	32° 37' 6.09477 N	104° 30' 52.33594 W	Point
PP-Savannah #3H	2450.00	3.73	-477.00	588703.73	489881.60	32° 37' 5.82988 N	104° 30' 1.64738 W	Point
- plan hits target center								
- plan misses target center by 2.52usft at 2710.68usft MD (2447.55 TVD, 3.14 N, -477.05 E)								

Map System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone Name: New Mexico Eastern Zone

Local Origin: Well #3H, Grid North

Latitude: 32° 37' 5.80038 N
Longitude: 104° 29' 56.07002 W

Grid East: 490358.60
Grid North: 588700.00
Scale Factor: 1.000

Geomagnetic Model: IGRF2010_14
Sample Date: 15-Jan-14

Magnetic Declination: 7.72°
Dip Angle from Horizontal: 60.33°
Magnetic Field Strength: 48492

To convert a Magnetic Direction to a Grid Direction, Add 7.81°
To convert a Magnetic Direction to a True Direction, Add 7.72° East
To convert a True Direction to a Grid Direction, Add 0.09°

FORMATION TOP DETAILS


TVDPath	MDPath	Formation	DipAngle	DpDr
2224.57	2238.54	Glorieta	-0.30	270.45
2368.83	2442.00	Yeso	-0.30	270.45
2447.51	2709.04	TL2600' TVD @ 0 VZ, 90.3° Inc	-0.30	270.45

CASING DETAILS

TVD	MD	Name	Size
750.00		9 5/8" Surface	9-5/8
2447.64	2722.76	5 1/2" Production 1	5-1/2
2425.00	7045.93	5 1/2" Production 2	5-1/2

LEGEND

— #1, WB1, Inc Surveys V0
— #1, WB1, Inc Surveys V0
— #3H, WB1/Job #1410013, Surveys (Silver Oak 11) V0
— Plan #3 01-15-14



Ground Level: 3490.00

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres

San Andres


San Andres


San Andres

San Andres

San Andres

San Andres

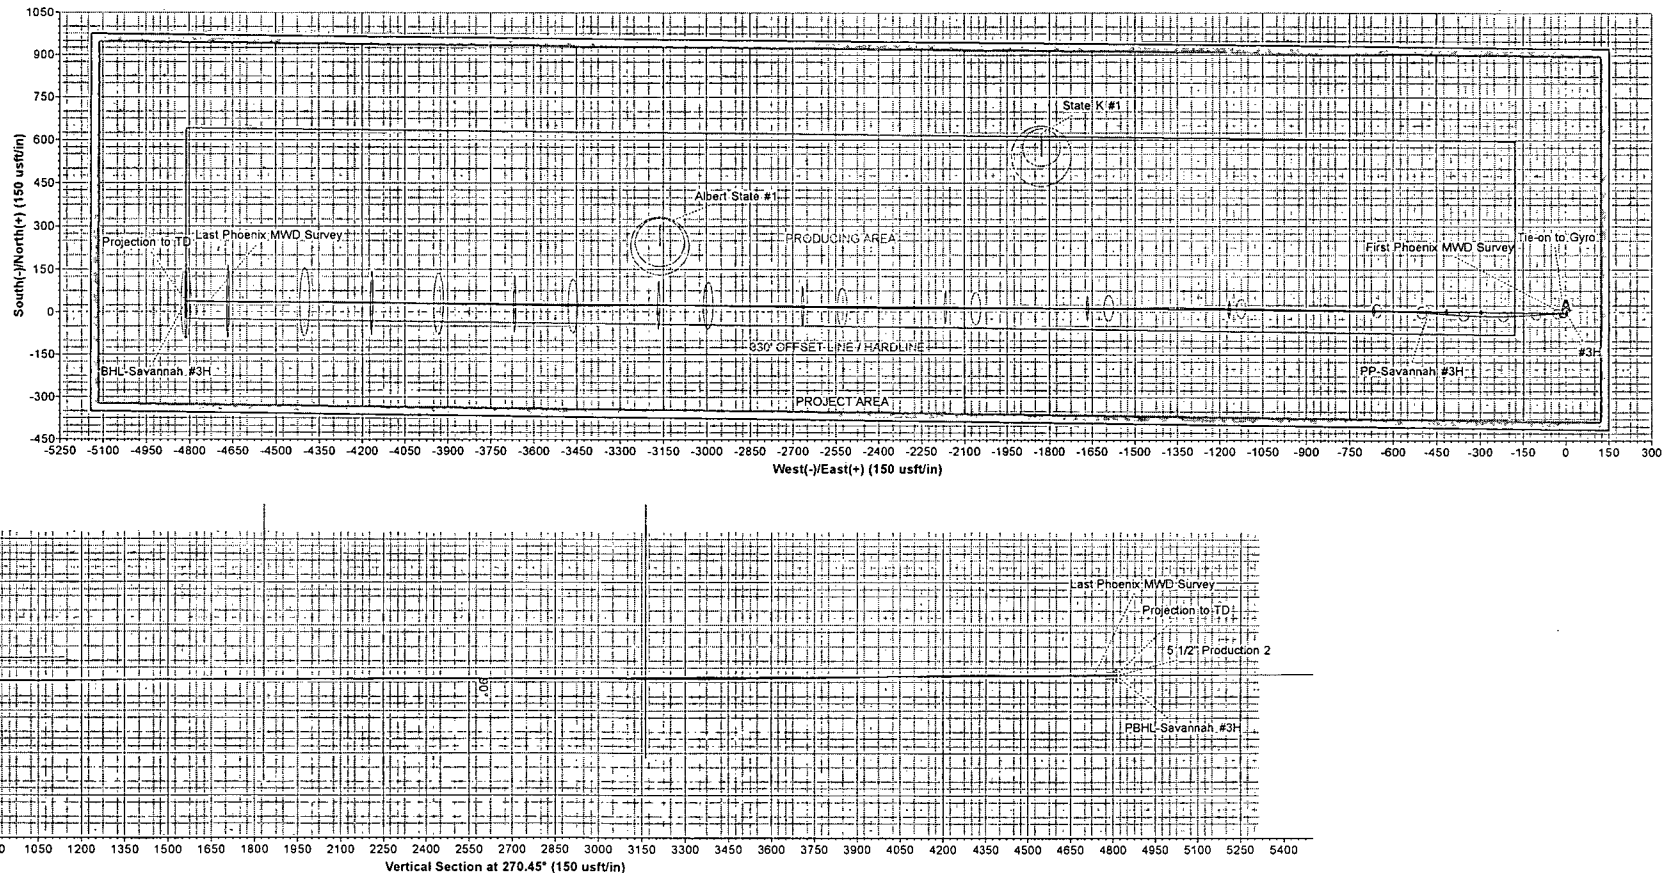

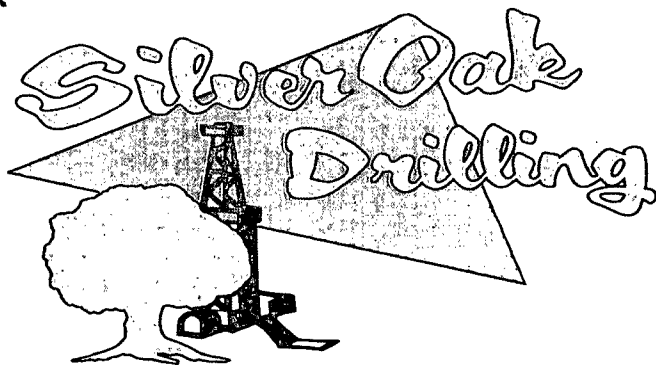

PO Box 1370
Artesia, NM 88211-1370
(505) 748-1288

NM OIL CONSERVATION
ARTESIA DISTRICT

JUL 09 2014

RECEIVED

January 27, 2014


Yates Petroleum Corporation
105 S. 4th
Artesia, NM 88211-1395

RE: Savannah State Com #3H
2260' FNL & 150' FEL
Sec. 32, T19S, R25E
Eddy County, New Mexico

Dear Sir,


The attached is the Deviation Survey for the above captioned well.

Very truly yours,



Eddie C. LaRue
Operations Manager

State of New Mexico }
County of Eddy }

The foregoing was acknowledged before me this 27th day of January, 2014.



Notary Public



SAVANNAH STATE COM.3H

#

#	Date	Depth	Deviation	Direction	TVD
	1/13/2014	240	0.40	0.00	0.00
	1/13/2014	457	0.30	0.00	0.00
	1/13/2014	677	0.40	0.00	717.00
	1/14/2014	803	0.30	0.00	0.00
	1/15/2014	1135	0.70	0.00	0.00
	1/15/2014	1354	0.40	0.00	0.00
	1/15/2014	1540	0.60	0.00	0.00
	1/15/2014	1759	0.40	0.00	1830.00
	1/16/2014	1934	0.40	304.20	1933.92
	1/16/2014	1965	1.30	275.70	1964.92
	1/16/2014	1996	4.60	265.30	0.00
	1/16/2014	2028	8.80	262.40	0.00
	1/16/2014	2058	13.00	263.40	0.00
	1/16/2014	2090	17.40	265.50	0.00
	1/16/2014	2121	22.00	267.10	0.00
	1/16/2014	2152	26.80	267.40	0.00
	1/17/2014	2215	35.60	266.00	2199.22
	1/17/2014	2246	39.60	265.70	2223.77
	1/17/2014	2277	43.30	266.20	2247.00
	1/17/2014	2308	46.40	267.00	2268.98
	1/17/2014	2339	49.30	268.00	2289.78
	1/17/2014	2371	52.50	268.90	2309.96
	1/17/2014	2402	55.70	269.40	2328.13
	1/17/2014	2433	58.80	270.00	2344.90
	1/17/2014	2495	64.70	271.70	2374.12
	1/17/2014	2527	67.00	272.70	2387.22
	1/17/2014	2558	69.70	272.90	2398.64
	1/17/2014	2589	71.70	273.20	0.00
	1/17/2014	2620	74.00	274.00	0.00
	1/17/2014	2652	76.10	274.60	0.00
	1/17/2014	2683	77.90	274.30	0.00
	1/18/2014	2676	77.30	273.60	0.00
	1/18/2014	2708	80.40	273.20	2437.98
	1/18/2014	2770	84.70	272.60	0.00
	1/18/2014	2801	86.10	272.20	0.00
	1/18/2014	2831	83.10	273.00	0.00
	1/18/2014	2956	91.50	270.80	0.00
	1/18/2014	3051	91.90	270.90	0.00
	1/18/2014	3145	90.40	270.70	0.00
	1/19/2014	3239	90.20	270.70	2445.52
	1/19/2014	3332	90.50	270.70	2444.96
	1/19/2014	3425	90.70	271.00	2443.98

#	Date	Depth	Deviation	Direction	TVD
1/19/2014	3519	91.30	271.10	2442.34	
1/19/2014	3613	90.20	269.90	2441.11	
1/19/2014	3706	90.20	269.30	2440.79	
1/19/2014	3800	90.90	269.30	2439.88	
1/19/2014	3893	91.10	269.30	2438.26	
1/19/2014	3987	89.90	269.80	2437.44	
1/19/2014	4080	90.20	270.10	0.00	
1/19/2014	4174	90.20	269.80	0.00	
1/19/2014	4268	90.50	269.80	0.00	
1/20/2014	4361	90.60	270.00	2435.57	
1/20/2014	4455	90.90	270.20	2434.34	
1/20/2014	4548	89.40	270.40	2434.09	
1/20/2014	4642	89.50	270.40	2435.00	
1/20/2014	4735	89.60	270.60	2435.73	
1/20/2014	4829	89.60	270.50	2436.38	
1/20/2014	4922	90.00	271.10	2436.71	
1/20/2014	5016	90.20	271.10	2436.54	
1/20/2014	5110	90.00	271.30	2436.38	
1/20/2014	5296	88.80	270.20	2437.85	
1/20/2014	5390	88.60	269.70	2439.15	
1/20/2014	5484	90.40	269.00	2439.15	
1/21/2014	5578	90.30	269.60	0.00	
1/21/2014	5671	90.80	270.30	0.00	
1/21/2014	5764	90.70	271.10	0.00	
1/21/2014	5898	90.70	271.10	0.00	
1/21/2014	5953	90.70	270.80	2434.16	
1/21/2014	6046	90.90	271.10	2432.86	
1/21/2014	6140	91.10	271.00	2431.22	
1/21/2014	6234	91.40	271.40	2429.17	
1/21/2014	6327	91.70	271.80	2426.65	
1/21/2014	6420	91.20	270.50	2424.30	
1/21/2014	6514	89.80	270.00	2423.48	
1/21/2014	6608	89.90	269.80	2423.72	
1/22/2014	6702	89.70	269.10	0.00	
1/22/2014	6795	90.30	270.30	0.00	
1/22/2014	6889	90.90	271.00	0.00	
1/22/2014	6942	90.80	270.60	0.00	

EOF