

Submit To Appropriate District Office
State Lease - 6 copies
Fee Lease - 5 copies
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-105
Revised June 10, 2003

WELL API NO.
30-015-32612

5. Indicate Type of Lease
STATE ☒ FEE ☐

State Oil & Gas Lease No.

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well:
OIL WELL ☒ GAS WELL ☐ DRY ☐ OTHER _____

b. Type of Completion:
NEW ☐ WORK ☐ DEEPEN ☐ PLUG ☒ DIFF.
WELL OVER BACK RESVR. ☐ OTHER

2. Name of Operator

POGO PRODUCING COMPANY

3. Address of Operator

P. O. BOX 10340, MIDLAND, TX 79702-7340

4. Well Location

Unit Letter L : 1980 Feet From The SOUTH Line and 660 Feet From The WEST Line
Section 19 Township 20S Range 27E NMPM EDDY County

10. Date Spudded 11. Date T.D. Reached 12. Date Compl. (Ready to Prod.) 13. Elevations (DF& RKB, RT, GR, etc.) 14. Elev. Casinghead
03/12/06 04/30/06 3289' GR

15. Total Depth 16. Plug Back T.D. 17. If Multiple Compl. How Many 18. Intervals Rotary Tools Cable Tools
10,661' Zones? Drilled By

19. Producing Interval(s), of this completion - Top, Bottom, Name 20. Was Directional Survey Made
WOLFCAMP 8072, 8218, 8724, 8923, 9197, 9460, 9644, 10,002, 10,570, 10,780 YES

21. Type Electric and Other Logs Run 22. Was Well Cored

23. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
13-3/8	48	450	17-1/2	1030SKS	
9-5/8	40, 43.5, 53.5	3000	12-1/4	975 SKS	
7	29	8094	8-1/2	1000 SKS	

24. LINER RECORD				25. TUBING RECORD		
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET
4-1/2	7565	10900	300		2-3/8	10,780

26. Perforation record (interval, size, and number) 8072-10,780 (OA) - 53 HOLES	27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.					
	DEPTH INTERVAL			AMOUNT AND KIND MATERIAL USED		
	8072-10,780			ACDZ W/ 5000 GALS 15% ACID		
				FRAC W/ 96,000# 20/40 ECONOPROP		

28. PRODUCTION

Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)				Well Status (Prod. or Shut-in)	
04/30/06		FLOWING				PRODUCING	
Date of Test	Hours Tested	Choke Size	Prod'n For Test Period	Oil - Bbl	Gas - MCF	Water - Bbl.	Gas - Oil Ratio
05/01/06	24 HRS	25/64		352	600	363	1705:1
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)	
530	1700					47.2	

29. Disposition of Gas (Sold, used for fuel, vented, etc.) Test Witnessed By
SOLD MARCUS ROBERSON

30. List Attachments

C-104, SUNDRY, DEVIATION SURVEY, C-102

31. I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief

Signature Cathy Wright Printed Name Cathy Wright Title Sr. Eng Tech Date 05/01/06
E-mail Address: wrightc@pogoproducing.com

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised June 10, 2003
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-32612	² Pool Code 45090	³ Pool Name McMillan Wolfcamp
⁴ Property Code 31922	⁵ Property Name State 19	⁶ Well Number 2
⁷ OGRID No. 017891	⁸ Operator Name Pogo Producing Company	⁹ Elevation 3289'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	19	20S	27E		1980	South	660	West	Eddy

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	19	20S	27E		333.26	North	370.25	West	Eddy

¹² Dedicated Acres 120	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--------------------------------------	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

¹⁶ 	Terminus 10,900' MD 333.26 FNL 370.25 FWL	RECEIVED MAY 03 2006 OIL CONSERVATION DIVISION	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief. Signature Cathy Wright Printed Name Sr. Eng Tech Title and E-mail Address 05/01/06 Date
	Penetration 7804' MD 1980' FSL 660' FWL		¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey Signature and Seal of Professional Surveyor: Certificate Number



Pogo Producing Company

Eddy Co., New Mexico

State 19 Com #2

State 19 Com #2

Lateral #1

Survey: MWD Survey #1

Standard Survey Report

13 March, 2006

RECEIVED

MAY 03 2006

WULF-MEDIA





Black Viper Energy Services

Survey Report



Company:	Pogo Producing Company	Local Co-ordinate Reference:	Well State 19 Com #2
Project:	Eddy Co., New Mexico	TVD Reference:	WELL @ 0.00ft (Original Well Elev)
Site:	State 19 Com #2	MD Reference:	WELL @ 0.00ft (Original Well Elev)
Well:	State 19 Com #2	North Reference:	Grid
Wellbore:	Lateral #1	Survey Calculation Method:	Minimum Curvature
Design:	Lateral #1	Database:	EDM 2003.11 Server Db

Project	Eddy Co., New Mexico		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Ground Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	State 19 Com #2		
Site Position:		Northing:	566,360.10 ft
From:	Map	Easting:	502,156.10 ft
Position Uncertainty:	0.00 ft	Slot Radius:	"
		Latitude:	32° 33' 25.302" N
		Longitude:	104° 19' 34.819" W
		Grid Convergence:	0.00 °

Well	State 19 Com #2		
Well Position	+N/-S	0.00 ft	Northing: 566,360.10 ft
	+E/-W	0.00 ft	Easting: 502,156.10 ft
Position Uncertainty	0.00 ft	Wellhead Elevation:	ft
		Latitude:	32° 33' 25.302" N
		Longitude:	104° 19' 34.819" W
		Ground Level:	0.00 ft

Wellbore	Lateral #1		
Magnetics	Model Name	Sample Date	Declination
	IGRF200510	2/17/2006	(°)
			8.58
			Dip Angle
			(°)
			60.49
			Field Strength
			(nT)
			49,302

Design	Lateral #1		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
		Tie On Depth:	7,790.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(ft)	(ft)	(ft)
	0.00	0.00	0.00
		Direction	(°)
		359.77	

Survey Program	Date 3/13/2006		
From	To	Survey (Wellbore)	Tool Name
(ft)	(ft)		
100.00	7,790.00	Gyro Survey #1 (OH)	GM
7,873.00	10,900.00	MWD Survey #1 (Lateral #1)	MWD
			Description
			Gyro MultiShot
			Standard MWD

Survey										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Vertical	Dogleg	Build	Turn	
Depth	(°)	(°)	Depth	(ft)	(ft)	Section	Rate	Rate	Rate	
(ft)			(ft)			(ft)	(°/100ft)	(°/100ft)	(°/100ft)	
7,790.00	0.35	121.13	7,786.78	4.08	-103.35	4.49	0.00	0.00	0.00	
7,873.00	18.40	14.10	7,868.37	16.76	-99.91	17.16	22.30	21.75	-128.95	
First MWD Survey										
7,905.00	26.90	15.20	7,897.87	28.67	-96.77	29.05	26.59	26.56	3.44	
7,937.00	34.70	15.20	7,925.34	44.47	-92.48	44.84	24.38	24.38	0.00	
7,969.00	42.60	13.90	7,950.31	63.80	-87.48	64.15	24.82	24.69	-4.06	
7,999.00	50.30	12.30	7,970.96	84.96	-82.58	85.29	25.95	25.67	-5.33	
8,031.00	59.90	9.90	7,989.25	110.69	-77.56	111.00	30.62	30.00	-7.50	
8,062.00	74.70	7.80	8,001.18	138.87	-73.20	139.17	48.15	47.74	-6.77	
8,094.00	87.60	2.50	8,006.10	170.29	-70.40	170.57	43.49	40.31	-16.56	
8,126.00	90.70	356.10	8,006.57	202.26	-70.79	202.54	22.22	9.69	-20.00	
8,158.00	92.50	353.50	8,005.68	234.11	-73.69	234.41	9.88	5.63	-8.13	



Black Viper Energy Services

Survey Report



Company: Pogo Producing Company
Project: Eddy Co., New Mexico
Site: State 19 Com #2
Well: State 19 Com #2
Wellbore: Lateral #1
Design: Lateral #1

Local Co-ordinate Reference: Well State 19 Com #2
TVD Reference: WELL @ 0.00ft (Original Well Elev)
MD Reference: WELL @ 0.00ft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.11 Server Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,190.00	92.40	353.50	8,004.31	265.88	-77.31	266.19	0.31	-0.31	0.00
8,222.00	91.80	353.60	8,003.14	297.65	-80.90	297.98	1.90	-1.88	0.31
8,253.00	92.00	354.50	8,002.11	328.47	-84.11	328.81	2.97	0.65	2.90
8,273.00	91.10	354.20	8,001.57	348.37	-86.08	348.71	4.74	-4.50	-1.50
8,317.00	90.90	353.80	8,000.80	392.12	-90.68	392.48	1.02	-0.45	-0.91
8,349.00	91.00	354.60	8,000.27	423.95	-93.91	424.32	2.52	0.31	2.50
8,380.00	91.40	354.80	7,999.62	454.81	-96.78	455.19	1.44	1.29	0.65
8,412.00	91.60	354.70	7,998.79	486.66	-99.70	487.06	0.70	0.63	-0.31
8,444.00	91.60	354.70	7,997.89	518.52	-102.66	518.92	0.00	0.00	0.00
8,476.00	91.60	356.20	7,997.00	550.40	-105.19	550.82	4.69	0.00	4.69
8,508.00	91.70	355.70	7,996.08	582.31	-107.45	582.73	1.59	0.31	-1.56
8,539.00	91.60	355.80	7,995.18	613.21	-109.75	613.65	0.46	-0.32	0.32
8,571.00	91.80	356.80	7,994.24	645.13	-111.81	645.57	3.19	0.63	3.13
8,603.00	91.50	355.60	7,993.31	677.04	-113.93	677.50	3.86	-0.94	-3.75
8,634.00	91.80	355.70	7,992.42	707.94	-116.28	708.40	1.02	0.97	0.32
8,666.00	91.70	356.80	7,991.44	739.86	-118.38	740.33	3.45	-0.31	3.44
8,698.00	91.30	356.40	7,990.61	771.79	-120.27	772.27	1.77	-1.25	-1.25
8,729.00	91.30	356.90	7,989.90	802.73	-122.08	803.21	1.61	0.00	1.61
8,761.00	91.30	357.20	7,989.18	834.68	-123.73	835.17	0.94	0.00	0.94
8,793.00	91.20	355.80	7,988.48	866.61	-125.68	867.11	4.39	-0.31	-4.38
8,825.00	91.00	355.90	7,987.86	898.52	-128.00	899.03	0.70	-0.63	0.31
8,857.00	90.60	355.10	7,987.42	930.42	-130.51	930.94	2.79	-1.25	-2.50
8,889.00	90.60	355.20	7,987.08	962.30	-133.22	962.83	0.31	0.00	0.31
8,921.00	90.30	354.60	7,986.83	994.18	-136.06	994.71	2.10	-0.94	-1.88
8,952.00	89.80	354.70	7,986.80	1,025.04	-138.95	1,025.59	1.64	-1.61	0.32
8,984.00	89.50	354.50	7,987.00	1,056.90	-141.96	1,057.46	1.13	-0.94	-0.63
9,016.00	90.60	354.80	7,986.97	1,088.76	-144.95	1,089.33	3.56	3.44	0.94
9,048.00	91.10	355.50	7,986.50	1,120.64	-147.65	1,121.22	2.69	1.56	2.19
9,079.00	91.00	355.10	7,985.93	1,151.53	-150.19	1,152.12	1.33	-0.32	-1.29
9,111.00	91.00	355.00	7,985.37	1,183.41	-152.95	1,184.01	0.31	0.00	-0.31
9,143.00	90.90	355.00	7,984.84	1,215.28	-155.74	1,215.89	0.31	-0.31	0.00
9,174.00	90.80	355.60	7,984.38	1,246.17	-158.28	1,246.80	1.96	-0.32	1.94
9,206.00	90.30	355.80	7,984.07	1,278.08	-160.68	1,278.71	1.68	-1.56	0.63
9,238.00	89.80	355.70	7,984.05	1,309.99	-163.05	1,310.64	1.59	-1.56	-0.31
9,270.00	90.50	356.30	7,983.96	1,341.91	-165.28	1,342.57	2.88	2.19	1.88
9,302.00	90.90	355.40	7,983.57	1,373.83	-167.60	1,374.49	3.08	1.25	-2.81
9,333.00	90.50	356.00	7,983.19	1,404.74	-169.92	1,405.41	2.33	-1.29	1.94
9,365.00	90.10	356.00	7,983.02	1,436.66	-172.15	1,437.34	1.25	-1.25	0.00
9,397.00	89.40	355.40	7,983.16	1,468.57	-174.55	1,469.26	2.88	-2.19	-1.88
9,428.00	89.00	355.60	7,983.60	1,499.47	-176.99	1,500.17	1.44	-1.29	0.65
9,460.00	89.90	354.50	7,983.90	1,531.35	-179.75	1,532.06	4.44	2.81	-3.44
9,492.00	90.70	354.50	7,983.74	1,563.20	-182.81	1,563.92	2.50	2.50	0.00
9,523.00	90.60	355.20	7,983.38	1,594.07	-185.60	1,594.80	2.28	-0.32	2.26
9,556.00	90.50	355.00	7,983.07	1,626.95	-188.41	1,627.69	0.68	-0.30	-0.61
9,586.00	90.20	354.80	7,982.88	1,656.83	-191.08	1,657.58	1.20	-1.00	-0.67
9,618.00	89.80	355.00	7,982.88	1,688.70	-193.93	1,689.47	1.40	-1.25	0.63
9,650.00	91.40	355.00	7,982.55	1,720.58	-196.71	1,721.35	5.00	5.00	0.00
9,682.00	91.90	355.10	7,981.63	1,752.45	-199.47	1,753.23	1.59	1.56	0.31
9,713.00	91.80	355.10	7,980.63	1,783.32	-202.12	1,784.11	0.32	-0.32	0.00
9,745.00	91.70	355.60	7,979.65	1,815.20	-204.71	1,816.00	1.59	-0.31	1.56
9,777.00	91.50	355.10	7,978.76	1,847.08	-207.31	1,847.90	1.68	-0.63	-1.56
9,809.00	91.30	355.50	7,977.97	1,878.96	-209.93	1,879.79	1.40	-0.63	1.25
9,840.00	91.10	355.90	7,977.33	1,909.87	-212.25	1,910.70	1.44	-0.65	1.29
9,872.00	90.90	356.00	7,976.77	1,941.78	-214.51	1,942.63	0.70	-0.63	0.31



Black Viper Energy Services

Survey Report



Company: Pogo Producing Company
Project: Eddy Co., New Mexico
Site: State 19 Com #2
Well: State 19 Com #2
Wellbore: Lateral #1
Design: Lateral #1

Local Co-ordinate Reference: Well State 19 Com #2
TVD Reference: WELL @ 0.00ft (Original Well Elev)
MD Reference: WELL @ 0.00ft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.11 Server Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
9,904.00	90.90	355.70	7,976.26	1,973.69	-216.83	1,974.55	0.94	0.00	-0.94
9,935.00	90.70	356.40	7,975.83	2,004.62	-218.96	2,005.48	2.35	-0.65	2.26
9,967.00	90.50	356.20	7,975.50	2,036.55	-221.03	2,037.42	0.88	-0.63	-0.63
9,999.00	90.50	356.40	7,975.22	2,068.48	-223.09	2,069.36	0.62	0.00	0.63
10,031.00	90.60	356.80	7,974.91	2,100.42	-224.99	2,101.31	1.29	0.31	1.25
10,063.00	90.60	356.70	7,974.58	2,132.37	-226.80	2,133.26	0.31	0.00	-0.31
10,095.00	90.80	357.80	7,974.18	2,164.33	-228.34	2,165.23	3.49	0.63	3.44
10,126.00	90.70	357.00	7,973.78	2,195.30	-229.75	2,196.20	2.60	-0.32	-2.58
10,158.00	91.90	356.40	7,973.05	2,227.23	-231.59	2,228.15	4.19	3.75	-1.88
10,189.00	92.30	355.80	7,971.92	2,258.14	-233.69	2,259.06	2.33	1.29	-1.94
10,221.00	92.00	356.10	7,970.72	2,290.04	-235.95	2,290.97	1.33	-0.94	0.94
10,253.00	92.10	355.30	7,969.57	2,321.93	-238.35	2,322.87	2.52	0.31	-2.50
10,284.00	92.20	355.70	7,968.41	2,352.81	-240.78	2,353.76	1.33	0.32	1.29
10,316.00	92.20	355.90	7,967.18	2,384.70	-243.12	2,385.66	0.62	0.00	0.63
10,348.00	91.90	355.10	7,966.04	2,416.58	-245.63	2,417.55	2.67	-0.94	-2.50
10,380.00	91.50	355.40	7,965.09	2,448.46	-248.28	2,449.43	1.56	-1.25	0.94
10,412.00	91.40	355.40	7,964.28	2,480.34	-250.85	2,481.33	0.31	-0.31	0.00
10,443.00	91.20	355.50	7,963.57	2,511.24	-253.30	2,512.24	0.72	-0.65	0.32
10,475.00	91.20	355.30	7,962.90	2,543.13	-255.87	2,544.14	0.62	0.00	-0.63
10,507.00	90.90	356.60	7,962.32	2,575.04	-258.13	2,576.06	4.17	-0.94	4.06
10,539.00	90.70	355.20	7,961.87	2,606.96	-260.42	2,607.98	4.42	-0.63	-4.38
10,570.00	90.30	355.00	7,961.60	2,637.84	-263.07	2,638.88	1.44	-1.29	-0.65
10,602.00	90.40	355.40	7,961.40	2,669.73	-265.74	2,670.77	1.29	0.31	1.25
10,633.00	90.10	355.20	7,961.27	2,700.62	-268.28	2,701.68	1.16	-0.97	-0.65
10,665.00	89.90	355.40	7,961.27	2,732.52	-270.91	2,733.58	0.88	-0.63	0.63
10,696.00	89.80	355.30	7,961.35	2,764.41	-273.42	2,764.49	0.46	-0.32	-0.32
10,728.00	89.70	355.00	7,961.49	2,795.30	-276.12	2,796.39	0.99	-0.31	-0.94
10,760.00	89.80	355.70	7,961.63	2,827.19	-278.72	2,828.29	2.21	0.31	2.19
10,792.00	89.50	355.60	7,961.82	2,859.10	-281.14	2,860.21	0.99	-0.94	-0.31
10,824.00	89.20	355.40	7,962.19	2,891.00	-283.66	2,892.12	1.13	-0.94	-0.63
10,844.00	89.00	355.40	7,962.50	2,910.93	-285.26	2,912.06	1.00	-1.00	0.00
Last MWD Survey									
10,900.00	89.00	355.40	7,963.48	2,966.74	-289.75	2,967.88	0.00	0.00	0.00
Proj to Bit - TD									



Black Viper Energy Services
Survey Report



Company: Pogo Producing Company
Project: Eddy Co., New Mexico
Site: State 19 Com #2
Well: State 19 Com #2
Wellbore: Lateral #1
Design: Lateral #1

Local Co-ordinate Reference: Well State 19 Com #2
TVD Reference: WELL @ 0.00ft (Original Well Elev)
MD Reference: WELL @ 0.00ft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.11 Server Db

Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(ft)	ft	ft	(ft)	(ft)		
PBHL #1 [S19C#2]	0.00	359.98	8,050.00	2,984.80	-12.10	569,344.90	502,144.00	32° 33' 54.839" N	104° 19' 34.958" W
- survey misses by 291.38ft at 10900.00ft MD (7963.48 TVD, 2966.74 N, -289.75 E)									
- Point									
PBHL #3 [S19C#2]	0.00	0.00	7,959.00	2,984.80	-312.10	569,344.90	501,844.00	32° 33' 54.839" N	104° 19' 38.464" W
- survey misses by 2921.60ft at 7981.12ft MD (7959.00 TVD, 72.00 N, -85.51 E)									
- Point									

Survey Annotations				
Measured Depth	Vertical Depth	Local Coordinates		Comment
(ft)	(ft)	+N/-S (ft)	+E/-W (ft)	
7,873.00	7,868.37	16.76	-99.91	First MWD Survey
10,844.00	7,962.50	2,910.93	-285.26	Last MWD Survey
10,900.00	7,963.48	2,966.74	-289.75	Proj to Bit - TD

Checked By: _____ Approved By: _____ Date: _____



Pogo Producing



Project: Eddy Co., New Mexico
Site: State 19 Corn #2
Well: State 19 Corn #2
Wellbore: Lateral #1
Plan: Plan #4


PROJECT DETAILS: Eddy Co., New Mexico
Geodetic System: US State Plane 1827 (Exact solution)
Datum: NAD 1827 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Ground Level

ANNOTATIONS
TVD 7801.78 7805.00 Top of Window
7805.77 7812.00 Btm of Window
7811.77 7815.00 KOP - Build 30/100
7895.00 8110.58 EOC - Hold 91°



Azimuths to Grid North
True North: -0.00°
Magnetic North: 8.57°
Magnetic Field
Strength: 49302.4 nT
Dip Angle: 60.49°
Declination: 17705.06
Model: IGRF200510

SECTION DETAILS									
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec Target
1	7790.00	0.35	121.13	7786.78	4.08	-103.35	0.00	0.00	4.49
2	7805.00	0.35	121.13	7801.78	4.03	-103.27	0.00	0.00	4.44
3	7812.00	2.75	355.99	7808.77	4.18	-103.26	42.36	229.33	4.60
4	7815.00	2.75	355.99	7811.77	4.33	-103.27	0.00	0.00	4.74
5	8110.58	90.74	355.99	7895.00	198.59	-116.88	29.77	0.00	199.05
6	10903.86	90.74	355.99	7959.00	2984.80	-312.10	0.00	0.00	2986.03

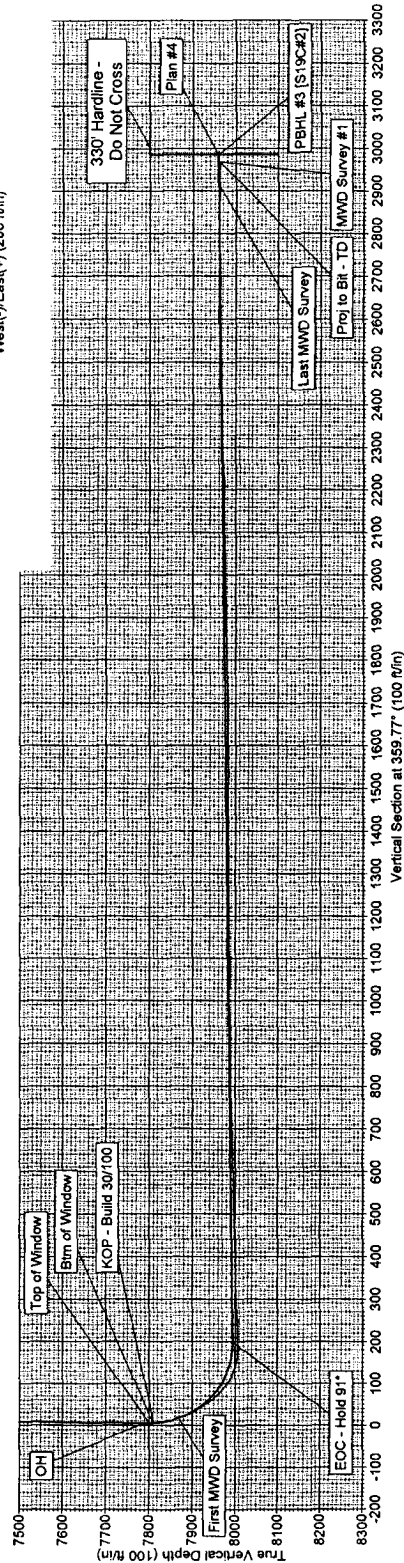

Plan: Plan #4 (State 19 Corn #2, Lateral #1)
Created By: John Harberg Date: 02/17/2008