


NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	<input checked="" type="checkbox"/>
FILE	<input checked="" type="checkbox"/>
U.S.G.S.	
LAND OFFICE	<input checked="" type="checkbox"/>
OPERATOR	<input checked="" type="checkbox"/>

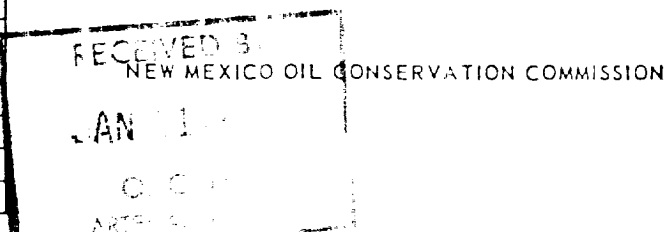

Form C-103  
Supersedes Old  
C-102 and C-103  
Effective 1-1-65

5a. Indicate Type of Lease
State <input checked="" type="checkbox"/> Fee <input type="checkbox"/>
5. State Oil & Gas Lease No.
L-1648

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.  
USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator Cities Service Oil and Gas Corporation ✓	8. Farm or Lease Name State CP Com
3. Address of Operator P.O. Box 1919 - Midland, Texas 79702	9. Well No. 2
4. Location of Well UNIT LETTER K 1980 FEET FROM THE South 1980 FEET FROM THE West 9 LINE, SECTION 21S RANGE 27E NMPM.	10. Field and Pool, or Wildcat Undesig. Bone Springs
15. Elevation (Show whether DF, FT, GR, etc.) 3232' GR	12. County Eddy

16.

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐  
TEMPORARILY ABANDON ☐  
PULL OR ALTER CASING ☐

PLUG AND ABANDON ☐  
CHANGE PLANS ☐

OTHER ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐  
COMMENCE DRILLING OPNS. ☐  
CASING TEST AND CEMENT JOBS ☒

ALTERING CASING ☐  
PLUG AND ABANDONMENT ☐

OTHER ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

T.D. 5350' Lime & Shale. Waiting on completion unit. Drilled a 7-7/8" hole from 2500' to a T.D. of 5350' in Lime & Shale. Ran and set 125 Jts (5339.00') 5-1/2" OD 14# casing @ 5350' and cemented w/300 sacks of Class C w/5# salt, 6# Gilsonite and 0.3 of 1% Halad 4/sack + 200 sacks of Class C w/5# salt and 0.3 of 1% Halad 4/sack cement. Plug down @ 1930 MST on 1-08-85. Cement did not circulate to the surface. Bumped float w/1400# - OK. PU BOP, set slips, CO casing and ND BOP. Ran temp. survey. TOC @ 2850'.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED

*Elmer Startz*

TITLE

Region Opr. Mgr. - Prod.

DATE

1-10-85

APPROVED BY

Original Signed By  
Leslie A. Clements  
Supervisor District II

TITLE

DATE

JAN 16 1985

CONDITIONS OF APPROVAL, IF ANY: