

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Perwell Energy, Inc.

3. Address and Telephone No.

600 N. Marienfeld, Ste 1100, Midland, Texas 79701

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FSL & 660' FEL  
Sec. 29; T-23-S; R-26-E

5. Lease Designation and Serial No.  
NM94838

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

F.H. "29" Federal Com. #1

9. API Well No.

30-015-29570

10. Field and Pool, or Exploratory Area

11. County or Parish, State

Eddy

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent  
☐ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☐ Other

- ☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form 1)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

- 4-4-97 Spudded 17 1/2" surface hole @ 7:00AM CST 4-4-97.  
4-6-97 Ran 14 jts. 13 3/8", 54.5#, J-55 8rd STC New csg set @ 600'. Cmt'd w/ 600sks of Cl C Neet containing 2% CaCl<sub>2</sub>. Circ. 135 sks of cmt to surface. Tested to 600 psi - OK.  
4-10-97 21 jts. 9 5/8", 40#, J-55, 8rd STC New API csg & 17 jts. 9 5/8" 36#, J-55 8rd STC New API csg set @ 1677'. Cmt'd w/ 500 sx of Cl C Lite containing 1% CaCl<sub>2</sub> + 6% gel + 1#/sk gildonite + 1/4#/sk flocele mixed @ 12.40ppg & 200 sks of Cl C Neet + 2% CaCl<sub>2</sub> mixed @ 14.8 ppg. Circ.'d 150 sks cmt to the surface. Tested to 600 psi - OK.

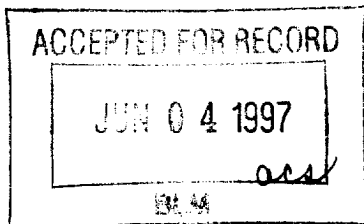

RECEIVED  
1997 MAY 16 P 9 27  
BUREAU OF LAND MGMT  
ROSWell OFFICE

14. I hereby certify that the foregoing is true and correct

Signed

Title Regulatory Analyst

Date 5-15-97

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: