<u>District I</u> 1625 N French Dr , Hobbs, NM 88240 State of New Mexico Energy Minerals and Natural Resources

Form C-144 July 21, 2008

District II

1301 W Grand Ave , Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

<u>District IV</u> 1220 S St Francis Dr , Santa Fe, NM 87505 Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

<	1	ال	1
~	٥,	7	-1

<u>Pit, Closed-Loop System, Below-Grade Tank, or</u> <u>Proposed Alternative Method Permit or Closure Plan Application</u>

Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method				
	X Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method				
Modification to an existing permit					
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method				
	below-grade tank, or proposed atternative method				

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances

Operator: Burlington Resources Oil & Gas Company, LP OGRID# 14538	
Address: P.O. Box 4289, Farmington, NM 87499	
Facility or well name Grambling C 202S	
API Number. 30-045-34621 OCD Permit Number	
U/L or Qtr/Qtr. P(SE/SE) Section: 14 Township 30N Range: 10W County: San Juan	
Center of Proposed Design Latitude: 36.80688 °N Longitude: 107.84791 °W NAD: 192	7 X 1983
Surface Owner X Federal State Private Tribal Trust or Indian Allotment	
X Pit: Subsection F or G of 19 15 17 11 NMAC	D 10'
3 Closed-loop System: Subsection H of 19 15 17 11 NMAC Type of Operation P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a per notice of intent)	mit or
Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type Thickness mil LLDPE HDPE PVD Other Liner Seams Welded Factory Other	01112 13 1 1 3 1 1 3 1 1 3 1 1 3 1 1 3 1 1 3 1
Below-grade tank: Subsection I of 19 15 17 11 NMAC Volume bbl Type of fluid	CEIVE) 88/2010
Tank Construction material Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner Type Thickness mil HDPE PVC Other	NS. DIV. DIS. 3
Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approximately ap	

Form C-144

Oil Conservation Division

Page 1 of 5



6								
Fencing: Subsection D of 19 15 17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)								
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)								
Four foot height, four strands of barbed wire evenly spaced between one and four feet								
Alternate Please specify								
Nothing: Subsection F of 10.15.17.11.NIMAC (Ambies to numerous following and numerous ton toute)								
Netting: Subsection E of 19 15 17 11 NMAC (Applies to permanent pits and permanent open top tanks)								
Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)								
8								
Signs: Subsection C of 19 15 17 11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers								
X Signed in compliance with 19 15 3 103 NMAC								
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19 15 17 NMAC for guidance								
Please check a box if one or more of the following is requested, if not leave blank:								
Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for constant	ideration of ar	proval						
(Fencing/BGT Liner)		•						
Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval								
10								
Siting Criteria (regarding permitting) 19 15 17 10 NMAC								
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable								
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for								
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria								
does not apply to drying pads or above grade-tanks associated with a closed-loop system.								
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.	Yes	\square_{N_0}						
- NM Office of the State Engineer - 1WATERS database search, USGS, Data obtained from nearby wells		□.,,						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake	Yes	По						
(measured from the ordinary high-water mark).		ш						
- Topographic map, Visual inspection (certification) of the proposed site								
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	Yes	No						
application.	_							
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	│							
- Visual inspection (certification) of the proposed site, Aerial photo, Satellite image								
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No						
(Applied to permanent pits)	NA NA							
- Visual inspection (certification) of the proposed site, Aerial photo, Satellite image								
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering	Yes	No						
purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.		_						
- NM Office of the State Engineer - 1WATERS database search, Visual inspection (certification) of the proposed site								
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	Yes	□No						
adopted pursuant to NMSA 1978, Section 3-27-3, as amended								
- Written confirmation or verification from the municipality, Written approval obtained from the municipality								
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification man. Tonographic man. Visual inspection (certification) of the proposed site.	Yes	□No						
- US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site		[] _{\r}						
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	∐No						
Within an unstable area.	Yes	□No						
- Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological	" "	⊔						
Society, Topographic map								
Within a 100-year floodplain	Yes	□No						
• FEIVIA III								

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC
Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17 9 NMAC
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9 Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC
Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of
19 15 17 9 NMAC and 19 15 17 13 NMAC
Previously Approved Design (attach copy of design) API or Permit
12
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19 15 17 9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15 17 10 NMAC
Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9
NMAC and 19 15 17 13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
13
Permanent Pits Permit Application Checklist: Subsection B of 19 15 17 9 NMAC
Instructions: Each of the following stems must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19 15 17 9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC
Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19 15 17 11 NMAC
Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19 15 17 11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19 15 17 11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15 17 11 NMAC Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17 12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19 15 17 11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Proposed Closure: 19 15 17 13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
Alternative ·
Proposed Closure Method Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
On-site Closure Method (only for temporary pits and closed-loop systems)
In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Wasta Everyation and Damoval Closure Plan Charlists (19.15.17.12 NIMAC) Instructions: Each of the following items must be attached to the closure plan
Waste Excavation and Removal Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.
Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC

16							
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19 15 17 13 D NMAC) Instructions Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two	,						
facilities are required							
Disposal Facility Name Disposal Facility Permit #							
Disposal Facility Name Disposal Facility Permit #							
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future Yes (If yes, please provide the information No	service and						
Required for impacted areas which will not be used for future service and operations							
Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19 15 17 13 NM	AC						
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC							
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC							
Siting Criteria (Regarding on-site closure methods only: 19 15 17 10 NMAC Instructions Each stung criteria requires a demonstration of compliance in the closure plan Recommendations of acceptable source material are provided certain sting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to office for consideration of approval Justifications and/or demonstrations of equivalency are required Please refer to 19 15 17 10 NMAC for guidance							
Ground water is less than 50 feet below the bottom of the buried waste	Yes No						
- NM Office of the State Engineer - 1WATERS database search, USGS Data obtained from nearby wells	N/A □						
Ground water is between 50 and 100 feet below the bottom of the buried waste	☐Yes ☐No						
- NM Office of the State Engineer - 1WATERS database search, USGS, Data obtained from nearby wells							
-							
Ground water is more than 100 feet below the bottom of the buried waste	Yes No						
- NM Office of the State Engineer - iWATERS database search, USGS, Data obtained from nearby wells							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark)	Yes No						
- Topographic map, Visual inspection (certification) of the proposed site							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site, Aerial photo, satellite image	Yes No						
	Yes No						
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site							
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes No						
- Written confirmation or verification from the municipality, Written approval obtained from the municipality							
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site	Yes No						
Within the area overlying a subsurface mine							
- Written confirantion or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No						
Within an unstable area	Yes No						
Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS, NM Geological Society,							
Topographic map							
Within a 100-year floodplain - FEMA map	Yes No						
- I LIVIA IIIAP]						
On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must bee attached to the clos by a check mark in the box, that the documents are attached.	ure plan. Please indicate,						
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17 10 NMAC							
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC							
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15 17 11 NMAC							
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of	f 19 15 17 11 NMAC						
Protocols and Procedures - based upon the appropriate requirements of 19 15 17 13 NMAC							
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMA	c						
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19 15 17 13 NMAC							
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards of	cannot be achieved)						
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19 15 17 13 NMAC							
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17 13 NMAC							
Site Reclamation Plan - based upon the appropriate requirements of Subsection C of 10 15 17 12 NMAC	i						

19	
Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief Name (Print) Title	
Ditt	·
e-mail address Telephone	
OCD Approval: Permit Application (including classifie plan) Closs fre Plan (only) OCD Conditions (see att OCD Representative Signature: Approval Date: OCD Permit Number:	12011
Closure Report (required within 60 days of closure completion): Subsection K of 1915 1713 NMAC Instructions Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the creport is required to be submitted to the division within 60 days of the completion of the closure activities Please do not complete this sec approved closure plan has been obtained and the closure activities have been completed X Closure Completion Date:	
22	
Closure Method:	Closed-loop systems only)
23	
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off B Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed Use attachment were utilized.	
Disposal Facility Name Disposal Facility Permit Number	
Disposal Facility Name Disposal Facility Permit Number	
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations.	peartions?
Yes (If yes, please demonstrate compliane to the items below)	
Required for impacted areas which will not be used for future service and operations	
Site Reclamation (Photo Documentation)	
Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	
The regulation Application Rates and Seeding Technique	
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Pleathe box, that the documents are attached. X Proof of Closure Notice (surface owner and division) X Proof of Deed Notice (required for on-site closure) X Plot Plan (for on-site closures and temporary pits) X Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (if applicable) X Disposal Facility Name and Permit Number X Soil Backfilling and Cover Installation X Re-vegetation Application Rates and Seeding Technique X Site Reclamation (Photo Documentation) On-site Closure Location Latitude 36.807 °N Longitude 107.847667 °W NAD	se indicate, by a check mark in
<u> </u>	
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my known the closure complies with all applicable closure requirements and conditions specified in the approved closure plan	nowledge and belief I also certify that
Name (Print) Ethel Tally Title Staff Regulatory To	echnician
Signature — Date — Date — Date	10
e-mail address Ethel Tally@conocophillips.com Telephone 505-599-40	27

Burlington Resources Oil Gas Company, LP San Juan Basin Closure Report

Lease Name: Grambling C 202S

API No.: 30-045-34621

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the temporary pit referenced above. All proper documentation regarding closure activities is being included with the C-144. The temporary pit for this location was constructed and location drilled before June 16, 2008 (effective date for Rule 19.15.17). While closure of the temporary pit did fall within the rule some dates for submittals are after the rig release date.

- Details on Capping and Covering, where applicable. (See report)
- Plot Plan (Pit Diagram) (Included as an attachment)
- Inspection Reports (Included as an attachment)
- Sampling Results (Included as an attachment)
- C-105 (Included as an attachment)
- Copy of Deed Notice will be filed with County Clerk (Not required on Federal, State, or Tribal land as stated by FAQ dated October 30, 2008)

General Plan:

1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B).

2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.

The pit was closed using onsite burial.

3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.

The closure process notification to the landowner was sent via email. (See Attached)(Well located on Federal Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.

Provision 4 of the closure plan requirements were not met due to rig move off date as noted on C-105 which was prior to pit rule change. Burlington will ensure compliance with this rule in the future.

- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.

Liner of temporary pit was removed above "mud level" after stabilization. Removal of the liner consisted of manually cutting liner at mud level and removing all remaining liner. Care was taken to remove "ALL" of the liner i.e., edges of liner entrenched or buried. All excessive liner was disposed of at a licensed disposal facility, (San Juan County Landfill).

7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

Burlington mixed the Pit contents with non-waste containing, earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed as safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.

8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components Tests Method		Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	ND ug/kg
BTEX	EPA SW-846 8021B or 8260B	50	21.9 ug/kG
TPH	EPA SW-846 418.1	2500	87.3mg/kg
GRO/DRO	EPA SW-846 8015M	500	1.5 mg/Kg
Chlorides	EPA 300.1	(1000/500	299 mg/L

The pit material passed solidification and testing standards. The pit area was then backfilled with compacted, non-waste containing, earthen material. More than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

The integrity of the liner was not damaged in the pit closure process.

11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011

Dig and Haul was not required.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final recontour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The pit area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Reshaping included drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. Notification will be sent to OCD when the reclaimed area is seeded.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 14 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

Provision 15 was accomplished by installing a steel marker in the temporary pit, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial. The marker is flush with the ground to allow access of the active well pad and for safety concerns. The top of the marker contains a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate contains the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the following operator's information at the time of all wells on the pad are abandoned. The riser will be labeled: BR, BLM, Grambling C 202S, UL-P, Sec. 14, T 30N, R 10W, API # 30-045-34621

Tafoya, Crystal

From:

Sent:

Tafoya, Crystal Thursday, October 16, 2008 10:55 AM

To: Subject: 'mark_kelly@nm.blm.gov' **Surface Owner Notification**

The following locations temporary pit will be closed on-site. Please let me know if you have any questions.

Grambling C.202S McDurmitt Com 100S Huerfano Unit 305 Canyon Largo Unit 250N Federal A 1E Helms Federal 1G

Thank you,

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company San Juan Business Unit

Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005

DISTRICT II 1301 V. Grand Avenue, Artesia, N.M. 88210

DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410 OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe. NM 87505 Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

☐ AMENDED REPORT

DISTRICT IV 1220 S. St. Francis Dr., Santa Pe, NM 87505

WELL.	LOCATION	ΔNĎ	ACREAGE	DEDICATION	PÍ ÁT
** ('. * .) .	IANDALINI	MINI	AURICALTE	DEDICATION	LIAI

¹ API Number ⁹ Pool Code		Pool Name BASIN FRUITLAND COAL		
⁴ Property Code		erty Name * Well Nu 4BLING C 202		
A721649-0001	·	ator Name PRevai		
	BURLINGTON RESOURCE	OIL AND GAS COMPANY LP 632	.O '	


¹⁰ Surface Location

UL or lot no.	Section 14	Township 3ÖN	Range 10W	املا الطب 16	Feet from the 731	North/South line SOUTH	Feet from the 906.	Rest/West line EAST	County SAN JUAN
			11	•• •			~ .		

¹¹ Bottom Hole Location If Different From Surface

ſ	UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	. Leer thour rive	East/West line	County
	Dedicated Acre	39		13 Joint or	Intill	¹⁴ Consolidation (code	¹⁵ Order No.		
	313.36	Acres -	(E/2)							

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

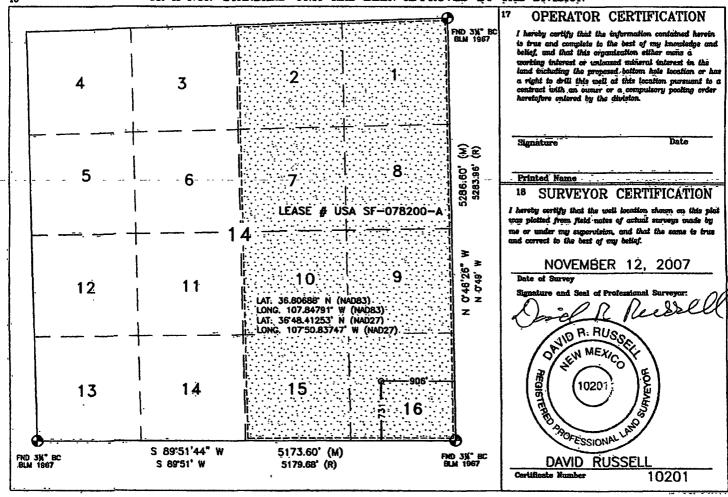



LATITUDE: 36,80688°N LONGITUDE: 107.84791°W DATUM: NAD 83

SLOPES TO BE CONSTRUCTED TO MATCH THE ORIGINAL CONTOURS AS CLOSE AS POSSIBLE.

BURLINGTON RESOURCES 0&G CO LP

GRAMBLING C # 202 S
731' FSL & 906' FEL
LOCATED IN THE SE/4 SE/4 OF SECTION 14,
T30N, R10W, N.M.P.M.,
SAN JUAN COUNTY, NEW MEXICO
GROUND ELEVATION: 6320', NAVD 88
FINISHED PAD ELEVATION: 6320.1', NAVD 88



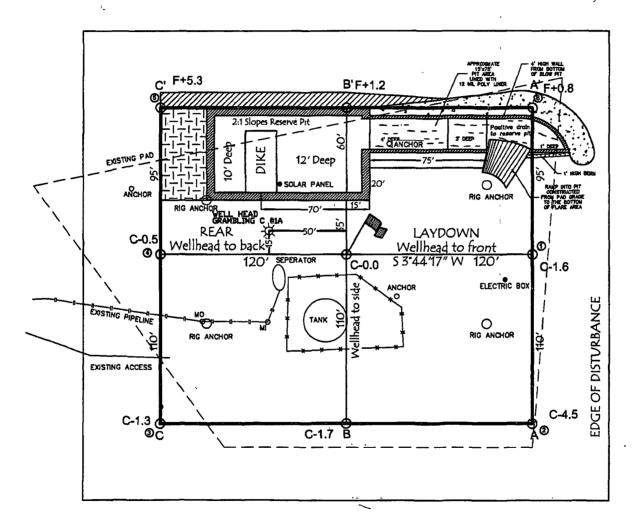

305' x 340' =2.38 ACRES OF DISTURBANCE

SCALE: 1" = 60' JOB No.: COPC129 DATE: 11/27/07 NOTE:

RESERVE PIT DIKE: TO BE 8' ABOVE DEEP SIDE (OVERFLOW - 3' WIDE AND 1' ABOVE SHALLOW SIDE).

RUSSELL SURVEYING, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.

CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED, BURIED PIPELINES OR

CABLES ON WELL PAD, IN CONSTRUCTION ZONE AND/OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR

TO CONSTRUCTION.



Russell Surveying 1409 W. Aztec Bivd. #2 Aztec, New Mexico 87410 (505) 334-8637



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Grambling C #202S	Date Reported:	09-09-08
Laboratory Number:	46986	Date Sampled:	08-28-08
Chain of Custody No:	5102	Date Received:	09-02-08
Sample Matrix:	Soil	Date Extracted:	09-04-08
Preservative:	Cool	Date Analyzed:	09-05-08
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Ďet. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	1.5	0.1
Total Petroleum Hydrocarbons	1.5	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Mistry Walters Review

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505-632-0615 • Fax 505-632-1865



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client	ConocoPhillips	Project #:	96052-0026
Sample ID:	Grambling C #202S Background	Date Reported:	09-09-08
Laboratory Number:	46987	Date Sampled:	08-28-08
Chain of Custody No:	5102	Date Received:	09-02-08
Sample Matrix:	Soil	Date Extracted:	09-04-08
Preservative:	Cool	Date Analyzed:	09-05-08
Condition:	Intact	Analysis Requested:	8015 TPH
		•	

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Review

5796 U.S. Highway 64 • Farmington, NM 87401 • Tel 505-632-0615 • Fax 505-632-1865



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

					
Client:	QA/QC		Project #:		N/A
Sample ID:	09-05-08 QA/0	QC .	Date Reported:		09-09-08
Laboratory Number:	46985		Date Sampled:		N/A
Sample Matrix:	Methylene Chlor	ride	Date Received:		N/A
Preservative:	N/A		Date Analyzed:		09-05-08
Condition:	N/A		Analysis Reques	ted:	TPH
	*I-Cal Date	Feal RF	C=Cal RF	% Difference	Accept Range
Gasoline Range C5 - C10	05-07-07	9.9190E+002	9.9229E+002	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-07	1.0021E+003	1.0025E+003	0.04%	0 - 15%
Blank Conc. (mg/L = mg/Kg)		Concentration		Detection Limi	
Gasoline Range C5 - C10		ND		0.2	•
Diesel Range C10 - C28		ND		0.1	-
Total Petroleum Hydrocarbons		ND		0.2	
Duplicate Conc. (mg/kg)	Sample	Duplicate	% Difference	Accept Range	
Gasoline Range C5 - C10	ND	ND	0.0%	0 - 30%	
Diesel Range C10 - C28	ND	ND	0.0%	0 - 30%	
Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept Range
Gasoline Range C5 - C10	ND	250	252	101%	75 - 125%
Diesel Range C10 - C28	ND	250	254	102%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 46984 - 46987, 46992, and 46993.

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	{	96052-0026
Sample ID:	Grambling C #202S	Date Reported:		09-09-08
Laboratory Number:	46986	Date Sampled:		08-28-08
Chain of Custody:	5102	Date Received:		09-02-08
Sample Matrix:	Soil	Date Analyzed:		09-05-08
Preservative:	Cool	Date Extracted:		09-04-08
Condition:	Intact	Analysis Requested:		BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	ND	0.9	sã».
Toluene	9.3	1.0	
Ethylbenzene	1.1	1.0	 /
p,m-Xylene	9.0	1.2	
o-Xylene	2.5	0.9	
Total BTEX	21.9		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	96.0 %
	1,4-difluorobenzene	96.0 %
	Bromochlorobenzene	96.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Mister Claster Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Grambling C #202S Background	Date Reported:	09-09-08
Laboratory Number:	46987	Date Sampled:	08-28-08
Chain of Custody:	5102	Date Received:	09-02-08
Sample Matrix:	Soil	Date Analyzed:	09-05-08
Preservative:	Cool	Date Extracted:	09-04-08
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	ND	0.9	<i>3</i>
Toluene	2.9	1.0	
Ethylbenzene	1.1	1.0	-
p,m-Xylene	2.6	1.2	
o-Xylene	2.4	0.9	
Total BTEX	9.0		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	99.0 %
	1,4-difluorobenzene	99.0 %
	Bromochlorobenzene	99.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client: Sample ID:	N/A 09-05-BT QA/QC	Project #: Date Reported:	N/A 09-09-08 N/A
Laboratory Number:	46985	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	
Preservative:	N/A	Date Analyzed:	09-05-08
Condition:	N/A	Analysis:	BTEX

Calibration and Detection Limits (ug/L)	I-Calire	G-CallRF: Accept. Rand	%Diff. je 0 = 15%	Blank ©	Defect. Limit
Benzene	8.0875E+007	8.1037E+007	0.2%	ND	0.1
Toluene	6.2040E+007	6.2164E+007	0.2%	ND	0.1
Ethylbenzene	4.8594E+007	4.8691E+007	0.2%	ND	0.1
p,m-Xylene	1.0104E+008	1.0124E+008	0.2%	ND	0.1
o-Xylene	4.6678E+007	4.6771E+007	0.2%	ND	0.1

Duplicate Conc. (ug/Kg)	Sample Du	plicate	%Diff.	Accept Range	Detect Limit
Benzene	1.8	1.9	5.6%	0 - 30%	0.9
Toluene	5.2	5.5	5.8%	0 - 30%	1.0
Ethylbenzene	2.8	3.0	7.1%	0 - 30%	1.0
p,m-Xylene	3.8	3.9	2.6%	0 - 30%	1.2
o-Xylene	2.9	3.1	6.9%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample Amo	untSpiked Spik	ed Sample	% Recovery	AcceptiRange
Benzene	1.8	50.0	51.4	99.2%	39 - 150
Toluene	5.2	50.0	53.2	96.4%	46 - 148
Ethylbenzene	2.8	50.0	49.8	94.3%	· 32 - 160
p,m-Xylene	3.8	100	98.8	95.2%	46 - 148
o-Xylene	2.9	50.0	47.9	90.5%	46 - 148

ND - Parameter not detected at the stated detection limit.

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using

Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments:

QA/QC for Samples 46984 - 46993.

Analyst



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Grambling C #202S	Date Reported:	09-10-08
Laboratory Number:	46986	Date Sampled:	08-28-08
Chain of Custody No:	5102	Date Received:	09-02-08
Sample Matrix:	Soil	Date Extracted:	09-05-08
Preservative:	Cool	Date Analyzed:	09-05-08
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

87.3

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample.

Analyst

Mustem m Waeters



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Grambling C #202S Background	Date Reported:	09-10-08
Laboratory Number:	46987	Date Sampled:	08-28-08
Chain of Custody No:	5102	Date Received:	09-02-08
Sample Matrix:	Soil	Date Extracted:	09-05-08
Preservative:	Cool	Date Analyzed:	09-05-08
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

60.4

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample.

Analyst

Review Mulaters



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

Client: Sample ID: Laboratory Number Sample Matrix: Preservative: Condition:	:	QA/QC QA/QC 09-05-TPH.QA/0 Freon-113 N/A N/A	QC 46985	Project #: Date Reported Date Sampled: Date Analyzed Date Extracted Analysis Need	:	N/A 09-08-08 N/A 09-03-08 09-03-08 TPH
Calibration	I-Cal Date 08-22-08	C-Cal Date 09-03-08	I-Cal RF: 1,680	C-Cal RF: 1,590	% Difference 5.4%	Accept. Range +/- 10%
Blank Conc. (m TPH	g/Kg)		Concentration ND		Detection Lim	it
Duplicate Conc.	. (mg/Kg)		Sample 73.9	Duplicate 53.7	% Difference 27.3%	Accept. Rarige +/- 30%

Spike Conc. (mg/Kg): Sample Spike Added Spike Result % Recovery Accept Range

2,000

1,850

89.2%

80 - 120%

ND = Parameter not detected at the stated detection limit.

References:

TPH

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

73.9

Comments:

QA/QC for Samples 46984 - 46987 and 46992.

Analyst

Review /Y



Chloride

Client:	ConocoPhillips	Project #:	96052-002
Sample ID:	Grambling C #202S	Date Reported:	09-10-08
Lab ID#:	46986	Date Sampled:	08-28-08
Sample Matrix:	Soil	Date Received:	09-02-08
Preservative:	Cool	Date Analyzed:	09-05-08
Condition:	Intact	Chain of Custody:	5102

Parameter

Concentration (mg/Kg)

Total Chloride

299

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Drilling Pit Sample.

Analyst

Motin Milaeters.
Review



Chloride

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Grambling C #202S Background	Date Reported:	09-10-08
Lab ID#:	46987	Date Sampled:	08-28-08
Sample Matrix:	Soil	Date Received:	09-02-08
Preservative:	Cool	Date Analyzed:	09-05-08
Condition:	Intact	Chain of Custody:	5102

Parameter

Concentration (mg/Kg)

Total Chloride

31.0

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Drilling Pit Sample.

Analyst

Muster my Workers Review

Submit To Approp Two Copies District I	riate District G	Office	Energy	State of Ne Minerals and			sources				·			orm C-105 July 17, 2008
1625 N French Dr District II 1301 W Grand Av									1. WELL API NO. 30-045-34621					
District III 1000 Rio Brazos R	, ,			il Conservat 20 South St				ľ	2 Type of Lease .					
District IV			12	Santa Fe, N			т.	-	STATE FEE FED/INDIAN 3 State Oil & Gas Lease No					
1220 S St Francis	Dr , Santa Fe,	NM 8/505		Sama re, r	1111 073	05			SF-078200-		sease 110			
		ETION OI	R RECOMPL	ETION REF	PORT	AND	LOG							
4 Reason for fil	ıng								5 Lease Name Grambling		nit Agree	ment Na	me	
☐ COMPLET	ION REPO	RT (Fill in bo	xes #1 through #31	for State and Fee	wells only	y)			6 Well Numb					
	nd the plat to		(Fill in boxes #1 thosure report in acco					or	202S					
⊠ NEW	WELL 🔲	WORKOVER	DEEPENING	□PLUGBACK	DIFF	EREN	NT RESERVO							
8 Name of Opera Burlington R		Oil Cas C	ompany I D						9 OGRID 14538					
10 Address of O		On Gas C	опрану, ст						11 Pool name	or Wıl	dcat			
PO Box 4298, Fa	rmington, N	M 87499												
12.Location	Unit Ltr	Section	Township	Range	Lot		Feet from th	ie	N/S Line	Feet	from the	E/W I	ine	County
Surface:														
вн:														
13 Date Spudde	d 14 Date	T D Reached	15 Date R ₁ 05/18/2008			16	Date Comple	eted	(Ready to Prod	uce)		Elevat		and RKB,
18 Total Measur	ed Depth of	Well		ck Measured Dep	th	20	Was Direction	onal	Survey Made?					her Logs Run
22 Producing In	terval(s) of t	his completio	n - Top, Bottom, N	ame			· · -							
22 Floducing III	icivai(s), oi i	completio	n - Top, Bottom, N											
23			CAS	SING RECO	ORD (1			ing						
CASING SI	ZE	WEIGHT L	B /FT	DEPTH SET		НО	LE SIZE		CEMENTING	G REC	CORD	AN	TNUON	PULLED
								\exists						
				•										
24			LIN	IER RECORD			1	25	, Tr	LIDIN	IC DEC	ODD		
SIZE	ТОР		ВОТТОМ	SACKS CEME	ENT SC	REEN		SIZI				PACKER SET		
26 Perforation	record (inte	rval, size, and	number)	1	27	ACI	D SHOT I	FR A	CTURE CE	MEN	T SOLI	FEZE	FTC	
20 remoration							NTERVAL	IKA	RACTURE, CEMENT, SQUEEZE, ETC AMOUNT AND KIND MATERIAL USED					
					_				-					
28		<u></u>]	PROD	UC	ΓΙΟΝ							
Date First Produc	ction	Prod	luction Method (Fi						Well Status	(Prod	or Shut-	- <i>in)</i>		
Date of Test	Hours To	ested	Choke Size	Prod'n For Test Period	Oil	- Bbl		Gas	- MCF	Wa	ter - Bbl		Gas - (Oil Ratio
Flow Tubing Press	Casing F		Calculated 24- Hour Rate	Oıl - Bbl		Gas -	- MCF	 	Vater - Bbl		Oıl Gra	vity - A	PI - (Cor	r)
29 Disposition o	f Gas (Sold,	used for fuel,	vented, etc)							30 T	est Witne	ssed By		
31 List Attachm	ents													
32 If a temporar	y pit was use	d at the well,	attach a plat with t	he location of the	temporary	pit								
33 If an on-site b	ourial was us	ed at the well,	report the exact lo	cation of the on-s	ite burial									
I herehv certi	fv that the	Latitude 3	6.807°N Longi n shown`on bot	tude 107.847667°	ow NAD	19.	27 ⊠1983 and comple	oto 1	to the hest or	f my	knowle	doe an	d helie	<u>r</u>
Signature Signature	Flied	Pal	-n Pri	nted me Ethel Tall	-		-		-	•			u vene,	
E-mail Addre	ss ethel.ta	ally@conoc	ophillips.com											, . 🔾

Corcoitings

it Closure Form:
Date:
Vell Manne: Grain bling C 2025
footages: 731 FSL 906 FEL Unit Letter: P
Section: 14, 7-30-N, R-10-W, County: 57 State: 111
Contractor Closing Pit: Ace
Construction Inspector: Norman Faver Date: 11/11/2005
nspecior Signature: Toma To

Tally, Ethel

From:

Busse, Dollie L

Sent:

Monday, July 14, 2008 9 31 AM

To:

Brandon Powell@state nm us; Mark Kelly, Robert Switzer, Sherrie Landon

Cc:

A&Z, 'Faver Norman'; Chavez, Virgil E, GRP SJBU Production Foreman, GRP SJBU

Production Leads, Kramme, Jeff L, Blair, Maxwell O; Blakley, Maclovia, Clark, Joan E, Farrell, Juanita R, Finkler, Jane; Maxwell, Mary A (SOS Staffing Services, Inc.), McWilliams, Peggy L,

Seabolt, Elmo F

Subject:

Clean Up Notice - Grambling C 1F

Importance:

High

Attachments:

Grambling C 1F PDF

A&Z Contracting will move a tractor to the **Grambling C 1F** on **Thursday**, **July 17** to start the reclamation process. Please contact **N**orman Faver (320-0670) if you have any questions or need additional information Thanks¹ Dollie

Network #: 10197506 (NANN)

Operator:

Burlington Resources

Legals:

1310' FNL, 1600' FWL Section 14, T30N, R10W Unit Letter 'F' (SENW) San Juan County, NM

Lease Name:

USA SF-078200-A

API #:

30-045-34459

Surface/Minerals:

BLM/BLM



Dollie L. Busse

ConocoPhillips Company-SJBU

Construction Technician
Project Development
505-324-6104
505-500-4063 (fee)


505-599-4062 (fax)


Dollie.L.Busse@conocophillips.com

ConociPhillips

Reclamation Form:	
Date: 12-10-2008	<u>}</u>
	oling C 2025
Footages: <u>731 FS1</u>	906 FEL Unit Letter:
Section: 14, 7-30-	N, R-10-W, County: <u>\$3</u> State: <u>WM</u>
Reclamation Contractor:	Ace
Reclamation Date:	11-13-2008
Road Completion Date:	12-5-2008
Seeding Date:	12-2-2008
Construction Inspector:	Norman Faver Date: 12-10-2008
Inspector Signature:	Norman For



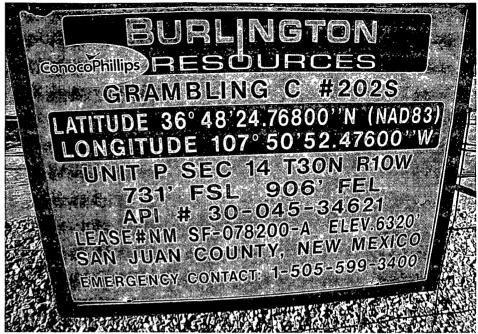

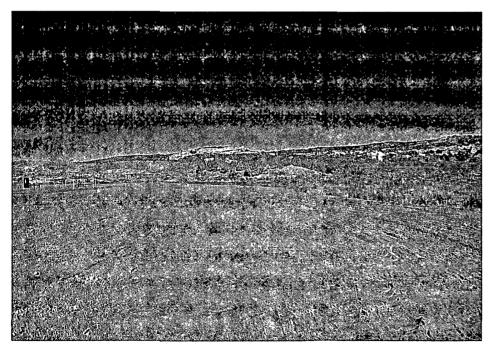



WELL PAD SAFETY AND ENVIRONMENTAL CHECK LIST

WELL NAME: Grambling C 202S

API#:30-045-34621

DATE	INSPECTOR	SAFETY CHECK	LOCATION CHECK	PICTURES TAKEN	COMMENTS
5/30/08	Jared Chavez	Х	X		
6/11/08	Jared Chavez	Х	X		Pit and location in good condition
6/18/08	Jared Chavez	Х	, X		Pit and location in good condition
6/25/08	Jared Chavez	Х	X		Pit and location in good condition
7/2/08	Jared Chavez	Х	Х		Pit and location in good condition
7/9/08	Jared Chavez	Х	, X		Pit and location in good condition
7/16/08	Jared Chavez	Х	X		Pit and location in good condition
7/22/08	Jared Chavez	Х	X		Pit and location in good condition
7/30/08	Jared Chavez	Х	X		Blow pit water needs pulled, contacted Noble Trucking
8/6/08	Jared Chavez	X	X		Fence needs tightened, contacted Crossfire for repair, blow pit water needs pulled, contacted Noble Trucking
8/12/08	Jared Chavez	Х	X		Pit and location in good condition
8/20/08	Jared Chavez				Basic #1576 is on location
9/3/08	Jared Chavez	Х	; X		Pit and location in good condition
9/16/08	Jared Chavez	Х	X		Pit and location in good condition
9/24/08	Jared Chavez	Х	X		Pit and location in good condition
10/2/08	Jared Chavez	Х	Х		Pit and location in good condition
10/9/08	Jared Chavez	Х	X		Pit and location in good condition
10/17/08	Jared Chavez	Х	X		Pit and location in good condition
10/24/08	Jared Chavez	Х	X		Pit and location in good condition