

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No.1004-035

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen
or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT" For such proposals

5. Lease Designation and Ser. No.

JAT 129

6. If Indian, Allottee or Tribe Name

Jicarilla Apache Tribe

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Apache 12

9. API Well No.

30 03920707

10. Field and Pool, or Exploratory Area

S. Blanco P.C.

11. County or Parish, State

Rio Arriba NM

SUBMIT IN TRIPLICATE

1. Type of Well:

Oil Well

XX Gas Well

Other

2. Name of Operator

Apache Corporation

3. Address and Telephone No.

2855 Southside River Road Suite A, Farmington, NM 87401 505-325-0318

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

790 FNL & 1850 FWL NE NW Sec 13 T24N R4W

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
☒ Notice of Intent	Abandonment
	Recompletion
	Plugging Back
	Casing Repair
	Altering Casing
	☒ Other Produce or P&A
	(Note: Report results of multiple completions on Well Completion or Recompletion Report and LogForm.)
	Change of Plans
	New Construction
	Non-Routine Fracturing
	Water Shut-Off
	Conversion to Injection
	Dispose Water

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.

If well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Apache Corporation proposes to return this well to production by pulling and replacing the sanded in tubing. If the tubing is stuck, Apache will start P&A procedures per the attached.

Attachment.

14. I Certify that the foregoing is true and correct.

Signed

(Stan Phillips)

Title Senior Production Foreman

Date

6-2-2003

(This space for Federal or State office use)

Approved by

/s/ Brian W. Davis

Title

Division of Multi-Resources

JUN 10 2003

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly to make to any department or agency to the United States any false, fictitious or

Fraudulent statements or representations as to any matter within its jurisdiction.

Apache Corporation
 JAT 129 #12
 NENW Sec 13 T24N R4W
 Rio Arriba Co., NM
 API 3003920707
 South Blanco Pictured Cliffs
 Spud 7-24-1973

Existing Wellbore Diagram

6-2-2003


Formation Tops

Nacimiento	1150' (JAT 129 #120)
Ojo Alamo	2376' (actual)
Pictured Cliffs	3000' (actual)

Note: JAT 129 #120 NENW Sec 13 T24N R4W
 P#A'd 11-15-01

Cement:

- 8 5/8" w/ 125 SX
 - 4 1/2" w/ 100 SX (assume 1.18 ft³ yield)
 = 118 ft³ x .75 = 88.5 ft³
 = 389' of cmt = 2749' cmt top

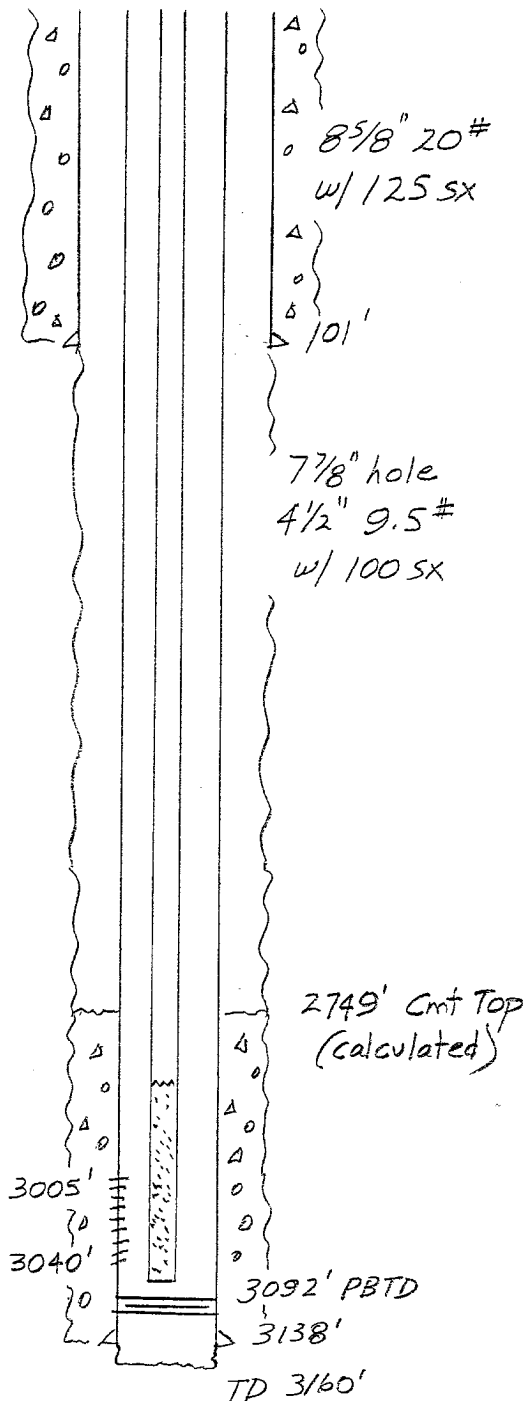

6-1998 Ran tbg wireline tools. Tbg filled w/ sand @ 2968'.

6-1998 Zero PSI on tbg/csg. Assume both tbg/csg sanded in.

Apache Corporation
JAT 129 #12
API 3003920707

6-2-2003


Apache Corp. proposes to return the well to production on P&A, depending the outcome of the upcoming workover.

- Workover operations:

- MIRVSV. Pull the 1 1/2" sanded in tbg. Bail / clean out the sand in the csg. Run 2 3/8" prod tbg - return well to prod.
- If the tbg is stuck:
 - Cut tbg @ 2960'.
 - Start P&A operations.

Formation Tops

Nacimiento	1150'
Ojo Alamo	2376'
P.C.	3000'

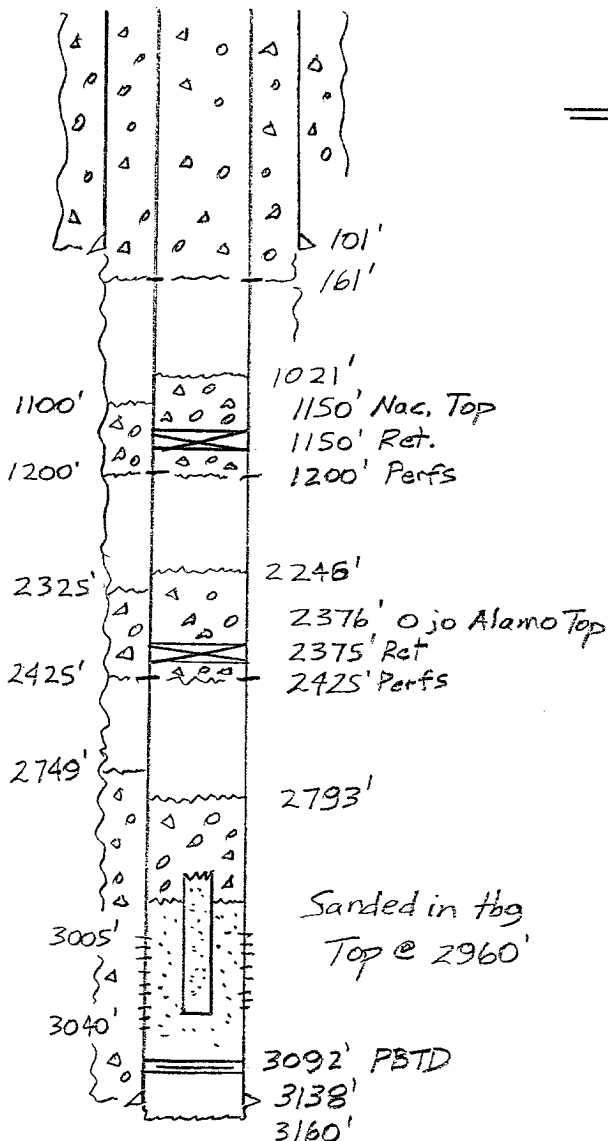

Proposed P&A

- All cmt - Class B 15.6 #/gal
- All spacer fluid - fresh water
- 1. Load csg, attempt 500 PSI press test.
- 2. Spot 12 sx (14.2 ft³) from 2793' to 2950'.
 - If csg did not test - WOC, tag cmt.
- 3. Perf csg @ 2425'. Set cmt ret @ 2375'.
 - Pump 45 sx under ret.
 - Sting out, spot 10 sx on top of ret from 2246' to 2375'.
- 4. Perf csg @ 1200'. Set cmt ret @ 1150'.
 - Pump 45 sx under ret.
 - Sting out, spot 10 sx on top of ret from 1021' to 1150'.
- 5. Perf csg @ 161'. Circ cmt down 4 1/2" csg thru perfs back to surface (approx 61 sx)
- 6. Cut off wellhead, fill voids w/ cmt.
- 7. Remediate location.

Total cmt - approx 183 sx.