


**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

Sundry Notices and Reports on Wells

2006 SEP 21 AM 8 07

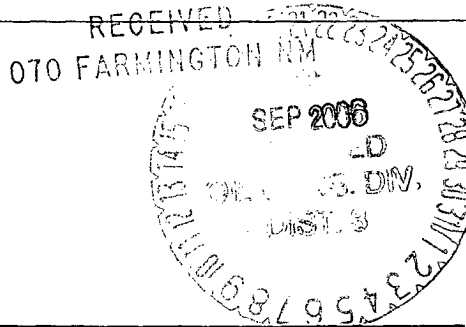

1. Type of Well
GAS

2. Name of Operator
CDX RIO, LLC

3. Address & Phone No. of Operator

2010 Afton Place, Farmington, New Mexico 87401 (505) 326-3003

4. Location of Well, Footage, Sec., T, R, M
890'FSL, 1190'FWL, Sec.10, T-25-N, R-5-W, NMPM

5. Lease Number
Jicarilla Contract 146
6. If Indian, All. or
Tribe Name
Jicarilla Apache
7. Unit Agreement Name

8. Well Name & Number

9. Jicarilla 146 #16
API Well No.

10. 30-039-06065
Field and Pool

11. Otero Chacra
County and State

Rio Arriba Co, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission	Type of Action
☐ Notice of Intent	☒ Abandonment ☐ Change of Plans
☒ Subsequent Report	☐ Recompletion ☐ New Construction
☐ Final Abandonment	☐ Plugging ☐ Non-Routine Fracturing
	☐ Casing Repair ☐ Water Shut off
	☐ Altering Casing ☐ Conversion to Injection
	☐ Other

13. Describe Proposed or Completed Operations

9-5-06 MIRU. Change out bradenhead valve. ND WH. NU BOP. Conduct ram check. TOOHH w/127 jts 2 3/8" tbg. TIH w/4 1/2" csg scraper to 3982'. SDON. (Rod Velarde, Jicarilla Tribe on location).

9-6-06 TOOHH w/csg scraper. TIH w/4 1/2" cmt retainer, set @ 3982'. Load tbg w/3 bbl wtr. PT cmt retainer to 1500 psi, OK. Establish circ out csg w/9 bbl wtr. Circ hole clean. Attempt to PT csg. Establish injection into hole w/1.5 bbl min @ 750 psi. Plug #1: pump 11 sx Type III cmt (15 cu.ft.) inside csg @ 3823-3982' to cover Chacra perfs & top. WOC. TOOHH. TIH to 3190'. SDON. (Rod Velarde, Jicarilla Tribe on location).

9-7-06 TIH, tag TOC @ 3885'. TOOHH to 3180'. Load csg w/7 bbl wtr. Attempt to PT csg, failed. Plug #2: pump 49 sx Type III cmt (65 cu.ft.) inside csg @ 2471-3180' to cover Pictured Cliffs, Fruitland, Kirtland & Ojo Alamo tops. WOC. TOOHH to 1173'. Attempt to PT csg, failed. TIH, tag TOC @ 2404'. TOOHH. TIH, perf 3 sqz holes @ 1223'. TOOHH. TIH w/cmt retainer, set @ 1173'. Load csg. Attempt to PT csg, failed. Establish injection w/2 bbl per min @ 800 psi. Establish rate into sqz holes & out bradenhead w/2 bbl per min @ 500 psi. Plug #3: pump 35 sx Type III cmt outside csg; pump 4 sx Type III cmt inside csg below cmt retainer; pump 7 sx Type III cmt inside csg above cmt retainer to cover Nacimiento top. TOOHH WOC. SDON. (Rod Velarde, Jicarilla Tribe on location).

Continued on back

14. I hereby certify that the foregoing is true and correct.

Signed Nancy Oetmanns Title Agent Date _____

(This space for Federal or State Office use)

APPROVED BY _____ Title _____

CONDITION OF APPROVAL, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

ACCEPTED FOR RECORD

Date SEP 21 2006

NMOCD

FARMINGTON FIELD OFFICE

9-8-06 SD for weather & weekend.

9-11-06 Load hole w/4 bbl wtr. Establish injection w/2 bbl min @ 800 psi. Attempt to PT csg, failed. TIH, tag TOC @ 1060'. TOOH to 262'. Perf 3 sqz holes @ 262'. TOOH. Establish circ down csg & out bradenhead w/2 bbl min @ 400 psi. Plug #4: pump 90 sx Type III cmt (118 cu.ft.). down 4 ½" csg & out bradenhead. Circ 1 bbl cmt to surface. ND BOP. Cut off WH. Cmt at surface in the 4 ½" and 8 5/8" csg. Set dry hole marker w/25 sx Type III cmt (33 cu.ft.). RD. Rig released. (Rod Velarde, Jicarilla Tribe on location).

Well plugged and abandoned 9-11-06