

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

RECEIVED**APR 16 2008****Sundry Notices and Reports on Wells**Bureau of Land Management
Farmington Field Office1. **Type of Well**
GAS5. **Lease Number**
USA SF-079391
6. **If Indian, All. or
Tribe Name**2. **Name of Operator****BURLINGTON
RESOURCES**7. **Unit Agreement Name**
San Juan 27-5 Unit3. **Address & Phone No. of Operator**

PO Box 4289, Farmington, NM 87499 (505) 326-9700

8. **Well Name & Number**
9154. **Location of Well, Footage, Sec., T, R, M**Unit J (NWSE), 1437' FSL & 1780' FSL, Surface Sec. 08, T27N, R5W, NMPM
Unit P (SESE), 1115' FSL & 1010' FEL BH9. **API Well No.**

30-039-30346

10. **Field and Pool**
Blanco MV/Basin DK

Rio Arriba Co., NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA**Type of Submission**☒ Notice of Intent☐ Subsequent Report☐ Final Abandonment**Type of Action**☐ Abandonment☐ Recompletion☐ Plugging☐ Casing Repair☐ Altering Casing☒ Change of Plans☐ New Construction☐ Non-Routine Fracturing☐ Water Shut off☐ Conversion to InjectionRCVD MAY 2 '08
OIL CONS. DIV.

DIST. 3

13. Describe Proposed or Completed Operations

Burlington Resources would like to make the following changes to the directional drill plan. The surface setting depth change from 200' 215'. Also we would like to deepen the kick off point and increase the build and drop rates.

14. I hereby certify that the foregoing is true and correct.Signed Sasha Spangler Sasha Spangler Title Regulatory Technician Date 04/16/08

(This space for Federal or State Office use)

APPROVED BY Troy L. Saliers Title Petroleum Engineer Date 4-30-08

CONDITION OF APPROVAL, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

NMOCD



ConocoPhillips


**San Juan Basin New Mexico
Rio Arriba SEC 8
SJ 27-5 Unit #915**

PLANNED SURVEY

Plan: Design #1

Standard Planning Report

02 April, 2008

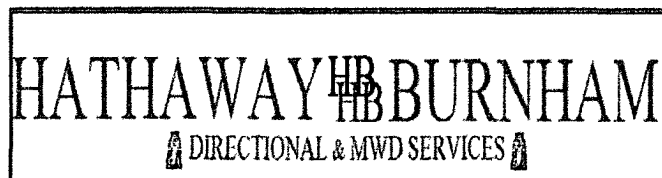

Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well SJ 27-5 Unit #915
Company:	ConocoPhillips	TVD Reference:	SJ 27-5 Unit #915 @ 6661.0ft (AWS #730)
Project:	San Juan Basin New Mexico	MD Reference:	SJ 27-5 Unit #915 @ 6661.0ft (AWS #730)
Site:	Rio Arriba SEC 8	North Reference:	True
Well:	SJ 27-5 Unit #915	Survey Calculation Method:	Minimum Curvature
Wellbore:	PLANNED SURVEY		
Design:	Design #1		

Project	San Juan Basin New Mexico, NEW MEXICO		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico West 3003		

Site	Rio Amba SEC 8, T27N R5W		
Site Position:		Northing:	2,063,816.10 ft
From:	Map	Easting:	653,995.00 ft
Position Uncertainty:	15.0 ft	Slot Radius:	32"
		Latitude:	36° 40' 14.586 N
		Longitude:	107° 18' 29.658 W
		Grid Convergence:	0.31 °

Well	SJ 27-5 Unit #915, SURFACE IS 1437' FSL AND 1780' FEL OF SEC 8		
Well Position	+N/-S	1,437.0 ft	Northing:
	+E/-W	1,780.0 ft	Easting:
Position Uncertainty		0.0 ft	Wellhead Elevation:
			Ground Level:

Wellbore	PLANNED SURVEY				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	4/2/2008	10.07	63.58	51,150

Design	Design #1			
Audit Notes:				
Version:	1	Phase:	PLAN	Tie On Depth:
				0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(ft)	(ft)	(ft)	(°)
	0.0	0.1	-0.1	108.33

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(ft)	(ft)	Rate	Rate	Rate	(°)	
(ft)			(ft)			(°/100ft)	(°/100ft)	(°/100ft)		
0.0	0.00	0.00	0.0	0.1	-0.1	0.00	0.00	0.00	0.00	
700.0	0.00	0.00	700.0	0.1	-0.1	0.00	0.00	0.00	0.00	
1,664.6	19.29	108.33	1,646.5	-50.5	152.6	2.00	2.00	0.00	108.33	
3,195.1	19.29	108.33	3,091.0	-209.5	632.6	0.00	0.00	0.00	0.00	
3,838.1	0.00	0.00	3,722.0	-243.2	734.4	3.00	-3.00	0.00	180.00	SJ 27-5 Unit #915 I
7,991.1	0.00	0.00	7,875.0	-243.2	734.4	0.00	0.00	0.00	0.00	SJ 27-5 Unit #915 F

Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well SJ 27-5 Unit #915
Company:	ConocoPhillips	TVD Reference:	SJ 27-5 Unit #915 @ 6661.0ft (AWS #730)
Project:	San Juan Basin New Mexico	MD Reference:	SJ 27-5 Unit #915 @ 6661.0ft (AWS #730)
Site:	Rio Arriba SEC 8	North Reference:	True
Well:	SJ 27-5 Unit #915	Survey Calculation Method:	Minimum Curvature
Wellbore:	PLANNED SURVEY		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.1	-0.1	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.1	-0.1	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.1	-0.1	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.1	-0.1	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.1	-0.1	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.1	-0.1	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.1	-0.1	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.1	-0.1	0.0	0.00	0.00	0.00
800.0	2.00	108.33	800.0	-0.4	1.6	1.7	2.00	2.00	0.00
900.0	4.00	108.33	899.8	-2.1	6.5	7.0	2.00	2.00	0.00
1,000.0	6.00	108.33	999.5	-4.8	14.8	15.7	2.00	2.00	0.00
1,100.0	8.00	108.33	1,098.7	-8.7	26.4	27.9	2.00	2.00	0.00
1,200.0	10.00	108.33	1,197.5	-13.6	41.2	43.5	2.00	2.00	0.00
1,300.0	12.00	108.33	1,295.6	-19.6	59.3	62.6	2.00	2.00	0.00
1,400.0	14.00	108.33	1,393.1	-26.6	80.7	85.1	2.00	2.00	0.00
1,500.0	16.00	108.33	1,489.6	-34.8	105.3	111.0	2.00	2.00	0.00
1,600.0	18.00	108.33	1,585.3	-44.0	133.0	140.2	2.00	2.00	0.00
1,664.6	19.29	108.33	1,646.5	-50.5	152.6	160.9	2.00	2.00	0.00
1,700.0	19.29	108.33	1,679.9	-54.1	163.7	172.6	0.00	0.00	0.00
1,800.0	19.29	108.33	1,774.3	-64.5	195.1	205.6	0.00	0.00	0.00
1,900.0	19.29	108.33	1,868.7	-74.9	226.4	238.6	0.00	0.00	0.00
2,000.0	19.29	108.33	1,963.0	-85.3	257.8	271.7	0.00	0.00	0.00
2,100.0	19.29	108.33	2,057.4	-95.7	289.2	304.7	0.00	0.00	0.00
2,200.0	19.29	108.33	2,151.8	-106.1	320.5	337.8	0.00	0.00	0.00
2,300.0	19.29	108.33	2,246.2	-116.5	351.9	370.8	0.00	0.00	0.00
2,400.0	19.29	108.33	2,340.6	-126.9	383.3	403.8	0.00	0.00	0.00
2,500.0	19.29	108.33	2,435.0	-137.3	414.6	436.9	0.00	0.00	0.00
2,600.0	19.29	108.33	2,529.4	-147.6	446.0	469.9	0.00	0.00	0.00
2,700.0	19.29	108.33	2,623.7	-158.0	477.3	502.9	0.00	0.00	0.00
2,800.0	19.29	108.33	2,718.1	-168.4	508.7	536.0	0.00	0.00	0.00
2,900.0	19.29	108.33	2,812.5	-178.8	540.1	569.0	0.00	0.00	0.00
3,000.0	19.29	108.33	2,906.9	-189.2	571.4	602.1	0.00	0.00	0.00
3,100.0	19.29	108.33	3,001.3	-199.6	602.8	635.1	0.00	0.00	0.00
3,195.1	19.29	108.33	3,091.0	-209.5	632.6	666.5	0.00	0.00	0.00
3,200.0	19.14	108.33	3,095.7	-210.0	634.1	668.1	3.00	-3.00	0.00
3,300.0	16.14	108.33	3,190.9	-219.5	662.9	698.4	3.00	-3.00	0.00
3,400.0	13.14	108.33	3,287.7	-227.5	686.9	723.7	3.00	-3.00	0.00
3,500.0	10.14	108.33	3,385.6	-233.8	706.1	743.9	3.00	-3.00	0.00
3,600.0	7.14	108.33	3,484.5	-238.5	720.3	758.9	3.00	-3.00	0.00
3,700.0	4.14	108.33	3,584.0	-241.6	729.7	768.8	3.00	-3.00	0.00
3,800.0	1.14	108.33	3,683.9	-243.1	734.0	773.4	3.00	-3.00	0.00
3,838.1	0.00	0.00	3,722.0	-243.2	734.4	773.7	3.00	-3.00	0.00
3,900.0	0.00	0.00	3,783.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,000.0	0.00	0.00	3,883.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,100.0	0.00	0.00	3,983.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,200.0	0.00	0.00	4,083.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,300.0	0.00	0.00	4,183.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,400.0	0.00	0.00	4,283.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,500.0	0.00	0.00	4,383.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,600.0	0.00	0.00	4,483.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,700.0	0.00	0.00	4,583.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,800.0	0.00	0.00	4,683.9	-243.2	734.4	773.7	0.00	0.00	0.00
4,900.0	0.00	0.00	4,783.9	-243.2	734.4	773.7	0.00	0.00	0.00
5,000.0	0.00	0.00	4,883.9	-243.2	734.4	773.7	0.00	0.00	0.00

Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well SJ 27-5 Unit #915
Company:	ConocoPhillips	TVD Reference:	SJ 27-5 Unit #915 @ 6661.0ft (AWS #730)
Project:	San Juan Basin New Mexico	MD Reference:	SJ 27-5 Unit #915 @ 6661.0ft (AWS #730)
Site:	Rio Arriba SEC 8	North Reference:	True
Well:	SJ 27-5 Unit #915	Survey Calculation Method:	Minimum Curvature
Wellbore:	PLANNED SURVEY		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,100.0	0.00	0.00	4,983.9	-243.2	734.4	773.7	0.00	0.00	0.00
5,200.0	0.00	0.00	5,083.9	-243.2	734.4	773.7	0.00	0.00	0.00
5,300.0	0.00	0.00	5,183.9	-243.2	734.4	773.7	0.00	0.00	0.00
5,400.0	0.00	0.00	5,283.9	-243.2	734.4	773.7	0.00	0.00	0.00
5,500.0	0.00	0.00	5,383.9	-243.2	734.4	773.7	0.00	0.00	0.00
5,600.0	0.00	0.00	5,483.9	-243.2	734.4	773.7	0.00	0.00	0.00
5,700.0	0.00	0.00	5,583.9	-243.2	734.4	773.7	0.00	0.00	0.00
5,800.0	0.00	0.00	5,683.9	-243.2	734.4	773.7	0.00	0.00	0.00
5,900.0	0.00	0.00	5,783.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,000.0	0.00	0.00	5,883.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,100.0	0.00	0.00	5,983.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,200.0	0.00	0.00	6,083.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,300.0	0.00	0.00	6,183.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,400.0	0.00	0.00	6,283.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,500.0	0.00	0.00	6,383.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,600.0	0.00	0.00	6,483.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,700.0	0.00	0.00	6,583.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,800.0	0.00	0.00	6,683.9	-243.2	734.4	773.7	0.00	0.00	0.00
6,900.0	0.00	0.00	6,783.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,000.0	0.00	0.00	6,883.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,100.0	0.00	0.00	6,983.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,200.0	0.00	0.00	7,083.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,300.0	0.00	0.00	7,183.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,400.0	0.00	0.00	7,283.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,500.0	0.00	0.00	7,383.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,600.0	0.00	0.00	7,483.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,700.0	0.00	0.00	7,583.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,800.0	0.00	0.00	7,683.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,900.0	0.00	0.00	7,783.9	-243.2	734.4	773.7	0.00	0.00	0.00
7,991.1	0.00	0.00	7,875.0	-243.2	734.4	773.7	0.00	0.00	0.00