

2 = 30-045-10178
17 = 30-045-23432
200 = 30-045-26949

3545

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit G Sec. 35 Twp 31 Rng 10

Name of Well/Wells or Pipeline Serviced ATLANTIC C #2, #17, #200

cps 2091w

Elevation 6401' Completion Date 7/18/74 Total Depth 520' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 240'

Depths gas encountered: N/A


Type & amount of coke breeze used: N/A

Depths anodes placed: 475', 410', 395', 370', 360', 350', 290', 280', 270', 255'

Depths vent pipes placed: N/A

Vent pipe perforations: 300'

Remarks gb #2

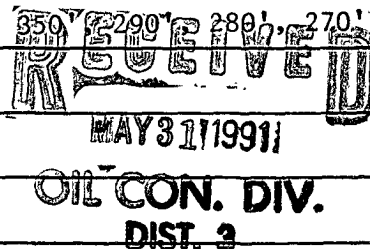

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

logged

Drilling Log (Attach Hereto) ☐

#17
#200

Completion Date **7-18-74**

Well Name Atlantic #2		Location NE 35-31-10		CPS No. 379W 2091	
Type & Size Bit Used 6 3/4				Work Order No. 52249	
Anode Hole Depth 520	Total Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
# 1 475	# 2 410	# 3 395	# 4 370	# 5 360	# 6 350
# 7 290	# 8 280	# 9 27	# 10 255		
Anode Output (Amps)					
# 1 3.5	# 2 2.2	# 3 2.1	# 4 4.3	# 5 3.6	# 6 3.0
# 7 4.1	# 8 4.0	# 9 3.7	# 10 4.2		
Anode Depth					
# 11	# 12	# 13	# 14	# 15	# 16
Anode Output (Amps)					
# 11	# 12	# 13	# 14	# 15	# 16
Total Circuit Resistance					
Volts 11.2	Amps 14.0	Ohms 0.8	No. 8 C.P. Cable Used 180		No. 2 C.P. Cable Used

Remarks: **Driller said water at 240' - Start injection at 60' -**


Vent Perforated 300'
Pump Coke to Surface

\$3,409.00
72.00 Cable
\$3,481.00
139.24 TAX
\$3,620.24 TOTAL

Construction Completed

Amels
(Signature)

GROUND BED LAYOUT SKETCH

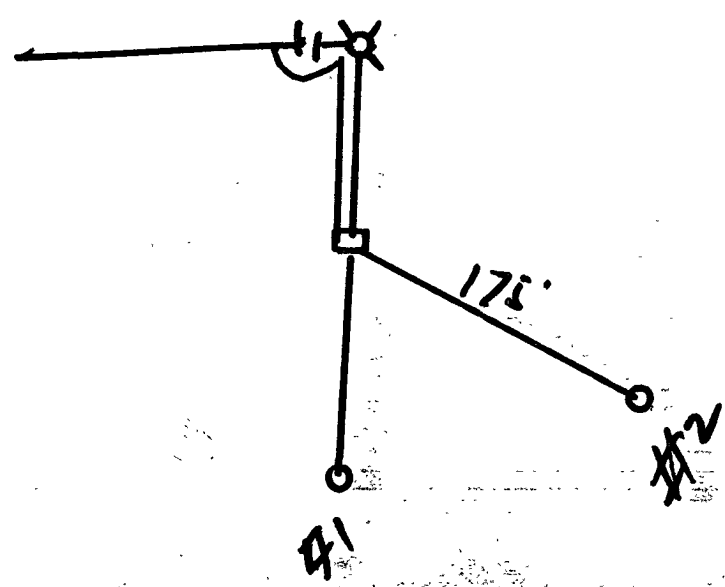

STORM WATER WELL DRILLING INC.

DIAMOND CORE DRILLING
DIAMOND DRILLING EQUIPMENT
GROUTING
FOUNDATION TESTING
MINING
QUARRYING
SHAFT SINKING
WATER WELL DRILLING

CONTRACTORS
14991 W. 44TH AVENUE
GOLDEN, COLORADO 80401
PHONE (303) 278-9505

GENERAL OFFICE
14991 W. 44TH AVENUE
BAILEY OFFICE
CALL 1-838-4821

Drill GD 15

Date 7-18-74

Owner C.P.S. 379

Location _____
City SARASOTA State FL County _____

[illegible]

Total Hours _____

Equipment Down Time _____

Hours Drilling 1 1 1 1

Driller Art Macwell

Helper

Helper

C.P.S. Time _____

S.W.W.D.I. Time _____

Total Footage _____

Approval of
C.P.S. Engineer _____