1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources** Department

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application

Proposed Alternative Method Permit or Closure Plan Application						
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method						
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request						
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.						
Operator: Williams Operating Co, LLC OGRÍD #: 120782						
Address: PO Box 640 / 721 S Main Aztec, NM 87410						
Facility or well name: Rosa Unit #060B						
API Number:3004534251OCD Permit Number:						
U/L or Qtr/Qtr N Section 4 Township 31N Range 6W County: San Juan						
Center of Proposed Design: Latitude 36.92208N Longitude -107.47222W NAD: □1927 ☒ 1983						
Surface Owner: ☑ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment						
2.						
Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other RECEIVED RECEIVED RECEIVED RECEIVED Control of the control						
Liner Seams: Welded Factory Other RECEIVED						

Tank Construction material: ☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off ☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other mil HDPE PVC Other Liner type: Thickness

_bbl Type of fluid: _____

Alternative Method:

Volume: ____

Below-grade tank: Subsection I of 19.15.17.11 NMAC

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

OIL CONS. DIV. DIST. 3


Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specifyBLM Stipulation in APD	hospital,
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15.17.11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers ☐ Signed in compliance with 19.15.3.103 NMAC	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approach office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	priate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☒ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☑ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☐ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☑ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☑ No
Within a 100-year floodplain FEMA map	☐ Yes ⊠ No


·	
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.	
 ☑ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC ☑ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC ☑ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☑ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☑ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☑ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC 	
and 19.15.17.13 NMAC	
Previously Approved Design (attach copy of design) API Number: or Permit Number:	
12. <u>Closed-loop Systems Permit Application Attachment Checklist</u> : Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.	
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC	
and 19.15.17.13 NMAC	
Previously Approved Design (attach copy of design) API Number:	
☐ Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use	
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)	
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Gil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative	
15. Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D. Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if n facilities are required.							
Disposal Facility Name: Disposal Facility Permit Number:							
Disposal Facility Name: Disposal Facility Permit Number:							
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future server in Yes (If yes, please provide the information below) No	vice and operations?						
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	C						
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate distriction considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justif demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	rict office or may be						
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No ☐ NA						
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☒ No☐ NA						
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	⊠ Yes □ No □ NA						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ⊠ No						
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ⊠ No						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ⊠ No						
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No						
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes 🛛 No						
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☑ No						
Within a 100-year floodplain FEMA map	☐ Yes ☑ No						
Non-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	15.17.11 NMAC						

19.							
Operator Application Certification:							
I hereby certify that the information submitted with this application is true, accur	ate and complete to the best of my knowledge and belief.						
Name (Print): Michael K. Lane	Title: Sr. EH & S Specialist						
Signature:	Date: 9/29/08						
e-mail address: <u>myke.lane@williams.com</u>	Telephone: 505-634-4219						
OCD Approval: (X) Permit Application (including closure plan) Closure P	lan (only) OCD Conditions (see attachment)						
OCD Representative Signature: But bell	Approval Date: 10-10-08						
Title: Enviro /spec	OCD Permit Number:						
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date:							
22.							
Closure Method: Waste Excavation and Removal On-Site Closure Method Alternation If different from approved plan, please explain.	ative Closure Method						
23. Closure Report Regarding Waste Removal Closure For Closed-loop Systems	That Utilize Above Cround Steel Tanks or Haul-off Rins Only						
Instructions: Please indentify the facility or facilities for where the liquids, dril	ling fluids and drill cuttings were disposed. Use attachment if more than						
two facilities were utilized.							
Disposal Facility Name:	Disposal Facility Permit Number:						
Disposal Facility Name:							
Were the closed-loop system operations and associated activities performed on or Yes (If yes, please demonstrate compliance to the items below) No	in areas that will not be used for future service and operations?						
Required for impacted areas which will not be used for future service and operation	ons:						
☐ Site Reclamation (Photo Documentation) ☐ Soil Backfilling and Cover Installation							
Re-vegetation Application Rates and Seeding Technique							
24.							
Closure Report Attachment Checklist: Instructions: Each of the following its	ems must be attached to the closure report. Please indicate, by a check						
mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division)							
Proof of Deed Notice (required for on-site closure)							
Plot Plan (for on-site closures and temporary pits)							
☐ Confirmation Sampling Analytical Results (if applicable) ☐ Waste Material Sampling Analytical Results (required for on-site closure)							
Disposal Facility Name and Permit Number							
Soil Backfilling and Cover Installation							
☐ Re-vegetation Application Rates and Seeding Technique ☐ Site Reclamation (Photo Documentation)							
	nude NAD:						
25.							
Operator Closure Certification:							
I hereby certify that the information and attachments submitted with this closure rebelief. I also certify that the closure complies with all applicable closure requirements.							
Name (Print):							
Signature:	Date:						
e-mail address:	Telephone:						

Editoriacia II 1622 M. Frienchi Dr., Hobba, HY 88250 State of New Mexico Form C-192 Privised Ceboos 12, 2002 Distriction on two Butsell to Appropriate District Celibe Charge, Könerele is Neberall Resources Department Contrict 10 1000 M. Grand Arman, Artista, MM (CSCID State Laws - 4 Copies Fee Lasse - 3 Copies OIL COMBERVATION DIVISION Organici 196 1999 Algo Hruspy Rd., bijis, wa 97439 1220 South St. Francis Or. Santa Fe. NA 87808 Contrict 17 1220 St. St. Francis Cr., Santa Fa, 64 85505 AMENDED REPORT WELL LOCATION AND ACHEAGE DEDICATION FLAT WI HARRY Pool Uses 723 19 BLANCO MESAVERCE Property Code Prosetty Here HUSA UNIT COM 17031 DCHID Fa. "Operator Kinas ENSTRUCTION. 120702 MILLIAMS PRODUCTION COMPANY BANG' * Surface Location Sea. Mar had the and edition for Part Mos Ura N 4 31M EN 275 SOUTH 1450 HE5T MALITY KARS 49 Botton Hale Location Different From Surface And Chicago Com d sincini icre ™ Doesan Taintijara Casio d Brise biy, no allonable mill be assibato to this completion until all interests have been consolidated MODELING THE MEDITARIES AND THE DEVISION A HO "OPERATOR CERTIFICATION L'hembe dercity that des extresions declares reseau de les establicas de transcente de les establicas de transcente de les establicas de transcente en delles, con les establicas de les establi 5354.46" LOT B LOT LOTS LOT 5 133 C: TRACT Ä 8 Date Storeture LOT 115 Printed Nove * SURVEYOR CERTIFICATION I hereby portion that the wall, broaders around to take place and character from their category around extreme, made by the en under the masser matter, and by the five needs his broader and convenient to the best of as produced. 8 07 Date of Survey: MAY 151 2006 PROPERTY OF STATE OF PERSONS ASSESSED. LATE DE SEPORTU LOVEE 197 47222 D DATURE VALUERO KEAG 4 M50 275 5270.76 AU SOUP WRDS Contribilitation Number 5340

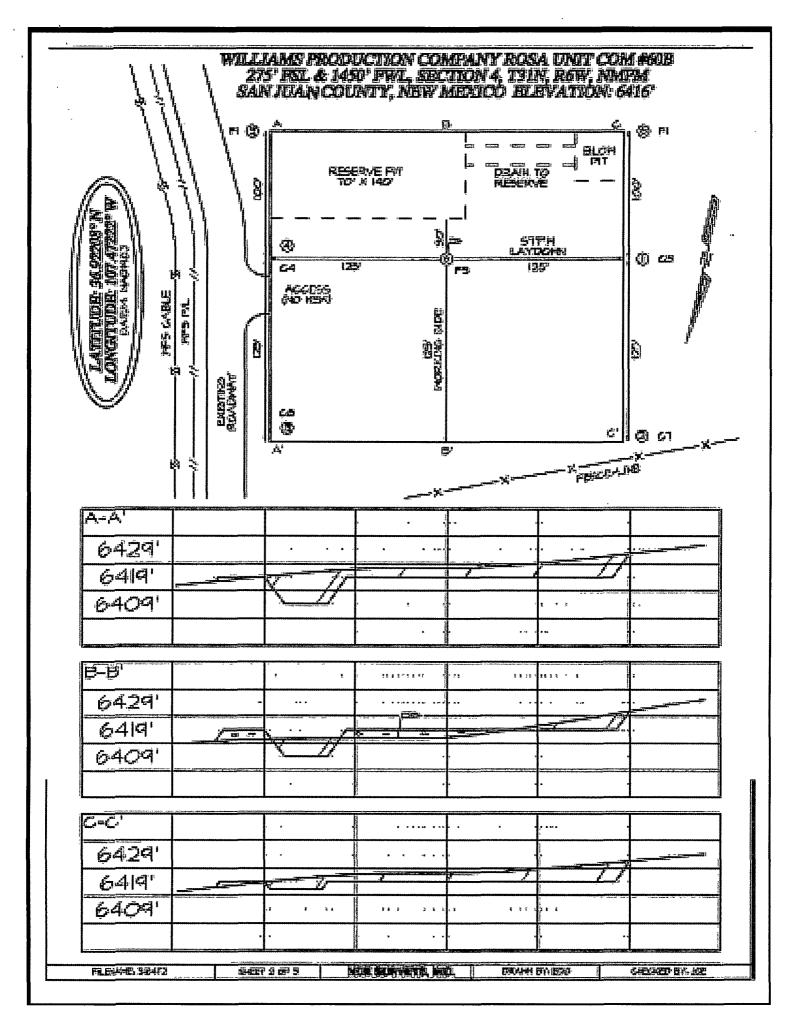

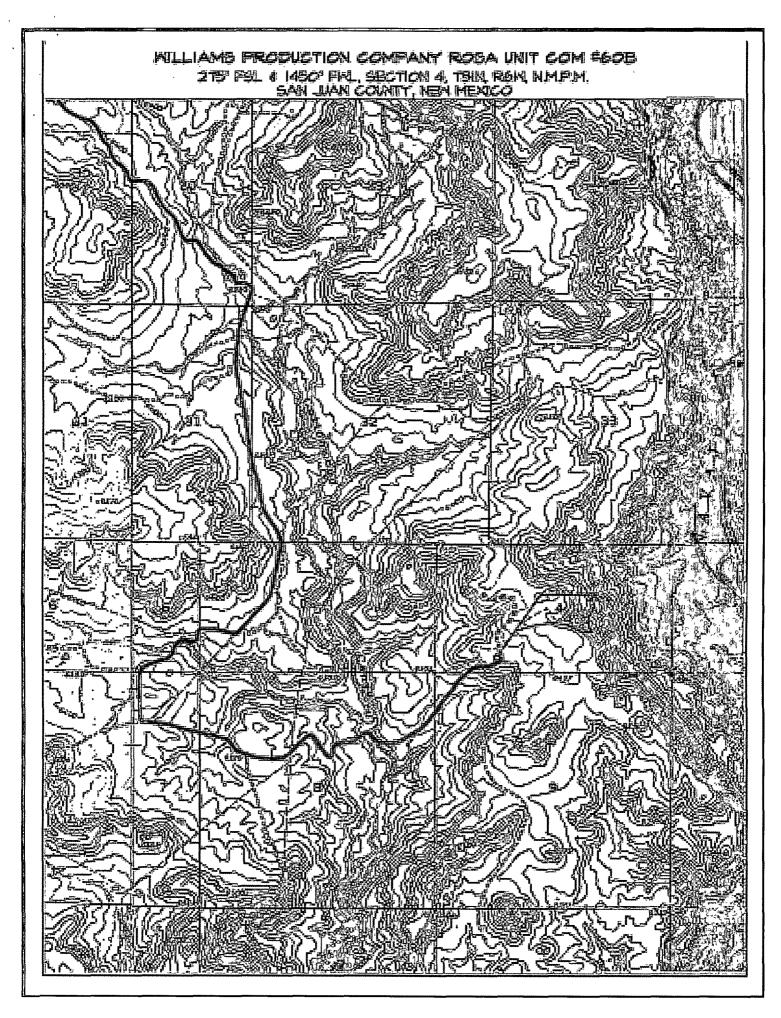

Hydrogeological Report Williams Production Company, LLC Rosa Unit #60B

Regional Hydrological Context

Referenced Well Location:

The proposed well is located in San Juan County, New Mexico on Bureau of Land Management land managed by the Farmington Field Office (FFO). The FFO management region is located in the northeastern portion of the San Juan Basin, an asymetrical syncline that extends from northwestern New Mexico into southwestern Colorado (Carson National Forest DEIS, 2007). Elevation of the proposed well is approximately 6343 feet MSL.

General Regional Groundwater Description:

As a portion of the San Juan Basin, the Farmington Field Office (FFO) is underlain by sandstone aquifers of the Colorado Plateau. The primary aquifer of potential concern at this location is the Unita-Animas Aquifer, composed primarily of Lower Tertiary rocks in the San Juan Basin. The aquifer consists of the San Jose Formation; the underlying Animas formation and its lateral equivalent, the Nacimiento formation; and the Ojo Alamo Sandstone. The thickness of the Unita-Animas aquifer generally increases toward the central part of the basin. In this region, the maximum thickness of the aquifer is approximately 3500 feet (USGS, 2001). This aguifer contains fresh to moderately saline water.

Groundwater generally flows toward the San Juan River and it tributaries, where it becomes alluvial groundwater or is discharged to stream flow. Additional information regarding the hydrogeologic setting can be found in the provided references.

Site Specific Information:

Surface Hydrology: The pit is located on a western facing slope which drains into

Cottonwood Canyon, approximately 0.70 mile to the west.

1st Water Bearing Formation:

San Jose, Tertiary Formation Thickness: Approximately 1,900 ft. **Underlying Formation:** Nacimiento, Tertiary

Depth to Groundwater: Depth to groundwater is estimated at greater than 100 feet bgs.

Within a one-mile radius of this location, there were no iWATERS wells with recorded water depth information. However, cathodic data associated with the Rosa Units 60 (approximately 1449 feet from pit), and 237 (approximately 1379 feet from pit) show depth to moisture at 300 feet (see

Siting Criteria Map I for details).

References:

Allen, Erin. Undated. Colorado Plateau Aquifers. http://academic.emporia.edu/schulmem/hydro/TERM%20PROJECTS/2007/Allen/Aquifer.html.

New Mexico Office of the State Engineer.

United States Department of Agriculture, Forest Service. 2007. Draft Environmental Impact Statement for Surface Management of Gas Leasing and Development. Jicarilla Ranger District, Carson National Forest, Rio Arriba County, New Mexico.

United States Department of the Interior. Bureau of Land Management. 2003. Final Farmington Resource Management Plan and Final Environmental Impact Statement. Farmington Field Office, Farmington, New Mexico.

United States Geological Survey. 2001. Ground Water Atlas of the United States: Arizona, Colorado, New Mexico and Utah. USGS Publication HA 730-C; http://capp.water.usgs.gov.

> Page 9 of 18 Rosa Unit 60B

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 32N Range: 06W Sections:
NAD27 X: Y: Zone: Search Radius:
County: Basin: Number: Suffix:
Owner Name: (First) (Last) C Non-Domestic O Domestic All

POD / Surface Data ReportAvg Depth to Water ReportWater Column Report

WATER COLUMN REPORT 08/07/2008

	(quarter	s are	e 1=1	WW	2=	=NE	3=SW	4=SE)			
	(quarter	s are	e bi	gge	est	t t	o smal	lest)		Depth	Depth
Water (in feet)											
POD Number	Tws	Rng	Sec	q	q	q	Zone	· X	Y	Well	Water
Column											
SJ 03775 POD1	32N	06W	8 0	1	3	3		282326	2181933	260	200
60											
SJ 03302	32N	06W	8 0	1	3	4				250	
SJ 03135	32N	06W	09	3	1	1				200	
SJ 01957	32N	06W	10	2	2	3				280	280
SJ 01949	32N	06W	10	2	2	3				300	260
40											
SJ 02711	32N	06W	11	3	1	3				200	120
80											
SJ 03420	32N	06W	19	4	2					415	60
355											
sJ 03055	32N	06W	20	1	2	2				290	100
190											

Record Count: 8

New Mexico Office of the State Engineer POD Reports and Downloads

Townshi	p: 31N Ra	nge:	06W	Sectio	ns:				
NAD27 X:	. Y	:]	z	Zone:		Search I	Radius:		
County:	B	asin:		Print Science - Science		N N	lumber:	So	uffix:
Owner Name: (First)	Surface Date	(Last		epth t	O Water Repo	Non-Domes		Domestic	⊙ All
						REPORT 0	8/05/20	008	
	-				E 3=SW 4=; to smalle;	•		Depth	Depth
Water (in feet)	_							-	_
POD Number Column	Tws	Rng S	ec q	đ đ	Zone	x	Y	Well	Water
SJ 03685 POD1	31N	06W 0	7 1	2 4				460	310
150									


Record Count: 2

____ 31N 06W 32


SJ 00011

610


Siting Criteria Map I Water Wells, Cathodic Wells, & Springs Williams Exploration and Production Company Rosa Unit #60B T31N, R06W, Section 4, NMPM San Juan County, New Mexico

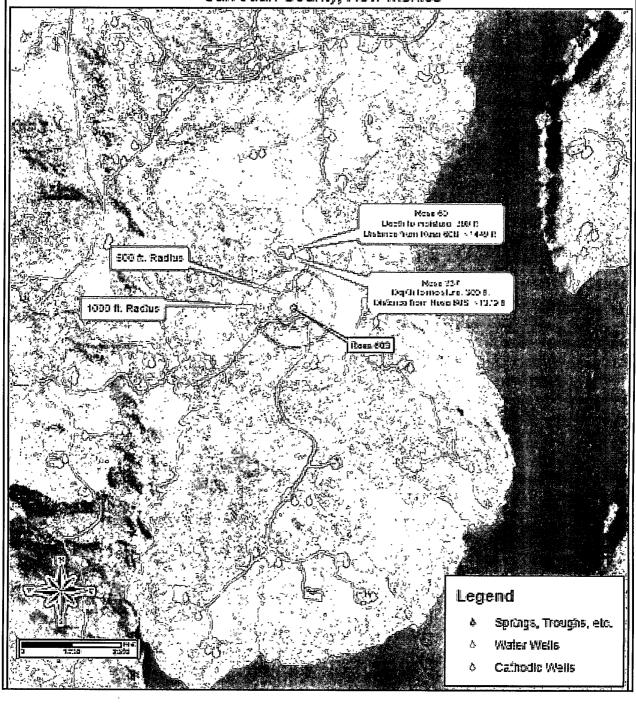

Siting Criteria Map II Topographic Features Williams Exploration and Production Company Rosa Unit #60B T31N, R05W, Section 3, NMPM San Juan County, New Mexico

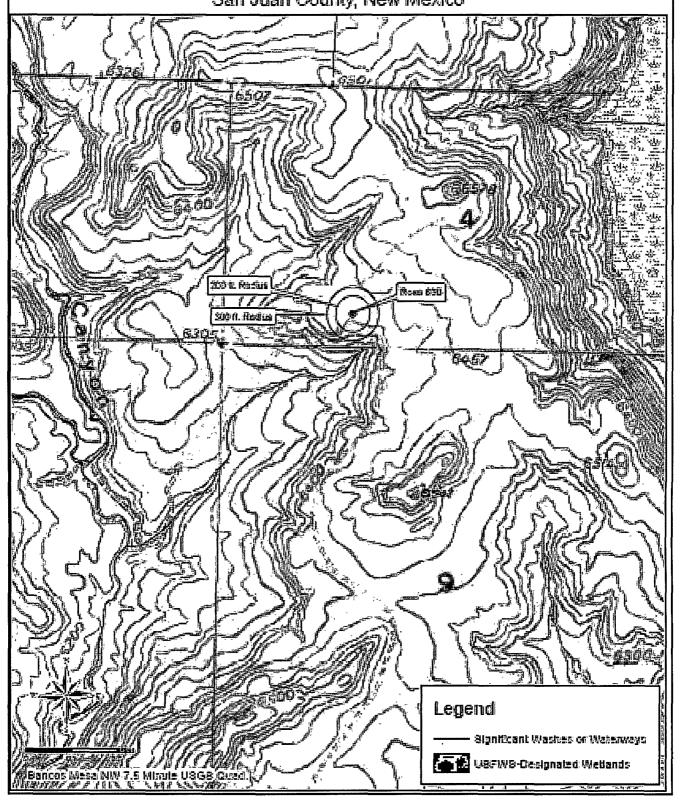

MMQonline Public Version

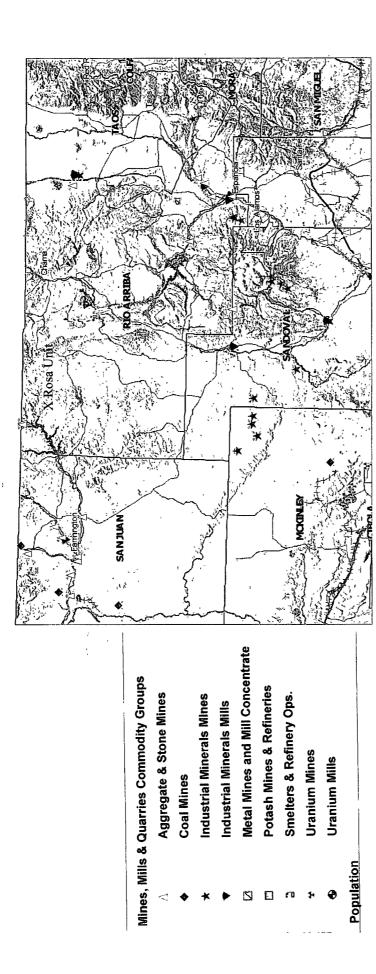

SCALE 1: 2,203,053

FEMA Map – 100-Year Floodplain:


According to FEMA records, this site is not located in a 100-year floodplain (see attached FEMA map).

Siting Criteria Compliance Demonstrations:

The Rosa Unit #29C well is not located in an unstable area. The location is not situated over a mine or a steep slope. Excavated pit material will not be located within 300 feet of a continuously flowing water course or within 200 feet of any other significant water course, lakebed, sinkhole, or playa lake (see Siting Criteria Map II). The site is not within 500 feet of any reported riparian areas or wetlands (see attached USFWS wetland map); within 500 feet of any private, domestic fresh water well or spring; or within 1000 feet of any other fresh water well or spring (see Siting Criteria Map I). The pit will not be within any incorporated municipal boundaries or defined municipal freshwater well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. The location of the proposed pit is not within 300 feet of any permanent residence, school, hospital, institution, or church.

Page 15 of 18

Rosa Unit 60B

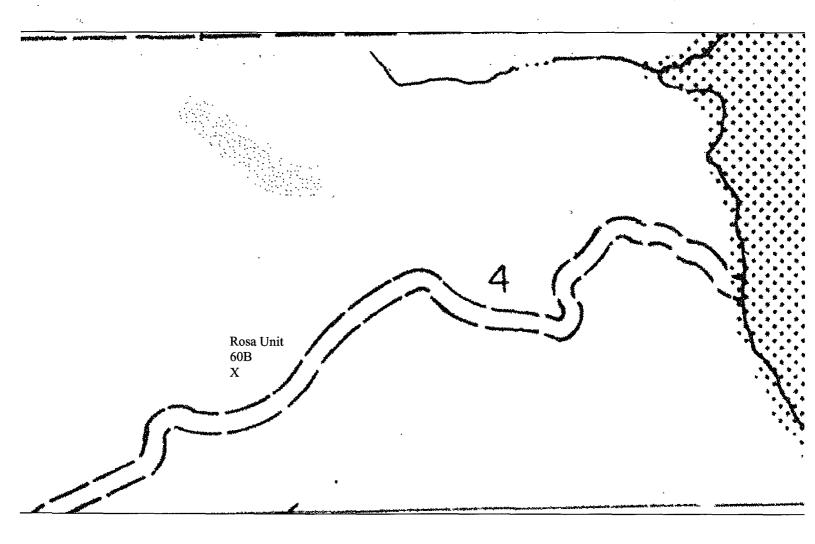

Williams Production Co., LLC San Juan Basin: New Mexico Assets

Temporary Pit In-place Closure Plan Drilling/Completion and Workover (Groundwater >100 feet bgs)

In accordance with Rule 19.15.17.13 NMAC, the following plan describes the general in-place closure requirements of temporary pits on Williams Production Co, LLC (WPX) locations in the San Juan Basin of New Mexico. This is WPX's standard procedure for all temporary pits to be utilized for the drilling, completion and/or workovers of oil and gas wells operated by WPX. For those temporary pits which do not conform to this standard closure plan, a separate well/pit specific closure plan will be developed and utilized.

All closure activities will include proper documentation and will be submitted to OCD within 60 days of the pit closure on a Closure Report using Division Form C-144. The Report will include the following:

- Details on Capping and Covering, where applicable
- Plot Plan (Pit Diagram)
- Inspection reports
- Sampling Results
- Division Form C-105: WELL COMPLETION OR RECOMPLETION REPORT AND LOG
- Copy of Deed Notice filed with the County Clerk (format to meet County requirements)

General Plan Requirements:

- 1. All free standing liquids will be removed from the pit at the start of the closure process. Liquids will be removed in a manner that the appropriate District Office approves including; recycled, reused, reclaimed, evaporated, and/or disposed of in a Division-approved facility.
- 2. The preferred method of closure for all temporary pits will be on-site closure by in-place burial, provided all the criteria in 19.15.17.13.B are met.
- 3. The surface owner shall be notified of WPX's proposed clclosure plan using a means that provides proof of notice (i.e. certified mail/retrun receipt requested)
- 4. Within six months of the "rig-off" status occurring WPX will ensure that the temporary pit is covered, recontoured and reseeding in progress.
- 5. Notice of Closure will be given to the Aztec District office between 72 hours and one week of the scheduled closure via email or phone. The notification of closure will include the following:
 - a. Operators Name (WPX)
 - b. Well Name and API Number
 - c. Location (USTR)
- 6. The pit liner shall be removed above "mud level" after stabilization. Removal of the liner will consist of manually or mechanically cutting the liner at the mud level and removing all remaining liner. Care will be taken to remove "all" of the liner (I.e. anchored material). All excessive liner will be disposed of at a licensed disposal facility (probably San Juan Regional Landfill operated by Waste Management under NMED Permit SWM-052426).
- 7. Solidification of the remaining pit contents shall be achieved by mixing non-waste containing, earthen material. The solidification process will be accomplished use a combination of natural drying and mechanical mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed safe and stable. The mixing ratio shall not exceed 3 parts non-waste to 1 part pit contents.
- 8. A five-point composite sample will be taken of the pit using sampling tools and all samples tested per 19.15.17.13(B)(1)(b) NMAC. In the event that the criteria are not met (See Table 1), all contents will be handled per 19.15.17.13(B)(1)(a) (i.e. dig and haul to a Division-approved facility). Approval to haul will be requested of the Aztec District office prior to initiation.

Table 1: Closure Criteria for Temporary Pits in Non-sensitive Areas

Components	Testing Methods	Closure Limits (mg/Kg)
Benzene	EPA SW-846 Method 8021B or 8260B	0.2
BTEX	EPA SW-846 Method 8021B or 8260B	50
TPH	EPA SW-846 Method 8015 M(Full Range)* or	2500
	Method 418.1	
GRO/DRO	EPA SW-846 Method 8015M (GRO/DRO)	500
Chlorides	EPA SW-846 Method 300.1	1000

^{*} Preferred method

- 9. Upon completion of solidification and testing, the pit area will be backfilled with non-waste earthen material compacted to native conditions to enable effective revegetation for successful evapotranspiration. A minimum of four feet of cover including replacement of one foot of suitable material to establish vegetation, or the background thickness of topsoil, whichever is greater.
- 10. Following cover, the site will be recontoured to meet the Surface Management Agency or surface owner requirements. Re-contouring will attempt to match fit, shape, line form, and texture of the surrounding geography. Re-shaping will include drainage control, prevent ponding, and minimize erosion. Natural drainages will be unimpeded and stormwater Best Management Practices (BMPs) will be used to aid in soil stabilization and protection surface water quality.
- 11. Notification will be sent to the Aztec District office when the reclaimed area is seeded.
- 12. WPX shall seed the disturbed areas the first growing season after the pit is covered. Seeding will be accomplished via drilling on the contour whenever practical, or by other Division-approved methods. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintained that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs. Note: WPX assumes the seeding stipulations including mix and seeding methods specified by the Surface Management Agency (BLM, BOR, USFS, Tribal, etc.) or Land owner as part of a surface use agreement or APD are Division-approved methods unless notified by the Division of their unacceptability.
- 13. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the on site burial upon the abandonment of all wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the on site burial of the temporary pit. The plate will be easily removable and a four-foot tall riser will be threaded into the top of the collar marker and welded around the base with the operations information at the time of all wells on the pad abandoned. The information will include Operator Name, Lease Name, Well Name, and number, USTR, and an indicator that the marker is an onsite pit burial location.

Lane, Myke (E&P)

From: Lane, Myke (E&P)

Sent: Saturday, September 27, 2008 11:09 PM

To: Mark Kelly (Mark_Kelly@nm.blm.gov)

Cc: Brandon.powell@state.nm.us

Subject: Land Owner Notice - Rosa 060B pit closure

Mark;

This correspondence is to notify the BLM-FFO that Williams Production is planning to close the temporary pit associated with the drilling and completion of the reference well on-site. The planned closure is consistent with the Surface Use Plan submitted with Williams APD, approved earlier.

This notice is to comply with the NMOCD Pit Rule 19.15.17 NMAC requirement to notify surface owners of the operator's intended closure method. If site conditions do not allow Williams to close in-place, we will provide your office with prior notice should the BLM have any concerns.

Please contact us if there are any questions or additional information is required.

Michael K. (Myke) Lane, PE EH&S Team Leader - San Juan Basin Operations 721 S. Main/PO Box 640. Aztec, NM 87410 (505) 634-4219(off); -4205(fax); 330-3198(cell)

"The problems we face cannot be resolved at the same level of thinking as that which gave rise to them!"---shared with me by Brent Hale