District I 1625 N. French Dr., Hobbs, NM 88240

District II 1301 W. Grand Ave., Artesia, NM 88210 District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources**

> Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade

Form C-144

tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe

Environmental Bureau office and provide a copy to the

appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	X Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,
*	below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the

Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538
Address: P.O. Box 4289, Farmington, NM 87499
Facility or well name: RIDDLE A 2B
API Number: 0CD Permit Number: 0CD Permit Number:
U/L or Qtr/Qtr: B(NW/NE) Section: 1 Township: 29N Range: 9W County: San Juan
Center of Proposed Design: Latitude: 36.757909 °N Longitude: 107.725257 °W NAD: 1927 X 1983
Surface Owner: X Federal State Private Tribal Trust or Indian Allotment
Modification was Submitted on 1/28/II X Pit: Subsection For G of 19.15.17.11 NMAC Approved on 2/25/II Temporary: X Drilling Workover Permanent Emergency Cavitation P&A X Lined Unlined Liner type: Thickness 12 mil X LLDPE HDPE PVC Other X String-Reinforced Liner Seams: X Welded X Factory Other Volume: 4400 bbl Dimensions L 65' x W 45' x D 10'
Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thickness mil LLDPE HDPE PVD Other Liner Seams: Welded Factory Other
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume:
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6 • * '						
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)						
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, inst Four foot height, four strands of barbed wire evenly spaced between one and four feet	nunon or cnu	rcn)				
Alternate. Please specify						
Notting: Subsection E of 10 15 17 11 NMAC (Applies to assure and wife and a superior to a superior to the supe						
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other						
Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)						
Informally inspections (i) nerting of selecting is not physically feasine)						
Signs: Subsection C of 19.15.17.11 NMAC						
Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers						
X Signed in compliance with 19.15.3.103 NMAC						
Administrative Approvals and Exceptions:						
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.						
Please check a box if one or more of the following is requested, if not leave blank:						
Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons (Fencing/BGT Liner)	deration of ap	proval.				
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.						
10						
Siting Criteria (regarding permitting): 19.15.17.10 NMAC						
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable						
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for						
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria	ı					
does not apply to drying pads or above grade-tanks associated with a closed-loop system.						
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	No				
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake	Yes	□No				
(measured from the ordinary high-water mark).						
- Topographic map; Visual inspection (certification) of the proposed site		_				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	∐No				
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	NA					
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No				
(Applied to permanent pits)	NA NA					
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	No				
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	□No				
- Written confirmation or verification from the municipality; Written approval obtained from the municipality						
 Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes	∐No				
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	No				
Within an unstable area.	Yes	No				
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map						
Within a 100-year floodplain - FFMA man	Yes	□No				

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of
19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API or Permit
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
14 Proposed Closure: 10 15 17 13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative
Proposed Closure Method: Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
On-site Closure Method (only for temporary pits and closed-loop systems)
In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Form C-144 Oil Conservation Division Page 3 of 5

16 <u>Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:</u> (19.15.17.13.D NMAC))						
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.	· ·						
Disposal Facility Name: Disposal Facility Permit #:							
Disposal Facility Name: Disposal Facility Permit #:							
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future Yes (If yes, please provide the information No	e service and						
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19.15.17.13 NM Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	IAC						
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.							
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS: Data obtained from nearby wells	Yes No						
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No						
Ground water is more than 100 feet below the bottom of the buried waste.	Yes No						
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	Yes No						
- Topographic map; Visual inspection (certification) of the proposed site							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	Yes No						
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality	Yes No						
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No						
Within the area overlying a subsurface mine. - Written confirantion or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No						
Within an unstable area Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society;	Yes No						
Topographic map Within a 100-year floodplain FEMA map	Yes No						
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must bee attached to the close by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	sure plan. Please indicate,						
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC							
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC							
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC							
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC							
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC							
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC							
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC							

19 Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Title:
Signature: Date: e-mail address: Telephone:
C-man address.
20 OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature:Approval Date:Approval Date:
Title:OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.
X Closure Completion Date: July 6, 2009
Closure Method: Waste Excavation and Removal X On-site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain.
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities
were utilized. Disposal Facility Name: Disposal Facility Permit Number:
Disposal Facility Name: Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?
Yes (If yes, please demonstrate compliant to the items below) Required for impacted areas which will not be used for future service and operations:
Site Reclamation (Photo Documentation)
Soil Backfilling and Cover Installation Representation Application Retected Application Technique
Re-vegetation Application Rates and Seeding Technique
24 <u>Closure Report Attachment Checklist:</u> Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.
X Proof of Closure Notice (surface owner and division)
Proof of Deed Notice (required for on-site closure)
X Plot Plan (for on-site closures and temporary pits)
X Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (if applicable)
X Disposal Facility Name and Permit Number
Soil Backfilling and Cover Installation
X Re-vegetation Application Rates and Seeding Technique
X Site Reclamation (Photo Documentation) On-site Closure Location: Latitude: 36.758225 °N Longitude: 107.72522 °W NAD 1927 X 1983
on the closure becaute.
Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print): Crystal Tafoya Title: Regulatory Tech
Signature:
e-mail address: crystal.tafoya@conocophillips.com Telephone: 505-326-9837

Burlington Resources Oil Gas Company, LP San Juan Basin Closure Report

Lease Name: RIDDLE A 2B API No.: 30-045-34736

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the temporary pit referenced above. All proper documentation regarding closure activities is being included with the C-144. The temporary pit for this location was constructed and location drilled before June 16, 2008 (effective date for Rule 19.15.17). While closure of the temporary pit did fall within the rule some dates for submittals are after the rig release date.

- Details on Capping and Covering, where applicable. (See report)
- Plot Plan (Pit Diagram) (Included as an attachment)
- Inspection Reports (Included as an attachment)
- Sampling Results (Included as an attachment)
- C-105 (Included as an attachment)
- Copy of Deed Notice will be filed with County Clerk (Not required on Federal, State, or Tribal land as stated by FAQ dated October 30, 2008)

General Plan:

1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B).

2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.

The pit was closed using onsite burial.

3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.

The closure process notification to the landowner was sent via email. (See Attached)(Well located on Federal Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.

Provision 4 of the closure plan requirements were not met due to rig move off date as noted on C-105 which was prior to pit rule change. Burlington will ensure compliance with this rule in the future.

- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.

Liner of temporary pit was removed above "mud level" after stabilization. Removal of the liner consisted of manually cutting liner at mud level and removing all remaining liner. Care was taken to remove "ALL" of the liner i.e., edges of liner entrenched or buried. All excessive liner was disposed of at a licensed disposal facility, (San Juan County Landfill).

7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

Burlington mixed the Pit contents with non-waste containing, earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed as safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.

8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	14.5 ug/kg
BTEX	EPA SW-846 8021B or 8260B	50	332 ug/kG
TPH	EPA SW-846 418.1	2500	351 mg/kg
GRO/DRO	EPA SW-846 8015M	500	72.5 mg/Kg
Chlorides	EPA 300.1	1000/500	90 mg/L

9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.

The pit material passed solidification and testing standards. The pit area was then backfilled with compacted, non-waste containing, earthen material. More than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

The integrity of the liner was not damaged in the pit closure process.

11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011

Dig and Haul was not required.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final recontour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The pit area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Reshaping included drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. Notification will be sent to OCD when the reclaimed area is seeded.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 14 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

Provision 15 was accomplished by installing a steel marker in the temporary pit, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial. The marker is flush with the ground to allow access of the active well pad and for safety concerns. The top of the marker contains a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate contains the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the following operator's information at the time of all wells on the pad are abandoned. The riser will be labeled: BR, BLM, RIDDLE A 2B, UL-B, Sec. 1, T 29N, R 9W, API # 30-045-34736

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Wednesday, August 20, 2008 11:27 AM

To: Subject: 'mark_kelly@nm.blm.gov' **Surface Owner Notification**

The following well locations temporary pit will be closed on-site. Please feel free to contact me at any time if you have any questions.

Scott Gas Com #100S Senter Federal #100 Day B #3M San Juan 31-6 Unit #35P Riddle A #2B

Thank you,

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company San Juan Business Unit Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised October 12, 2005 Submit to Appropriate District Office State Lease - 7 Copies Fee Lease - 3 Copies


MAMMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

۱۸	API Number			² Pool Code			3 Pool Name BLANCO MESAVERDE			
Property Code Property Name RIDDLE A						⁶ Well Number 2B				
⁷ OGRID N	7 OGRID No. 8 Operator Name BURLINGTON RESOURCES OIL & GAS COMPANY LP					⁹ Elevation 6339				
			-		10 SURFACE	LOCATION				
UL or lot no.	Section 1	Township 29-N	Range 9-W	Lot Idn	Feet from the 895	North/South line NORTH	Feet from the 1485	East/West line EAST	County SAN JUAN	
			11 E	Bottom H	ole Location	If Different Fro	m Surface			
UL or lot no.	Section	Township	Range		Feet from the	North/South line	Feet from the	East/West line	County	
Dedicated Acres 332.05	Joint	or Infill	Consolidation	15 Code	Order No.					

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

~					
16 N 88*29*18* W BLM N 88*22*00* W		.568	6010.2' (M) 6000.7' (R)	5147.3' (R) 66.9 5146.4' (M) 000	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and bettef, and that this organization either owns a working interest or inleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a computary pooling order heretofare entered by the division.
	·	·	WELL FLAG NAD 83 LAT: 36.757909° N LONG: 107.725257° NAD 27 LAT:36°45.474274' LONG: 107°43.4785	W N	Signature Printed Name Title and E-mail Address Date 18 SURVEYOR CERTIFICATION
		USA S	ATED ACREAGE SF-078201-A CCTION 1, I-N, R-9-W		I hereby certify that the well location shown on this plat was plotted from felid notes of actual surveys made by me or under my supervision, and that the same is true and correct to the hest of my behef Date of Survey: 4/04/08 Signature and Seal of Professional Surveys
		·		N 755'00" E	Certificate Number: NM 11393

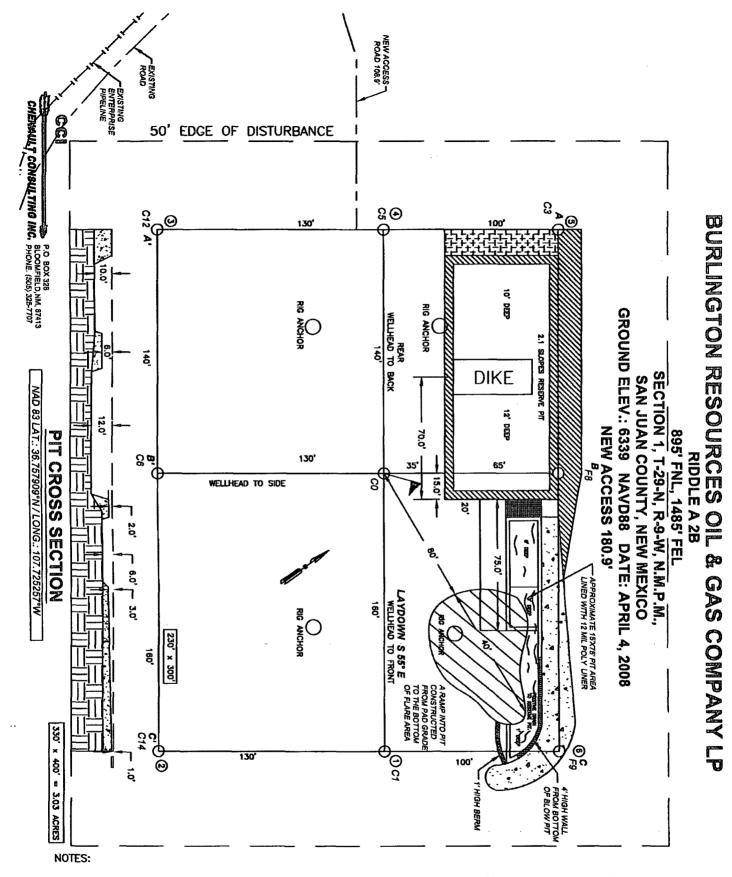

- 1. RESERVE PIT DIKE: TO BE 8' ABOVE DEEP SIDE (OVERFLOW-3' WIDE AND 1' ABOVE SHALLOW SIDE).
- 2. C.C.I. SURVEYS IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.
 CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED
 PIPLINES OR CABLES ON WELL PAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION.



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Riddle A #2B	Date Reported:	03-13-09
Laboratory Number:	49257	Date Sampled:	03-06-09
Chain of Custody No:	6449	Date Received:	03-10-09
Sample Matrix:	Soil	Date Extracted:	03-11-09
Preservative:	Cool	Date Analyzed:	03-12-09
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	4.0	0.2
Diesel Range (C10 - C28)	68.5	0.1
Total Petroleum Hydrocarbons	72.5	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample.



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Riddle A #2B Background	Date Reported:	03-13-09
Laboratory Number:	49258	Date Sampled:	03-06-09
Chain of Custody No:	6449	Date Received:	03-10-09
Sample Matrix:	Soil	Date Extracted:	03-11-09
Preservative:	Cool	Date Analyzed:	03-12-09
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drilling Pit Sample.

Analyst



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client:	QA/QC	Project #:	N/A
Sample ID:	03-12-09 QA/QC	Date Reported:	03-13-09
Laboratory Number:	49257	Date Sampled:	N/A
Sample Matrix:	Methylene Chloride	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	03-12-09
Condition:	N/A	Analysis Requested:	TPH

	I-Cal Date	I-Cal RF:	C-Cal RF:	% Difference	Accept. Range
Gasoline Range C5 - C10	05-07-07	9.9245E+002	9.9285E+002	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-07	9.9887E+002	9.9927E+002	0.04%	0 - 15%

Blank Conc. (mg/L - mg/Kg)	Concentration	Detection Limit
Gasoline Range C5 - C10	ND	0.2
Diesel Range C10 - C28	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

Duplicate Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept. Range
Gasoline Range C5 - C10	4.0	4.2	5.0%	0 - 30%
Diesel Range C10 - C28	68.5	67.6	1.3%	0 - 30%

Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept: Range
Gasoline Range C5 - C10	4.0	250	248	97.5%	75 - 125%
Diesel Range C10 - C28	68.5	250	316	99.1%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 49257 - 49266.



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project _. #:	96052-0026
Sample ID:	Riddle A #2B	Date Reported:	03-13-09
Laboratory Number:	49257	Date Sampled:	03-06-09
Chain of Custody:	6449	Date Received:	03-10-09
Sample Matrix:	Soil	Date Analyzed:	03-12-09
Preservative:	Cool	Date Extracted:	03-11-09
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	14.5	0.9	
Toluene	99.2	1.0	
Ethylbenzene	1.9	1.0	
p,m-Xylene	178	1.2	
o-Xylene	38.8	0.9	
Total BTEX	332		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	96.0 %
	1,4-difluorobenzene	96.0 %
	Bromochlorobenzene	96.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample.

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Riddle A #2B Background	Date Reported:	03-13-09
Laboratory Number:	49258	Date Sampled:	03-06-09
Chain of Custody:	6449	Date Received:	03-10-09
Sample Matrix:	Soil	Date Analyzed:	03-12-099
Preservative:	Cool	Date Extracted:	03-11-09
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	0.9
Toluene	ND	1.0
Ethylbenzene	ND	1.0
p,m-Xylene	ND	1.2
o-Xylene	ND	0.9
Total BTEX	ND	

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	99.0 %
	1,4-difluorobenzene	99.0 %
	Bromochlorobenzene	99.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drilling Pit Sample.

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	N/A	Project #:	N/A
Sample ID:	03-12-BT QA/QC	Date Reported:	03-13-09
Laboratory Number:	49257	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	03-12-09
Condition:	N/A	Analysis:	BTEX

Calibration and Detection Limits (ug/L)	I-Cal RF:	C-Cal RF: Accept, Rang	%Diff. je 0 - 15%	Blank Conc	Detect, Limit
Benzene	3.1646E+007	3.1709E+007	0.2%	ND	0.1
Toluene	2.5968E+007	2.6020E+007	0.2%	ND	0.1
Ethylbenzene	1.9596E+007	1.9635E+007	0.2%	ND	0.1
p,m-Xylene	4.4574E+007	4.4664E+007	0.2%	ND	0.1
o-Xylene	1.9128E+007	1.9166E+007	0.2%	ND	0.1

Duplicate Conc. (ug/Kg)	Sample Di	uplicate	%Diff.	Accept Range	Detect, Limit
Benzene	14.5	15.7	8.3%	0 - 30%	0.9
Toluene	99.2	98.1	1.1%	0 - 30%	1.0
Ethylbenzene	1.9	1.9	0.0%	0 - 30%	1.0
p,m-Xylene	178	172	3.6%	0 - 30%	1.2
o-Xylene	38.8	37.6	3.1%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample Amo	iunt Spiked Sp ik	ed Sample	% Recovery	Accept Range
Benzene	14.5	50.0	60.1	93.2%	39 - 150
Toluene	99.2	50.0	146	97.9%	46 - 148
Ethylbenzene	1.9	50.0	50.9	98.1%	32 - 160
p,m-Xylene	178	100	266	95.5%	46 - 148
o-Xylene	38.8	50.0	86.4	97.3%	46 - 148

ND - Parameter not detected at the stated detection limit.

References: Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using

Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments: QA/QC for Samples 49257 - 49266.

EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Riddle A #2B	Date Reported:	03-13-09
Laboratory Number:	49257	Date Sampled:	03-06-09
Chain of Custody No:	6449	Date Received:	03-10-09
Sample Matrix:	Soil	Date Extracted:	03-12-09
Preservative:	Cool	Date Analyzed:	03-12-09
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

351

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample.

Monueen /

Mustum Weeters
Review

EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Riddle A #2B Background	Date Reported:	03-13-09
Laboratory Number:	49258	Date Sampled:	03-06-09
Chain of Custody No:	6449	Date Received:	03-10-09
Sample Matrix:	Soil	Date Extracted:	03-12-09
Preservative:	Cool	Date Analyzed:	03-12-09
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

47.2

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drilling Pit Sample.

Monua J

Mustum Walter



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

Client:

QA/QC

Project #:

N/A

Sample ID:

QA/QC

Date Reported:

03-13-09

Laboratory Number:

03-12-TPH.QA/QC 49257

Date Sampled:

N/A

Sample Matrix:

Freon-113

Date Analyzed:

03-12-09

Preservative: Condition:

N/A

N/A

Date Extracted: Analysis Needed: 03-12-09 TPH

Calibration

I-Cal Date

C-Cal Date I-Cal RE:

C-Cal RF: % Difference Accept. Range

03-09-09

03-12-09

1,370

1,430

4.4%

+/- 10%

Blank Conc. (mg/Kg)

Concentration

Detection Limit

TPH

ND

11.0

Duplicate Conc. (mg/Kg)

TPH

Sample 351

Duplicate 308

% Difference 12.5%

Accept. Range +/- 30%

Sample

Spike Added Spike Result % Recovery

Accept Range

Spike Conc. (mg/Kg) **TPH**

351

2,000

2,090

88.9%

80 - 120%

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

QA/QC for Samples 49257 - 49266.

Meen



Chloride

Project #: ConocoPhillips 96052-0026 Client: Date Reported: 03-13-09 Sample ID: Riddle A #2B Date Sampled: 03-06-09 Lab ID#: 49257 Date Received: 03-10-09 Sample Matrix: Soil Date Analyzed: 03-13-09 Preservative: Cool Chain of Custody: 6449 Condition: Intact

Concentration (mg/Kg) **Parameter**

Total Chloride 90

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983. Reference:

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: **Drilling Pit Sample.**

Mustum Walters Review



Chloride

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	Riddle A #2B Background	Date Reported:	03-13-09
Lab ID#:	49258	Date Sampled:	03-06-09
Sample Matrix:	Soil	Date Received:	03-10-09
Preservative:	Cool	Date Analyzed:	03-13-09
Condition:	Intact	Chain of Custody:	6449

Parameter	Concentration (mg/Kg)

Total Chloride

10

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Drilling Pit Sample.

Monura M. Analyst

Review

Submit To Approp Two Copies	riate District	Office		State of New Mexico					Form C-105							
District I 1625 N. French Dr	., Hobbs, NM	1 88240	į	Energy, Minerals and Natural Resources				1. WELL	API	NO.			July 17, 2008			
District II 1301 W. Grand Av	enue, Artesia	ı, NM 88210								30-045-347	736					
District III 1000 Rio Brazos R	d., Aztec, Ni	√1 87410				20 South St					2. Type of Le		☐ FE	æ	☑ FED/INI	DIAN
District IV 1220 S. St. Francis	Dr., Santa F	e, NM 87505		Santa Fe, NM 87505						3. State Oil &	t Gas			M LED/III	JIAN	
\ <u>\\</u>	COMPL	ETION)D E	PECO	MDI	ETION REI	DOE	T AND	1100		SF-078201	-A		AS IN THE		
4. Reason for fil		EHON	אכ	KECOI	VIPL	ETION REI	PUF	KI AINL	LUG		5. Lease Nam	e or l	1044		Market Company	
☐ COMPLET	ION REPO	ORT (Fill in	hoxes #	#1 throug	h #31	for State and Fee	e wells	only)	•		RIDDLE A					
				_					and #22 an	d/or	6. Well Numb	er:				
#33; attach this a	nd the plat									J/01					·	
7. Type of Comp	oletion: WELL 🔲	WORKOVI	ER 🔲	DEEPEN	NING	□PLUGBACK	(🗆 1	DIFFEREI	NT RESER	VOII	R OTHER					
8. Name of Oper	ator	•									9. OGRID 14538					
Burlington R 10. Address of O	perator		Com	pany, 1	<u> </u>						11. Pool name	or W	ildcat			
PO Box 4298, Fa	irmington, 1	NM 87499														
12.Location	Unit Ltr	Section		Townsh	ip	Range	Lot		Feet from	the	N/S Line	Fee	t from tl	ne	E/W Line	County
Surface:														\perp		
13. Date Spudde	d 14 Dat	te T.D. Reacl	ned	15 Ds	nte Rio	Released		T 16	Date Comr	letec	l (Ready to Prod	luce)		17	Elevations (D	F and RKB
			icu	11/13/	2008									RT,	, GR, etc.)	
18. Total Measur	ed Depth o	f Well		19. Plı	ıg Bac	k Measured Dep	oth	20.	Was Direc	tiona	al Survey Made?	•	21. T	ype	Electric and (Other Logs Run
22. Producing In	terval(s), of	this comple	ion - T	op, Botto	om, Na	ame		<u> </u>					<u>L</u>			
					740	INC DEC	ODI	N (D	4 - 11 -4			-11\		_		
CASING SI	ZE	WEIGHT	LB./F			ING RECO	UKI		Dri ali si LE SIZE	rin	gs set in wo		CORD		AMOUN'	Γ PULLED
							_							I		
							-				 			-		
														+-		
										т-				L		
SIZE	TOP		ВОТ	TOM	LIN	ER RECORD SACKS CEMI	ENT	SCREEN	1	25 SE			NG RE EPTH S			KER SET
26. Perforation	record (int	terval size a	nd nun	nber)		<u> </u>		27 AC	ID SHOT	FR	ACTURE, CE	MEN	OZ TV	HEI	FZE FTC	
				,	** •				INTERVA						ERIAL USED)
28.	PRODUCTION PRODUCTION															
Date First Production Production Method (Flowing, gas lift, pumping - Size and type pump) Well Status (Prod. or Shut-in)																
Date of Test	Hours '	Tested	Cho	ke Size	ze Prod'n For Oil - Bbl Gas - MCF W Test Period			ater - B	bl.	Gas -	Oil Ratio					
Flow Tubing Press.	Casing	Pressure		culated 24 or Rate	1-	Oil - Bbl.	Bbl. Gas - MCF Water - Bbl. Oil Gravity - API -				ity - API - <i>(Ca</i>	orr.)				
29. Disposition o	f Gas <i>(Sola</i>	l, used for fue	fuel, vented, etc.) 30. Test Witnessed By													
31. List Attachm	ents											<u> </u>				
32. If a temporar	y pit was us	sed at the we	l, attac	ch a plat v	vith th	e location of the	tempo	orary pit.								***
33. If an on-site	burial was t			ort the ex		cation of the on-s			1927 🗖 10	983						
I hereby certi	fy that th	e informat	ion sl	nown or	ı botl	n sides of this	form	is true	and comp	lete					_	ef .
Signature	zotal	Tafo	ya		Prir Nan	ne Crystal T	`afoya	a Title	: Regula	ator	y Tech D	Date:	2/8	3/2	2010	
E-mail Addre	ss crysta	ıl.tafoya@	conoc	cophilli	ps.co	m										

ConocoPhillips

Pit Closure Form:
Date: 7/6/2009
Well Name: Riddle AZB
Footages: 895 FNL 1485 FEL Unit Letter: B
Section: _/, T-29-N, R-9W, County: _53_ State: _NM
Contractor Closing Pit: 30 R:H2
Construction Inspector: Norman Faver Date: 7/6/2009
Instructor Signature:

Tafoya, Crystal

From:

Silverman, Jason M

Sent:

Monday, June 29, 2009 8:50 AM

To:

Silverman, Jason M; 'Brandon.Powell@state.nm.us'; 'Mark Kelly'; 'Robert Switzer'; 'Sherrie

Landon

Cc:

'JDRITT@aol.com'; 'BOS'; Becker, Joey W; Bonilla, Amanda; Bowker, Terry D; Busse, Dollie L; Chavez, Virgil E; Gordon Chenault; GRP:SJBU Production Leads; Hockett, Christy R; Johnson, Kirk L; KENDAL BASSING; Kennedy, Jim R; Lopez, Richard A; Nelson, Terry J; O'Nan, Mike J.; Peace, James T; Pierce, Richard M; Poulson, Mark E; Richards, Brian; Smith, Randall O;

Stamets, Steve A; Thacker, LARRY; Work, Jim A; Art Sanchez (sancon.art@gmail.com); Faver

Norman (faverconsulting@yahoo.com); Jared Chavez; Scott Smith; Smith Eric

(sconsulting.eric@gmail.com); Terry Lowe; Blair, Maxwell O

(Maxwell.O.Blair@conocophillips.com); Blakley, Maclovia; Clark, Joan E

(Joni.E.Clark@conocophillips.com); Farrell, Juanita R (Juanita.R.Farrell@conocophillips.com); Gillette, Steven L (Gray Surface Specialties and Consulting, Ltd.); Greer, David A; Hines, Derek

J (Finney Land Co.); Maxwell, Mary Alice; McWilliams, Peggy L; Seabolt, Elmo F

(Elmo.F.Seabolt@conocophillips.com); Stallsmith, Mark R

Subject:

RE: Reclamation Notice: Riddle A 2B

Importance: High

JD Ritter will actually be performing the work on this location.

From: Silverman, Jason M

Sent: Monday, June 29, 2009 7:47 AM

To: Brandon.Powell@state.nm.us; Mark Kelly; Robert Switzer; Sherrie Landon **Cc:** 'JDRITT@aol.com'; 'BOS'; Art Sanchez (sancon.art@gmail.com); Faver Norman

(faverconsulting@yahoo.com); Jared Chavez; KENDAL BASSING; Scott Smith; Silverman, Jason M; Smith Eric (sconsulting.eric@gmail.com); Stan Mobley; Terry Lowe; Becker, Joey W; Bonilla, Amanda; Bowker, Terry D; Busse, Dollie L; Chavez, Virgil E; Gordon Chenault; GRP:SJBU Production Leads; Hockett, Christy R; Johnson, Kirk L; Kennedy, Jim R; Lopez, Richard A; Nelson, Terry J; O'Nan, Mike J.; Peace, James T; Pierce, Richard M; Poulson, Mark E; Richards, Brian; Smith, Randall O; Stamets, Steve A; Thacker, LARRY; Work, Jim A; Blair, Maxwell O (Maxwell.O.Blair@conocophillips.com); Blakley, Maclovia; Clark, Joan E

(Joni.E.Clark@conocophillips.com); Farrell, Juanita R (Juanita.R.Farrell@conocophillips.com); Gillette, Steven L (Gray Surface Specialties and Consulting, Ltd.); Greer, David A; Hines, Derek J (Finney Land Co.); Mankin, Mike L. (Mike.L.Mankin@conocophillips.com); Maxwell, Mary Alice; McWilliams, Peggy L; Seabolt, Elmo F

(Elmo.F.Seabolt@conocophillips.com); Stallsmith, Mark R

Subject: Reclamation Notice: Riddle A 2B

Importance: High

JD RITTER will move a tractor to the Riddle A 2B on Monday, July 6th, 2009 to start the Reclamation Process.

Please contact Norm Faver (320-0670) if you have any questions or need further assistance.

Thanks, Jason Silverman

Burlington Resources Well- Network #10222923

San Juan County, NM:

Riddle A 2B - BLM surface / BLM minerals

Twin: n/a

895' FNL, 1485' FEL Sec. 1, T29N, R9W

Unit Letter 'B'

Lease #: NMSF-078201-A

API #: 30-045-34736


Latitude: 36° 45' 28.4758" N (NAD 83)


Longitude: 107° 43' 30.9258" W

Elevation: 6339'

Jason Silverman -----Construction Technician ConocoPhillips Company - SJBU Construction Department P.O. Box 4289 Farmington, NM 87499-4289 505-326-9821

Jason.M.Silverman@ConocoPhillips.com

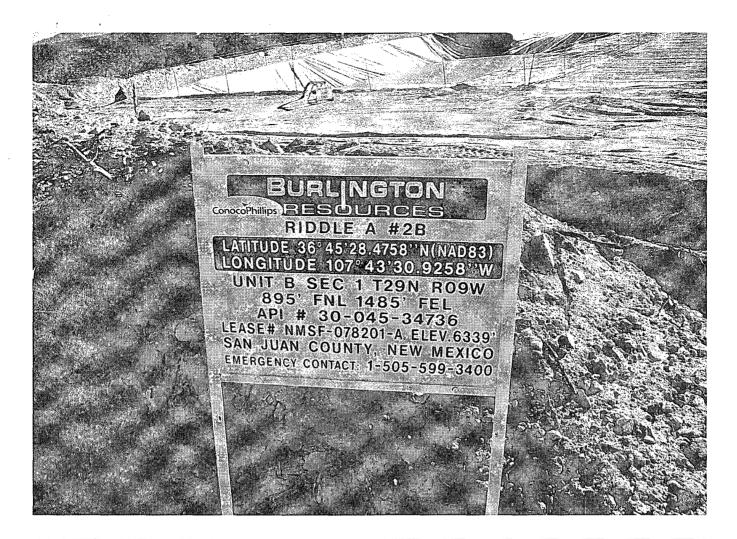

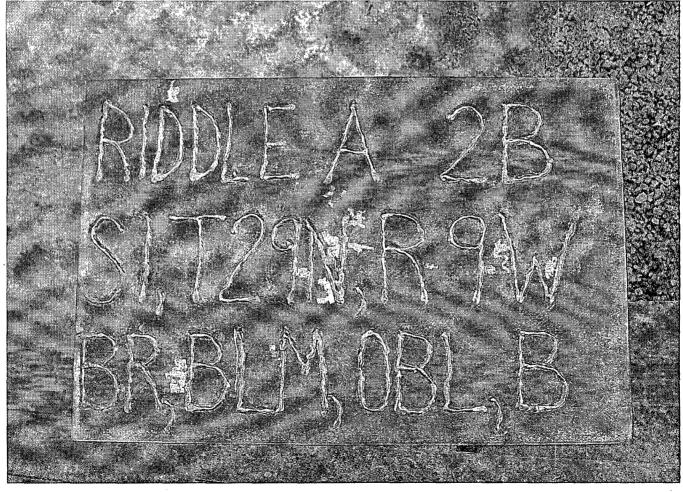

WELL PAD SAFETY AND ENVIRONMENTAL CHECK LIST

WELL NAME: Riddle A 2B

API#: 30-045-34736

AT 1#: 00-04-0-04-00	COMMENIS	Fence and liner in good condition	Fence and liner in good condition	Fence and liner in good condition	Equipment on location	Liner in good condition; fence needs repaired where it has been cut	Fence and liner in good condition	Crew installing facilities on location; fence & liner in good condition	Fence and liner in good condition															
	PICTURES TAKEN	×	×	×		×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
	CHECK	×	×	×		×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
20	SAFETY	×	×	×		×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×	×
VVELL INAIVIE. NIGGIE A 2B	INSPECTOR	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith	Scott Smith
\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	DAIE	11/17/08	12/2/08	12/8/08	12/15/08	12/30/08	1/5/09	1/19/09	2/2/09	2/5/09	2/11/09	2/18/09	2/23/09	3/2/09	3/17/09	3/19/09	4/6/09	4/13/09	4/20/09	4/27/09	5/4/09	2/19/09	5/27/09	6/2/08

60/6/9	Scott Smith				Could not inspect due to road conditions
6/12/09	Scott Smith	×	×	×	Fence and liner in good condition

,