

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office **Santa Fe**
Lease No. **078243**
Unit **N**

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

June 13, 1960

GOVT. GROSS

Well No. **1-7** is located **845** ft. from **N** line and **1650** ft. from **E** line of sec. **7**

SESW 7 **31N** **12W** **NMPM**

(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Undesignated Dakota **San Juan** **New Mexico**

(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is **5912** ft. **KB**

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

5/13/60

Total Depth 6860' - Ran 5-1/2" 17# J-55 casing to 6859'. Cemented with 225 sz 6% gel cement thru shoe. Bumped plugs and tested casing to 3000 psig, pressure held OK. Cemented thru stage collar at 4868' with 175 sz 30% pozmix and 12-1/2 lbs. of G leonite per sack. Bump plug, pressure tested sleeve OK.

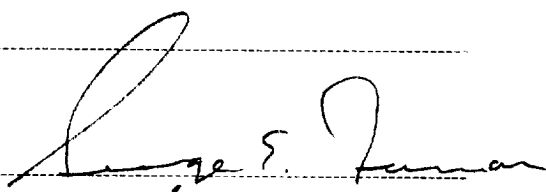
I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **CONSOLIDATED OIL & GAS, INC.**

Address **2112 Tower Bldg.**

1700 Broadway

Denver, 2, Colorado

By 
Title **George E. Farmer**
Production Manager