

Denny E. Foust
District I
DEPUTY OIL & GAS INSPECTOR

District II
P.O. Drawer D
District III
JAN 16 1998
1000 Rio Brazos Rd. Aztec, NM 87410

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

SUBMIT COPY TO
APPROPRIATE
DISTRICT OFFICE
AND 1 COPY TO
SANTA FE OFFICE

Approved

PIT REMEDIATION AND CLOSURE REPORT

Operator: Phillips Petroleum Company Telephone: (505) 599-3462

Address: 5525 Hwy. 64, NBU 3004, Farmington, NM 87401

Facility Or: San Juan 32 - 7 Unit # 52

Well Name

Location: Unit or Qtr/Qtr Sec SESE Sec 32 T 32N R 7W County San Juan

Pit Type: Separator X Dehydrator _____ Other _____

Land Type: BLM _____ State X Fee _____ Other _____

Pit Location: Pit dimensions: Length 25 ft, width 30 ft, depth 11 ft
(Attach diagram)

Reference: wellhead X other _____

Footage from reference: 60 ft

Direction from reference: 14 Degrees X East North _____
West South X

Depth to Ground Water: 380 ft
(vertical distance from
contaminants to seasonal
highwater elevation of
ground water)

Less than 50 feet (20 points)	_____
50 ft to 99 feet (10 points)	_____
Greater than 100 feet (0 points)	<u>X</u> <u>0</u>

Wellhead Protection Area:
(less than 200 feet from a private
domestic water source, or: less than
1000 feet from all other water sources)

Yes (20 points)	_____
No (0 points)	<u>X</u> <u>0</u>

Distance to Surface Water:
(horizontal distance to perennial
ponds, rivers, streams, creeks,
irrigation canals and ditches)

Less than 200 feet (20 points)	_____
200 feet to 1000 feet (10 points)	_____
Greater than 1000 feet (0 points)	<u>X</u> <u>0</u>

Date Remediation Started: 7/7/94 Dated Completed: 9/9/94

Excavation X Approx. cubic yards 320

Landfarmed X Insitu Bioremediation _____

Other _____

Remediation Method: Onsite X Offsite _____

(Check all appropriate
sections)

General Description of Remedial Action- The pit was assessed on 7/7/94 and found to be outside NMOCD and BLM Guidelines 3 feet below pit bottom (depth = 6 feet). The pit was excavated to a pit size of 25 ft X 30 ft X 11 ft in depth. The excavated pit was sampled for closure purposes and was determined that the walls and bottom were within NMOCD and BLM guidelines. The landfarm was determined to be within guidelines on 9/9/94. Based on this information and the physical location of the pit, there is no risk to human health or environment.

Ground Water Encountered: No X Yes _____ Depth _____

Final Pit:

(Attach Sampling
of multiple samples,
attach sample results

and diagram of sample
locations and depths)

Sample location: See pit closure verification field report form

Sample depth: 10' below ground level (sample #1)

Sample date 8/5/94 Sample time 10:10

Sample Results

Benzene(ppm) Non-Detect

Total BTEX (PPM) 0.034

Field Headspace (ppm) 216 (sample #1)

TPH 20 (sample #1)

Ground Water Sample: Yes No X (if yes, attach sample results)

I HEREBY CERTIFY THAT THE INFORMATION ABOVE IS TRUE AND COMPLETED TO THE BEST OF MY KNOWLEDGE AND BELIEF.

DATE 9/21/97 PRINTED NAME Bob Wirtanen

SIGNATURE [Signature] and TITLE Sr. Safety & Environmental Specialist

5796 US HWY. 64, FARMINGTON, NM 87401
(505) 832-0615

C.O.C. NO. 140

JOB No: 93163
PAGE No: 1 of 1

DATE STARTED: _____
DATE FINISHED: 7/7/79
EIMRO. SPCLY: CLG
OPERATOR: cimarrón
ASSISTANT: _____

LAND USE: Range Lease = FEE

SURFACE CONDITIONS: Earthen Pit - Water present on surface of pit

PIT CENTER IS LOCATED APPROXIMATELY 60 FEET S14E OF WELLHEAD.

CLOSURE STD: 5000 ppm

* Distance to Groundwater = 380 feet

RANKING SCORE: 0

T1 : Water present at pit surface, soil is stained gray and is composed of sand with some clay, moist, with an odor.

T1 @ 6' : $210 \times 2 = 420$ ppm, TPH

SAMPLE INVENTORY		
SAMPLE ID	SAMPLE TYPE	LABORATORY ANALYSIS
T1 @ 6'	soil	418.1
T1@6'	soil	BTEX

SCALE

0 FEET

SITE DIAGRAM

Surface Gradient

To wellhead

Sep.

Meter House


T118. 1

T114

7114

T114

[illegible][illegible]



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

FIELD MODIFIED EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	Phillips Petroleum	Project #:	93163
Sample ID:	T1 @ 6'	Date Analyzed:	7-7-94
Project Location:	San Juan 32-7 #52 PC	Date Reported:	7-7-94
Laboratory Number:	GAC0594	Sample Matrix:	Soil

Parameter	Result, mg/kg	Detection Limit, mg/kg
Total Recoverable Petroleum Hydrocarbons	420	10

ND = Not Detectable at stated detection limits.

QA/QC:	QA/QC Sample TPH mg/kg	Duplicate TPH mg/kg	% *Diff.
	11,000	12,600	14


*Administrative Acceptance limits set at 30%.

Method: Modified Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978

Comments: Separator Pit FA211

CL Genth
Analyst

Morris D. Young
Review



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

EPA METHOD 8020 AROMATIC VOLATILE ORGANICS

Client:	Phillips	Project #:	93163
Sample ID:	T1 @ 6'	Date Reported:	07-15-94
Laboratory Number:	7701	Date Sampled:	07-07-94
Sample Matrix:	Soil	Date Received:	07-07-94
Preservative:	Cool	Date Extracted:	07-08-94
Condition:	Cool & Intact	Date Analyzed:	07-14-94
		Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	26.9
Toluene	1110	33.6
Ethylbenzene	9800	20.2
p,m-Xylene	6600	26.9
o-Xylene	5200	20.2


SURROGATE RECOVERIES:	Parameter	Percent Recovery
	Trifluorotoluene	128 %
	Bromofluorobenzene	143 %


Method: Method 5030, Purge-and-Trap, Test Methods for
Evaluating Solid Waste, SW-846, USEPA, July 1992


Method 8020, Aromatic Volatile Organics, Test Methods
for Evaluating Solid Waste, SW-846, USEPA, Sept. 1986.

ND - Parameter not detected at the stated detection limit.

Comments: San Juan 32-7 #52 Separator Pit PA211.
Excessive surrogate recovery due to coelution


Analyst


Review



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

EPA METHOD 8020 AROMATIC VOLATILE ORGANICS

Client:	NA	Project #:	NA
Sample ID:	Laboratory Blank	Date Reported:	07-15-94
Laboratory Number:	0714BTLB	Date Sampled:	NA
Sample Matrix:	Water	Date Received:	NA
Preservative:	NA	Date Analyzed:	07-14-94
Condition:	NA	Analysis Requested:	BTEX

Parameter	Concentration (ug/L)	Det. Limit (ug/L)
Benzene	ND	0.4
Toluene	ND	0.5
Ethylbenzene	ND	0.3
p,m-Xylene	ND	0.4
o-Xylene	ND	0.3

SURROGATE RECOVERIES:	Parameter	Percent Recovery
	Trifluorotoluene	89 %
	Bromofluorobenzene	87 %

Method: Method 5030, Purge-and-Trap, Test Methods for Evaluating
Solid Waste, SW-846, USEPA, July 1992

Method 8020, Aromatic Volatile Organics, Test Methods for
Evaluating Solid Waste, SW-846, USEPA, Sept. 1986

ND - Parameter not detected at the stated detection limit.

Comments:

Analyst

Review

CHAIN OF CUSTODY RECORD

[illegible]

CLIENT: Phillips Petroleum**ENVIROTECH Inc.**PIT NO: PA2115798 US HWY 84, FARMINGTON, NM 87401
(505) 632-0815C.O.C. NO: 3825**FIELD REPORT: CLOSURE VERIFICATION**JOB No: 93163PAGE No: 1 of 1LOCATION: NAME: San Juan 32-7 WELL # 52, PC PIT: Separator
QUAD/UNIT: P SEC 32 TWP: 32N RNG: 7W HM: NM CNTY: SJ ST NM
DIR/FOOTAGE: 800' FSL & 920' FEL CONTRACTOR: CimarronDATE STARTED: 8/3/94DATE FINISHED: 8/5/94ENVIRONMENTAL
SPECIALIST: FMSOIL REMEDIATION: EXCAVATION APPROX. 25 FT. x 30 FT. x 11 FT. DEEP.DISPOSAL FACILITY: Landfarm - On-Site CUBIC YARDAGE: 306LAND USE: Range LEASE: FEEFIELD NOTES & REMARKS: PIT LOCATED APPROXIMATELY 60 FEET S14E FROM WELLHEAD.DEPTH TO GROUNDWATER: 380 ft NEAREST WATER SOURCE: >1000 ft NEAREST SURFACE WATER: >1000 ftNMDCD RANKING SCORE: 0 NMDCD TYP. CLOSURE STD: 5000 PPM

SOIL AND EXCAVATION DESCRIPTION: Soil is red-brown, moist, cohesive, clayey sand.

* Note: During excavation, tree roots (organics) encountered.

After field headspace analysis of sample = 2; pit was excavated an additional 3 feet East and re-sampled (sample 2A).

FIELD 4191 CALCULATIONS

SAMPLE ID	LAB No	WEIGHT (g)	mL. FREON	DILUTION	READING	CALC. ppm
1 @ 10 ft	GAC636	10	20	1	10	20
5 @ 11 ft	GAC631	10	20	1	9	18
2A @ 10 ft	GAC634	10	20	1	5	10
4 @ 10 ft	GAC635	10	20	1	12	24

SCALE




0 FEET

PIT PERIMETER


OVM
RESULTS

PIT PROFILE

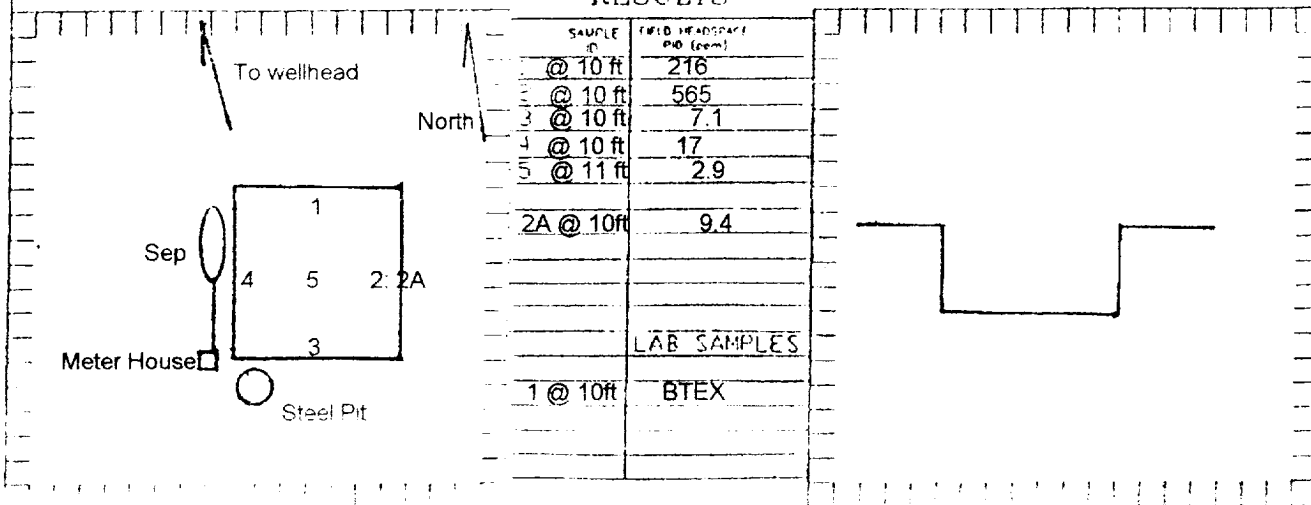

TRAVEL NOTES

CALLOUT: 8/3/94ONSITE: 8/3/94



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

FIELD MODIFIED EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	Phillips Petroleum	Project #:	93163
Sample ID:	1 @ 10'	Date Analyzed:	8-5-94
Project Location:	San Juan 32-7 #52 PC	Date Reported:	8-5-94
Laboratory Number:	GAC0636	Sample Matrix:	Soil

Parameter	Result, mg/kg	Detection Limit, mg/kg
Total Recoverable Petroleum Hydrocarbons	20	10


ND = Not Detectable at stated detection limits.


QA/QC:	QA/QC Sample TPH mg/kg	Duplicate TPH mg/kg	% *Diff.
	11,000	12,600	14


*Administrative Acceptance limits set at 30%.

Method: Modified Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No.4551, 1978

Comments: Separator Pit PA211


Analyst


Review



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

FIELD MODIFIED EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	Phillips Petroleum	Project #:	93163
Sample ID:	5 @ 11'	Date Analyzed:	8-4-94
Project Location:	San Juan 32-7 #52 PC	Date Reported:	8-4-94
Laboratory Number:	GAC0631	Sample Matrix:	Soil

Parameter	Result, mg/kg	Detection Limit, mg/kg
Total Recoverable Petroleum Hydrocarbons	18	10

ND = Not Detectable at stated detection limits.

QA/QC:	QA/QC Sample TPH mg/kg	Duplicate TPH mg/kg	% *Diff.
	11,000	12,600	14


*Administrative Acceptance limits set at 30%.

Method: Modified Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978

Comments: Separator Pit PA211

Analyst

Review



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

FIELD MODIFIED EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	Phillips Petroleum	Project #:	93163
Sample ID:	2A @ 10'	Date Analyzed:	8-4-94
Project Location:	San Juan 32-7 #52 PC	Date Reported:	8-4-94
Laboratory Number:	GAC0633	Sample Matrix:	Soil

Parameter	Result, mg/kg	Detection Limit, mg/kg
Total Recoverable Petroleum Hydrocarbons	10	10

ND = Not Detectable at stated detection limits.

QA/QC:	QA/QC Sample TPH mg/kg	Duplicate TPH mg/kg	% *Diff.
	11,000	12,600	14


*Administrative Acceptance limits set at 30%.

Method: Modified Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No.4551, 1978

Comments: Separator Pit PA211

Analyst

Review



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

FIELD MODIFIED EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	Phillips Petroleum	Project #:	93163
Sample ID:	4 @ 10'	Date Analyzed:	8-5-94
Project Location:	San Juan 32-7 #52 PC	Date Reported:	8-5-94
Laboratory Number:	GAC0635	Sample Matrix:	Soil

Parameter	Result, mg/kg	Detection Limit, mg/kg
Total Recoverable Petroleum Hydrocarbons	24	10


ND = Not Detectable at stated detection limits.


QA/QC:	QA/QC Sample TPH mg/kg	Duplicate TPH mg/kg	% *Diff.
	11,000	12,600	14

*Administrative Acceptance limits set at 30%.

Method: Modified Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No.4551, 1978

Comments: Separator Pit PA211


Analyst


Review

1st # RA 211

3825

CHAIN OF CUSTODY RECORD

Client/Project Name			Project Location			Chain of Custody Tape No.		ANALYSIS/PARAMETERS											
Sample: (Signature)			Sample No./ Identification			Sample Date	Sample Time	Lab Number	Sample Matrix	No. of Containers	Remarks								
<i>[Signature]</i> 93/123			SNOLAN 32-7 #522							1	BTEX (E020) Sep 7.1								
Relinquished by: (Signature) <i>[Signature]</i>			Date 8/5/94			Time 16:41		Received by: (Signature) <i>[Signature]</i>			Date 8/5/94								
Relinquished by: (Signature)								Received by: (Signature)											
Relinquished by: (Signature)								Received by: (Signature)											

ENVIROTECH INC.

5796 U.S. Highway 64-3014
Farmington, New Mexico 87401

(505) 632-0615

ENVIROTECH INC.

UNDERGROUND TANK TESTING • SITE ASSESSMENT • SITE REMEDIATION

5796 U.S. HIGHWAY 64 - 3014
FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615

EPA METHOD 8020 AROMATIC VOLATILE ORGANICS

Client:	PHILLIPS	Project #:	93163
Sample ID:	1@10'	Date Reported:	08-15-94
Laboratory Number:	7764	Date Sampled:	08-05-94
Sample Matrix:	Soil	Date Received:	08-08-94
Preservative:	Cool	Date Extracted:	08-08-94
Condition:	Cool & Intact	Date Analyzed:	08-11-94
		Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	20.0
Toluene	34	20.0
Ethylbenzene	ND	13.3
p,m-Xylene	ND	20.0
o-Xylene	ND	20.0


SURROGATE RECOVERIES:	Parameter	Percent Recovery
	Trifluorotoluene	119 %
	Bromofluorobenzene	97 %


Method: Method 5030, Purge-and-Trap, Test Methods for
Evaluating Solid Waste, SW-846, USEPA, July 1992


Method 8020, Aromatic Volatile Organics, Test Methods
for Evaluating Solid Waste, SW-846, USEPA, Sept. 1986.

ND - Parameter not detected at the stated detection limit.

Comments: SAN JUAN 32-7 # 52 PC SEP PIT PA211


Analyst


Review



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

** QUALITY ASSURANCE REPORT
METHOD 8020 BTEX

MATRIX DUPLICATE
AROMATIC VOLATILE ORGANICS

Client:	NA	Project #:	NA
Sample ID:	NA	Date Reported:	08-15-94
Laboratory Number:	7765 DUPLICATE	Date Sampled:	08-02-94
Sample Matrix:	Water	Date Received:	08-02-94
Preservative:	HgCl and Cool	Date Analyzed:	08-11-94
Condition:	Cool and Intact	Analysis Requested:	BTEX

Parameter	Sample Result (ug/Kg)	Duplicate Result (ug/Kg)	Percent Difference
Benzene	0	0	0.9
Toluene	15.2	16.0	5.4
Ethylbenzene	3.0	3.7	18.7
p,m-Xylene	ND	ND	0.0
o-Xylene	ND	ND	0.0

QA ACCEPTANCE CRITERIA:

Administrative control limit set
at maximum of 30% difference.

Method: Method 5030, Purge-and-Trap, Test Methods for
Evaluating Solid Waste, SW-846, USEPA, Sept. 1986.


Method 8020, Aromatic Volatile Organics, Test Methods
for Evaluating Solid Waste, SW-846, USEPA, Sept. 1986.

ND - Parameter not detected at the stated detection limit.

Comments:

Rex L. Griffin
Analyst

Mavis D. Young
Review



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

EPA METHOD 8020 AROMATIC VOLATILE ORGANICS

Client:	NA	Project #:	NA
Sample ID:	Laboratory Blank	Date Reported:	08-15-94
Laboratory Number:	0811BLK	Date Sampled:	NA
Sample Matrix:	Water	Date Received:	NA
Preservative:	NA	Date Analyzed:	08-11-94
Condition:	NA	Analysis Requested:	BTEX

Parameter	Concentration (ug/L)	Det. Limit (ug/L)
Benzene	ND	0.3
Toluene	ND	0.4
Ethylbenzene	ND	0.3
p,m-Xylene	ND	0.3
o-Xylene	ND	0.3

SURROGATE RECOVERIES:	Parameter	Percent Recovery
	Trifluorotoluene	102 %
	Bromofluorobenzene	128 %

Method: Method 5030, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, July 1992

Method 8020, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846, USEPA, Sept. 1986

ND - Parameter not detected at the stated detection limit.

Comments:

Rex L. Griffin
Analyst

Marian D. Young
Review

ENVIROTECH Inc.5798 US HWY 84, FARMINGTON, NM 87401
(505) 632-0815PIT No. PA 211
C.O.C. #**FIELD REPORT: REMEDIATION FACILITY
CLOSURE VERIFICATION**JOB No. 93163
PAGE No. 1 of 1

FACILITY LOCATION: San Juan 32-7 # 52, PC

SOURCE LOCATION: Separator Pit

SOURCE LOCATION:

SOURCE LOCATION:

FACILITY CLASSIFICATION: PIT TYPE: Separator

DATE STARTED: 9/9/94

DATE FINISHED: 9/9/94

ENVIRONMENTAL
SPECIALIST: CJCSOIL REMEDIATION: QUANTITY: 320 cubic yards # OF COMP. SAMPLES: 2
DIMENSIONS: 84 ft X 103 ft x 1 ft deep

VISIBLE OBSERVATIONS: clay, red-brown to brown in color, dry, NO odor

SAMPLING PLAN:

FIELD NOTES & REMARKS: FACILITY CENTER LOCATED APPROX 16 YARDS N FROM WELLHEAD.

DEPTH TO GROUNDWATER: 380 ft
NEAREST WATER SOURCE/TYPE: >1000 ft
NEAREST SURFACE WATER: >1000 ft
MAX TPH PER NMOC: 5000 ppm


C 1: 39 X 2 = 78 ppm, TPH

C 2: 42 X 2 = 84 ppm, TPH

No. OF 5-POINT
COMPOSITE SAMPLES:
YARDAGE--#
0-200=1
201-400=2
401-1000=3
/1000=5

FACILITY DIAGRAM


GRID SCALE: 1 inch = 40 feet

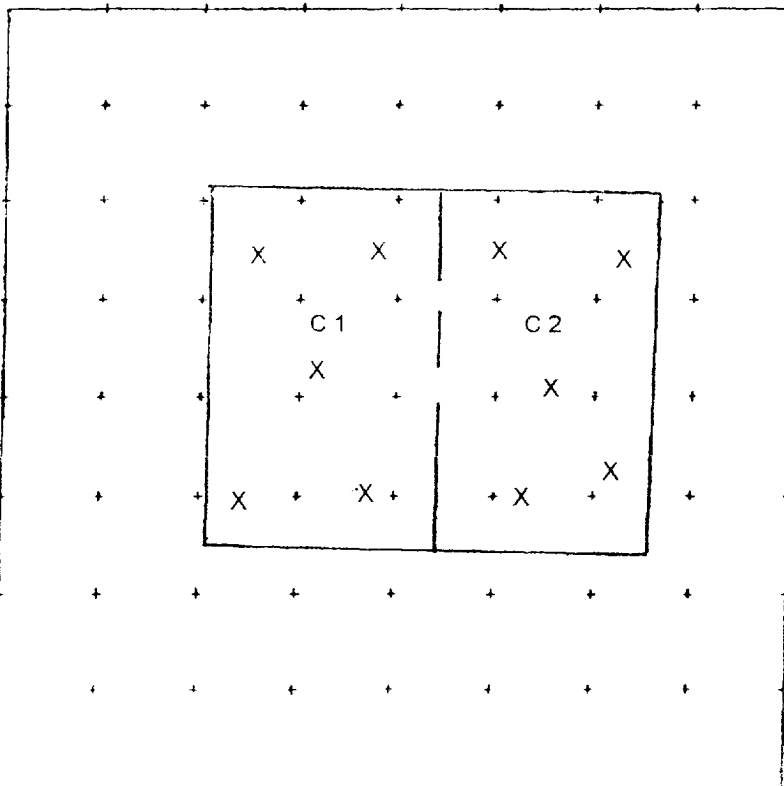
**OVM
RESULTS**

SAMPLE ID	FIELD HEADSPACE PPM (nom)
C1	9
C2	20

**LAB
RESULTS**

SAMPLE ID	ANALYSIS REQUESTED	RESULTS PPM
C1	TPH	78
C2	TPH	84





ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

FIELD MODIFIED EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	Phillips Petroleum	Project #:	93163
Sample ID:	C-1	Date Analyzed:	9-09-94
Project Location:	San Juan 32-7 #52 PC	Date Reported:	9-26-94
Laboratory Number:	GAC0731	Sample Matrix:	Soil

Parameter	Result, mg/kg	Detection Limit, mg/kg
Total Recoverable Petroleum Hydrocarbons	78	10

ND = Not Detectable at stated detection limits.


QA/QC:	QA/QC Sample TPH mg/kg	Duplicate TPH mg/kg	% *Diff.
	920	900	2


*Administrative Acceptance limits set at 30%.

Method: Modified Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No. 4551, 1978

Comments: Landfarm of Soil From Separator Pit PA211


Analyst


Review



ENVIROTECH LABS

5796 US HIGHWAY 64-3014 • FARMINGTON, NEW MEXICO 87401
PHONE: (505) 632-0615 • FAX: (505) 632-1865

FIELD MODIFIED EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	Phillips Petroleum	Project #:	93163
Sample ID:	C-2	Date Analyzed:	9-09-94
Project Location:	San Juan 32-7 #52 PC	Date Reported:	9-26-94
Laboratory Number:	GAC0732	Sample Matrix:	Soil

Parameter	Result, mg/kg	Detection Limit, mg/kg
Total Recoverable Petroleum Hydrocarbons	84	10

ND = Not Detectable at stated detection limits.


QA/QC:	QA/QC Sample TPH mg/kg	Duplicate TPH mg/kg	% *Diff.
	920	900	2

*Administrative Acceptance limits set at 30%.

Method: Modified Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water and Waste, USEPA Storet No.4551, 1978

Comments: Landfarm of Soil From Separator Pit PA211


Analyst


Review