


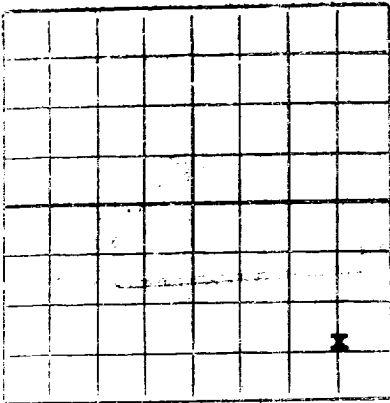

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

THE OHIO OIL COMPANY

James S. Slatton

(Company or Operator)

(Lease)

Well No. 1, in SE 1/4 of SE 1/4, of Sec. 1, T. 9-S, R. 37-E, NMPM.

Wildcat

Pool,

Lea

County.

Well is 660 feet from south line and 660 feet from east line

of Section 1. If State Land the Oil and Gas Lease No. is

Drilling Commenced 11-1-55, 19. Drilling was Completed 2-23-56, 19.

Name of Drilling Contractor Company Tools

Address Box 2107, Hobbs, New Mexico

Elevation above sea level at Top of Tubing Head 3995'. The information given is to be kept confidential until

19.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8	48	New	405.77	Guide shoe			Surface
9-5/8	36	New	2334.5				
9-5/8	40	New	537.19	Guide shoe			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2	13-3/8	405.77	450	Two plug		
12-1/4	9-5/8	2892.53	1700	" "		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Well plugged and abandoned March 1, 56

Result of Production Stimulation

Depth Cleaned Out

ORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 11,840' feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing Plugged & Abandoned 3-1- , 19. 56

OIL WELL: The production during the first 24 hours was barrels of liquid of which % was
was oil; % was emulsion; % water; and % was sediment. A.P.I.
Gravity.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in.

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy.		T. Devonian	11,800'
T. Salt.		T. Silurian	
B. Salt.		T. Montoya	
T. Yates.		T. Simpson	
T. 7 Rivers.		T. McKee	
T. Queen		T. Ellenburger	
T. Grayburg		T. Gr. Wash	
T. San Andres	4215'	T. Granite	
T. Glorieta		T.	
T. Drinkard		T.	
T. Tubbs	6831'	T.	
T. Abo	7645'	T.	
T. Penn.		T.	
T. Miss.		T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	42	42	Surface - Caliche				
42	410	368	Sand-red beds				
410	2537	2127	Red beds-Anhy/w streaks				
2537	2742	205	Anhy-Salt				
2742	4107	1365	Anhy-Salt-gyp-shale				
4107	4250	143	Shale-Anhy-Lime				
4250	4510	260	Lime				
4510	4957	447	Lime-anhy.				
4957	5539	582	Lime				
5539	5688	149	Lime-Sand - tr shale				
5688	6696	1008	Lime-anhy.				
6696	6844	148	Lime-gyp				
6844	6959	115	Delo-shale				
6959	7039	80	Sdy Lime-Anhy.				
7039	7157	118	Lime				
7157	8948	1791	Delo-Anhy-shale				
8948	11276	2328	Lime-shale-chert				
11276	11840	564	Lime-shale-sd-chert				
			11,840' T.D.				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator THE OHIO OIL COMPANY
ORIGINAL SIGNED BY:
Name CLYDE E. ALTON
Address Box 2107, Hobbs, New Mexico
Position or Title Petroleum Engineer
March 29, 1956 (Date)