

Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-47627
5. Indicate Type of Lease STATE ☐ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Bell Lake Unit South
8. Well Number : 321H
9. OGRID Number 12361
10. Pool name or Wildcat Bell Lake Bone Spring South 98264

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐
 2. Name of Operator Kaiser-Francis Oil Company
 3. Address of Operator
 P.O. Box 21468, Tulsa, OK 74121-1468

4. Well Location Unit Letter <u>J</u> : <u>1980</u> feet from the <u>South</u> line and <u>2340</u> feet from the <u>East</u> line Section 1 Township <u>24S</u> Range <u>33E</u> NMPM Lea County	11. Elevation 3627
---	--------------------

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
 PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☒
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐ Other ☐
 CLOSED-LOOP SYSTEM ☐

SUBSEQUENT REPORT OF:
 REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☐
 CASING/CEMENT JOB ☐
 OTHER: ☐

Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Kaiser-Francis Oil Company is planning to change the name, targeted formation, and casing setting depths for the Bell lake Unit South 321H API #30-025-47627.

Updated SHL location: lot J 1-24S-33E 1967 FSL 2300 FEL

Request to change name to the: Bell Lake Unit South 421H.

Request to change target formation from Bell Lake Bone Spring South pool code 98264 to Bell Lake Wolfcamp South pool code 98266.

Request to change production casing setting depth to TVD 12,100' MD 20,245'.
 Cement planned for the production casing 1185 Sacks Class H. Estimated TOC Surf.

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Eric Hansen TITLE Petroleum Engineer DATE 6/22/2021
 Type or print name Eric Hansen E-mail address: EricH@KFOC.net PHONE: 9184914339
 For State Use Only

APPROVED BY: P Kautz TITLE DATE 06/23/2021
 Conditions of Approval (if any):

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-47627	² Pool Code 98266	³ Pool Name Bell Lake Wolfcamp South pool
⁴ Property Code 316706	⁵ Property Name BELL LAKE UNIT SOUTH	⁶ Well Number 421H
⁷ OGRID No. 12361	⁸ Operator Name KAISER-FRANCIS OIL CO.	⁹ Elevation 3625.5

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	1	24 S	33 E		1967	SOUTH	2300	EAST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	36	23 S	33 E		100	NORTH	2110	WEST	LEA
¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. R-14601						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

NW CORNER SEC. 36 LAT. = 32.2682306°N LONG. = 103.5341166°W NMSP EAST (FT) N = 462219.92 E = 747032.45 N00°25'14"W 2636.82 FT 2110' N89°30'52"E 2638.73 FT BHL 100' DNF BOTTOM OF HOLE LAT. = 32.2679616°N LONG. = 103.5272920°W NMSP EAST (FT) N = 462137.82 E = 749142.69 NE CORNER SEC. 36 LAT. = 32.2682444°N LONG. = 103.5170470°W NMSP EAST (FT) N = 462264.64 E = 752308.67 E/4 CORNER SEC. 36 LAT. = 32.2609728°N LONG. = 103.5170466°W NMSP EAST (FT) N = 459619.34 E = 752328.92 S00°26'23"E 2645.98 FT S00°26'07"E 2639.92 FT NOTE: LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1983 (NAD83) LISTED NEW MEXICO STATE PLANE EAST COORDINATES ARE GRID (NAD83). BASIS OF BEARING AND DISTANCES USED ARE NEW MEXICO STATE PLANE EAST COORDINATES MODIFIED TO THE SURFACE, VERTICAL DATUM NAVD88. NW CORNER SEC. 1 LAT. = 32.2537378°N LONG. = 103.5341188°W NMSP EAST (FT) N = 456947.61 E = 747071.02 N00°25'14"W 2636.82 FT N89°38'51"E 2639.52 FT LOT 4 LOT 3 LOT 2 LOT 1 N00°31'54"W 7778.58 FT FTP N50°54'31"W 1110.23 FT SHL 2300' DNF SE CORNER SEC. 1 LAT. = 32.2537179°N LONG. = 103.5170468°W NMSP EAST (FT) N = 456980.11 E = 752348.92 S00°27'03"E 2639.17 FT BELL LAKE UNIT SOUTH 421H ELEV. = 3625.5' LAT. = 32.2446436°N (NAD27) LONG. = 103.5244819°W NMSP EAST (FT) N = 453661.56 E = 750075.23 SW CORNER SEC. 1 LAT. = 32.2392683°N LONG. = 103.5341534°W NMSP EAST (FT) N = 451683.74 E = 747099.52 N00°18'45"W 2632.57 FT S/4 CORNER SEC. 1 LAT. = 32.2392414°N LONG. = 103.5256003°W NMSP EAST (FT) N = 451693.75 E = 749744.21 S00°27'03"E 2638.17 FT SE CORNER SEC. 1 LAT. = 32.2392122°N LONG. = 103.5170430°W NMSP EAST (FT) N = 451703.11 E = 752390.23 S89°46'59"W 2645.24 FT S89°47'50"W 2646.56 FT		¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Eric Hansen 6/22/21 Signature Date Eric Hansen Printed Name Erich@KFOC.net E-mail Address
¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. JUNE 16, 2021 Date of Survey Signature and Seal of Professional Surveyor Certificate Number: FIRM 0083, JARAMILA, PLS 12797 STRUT NO. 6974C		



KAISER FRANCIS OIL CO.

LEA COUNTY, N.M. 27

SEC 1-T24S-R33E

BELL LAKE UNIT S. 421H

HORIZONTAL

Plan: PLAN 2

Standard Planning Report

21 June, 2021

Kaiser-Francis Oil Company



SB Directional Services

Planning Report

Kaiser-Francis Oil Company

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well BELL LAKE UNIT S. 421H
Company:	KAISER FRANCIS OIL CO.	TVD Reference:	GE+23' @ 3650.00usft (CAC 166)
Project:	LEA COUNTY, N.M. 27	MD Reference:	GE+23' @ 3650.00usft (CAC 166)
Site:	SEC 1-T24S-R33E	North Reference:	Grid
Well:	BELL LAKE UNIT S. 421H	Survey Calculation Method:	Minimum Curvature
Wellbore:	HORIZONTAL		
Design:	PLAN 2		

Project	LEA COUNTY, N.M. 27		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site		SEC 1-T24S-R33E			
Site Position:		Northing:	453,534.52 usft	Latitude:	32.24430
From:	Map	Easting:	750,061.29 usft	Longitude:	-103.52453
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.43 °

Well	BELL LAKE UNIT S. 421H					
Well Position	+N/-S	127.04 usft	Northing:	453,661.56 usft	Latitude:	32.24464
	+E/-W	13.94 usft	Easting:	750,075.23 usft	Longitude:	-103.52448
Position Uncertainty		0.00 usft	Wellhead Elevation:	3,627.00 usft	Ground Level:	3,627.00 usft

Wellbore	HORIZONTAL				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	2020/06/16	6.64	59.96	47,613.42643222

Design	PLAN 2				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	0.01	

Plan Survey Tool Program	Date	2021/06/21			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	20,245.28	PLAN 2 (HORIZONTAL)	MWD	
			OWSG MWD - Standard		



SB Directional Services

Planning Report

Kaiser-Francis Oil Company

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well BELL LAKE UNIT S. 421H
Company:	KAISER FRANCIS OIL CO.	TVD Reference:	GE+23' @ 3650.00usft (CAC 166)
Project:	LEA COUNTY, N.M. 27	MD Reference:	GE+23' @ 3650.00usft (CAC 166)
Site:	SEC 1-T24S-R33E	North Reference:	Grid
Well:	BELL LAKE UNIT S. 421H	Survey Calculation Method:	Minimum Curvature
Wellbore:	HORIZONTAL		
Design:	PLAN 2		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,300.00	14.00	282.29	2,293.06	18.12	-83.15	2.00	2.00	0.00	282.29	
6,958.80	14.00	282.29	6,813.47	258.08	-1,184.37	0.00	0.00	0.00	0.00	
7,892.13	0.00	0.00	7,737.54	282.24	-1,295.23	1.50	-1.50	0.00	180.00	
11,777.13	0.00	0.00	11,622.54	282.24	-1,295.23	0.00	0.00	0.00	0.00	KOP 421H
12,527.13	90.00	0.01	12,100.01	759.70	-1,295.19	12.00	12.00	0.00	0.01	
12,627.13	90.00	0.01	12,100.01	859.70	-1,295.18	0.00	0.00	0.00	0.00	
12,876.88	90.00	5.00	12,100.01	1,109.14	-1,284.28	2.00	0.00	2.00	90.00	
13,086.88	90.00	5.00	12,100.01	1,318.34	-1,265.98	0.00	0.00	0.00	0.00	
13,356.69	90.00	359.60	12,100.01	1,587.83	-1,255.14	2.00	0.00	-2.00	-90.00	
20,245.28	90.00	359.60	12,100.00	8,476.26	-1,302.78	0.00	0.00	0.00	0.00	PBHL 421H



SB Directional Services

Planning Report

Kaiser-Francis Oil Company

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well BELL LAKE UNIT S. 421H
Company:	KAISER FRANCIS OIL CO.	TVD Reference:	GE+23' @ 3650.00usft (CAC 166)
Project:	LEA COUNTY, N.M. 27	MD Reference:	GE+23' @ 3650.00usft (CAC 166)
Site:	SEC 1-T24S-R33E	North Reference:	Grid
Well:	BELL LAKE UNIT S. 421H	Survey Calculation Method:	Minimum Curvature
Wellbore:	HORIZONTAL		
Design:	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Nudge 2° DLS									
1,700.00	2.00	282.29	1,699.98	0.37	-1.71	0.37	2.00	2.00	0.00
1,800.00	4.00	282.29	1,799.84	1.49	-6.82	1.49	2.00	2.00	0.00
1,900.00	6.00	282.29	1,899.45	3.34	-15.33	3.34	2.00	2.00	0.00
2,000.00	8.00	282.29	1,998.70	5.94	-27.24	5.93	2.00	2.00	0.00
2,100.00	10.00	282.29	2,097.47	9.27	-42.52	9.26	2.00	2.00	0.00
2,200.00	12.00	282.29	2,195.62	13.33	-61.17	13.32	2.00	2.00	0.00
2,300.00	14.00	282.29	2,293.06	18.12	-83.15	18.11	2.00	2.00	0.00
Hold 14° Inc									
2,400.00	14.00	282.29	2,390.08	23.27	-106.78	23.26	0.00	0.00	0.00
2,500.00	14.00	282.29	2,487.11	28.42	-130.42	28.41	0.00	0.00	0.00
2,600.00	14.00	282.29	2,584.14	33.57	-154.06	33.56	0.00	0.00	0.00
2,700.00	14.00	282.29	2,681.17	38.72	-177.70	38.71	0.00	0.00	0.00
2,800.00	14.00	282.29	2,778.20	43.87	-201.33	43.85	0.00	0.00	0.00
2,900.00	14.00	282.29	2,875.23	49.02	-224.97	49.00	0.00	0.00	0.00
3,000.00	14.00	282.29	2,972.26	54.17	-248.61	54.15	0.00	0.00	0.00
3,100.00	14.00	282.29	3,069.29	59.32	-272.25	59.30	0.00	0.00	0.00
3,200.00	14.00	282.29	3,166.32	64.48	-295.88	64.45	0.00	0.00	0.00
3,300.00	14.00	282.29	3,263.35	69.63	-319.52	69.60	0.00	0.00	0.00
3,400.00	14.00	282.29	3,360.38	74.78	-343.16	74.75	0.00	0.00	0.00
3,500.00	14.00	282.29	3,457.41	79.93	-366.80	79.90	0.00	0.00	0.00
3,600.00	14.00	282.29	3,554.44	85.08	-390.43	85.04	0.00	0.00	0.00
3,700.00	14.00	282.29	3,651.47	90.23	-414.07	90.19	0.00	0.00	0.00
3,800.00	14.00	282.29	3,748.50	95.38	-437.71	95.34	0.00	0.00	0.00
3,900.00	14.00	282.29	3,845.53	100.53	-461.35	100.49	0.00	0.00	0.00
4,000.00	14.00	282.29	3,942.56	105.68	-484.98	105.64	0.00	0.00	0.00
4,100.00	14.00	282.29	4,039.59	110.83	-508.62	110.79	0.00	0.00	0.00
4,200.00	14.00	282.29	4,136.62	115.98	-532.26	115.94	0.00	0.00	0.00
4,300.00	14.00	282.29	4,233.65	121.13	-555.90	121.09	0.00	0.00	0.00
4,400.00	14.00	282.29	4,330.68	126.28	-579.53	126.23	0.00	0.00	0.00
4,500.00	14.00	282.29	4,427.71	131.44	-603.17	131.38	0.00	0.00	0.00
4,600.00	14.00	282.29	4,524.74	136.59	-626.81	136.53	0.00	0.00	0.00
4,700.00	14.00	282.29	4,621.77	141.74	-650.45	141.68	0.00	0.00	0.00
4,800.00	14.00	282.29	4,718.79	146.89	-674.08	146.83	0.00	0.00	0.00
4,900.00	14.00	282.29	4,815.82	152.04	-697.72	151.98	0.00	0.00	0.00
5,000.00	14.00	282.29	4,912.85	157.19	-721.36	157.13	0.00	0.00	0.00
5,100.00	14.00	282.29	5,009.88	162.34	-745.00	162.27	0.00	0.00	0.00



SB Directional Services

Planning Report

Kaiser-Francis Oil Company

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well BELL LAKE UNIT S. 421H
Company:	KAISER FRANCIS OIL CO.	TVD Reference:	GE+23' @ 3650.00usft (CAC 166)
Project:	LEA COUNTY, N.M. 27	MD Reference:	GE+23' @ 3650.00usft (CAC 166)
Site:	SEC 1-T24S-R33E	North Reference:	Grid
Well:	BELL LAKE UNIT S. 421H	Survey Calculation Method:	Minimum Curvature
Wellbore:	HORIZONTAL		
Design:	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,200.00	14.00	282.29	5,106.91	167.49	-768.63	167.42	0.00	0.00	0.00
5,300.00	14.00	282.29	5,203.94	172.64	-792.27	172.57	0.00	0.00	0.00
5,400.00	14.00	282.29	5,300.97	177.79	-815.91	177.72	0.00	0.00	0.00
5,500.00	14.00	282.29	5,398.00	182.94	-839.55	182.87	0.00	0.00	0.00
5,600.00	14.00	282.29	5,495.03	188.09	-863.18	188.02	0.00	0.00	0.00
5,700.00	14.00	282.29	5,592.06	193.24	-886.82	193.17	0.00	0.00	0.00
5,800.00	14.00	282.29	5,689.09	198.40	-910.46	198.32	0.00	0.00	0.00
5,900.00	14.00	282.29	5,786.12	203.55	-934.10	203.46	0.00	0.00	0.00
6,000.00	14.00	282.29	5,883.15	208.70	-957.73	208.61	0.00	0.00	0.00
6,100.00	14.00	282.29	5,980.18	213.85	-981.37	213.76	0.00	0.00	0.00
6,200.00	14.00	282.29	6,077.21	219.00	-1,005.01	218.91	0.00	0.00	0.00
6,300.00	14.00	282.29	6,174.24	224.15	-1,028.65	224.06	0.00	0.00	0.00
6,400.00	14.00	282.29	6,271.27	229.30	-1,052.28	229.21	0.00	0.00	0.00
6,500.00	14.00	282.29	6,368.30	234.45	-1,075.92	234.36	0.00	0.00	0.00
6,600.00	14.00	282.29	6,465.33	239.60	-1,099.56	239.51	0.00	0.00	0.00
6,700.00	14.00	282.29	6,562.36	244.75	-1,123.20	244.65	0.00	0.00	0.00
6,800.00	14.00	282.29	6,659.39	249.90	-1,146.83	249.80	0.00	0.00	0.00
6,900.00	14.00	282.29	6,756.42	255.05	-1,170.47	254.95	0.00	0.00	0.00
6,958.80	14.00	282.29	6,813.47	258.08	-1,184.37	257.98	0.00	0.00	0.00
Start Drop 1.5° DLS									
7,000.00	13.38	282.29	6,853.50	260.16	-1,193.90	260.05	1.50	-1.50	0.00
7,100.00	11.88	282.29	6,951.07	264.81	-1,215.26	264.71	1.50	-1.50	0.00
7,200.00	10.38	282.29	7,049.19	268.93	-1,234.13	268.82	1.50	-1.50	0.00
7,300.00	8.88	282.29	7,147.78	272.49	-1,250.48	272.38	1.50	-1.50	0.00
7,400.00	7.38	282.29	7,246.77	275.50	-1,264.30	275.39	1.50	-1.50	0.00
7,500.00	5.88	282.29	7,346.10	277.96	-1,275.58	277.85	1.50	-1.50	0.00
7,600.00	4.38	282.29	7,445.69	279.86	-1,284.32	279.75	1.50	-1.50	0.00
7,700.00	2.88	282.29	7,545.49	281.21	-1,290.51	281.10	1.50	-1.50	0.00
7,800.00	1.38	282.29	7,645.42	282.00	-1,294.14	281.89	1.50	-1.50	0.00
7,892.13	0.00	282.29	7,737.54	282.24	-1,295.23	282.13	1.50	-1.50	0.00
Hold 0° Inc									
7,900.00	0.00	0.00	7,745.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,000.00	0.00	0.00	7,845.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,100.00	0.00	0.00	7,945.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,200.00	0.00	0.00	8,045.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,300.00	0.00	0.00	8,145.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,400.00	0.00	0.00	8,245.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,500.00	0.00	0.00	8,345.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,600.00	0.00	0.00	8,445.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,700.00	0.00	0.00	8,545.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,800.00	0.00	0.00	8,645.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
8,900.00	0.00	0.00	8,745.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,000.00	0.00	0.00	8,845.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,100.00	0.00	0.00	8,945.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,200.00	0.00	0.00	9,045.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,300.00	0.00	0.00	9,145.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,400.00	0.00	0.00	9,245.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,500.00	0.00	0.00	9,345.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,600.00	0.00	0.00	9,445.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,700.00	0.00	0.00	9,545.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,800.00	0.00	0.00	9,645.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
9,900.00	0.00	0.00	9,745.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
10,000.00	0.00	0.00	9,845.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
10,100.00	0.00	0.00	9,945.41	282.24	-1,295.23	282.13	0.00	0.00	0.00



SB Directional Services

Planning Report

Kaiser-Francis Oil Company

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well BELL LAKE UNIT S. 421H
Company:	KAISER FRANCIS OIL CO.	TVD Reference:	GE+23' @ 3650.00usft (CAC 166)
Project:	LEA COUNTY, N.M. 27	MD Reference:	GE+23' @ 3650.00usft (CAC 166)
Site:	SEC 1-T24S-R33E	North Reference:	Grid
Well:	BELL LAKE UNIT S. 421H	Survey Calculation Method:	Minimum Curvature
Wellbore:	HORIZONTAL		
Design:	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,200.00	0.00	0.00	10,045.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
10,300.00	0.00	0.00	10,145.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
10,400.00	0.00	0.00	10,245.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
10,500.00	0.00	0.00	10,345.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
10,600.00	0.00	0.00	10,445.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
10,700.00	0.00	0.00	10,545.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
10,800.00	0.00	0.00	10,645.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
10,900.00	0.00	0.00	10,745.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
11,000.00	0.00	0.00	10,845.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
11,100.00	0.00	0.00	10,945.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
11,200.00	0.00	0.00	11,045.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
11,300.00	0.00	0.00	11,145.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
11,400.00	0.00	0.00	11,245.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
11,500.00	0.00	0.00	11,345.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
11,600.00	0.00	0.00	11,445.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
11,700.00	0.00	0.00	11,545.41	282.24	-1,295.23	282.13	0.00	0.00	0.00
11,777.13	0.00	0.00	11,622.54	282.24	-1,295.23	282.13	0.00	0.00	0.00
KOP 12° DLS									
11,800.00	2.74	0.01	11,645.40	282.79	-1,295.23	282.67	12.00	12.00	0.00
11,825.00	5.74	0.01	11,670.33	284.64	-1,295.23	284.52	12.00	12.00	0.00
11,850.00	8.74	0.01	11,695.13	287.79	-1,295.23	287.68	12.00	12.00	0.00
11,875.00	11.74	0.01	11,719.73	292.24	-1,295.23	292.12	12.00	12.00	0.00
11,900.00	14.74	0.01	11,744.06	297.96	-1,295.23	297.85	12.00	12.00	0.00
11,925.00	17.74	0.01	11,768.06	304.95	-1,295.23	304.84	12.00	12.00	0.00
11,950.00	20.74	0.01	11,791.66	313.19	-1,295.23	313.08	12.00	12.00	0.00
11,975.00	23.74	0.01	11,814.79	322.66	-1,295.23	322.54	12.00	12.00	0.00
12,000.00	26.74	0.01	11,837.40	333.32	-1,295.23	333.20	12.00	12.00	0.00
12,025.00	29.74	0.01	11,859.42	345.15	-1,295.22	345.03	12.00	12.00	0.00
12,050.00	32.74	0.01	11,880.80	358.11	-1,295.22	358.00	12.00	12.00	0.00
12,075.00	35.74	0.01	11,901.46	372.18	-1,295.22	372.07	12.00	12.00	0.00
12,100.00	38.74	0.01	11,921.36	387.31	-1,295.22	387.19	12.00	12.00	0.00
12,125.00	41.74	0.01	11,940.44	403.46	-1,295.22	403.34	12.00	12.00	0.00
12,150.00	44.74	0.01	11,958.65	420.58	-1,295.22	420.47	12.00	12.00	0.00
12,175.00	47.74	0.01	11,975.94	438.64	-1,295.22	438.53	12.00	12.00	0.00
12,200.00	50.74	0.01	11,992.26	457.57	-1,295.21	457.46	12.00	12.00	0.00
12,225.00	53.74	0.01	12,007.56	477.34	-1,295.21	477.22	12.00	12.00	0.00
12,250.00	56.74	0.01	12,021.81	497.87	-1,295.21	497.76	12.00	12.00	0.00
12,275.00	59.74	0.01	12,034.97	519.13	-1,295.21	519.02	12.00	12.00	0.00
12,300.00	62.74	0.01	12,046.99	541.04	-1,295.21	540.93	12.00	12.00	0.00
12,325.00	65.74	0.01	12,057.86	563.56	-1,295.21	563.44	12.00	12.00	0.00
12,350.00	68.74	0.01	12,067.52	586.61	-1,295.20	586.50	12.00	12.00	0.00
12,375.00	71.74	0.01	12,075.97	610.13	-1,295.20	610.02	12.00	12.00	0.00
12,400.00	74.74	0.01	12,083.18	634.07	-1,295.20	633.96	12.00	12.00	0.00
12,425.00	77.74	0.01	12,089.12	658.35	-1,295.20	658.24	12.00	12.00	0.00
12,450.00	80.74	0.01	12,093.79	682.91	-1,295.20	682.80	12.00	12.00	0.00
12,475.00	83.74	0.01	12,097.16	707.68	-1,295.19	707.56	12.00	12.00	0.00
12,500.00	86.74	0.01	12,099.23	732.59	-1,295.19	732.48	12.00	12.00	0.00
12,527.13	90.00	0.01	12,100.01	759.70	-1,295.19	759.59	12.00	12.00	0.00
LP 12527.13' MD & 12100.00' TVD									
12,600.00	90.00	0.01	12,100.01	832.57	-1,295.18	832.46	0.00	0.00	0.00
12,627.13	90.00	0.01	12,100.01	859.70	-1,295.18	859.59	0.00	0.00	0.00
Turn									
12,700.00	90.00	1.46	12,100.01	932.57	-1,294.25	932.45	2.00	0.00	2.00



SB Directional Services

Planning Report

Kaiser-Francis Oil Company

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well BELL LAKE UNIT S. 421H
Company:	KAISER FRANCIS OIL CO.	TVD Reference:	GE+23' @ 3650.00usft (CAC 166)
Project:	LEA COUNTY, N.M. 27	MD Reference:	GE+23' @ 3650.00usft (CAC 166)
Site:	SEC 1-T24S-R33E	North Reference:	Grid
Well:	BELL LAKE UNIT S. 421H	Survey Calculation Method:	Minimum Curvature
Wellbore:	HORIZONTAL		
Design:	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,800.00	90.00	3.46	12,100.01	1,032.47	-1,289.95	1,032.36	2.00	0.00	2.00
12,876.88	90.00	5.00	12,100.01	1,109.14	-1,284.28	1,109.02	2.00	0.00	2.00
Hold									
12,900.00	90.00	5.00	12,100.01	1,132.17	-1,282.26	1,132.06	0.00	0.00	0.00
13,000.00	90.00	5.00	12,100.01	1,231.79	-1,273.55	1,231.68	0.00	0.00	0.00
13,086.88	90.00	5.00	12,100.01	1,318.34	-1,265.98	1,318.23	0.00	0.00	0.00
Turn									
13,100.00	90.00	4.74	12,100.01	1,331.41	-1,264.86	1,331.30	2.00	0.00	-2.00
13,200.00	90.00	2.74	12,100.01	1,431.19	-1,258.34	1,431.08	2.00	0.00	-2.00
13,300.00	90.00	0.74	12,100.01	1,531.14	-1,255.31	1,531.03	2.00	0.00	-2.00
13,356.69	90.00	359.60	12,100.01	1,587.83	-1,255.14	1,587.72	2.00	0.00	-2.00
Hold									
13,400.00	90.00	359.60	12,100.00	1,631.14	-1,255.44	1,631.03	0.00	0.00	0.00
13,500.00	90.00	359.60	12,100.00	1,731.14	-1,256.13	1,731.03	0.00	0.00	0.00
13,600.00	90.00	359.60	12,100.00	1,831.13	-1,256.83	1,831.02	0.00	0.00	0.00
13,700.00	90.00	359.60	12,100.00	1,931.13	-1,257.52	1,931.02	0.00	0.00	0.00
13,800.00	90.00	359.60	12,100.00	2,031.13	-1,258.21	2,031.02	0.00	0.00	0.00
13,900.00	90.00	359.60	12,100.00	2,131.13	-1,258.90	2,131.02	0.00	0.00	0.00
14,000.00	90.00	359.60	12,100.00	2,231.12	-1,259.59	2,231.02	0.00	0.00	0.00
14,100.00	90.00	359.60	12,100.00	2,331.12	-1,260.28	2,331.01	0.00	0.00	0.00
14,200.00	90.00	359.60	12,100.00	2,431.12	-1,260.97	2,431.01	0.00	0.00	0.00
14,300.00	90.00	359.60	12,100.00	2,531.12	-1,261.67	2,531.01	0.00	0.00	0.00
14,400.00	90.00	359.60	12,100.00	2,631.12	-1,262.36	2,631.01	0.00	0.00	0.00
14,500.00	90.00	359.60	12,100.00	2,731.11	-1,263.05	2,731.00	0.00	0.00	0.00
14,600.00	90.00	359.60	12,100.00	2,831.11	-1,263.74	2,831.00	0.00	0.00	0.00
14,700.00	90.00	359.60	12,100.00	2,931.11	-1,264.43	2,931.00	0.00	0.00	0.00
14,800.00	90.00	359.60	12,100.00	3,031.11	-1,265.12	3,031.00	0.00	0.00	0.00
14,900.00	90.00	359.60	12,100.00	3,131.10	-1,265.82	3,130.99	0.00	0.00	0.00
15,000.00	90.00	359.60	12,100.00	3,231.10	-1,266.51	3,230.99	0.00	0.00	0.00
15,100.00	90.00	359.60	12,100.00	3,331.10	-1,267.20	3,330.99	0.00	0.00	0.00
15,200.00	90.00	359.60	12,100.00	3,431.10	-1,267.89	3,430.99	0.00	0.00	0.00
15,300.00	90.00	359.60	12,100.00	3,531.09	-1,268.58	3,530.98	0.00	0.00	0.00
15,400.00	90.00	359.60	12,100.00	3,631.09	-1,269.27	3,630.98	0.00	0.00	0.00
15,500.00	90.00	359.60	12,100.00	3,731.09	-1,269.96	3,730.98	0.00	0.00	0.00
15,600.00	90.00	359.60	12,100.00	3,831.09	-1,270.66	3,830.98	0.00	0.00	0.00
15,700.00	90.00	359.60	12,100.00	3,931.08	-1,271.35	3,930.97	0.00	0.00	0.00
15,800.00	90.00	359.60	12,100.00	4,031.08	-1,272.04	4,030.97	0.00	0.00	0.00
15,900.00	90.00	359.60	12,100.00	4,131.08	-1,272.73	4,130.97	0.00	0.00	0.00
16,000.00	90.00	359.60	12,100.00	4,231.08	-1,273.42	4,230.97	0.00	0.00	0.00
16,100.00	90.00	359.60	12,100.00	4,331.07	-1,274.11	4,330.96	0.00	0.00	0.00
16,200.00	90.00	359.60	12,100.00	4,431.07	-1,274.81	4,430.96	0.00	0.00	0.00
16,300.00	90.00	359.60	12,100.00	4,531.07	-1,275.50	4,530.96	0.00	0.00	0.00
16,400.00	90.00	359.60	12,100.00	4,631.07	-1,276.19	4,630.96	0.00	0.00	0.00
16,500.00	90.00	359.60	12,100.00	4,731.07	-1,276.88	4,730.95	0.00	0.00	0.00
16,600.00	90.00	359.60	12,100.00	4,831.06	-1,277.57	4,830.95	0.00	0.00	0.00
16,700.00	90.00	359.60	12,100.00	4,931.06	-1,278.26	4,930.95	0.00	0.00	0.00
16,800.00	90.00	359.60	12,100.00	5,031.06	-1,278.95	5,030.95	0.00	0.00	0.00
16,900.00	90.00	359.60	12,100.00	5,131.06	-1,279.65	5,130.94	0.00	0.00	0.00
17,000.00	90.00	359.60	12,100.00	5,231.05	-1,280.34	5,230.94	0.00	0.00	0.00
17,100.00	90.00	359.60	12,100.00	5,331.05	-1,281.03	5,330.94	0.00	0.00	0.00
17,200.00	90.00	359.60	12,100.00	5,431.05	-1,281.72	5,430.94	0.00	0.00	0.00
17,300.00	90.00	359.60	12,100.00	5,531.05	-1,282.41	5,530.93	0.00	0.00	0.00
17,400.00	90.00	359.60	12,100.00	5,631.04	-1,283.10	5,630.93	0.00	0.00	0.00



SB Directional Services

Planning Report

Kaiser-Francis Oil Company

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well BELL LAKE UNIT S. 421H
Company:	KAISER FRANCIS OIL CO.	TVD Reference:	GE+23' @ 3650.00usft (CAC 166)
Project:	LEA COUNTY, N.M. 27	MD Reference:	GE+23' @ 3650.00usft (CAC 166)
Site:	SEC 1-T24S-R33E	North Reference:	Grid
Well:	BELL LAKE UNIT S. 421H	Survey Calculation Method:	Minimum Curvature
Wellbore:	HORIZONTAL		
Design:	PLAN 2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
17,500.00	90.00	359.60	12,100.00	5,731.04	-1,283.80	5,730.93	0.00	0.00	0.00
17,600.00	90.00	359.60	12,100.00	5,831.04	-1,284.49	5,830.93	0.00	0.00	0.00
17,700.00	90.00	359.60	12,100.00	5,931.04	-1,285.18	5,930.92	0.00	0.00	0.00
17,800.00	90.00	359.60	12,100.00	6,031.03	-1,285.87	6,030.92	0.00	0.00	0.00
17,900.00	90.00	359.60	12,100.00	6,131.03	-1,286.56	6,130.92	0.00	0.00	0.00
18,000.00	90.00	359.60	12,100.00	6,231.03	-1,287.25	6,230.92	0.00	0.00	0.00
18,100.00	90.00	359.60	12,100.00	6,331.03	-1,287.94	6,330.91	0.00	0.00	0.00
18,200.00	90.00	359.60	12,100.00	6,431.02	-1,288.64	6,430.91	0.00	0.00	0.00
18,300.00	90.00	359.60	12,100.00	6,531.02	-1,289.33	6,530.91	0.00	0.00	0.00
18,400.00	90.00	359.60	12,100.00	6,631.02	-1,290.02	6,630.91	0.00	0.00	0.00
18,500.00	90.00	359.60	12,100.00	6,731.02	-1,290.71	6,730.90	0.00	0.00	0.00
18,600.00	90.00	359.60	12,100.00	6,831.02	-1,291.40	6,830.90	0.00	0.00	0.00
18,700.00	90.00	359.60	12,100.00	6,931.01	-1,292.09	6,930.90	0.00	0.00	0.00
18,800.00	90.00	359.60	12,100.00	7,031.01	-1,292.79	7,030.90	0.00	0.00	0.00
18,900.00	90.00	359.60	12,100.00	7,131.01	-1,293.48	7,130.90	0.00	0.00	0.00
19,000.00	90.00	359.60	12,100.00	7,231.01	-1,294.17	7,230.89	0.00	0.00	0.00
19,100.00	90.00	359.60	12,100.00	7,331.00	-1,294.86	7,330.89	0.00	0.00	0.00
19,200.00	90.00	359.60	12,100.00	7,431.00	-1,295.55	7,430.89	0.00	0.00	0.00
19,300.00	90.00	359.60	12,100.00	7,531.00	-1,296.24	7,530.89	0.00	0.00	0.00
19,400.00	90.00	359.60	12,100.00	7,631.00	-1,296.93	7,630.88	0.00	0.00	0.00
19,500.00	90.00	359.60	12,100.00	7,730.99	-1,297.63	7,730.88	0.00	0.00	0.00
19,600.00	90.00	359.60	12,100.00	7,830.99	-1,298.32	7,830.88	0.00	0.00	0.00
19,700.00	90.00	359.60	12,100.00	7,930.99	-1,299.01	7,930.88	0.00	0.00	0.00
19,800.00	90.00	359.60	12,100.00	8,030.99	-1,299.70	8,030.87	0.00	0.00	0.00
19,900.00	90.00	359.60	12,100.00	8,130.98	-1,300.39	8,130.87	0.00	0.00	0.00
20,000.00	90.00	359.60	12,100.00	8,230.98	-1,301.08	8,230.87	0.00	0.00	0.00
20,100.00	90.00	359.60	12,100.00	8,330.98	-1,301.78	8,330.87	0.00	0.00	0.00
20,200.00	90.00	359.60	12,100.00	8,430.98	-1,302.47	8,430.86	0.00	0.00	0.00
20,245.28	90.00	359.60	12,100.00	8,476.26	-1,302.78	8,476.14	0.00	0.00	0.00
PBHL 20245.28' MD & 12100.00' TVD									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KOP 421H - hit/miss target - Shape - Point	0.00	0.00	11,622.54	282.24	-1,295.23	453,943.80	748,780.00	32.24545	-103.52867
PBHL 421H - plan hits target center - Point	0.00	0.00	12,100.00	8,476.26	-1,302.78	462,137.82	748,772.45	32.26797	-103.52849
FTP 421H - plan misses target center by 0.04usft at 12527.13usft MD (12100.00 TVD, 759.70 N, -1295.19 E) - Point	0.00	0.00	12,100.00	759.70	-1,295.23	454,421.26	748,780.00	32.24676	-103.52866




SB Directional Services

Planning Report

Kaiser-Francis Oil Company

Database:	EDM 5000.15 Single User Db	Local Co-ordinate Reference:	Well BELL LAKE UNIT S. 421H
Company:	KAISER FRANCIS OIL CO.	TVD Reference:	GE+23' @ 3650.00usft (CAC 166)
Project:	LEA COUNTY, N.M. 27	MD Reference:	GE+23' @ 3650.00usft (CAC 166)
Site:	SEC 1-T24S-R33E	North Reference:	Grid
Well:	BELL LAKE UNIT S. 421H	Survey Calculation Method:	Minimum Curvature
Wellbore:	HORIZONTAL		
Design:	PLAN 2		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,600.00	1,600.00	0.00	0.00	Start Nudge 2° DLS
2,300.00	2,293.06	18.12	-83.15	Hold 14° Inc
6,958.80	6,813.47	258.08	-1,184.37	Start Drop 1.5° DLS
7,892.13	7,737.54	282.24	-1,295.23	Hold 0° Inc
11,777.13	11,622.54	282.24	-1,295.23	KOP 12° DLS
12,527.13	12,100.01	759.70	-1,295.19	LP 12527.13' MD & 12100.00' TVD
12,627.13	12,100.01	859.70	-1,295.18	Turn
12,876.88	12,100.01	1,109.14	-1,284.28	Hold
13,086.88	12,100.01	1,318.34	-1,265.98	Turn
13,356.69	12,100.01	1,587.83	-1,255.14	Hold
20,245.28	12,100.00	8,476.26	-1,302.78	PBHL 20245.28' MD & 12100.00' TVD

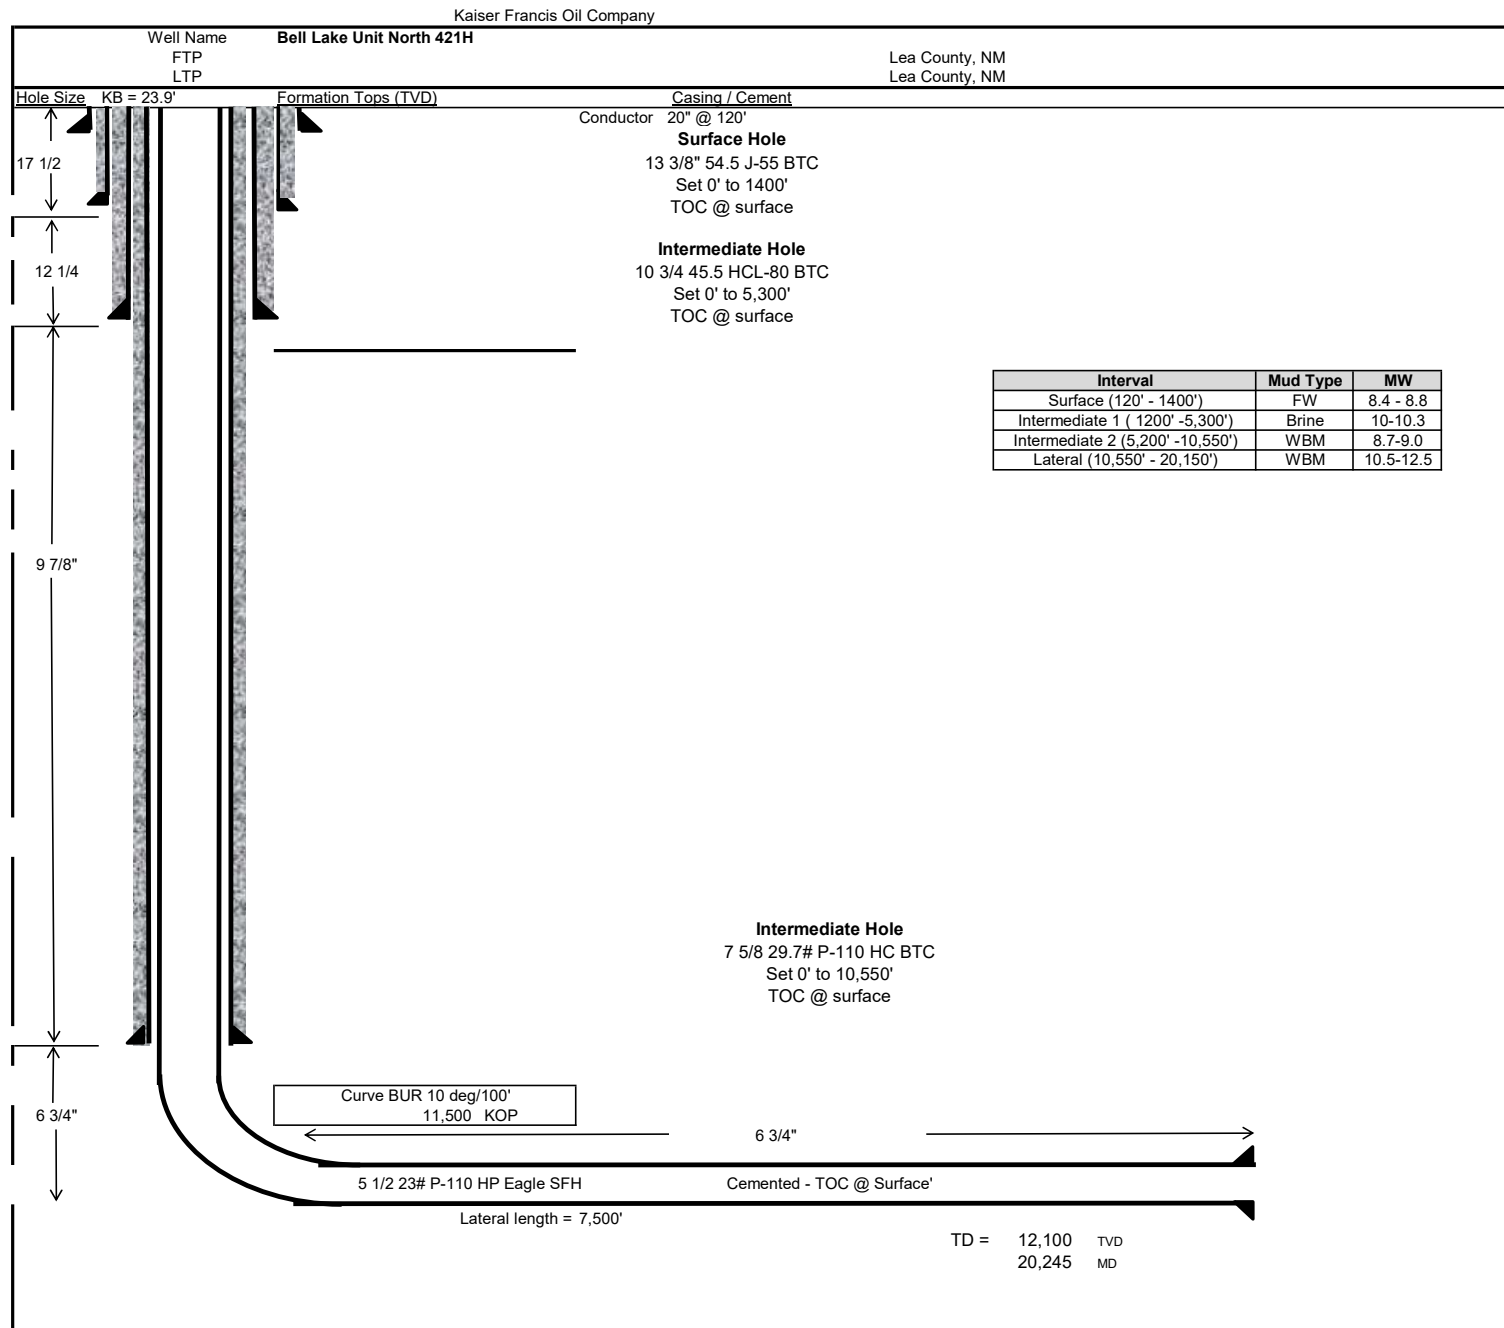

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 31916

CONDITIONS

Operator: KAISER-FRANCIS OIL CO P.O. Box 21468 Tulsa, OK 74121	OGRID: 12361
	Action Number: 31916
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	None	6/23/2021