

Well Name: STRINGER FEDERAL	Well Location: T12S / R31E / SEC 17 / SWSW /	County or Parish/State: CHAVES / NM
Well Number: 1	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name:
Lease Number: NMNM0314228	Unit or CA Name:	Unit or CA Number:
US Well Number: 300052035000S1	Well Status: Producing Gas Well	Operator: VINTAGE DRILLING LLC

Accepted for record – NMOCD gc1/19/2023

Notice of Intent

Type of Submission: Notice of Intent

Type of Action Plug and Abandonment

Date Sundry Submitted: 08/16/2021

Time Sundry Submitted: 01:57

Date proposed operation will begin: 10/11/2021

Procedure Description: 1. Set CIBP @ 2485'. Circ hole w/ MLF. Pressure test csg. Spot 25 sx cmt @ 2485-2135' 2. Spot 25 sx cmt @ 1840-1490'. WOC & Tag (B/Salt) 3. Spot 25 sx cmt @ 1130-780'. WOC & Tag (T/Salt) 4. Perf & Sqz 50sx cmt @ 345' to surface. (8 5/8" Shoe) 5. Cut off well head, verify cmt @ surface, weld on Dry Hole Marker.

** Revised procedure on page 3 **

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Vintage_Stringer_Federal_1_Proposed_WBD_20210816135651.pdf

Vintage_Stringer_Federal_1_Current_WBD_20210816135642.pdf

Vintage_Stringer_Federal_1_NOI_20210816135636.pdf

Well Name: STRINGER FEDERAL

Well Location: T12S / R31E / SEC 17 /
SWSW /County or Parish/State:
CHAVES / NM

Well Number: 1

Type of Well: CONVENTIONAL GAS
WELL

Allottee or Tribe Name:

Lease Number: NMNM0314228

Unit or CA Name:

Unit or CA Number:

US Well Number: 300052035000S1

Well Status: Producing Gas Well

Operator: VINTAGE DRILLING
LLC**Conditions of Approval****Specialist Review**

General_Conditions_of_Approval_20210819105812.pdf

Conditions_of_Approval_20210819105811.pdf

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: ABIGAIL ANDERSON

Signed on: AUG 16, 2021 01:56 PM

Name: VINTAGE DRILLING LLC

Title: Regulatory

Street Address: PO BOX 13077

City: ODESSA

State: TX

Phone: (432) 580-7161

Email address: ABBYM@BCMANDASSOCIATES.COM

Field Representative

Representative Name: Bill Hope

Street Address: R 310 Haldeman Rd

City: Artesia

State: NM

Zip: 88210

Phone: (575)365-8886

Email address: unohope@plateautel.net

BLM Point of Contact

BLM POC Name: JENNIFER SANCHEZ

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5756270237

BLM POC Email Address: j1sanchez@blm.gov

Disposition: Approved

Disposition Date: 08/19/2021

Stringer Federal 1
30-005-20350
Vintage Drilling, LLC
August 19, 2021
Conditions of Approval

1. Operator shall place CIBP at 2,485' (50'-100' above top most perf) and places 25 sx of Class C cement on top. WOC and TAG.
2. Operator shall place a balanced Class C cement plug from 1,840'-1,490' as proposed to seal the Yates and base of the Salt as proposed.
3. Operator shall place a balanced Class C cement plug from 1,130'-780' to seal the top of the Salt.
4. Operator shall perf and squeeze at 345'. Operator shall place a balanced Class C cement plug from 345'- surface to seal the 8-5/8" casing shoe.
5. See Attached for general plugging stipulations.

JAM 08192021

BUREAU OF LAND MANAGEMENT
Roswell Field Office
2909 W. Second Street
Roswell, New Mexico 88201
575-627-0272

General Requirements for Plug Backs

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from this approval.

If you are unable to plug back the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. Call 575-627-0205.
3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.
5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement.

Before pumping cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.


Unless otherwise specified in the approved procedure, the cement plug shall consist of either **Neat Class "C"**, for up to 7,500 feet of depth or **Neat Class "H"**, for deeper than 7,500 feet plugs.

6. **Subsequent Plug back Reporting:** Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date work was completed.**

7. **Trash:** All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Vintage Drilling LLC		CURRENT
Author:	Bill Hope	
Well Name	STRINGER Fld	Well No. 1
Field/Pool	QUEEN	API #: 30-085-20350
County	CHAVEZ	Location: S17 T12S R31E
State	NM	660 FSL 660-FWL
Spud Date	7-30-70	GL: 4084

8/19/21

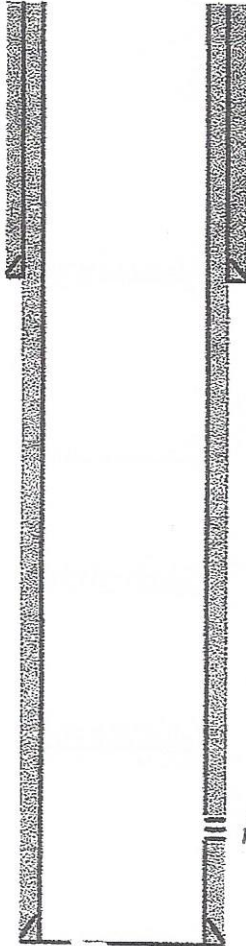


Perf 2535-2542

PBTD
2576

PROPOSED

8/19/21

Well Name	STRINBER Fdm	Well No.	#1
Field/Pool	QUEEN	API #	30-005-20350
County	Chavez	Location	S0017-T12S-R31E
State	NM		660 FSL 660 FWD
Spud Date	7-30-70	GL	4084

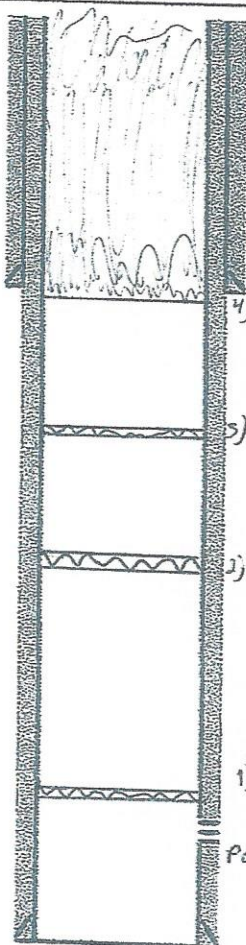

4) Perf 4 holes @ 345 - circ + SPOT 405x CMT to surface

5) circ w/MLF + spot 255x CMT @ 1130' TOL @ 730'

2) circ w/MLF + SPOT 255x CMT @ 1840 TOL @ 1490'

1) set CIBP @ 2485' - circ with MLF - pressure test csq - SPOT 255x CMT
NOC + TAG TOL @ 2098

Perfs 2535 - 2542

PBTD
2576'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 176370

COMMENTS

Operator: VINTAGE DRILLING LLC P. O. Box 248 Artesia, NM 88211024	OGRID: 24164
	Action Number: 176370
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

COMMENTS

Created By	Comment	Comment Date
plmartinez	DATA ENTRY PM	1/20/2023

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 176370

CONDITIONS

Operator: VINTAGE DRILLING LLC P. O. Box 248 Artesia, NM 88211024	OGRID: 24164
	Action Number: 176370
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	1/19/2023