

District I
1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

District II
811 S. First St., Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☒ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 08/29/2022
⁴ API Number 30 - 025-49152	⁵ Pool Name BILBREY BASIN; BONE SPRING, SOUTH	⁶ Pool Code 97366
⁷ Property Code: 332769	⁸ Property Name: DR PI FEDERAL UNIT 17-8 DA	⁹ Well Number: 311H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
M	17	22S	32E		350	SOUTH	1105	WEST	LEA

¹¹ Bottom Hole Location FTP- 362' FSL 1223' FWL LTP- 177' FNL 1288' FWL

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	8	22S	32E		45	NORTH	1289	WEST	LEA
¹² Lse Code F	¹³ Producing Method Code : P		¹⁴ Gas Connection Date: 9/1/22		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
237722	CENTURION PIPELINE L.P.	O
248749	DCP MIDSTREAM, LP	G

IV. Well Completion Data

²¹ Spud Date 01/27/22	²² Ready Date 08/29/2022	²³ TD 22309'M 11741'V	²⁴ PBSD 22265'M 11740'V	²⁵ Perforations 12155-22177'	²⁶ DHC, MC
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set	³⁰ Sacks Cement
17-1/2"		13-3/8"		940'	1140
9-7/8"		7-5/8"		11006'	2048
6-3/4"		5-1/2"		22287'	866
		2-3/8" TBG		11701'	NA

V. Well Test Data

³¹ Date New Oil 9/3/22	³² Gas Delivery Date 9/1/22	³³ Test Date 9/29/22	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 988
³⁷ Choke Size 128/128	³⁸ Oil 4375	³⁹ Water 7057	⁴⁰ Gas 6968		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:
Janalyn_mendiola@oxy.com

Date: 01/09/2023 Phone: 432-685-5936

OIL CONSERVATION DIVISION

Approved by:

PATRICIA MARTINEZ

Title: PETROLEUM SPECIALIST

Approval Date: 1/23/2023

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (505) 748-1283 Fax: (505) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-025-49152	² Pool Code 97366	³ Pool Name BILBREY BASIN; BONE SPRING, SOUTH
⁴ Property Code 332769	Property Name DR PI FEDERAL UNIT 17-8 DA	
⁷ OGRID No. 16696	⁸ Operator Name OXY USA INC.	⁶ Well Number 311H
		⁹ Elevation 3683'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	17	22S	32E		350	SOUTH	1105	WEST	LEA
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	8	22S	32E		45	NORTH	1289	WEST	LEA
¹² Dedicated Acres 640.0	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature: <i>[Signature]</i> Date: 8/26/2022 Printed Name: JANA MENDIOLA E-mail Address: janalyn_mendiola@oxy.com ¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. AUGUST 26, 2022 Date of Survey Signature and Seal of Professional Surveyor: <i>[Signature]</i> Certificate Number: LLOYD P. SHORT 21653
--	--

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99995379 Convergence Angle: 00°20'34.08"

Schlumberger



OXY



Borehole:				Well:				Field:				Structure:															
Dr Pi Fed Unit 17_8 DA 311H				Dr Pi Fed Unit 17_8 DA 311H				NM Lea County (NAD 83)				Oxy Dr Pi Fed Unit 17_8 DA_Citadel 2 (Pad)															
Gravity & Magnetic Parameters								Surface Location				NAD83 New Mexico State Plane, Eastern Zone, US Feet				Miscellaneous											
Model:		IFR1		Dip:		60.15°		Date:		06-May-2022		Lat:		N 32 23 7.07		Northing:		504478.47RUS		Grid Conv:		0.3383*					
MagDec:		6.72°		FS:		47857.2nT		Gravity FS:		998.451mgN (9.80665 Based)		Lon:		W 103 42 6.34		Easting:		736295.89RUS		Scale Fact:		0.99995262					
																Slot:				Dr Pi Fed Unit 17_8 DA 311H		TVD Ref:		RKB(3707ft above MSL)			
																Plan:				Oxy Dr Pi Fed Unit 17_8 DA 311H Gyro-MWD 0' to 22309MD							

Critical Points

Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL	24.00	0.00	0.00	24.00	0.00	0.00	0.00	
First Gyro Survey	67.64	0.13	32.17	67.64	0.04	0.04	0.03	0.30
Last Gyro Survey	927.09	0.26	75.78	927.08	-2.50	-2.50	-0.21	0.40
First SLB Survey	1032.00	0.06	199.35	1031.99	-2.50	-2.50	0.00	0.28
Actual KOP	11096.00	5.78	137.55	11044.69	-605.45	-606.39	111.71	15.49
3rd Bone Spring Intersection	11424.78	19.79	358.75	11362.00	-544.64	-545.95	157.32	13.57
100' FSL Crossing	11879.00	68.55	3.39	11676.33	-250.22	-250.97	91.16	6.48
100' FNL Crossing	22255.00	90.13	359.79	11740.84	10111.33	10110.75	112.04	1.16
Final MWD Survey	22276.00	90.36	359.71	11740.75	10132.33	10131.75	111.95	1.16
Proj to TD	22309.00	90.36	359.71	11740.55	10165.33	10164.75	111.78	0.00

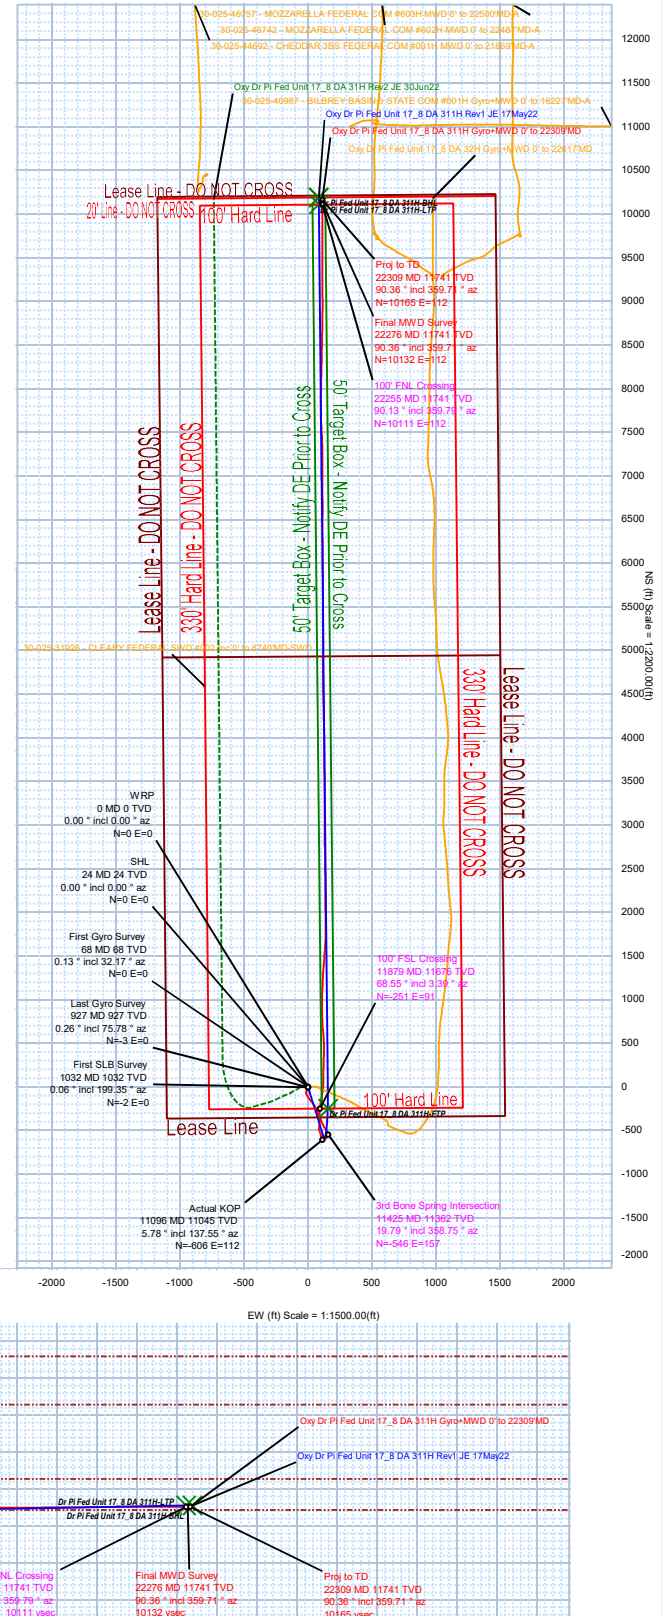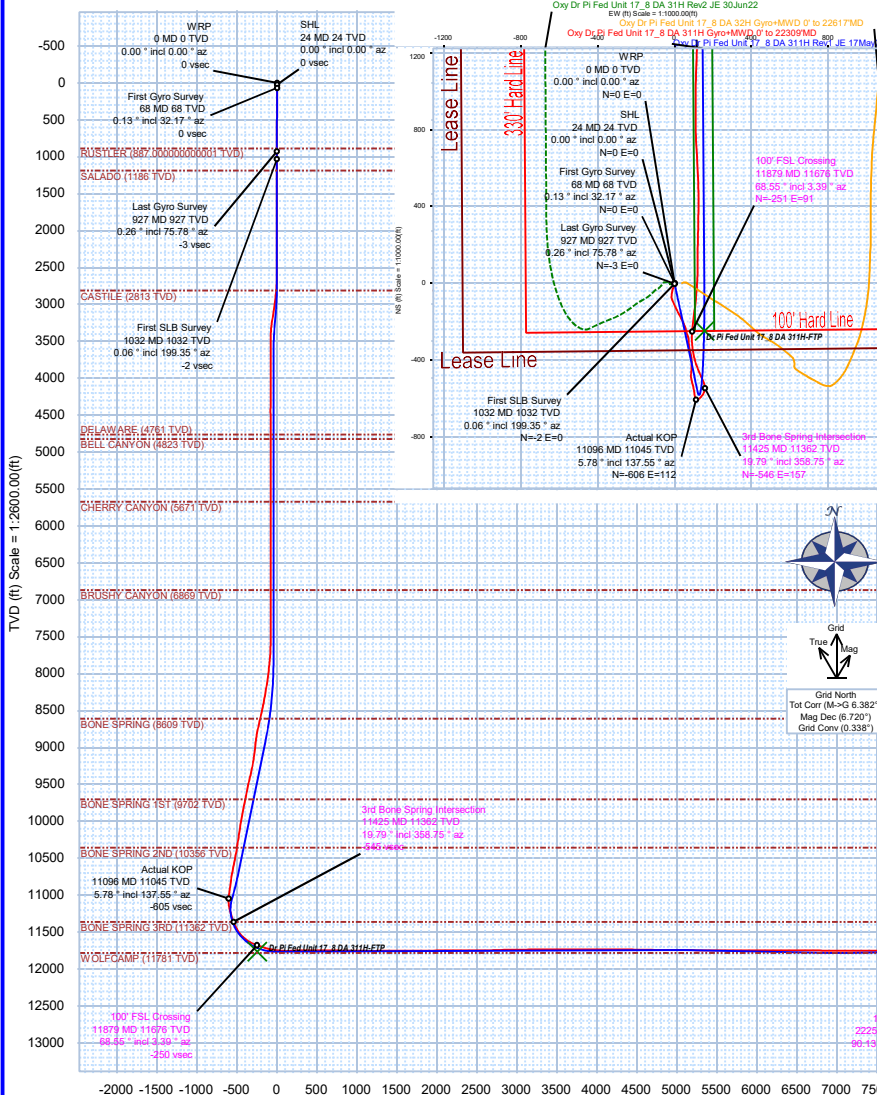

Vertical Section (ft) Azim = 0.47° Scale = 1:2400.00(ft) Origin = 0N/-S, 0E/-W



Oxy Dr Pi Fed Unit 17_8 DA 311H Gyro+MWD 0' to 22309'MD Survey Geodetic Report (Def Survey)



Report Date: July 01, 2022 - 09:04 AM
Client: OXY
Fielid: NM Lea County (NAD 83)
Structure / Slot: Oxy Dr Pi Fed Unit 17_8 DA_Citadel 2 (Pad) / Dr Pi Fed Unit 17_8 DA 311H
Well: Dr Pi Fed Unit 17_8 DA 311H
Borehole: Dr Pi Fed Unit 17_8 DA 311H
UWI / API#: Unknown / Unknown
Survey Name: Oxy Dr Pi Fed Unit 17_8 DA 311H Gyro+MWD 0' to 22309'MD
Survey Date: April 07, 2022
Tort / AHD / DDI / ERD Ratio: 272.146' / 11445.660 ft / 6.772 / 0.974
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 23' 7.07303", W 103° 42' 6.34025"
Location Grid N/E Y/X: N 504478.470 RUS, E 736295.890 RUS
CRS Grid Convergence Angle: 0.3383 °
Grid Scale Factor: 0.99995262
Version / Patch: 2.10.829.1

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 0.469 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3707.000 ft above MSL
Seabed / Ground Elevation: 3683.000 ft above MSL
Magnetic Declination: 6.720 °
Total Gravity Field Strength: 988.4513mgn (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47857.200 nT
Magnetic Dip Angle: 60.150 °
Declination Date: May 06, 2022
Magnetic Declination Model: IFR1
North Reference: Grid North
Grid Convergence Used: 0.3400 °
Total Corr Mag North->Grid North: 6.3800 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (N ° ' ")	Longitude (E ° ' ")
Last Gyro Survey First SLB Survey	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	504478.47	736295.89	N 32° 23' 7.07	W 103° 42' 6.34
	24.00	0.00	0.00	24.00	0.00	0.00	0.00	0.00	0.00	0.00	504478.47	736295.89	N 32° 23' 7.07	W 103° 42' 6.34
	67.64	0.13	32.17	67.64	0.04	0.04	0.03	0.30	0.05	32.17	504478.51	736295.92	N 32° 23' 7.07	W 103° 42' 6.34
	158.35	0.30	231.31	158.35	-0.02	-0.02	-0.10	0.47	0.11	259.44	504478.45	736295.79	N 32° 23' 7.07	W 103° 42' 6.34
	278.28	0.39	204.21	278.28	-0.59	-0.59	-0.52	0.15	0.78	221.31	504477.88	736295.37	N 32° 23' 7.07	W 103° 42' 6.35
	372.77	0.28	218.98	372.77	-1.07	-1.06	-0.79	0.15	1.32	216.81	504477.41	736295.10	N 32° 23' 7.06	W 103° 42' 6.35
	467.08	0.36	169.72	467.07	-1.54	-1.53	-0.89	0.29	1.77	210.05	504476.94	736295.00	N 32° 23' 7.06	W 103° 42' 6.35
	561.44	0.38	136.74	561.43	-2.06	-2.05	-0.62	0.22	2.14	196.78	504476.42	736295.27	N 32° 23' 7.05	W 103° 42' 6.35
	655.80	0.19	79.81	655.59	-2.25	-2.25	-0.25	0.34	2.26	186.36	504476.22	736295.64	N 32° 23' 7.05	W 103° 42' 6.34
	749.91	0.21	264.12	749.90	-2.24	-2.24	-0.27	0.42	2.26	186.84	504476.23	736295.62	N 32° 23' 7.05	W 103° 42' 6.34
844.19	0.19	170.47	844.18	-2.42	-2.41	-0.41	0.31	2.45	189.76	504476.06	736295.47	N 32° 23' 7.05	W 103° 42' 6.35	
927.09	0.26	75.78	927.08	-2.50	-2.50	-0.21	0.40	2.51	184.79	504475.97	736295.68	N 32° 23' 7.05	W 103° 42' 6.34	
1032.00	0.06	199.35	1031.99	-2.50	-2.50	0.00	0.28	2.50	179.94	504475.97	736295.89	N 32° 23' 7.05	W 103° 42' 6.34	
1126.00	0.03	265.21	1125.99	-2.54	-2.54	-0.04	0.06	2.54	180.86	504475.93	736295.85	N 32° 23' 7.05	W 103° 42' 6.34	
1217.00	0.05	297.70	1216.99	-2.53	-2.53	-0.10	0.03	2.53	182.20	504475.94	736295.79	N 32° 23' 7.05	W 103° 42' 6.34	
1311.00	0.04	93.91	1310.99	-2.51	-2.51	-0.10	0.09	2.51	182.29	504475.96	736295.79	N 32° 23' 7.05	W 103° 42' 6.34	
1403.00	0.05	114.47	1402.99	-2.53	-2.53	-0.03	0.02	2.53	180.72	504475.94	736295.86	N 32° 23' 7.05	W 103° 42' 6.34	
1497.00	0.04	300.89	1496.99	-2.53	-2.53	-0.02	0.10	2.53	180.52	504475.94	736295.87	N 32° 23' 7.05	W 103° 42' 6.34	
1589.00	0.02	278.33	1588.99	-2.51	-2.51	-0.07	0.02	2.51	181.51	504475.96	736295.82	N 32° 23' 7.05	W 103° 42' 6.34	
1651.00	0.03	266.19	1650.99	-2.51	-2.51	-0.09	0.02	2.51	182.13	504475.96	736295.80	N 32° 23' 7.05	W 103° 42' 6.34	
1745.00	0.03	155.54	1744.99	-2.54	-2.54	-0.11	0.05	2.54	182.43	504475.94	736295.78	N 32° 23' 7.05	W 103° 42' 6.34	
1840.00	0.02	225.74	1839.99	-2.57	-2.57	-0.11	0.03	2.57	182.43	504475.90	736295.78	N 32° 23' 7.05	W 103° 42' 6.34	
1935.00	0.06	198.10	1934.99	-2.63	-2.63	-0.14	0.05	2.63	182.97	504475.84	736295.75	N 32° 23' 7.05	W 103° 42' 6.34	
2030.00	0.03	55.43	2029.99	-2.66	-2.66	-0.13	0.09	2.66	182.83	504475.81	736295.76	N 32° 23' 7.05	W 103° 42' 6.34	
2124.00	0.03	233.49	2123.99	-2.66	-2.66	-0.13	0.06	2.66	182.82	504475.81	736295.76	N 32° 23' 7.05	W 103° 42' 6.34	
2219.00	0.05	104.22	2218.99	-2.69	-2.69	-0.11	0.08	2.69	182.36	504475.78	736295.78	N 32° 23' 7.05	W 103° 42' 6.34	
2314.00	0.07	118.97	2313.99	-2.72	-2.72	-0.02	0.03	2.72	180.42	504475.75	736295.87	N 32° 23' 7.05	W 103° 42' 6.34	
2408.00	0.04	28.94	2407.99	-2.72	-2.72	0.05	0.09	2.72	179.01	504475.75	736295.94	N 32° 23' 7.05	W 103° 42' 6.34	
2503.00	0.07	128.60	2502.99	-2.73	-2.73	0.11	0.09	2.73	177.72	504475.74	736296.00	N 32° 23' 7.05	W 103° 42' 6.34	
2598.00	0.03	41.53	2597.99	-2.75	-2.75	0.17	0.08	2.75	176.45	504475.72	736296.06	N 32° 23' 7.05	W 103° 42' 6.34	
2692.00	1.97	195.87	2691.97	-4.29	-4.28	-0.25	2.12	4.29	183.41	504474.19	736295.63	N 32° 23' 7.03	W 103° 42' 6.34	
2787.00	4.69	199.26	2786.80	-9.54	-9.52	-1.98	2.87	9.73	191.76	504468.95	736293.91	N 32° 23' 6.98	W 103° 42' 6.36	
2882.00	6.11	201.90	2881.38	-17.92	-17.88	-5.15	1.52	18.61	196.07	504460.59	736290.74	N 32° 23' 6.90	W 103° 42' 6.40	
2977.00	7.16	197.80	2975.74	-26.28	-26.21	-8.85	1.21	29.58	197.41	504450.26	736287.04	N 32° 23' 6.79	W 103° 42' 6.45	
3072.00	7.75	194.76	3069.94	-40.14	-40.04	-12.29	0.75	41.88	197.06	504438.43	736283.60	N 32° 23' 6.68	W 103° 42' 6.49	
3166.00	8.48	187.97	3163.00	-53.15	-53.03	-14.86	1.28	55.08	195.66	504425.44	736281.03	N 32° 23' 6.55	W 103° 42' 6.52	
3261.00	8.29	183.67	3256.98	-66.94	-66.81	-16.27	0.69	68.76	193.69	504411.67	736279.62	N 32° 23' 6.41	W 103° 42' 6.53	
3356.00	3.03	169.99	3351.49	-76.25	-76.12	-16.27	0.58	77.84	192.07	504402.35	736279.62	N 32° 23' 6.32	W 103° 42' 6.54	
3451.00	0.13	315.98	3446.45	-78.64	-78.51	-15.91	3.30	80.11	191.46	504399.96	736279.98	N 32° 23' 6.30	W 103° 42' 6.53	
3545.00	0.08	217.41	3540.45	-78.62	-78.49	-16.03	0.17	80.11	191.54	504399.98	736279.86	N 32° 23' 6.30	W 103° 42' 6.53	
3640.00	0.14	181.00	3635.45	-78.79	-78.66	-16.07	0.09	80.28	191.55	504399.81	736279.82	N 32° 23' 6.30	W 103° 42' 6.53	
3735.00	0.22	175.29	3730.45	-79.09	-78.96	-16.06	0.09	80.57	191.49	504399.52	736279.83	N 32° 23' 6.29	W 103° 42' 6.53	
3830.00	0.67	135.80	3825.44	-79.66	-79.54	-15.65	0.55	81.06	191.13	504398.94	736280.24	N 32° 23' 6.29	W 103° 42' 6.53	
3924.00	0.55	173.26	3919.44	-80.50	-80.38	-15.22	0.43	81.81	190.72	504398.10	736280.67	N 32° 23' 6.28	W 103° 42' 6.52	
4019.00	0.20	239.71	4014.44	-81.04	-80.92	-15.31	0.53	82.35	190.71	504397.56	736280.58	N 32° 23' 6.27	W 103° 42' 6.52	
4114.00	0.16	147.16	4109.44	-81.23	-81.11	-15.38	0.28	82.56	190.74	504397.36	736280.51	N 32° 23' 6.27	W 103° 42' 6.53	
4209.00	0.14	144.93	4204.44	-81.44	-81.32	-15.42	0.02	82.73	190.73	504397.16	736280.65	N 32° 23' 6.27	W 103° 42' 6.52	
4303.00	0.14	132.74	4298.44	-81.60	-81.48	-15.10	0.03	82.87	190.50	504396.99	736280.79	N 32° 23' 6.27	W 103° 42' 6.52	
4398.00	0.13	151.84	4393.44	-81.78	-81.66	-14.96	0.05	83.02	190.38	504396.82	736280.93	N 32° 23' 6.27	W 103° 42' 6.52	
4493.00	0.21	354.28	4488.44	-81.71	-81.59	-14.92	0.36	82.94	190.37	504396.89	736280.97	N 32° 23' 6.27	W 103° 42' 6.52	
4588.00	0.10	37.07	4583.44	-81.47	-81.35	-14.89	0.16	82.70	190.37	504397.13	736281.00	N 32° 23' 6.27	W 103° 42' 6.52	
4683.00	0.04	215.48	4678.44	-81.43	-81.31	-14.86	0.15	82.66	190.36	504397.16	736281.03	N 32° 23' 6.27	W 103° 42' 6.52	
4777.00	0.03	30.03	4772.44	-81.43	-81.31	-14.87	0.01	82.67	190.37	504397.16	736281.02	N 32° 23' 6.27	W 103° 42' 6.52	
4872.00	0.09	54.16	4867.44	-81.37	-81.25	-14.79	0.07	82.59	190.32	504397.22	736281.10	N 32° 23' 6.27	W 103° 42' 6.52	
4967.00	0.08	214.29	4962.44	-81.38	-81.26	-14.77	0.18	82.59	190.30	504397.21	736281.12	N 32° 23' 6.27	W 103° 42' 6.52	
5062.00	0.17	357.09	5057.44	-81.29	-81.17	-14.82	0.25	82.52	190.34	504397.30	736281.07	N 32° 23' 6.27	W 103° 42' 6.52	
5156.00	0.08	264.04	5151.44	-81.16	-81.04	-14.89	0.20	82.40	190.41	504397.43	736281.00	N 32° 23' 6.27	W 103° 42' 6.52	
5251.00	0.08	12.94	5246.44	-81.10	-80.98	-14.94	0.14	82.35	190.45	504397.49	736280.95	N 32° 23' 6.27	W 103° 42' 6.52	
5346.00	0.02	534.14	5341.44	-81.02	-80.90	-14.92	0.06	82.27	190.45	504397.57	736280.97	N 32° 23' 6.27	W 103° 42' 6.52	
5441.00	0.04	48.18	5436.44	-80.99	-80.87	-14.89	0.03	82.23	190.39	504397.61	736281.00	N 32° 23' 6.27	W 103° 42' 6.52	
5535.00	0.08	210.44	5530.44	-81.02	-80.90	-14.90	0.13	82.26	190.43	504397.57	736281.00	N 32° 23' 6.27	W 103° 42' 6.52	
5630.00	0.04	46.78	5625.44	-81.06	-80.94	-14.90	0.13	82.30	190.43	504397.54	736280.99	N 32° 23' 6.27	W 103° 42' 6.52	
5725.00	0.06	113.20	5720.44	-81.05	-80.93	-14.83	0.06	82.28	190.39	504397.54	736281.06	N 32° 23' 6.27	W 103° 42' 6.52	
5820.00	0.04	242.09	5815.44	-81.09	-80.97	-14.82	0.10	82.31	190.37	504397.51	736281.07	N 32° 23' 6.27	W 103° 42' 6.52	
5915.00	0.04	197.17	5910.44	-81.13	-81.02	-14.86	0.03	82.37	190.39	504397.4				

	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° '")	Longitude (E/W ° '")
	9429.00	13.13	168.95	9400.67	-338.29	-338.93	77.00	2.52	347.57	167.20	504139.56	736372.69	N 32.23 3.71	W 103.42 5.47
	9524.00	11.91	166.69	9493.41	-358.38	-359.06	81.33	1.38	368.16	167.24	504119.43	736377.21	N 32.23 3.52	W 103.42 5.42
	9618.00	10.32	168.08	9585.64	-376.03	-376.74	85.30	1.72	386.27	167.24	504101.75	736381.18	N 32.23 3.34	W 103.42 5.37
	9713.00	10.45	174.34	9679.09	-392.91	-393.64	87.91	1.20	403.33	167.41	504084.85	736383.79	N 32.23 3.17	W 103.42 5.34
	9808.00	10.89	179.52	9772.45	-410.45	-411.19	88.83	1.11	420.67	167.81	504067.30	736384.72	N 32.23 3.00	W 103.42 5.33
	9903.00	9.67	182.22	9865.92	-427.39	-428.13	88.60	1.38	437.20	168.31	504050.36	736384.48	N 32.23 2.83	W 103.42 5.34
	9998.00	9.88	182.93	9959.54	-443.51	-444.25	87.87	0.25	452.85	168.81	504034.25	736383.76	N 32.23 2.67	W 103.42 5.35
	10092.00	8.13	186.32	10052.38	-458.18	-458.91	86.73	1.94	467.03	169.30	504019.59	736382.61	N 32.23 2.53	W 103.42 5.36
	10187.00	8.07	185.41	10146.43	-471.51	-472.22	85.36	1.15	479.88	169.75	504006.27	736381.24	N 32.23 2.40	W 103.42 5.38
	10282.00	8.42	175.40	10240.45	-485.08	-485.79	85.29	1.55	493.22	170.04	503992.70	736381.17	N 32.23 2.26	W 103.42 5.38
	10377.00	8.20	168.25	10334.46	-498.63	-499.36	87.23	1.11	506.92	170.09	503979.13	736383.11	N 32.23 2.13	W 103.42 5.36
	10472.00	9.64	166.14	10428.31	-512.96	-513.72	90.51	1.55	521.63	170.01	503964.78	736386.40	N 32.23 1.98	W 103.42 5.32
	10566.00	10.77	165.92	10520.82	-529.09	-529.88	94.53	1.20	538.24	169.88	503948.62	736390.42	N 32.23 1.82	W 103.42 5.27
	10661.00	10.58	168.66	10614.18	-546.21	-547.04	98.41	0.57	555.82	169.90	503931.46	736394.29	N 32.23 1.65	W 103.42 5.23
	10756.00	9.85	172.22	10707.67	-562.79	-563.64	101.22	1.02	572.66	169.82	503914.86	736397.11	N 32.23 1.49	W 103.42 5.20
	10850.00	7.92	172.40	10800.54	-577.16	-578.03	103.17	2.05	587.16	169.88	503900.47	736399.05	N 32.23 1.35	W 103.42 5.18
	10945.00	6.90	169.30	10894.74	-589.24	-590.12	105.09	1.15	599.41	169.90	503888.38	736400.98	N 32.23 1.23	W 103.42 5.16
	10993.00	7.51	164.51	10942.37	-595.07	-595.98	106.47	1.78	605.41	169.87	503882.52	736402.35	N 32.23 1.17	W 103.42 5.14
	11095.00	5.82	139.03	11043.69	-605.38	-606.31	111.84	3.30	616.50	169.57	503872.19	736407.52	N 32.23 1.07	W 103.42 5.08
	11096.00	5.78	137.55	11044.69	-605.45	-606.39	111.71	15.49	616.59	169.56	503872.11	736407.59	N 32.23 1.07	W 103.42 5.08
Actual KOP	11190.00	14.28	56.11	11137.50	-602.36	-603.40	124.59	15.49	616.13	168.33	503875.10	736420.48	N 32.23 1.10	W 103.42 4.93
	11285.00	17.88	36.55	11228.83	-583.94	-585.13	143.02	6.80	602.36	166.26	503893.37	736438.91	N 32.23 1.27	W 103.42 4.71
	11380.00	17.20	16.18	11319.50	-558.61	-559.90	155.63	6.47	581.13	164.47	503918.60	736451.52	N 32.23 1.52	W 103.42 4.56
	11424.78	19.79	358.75	11362.00	-544.64	-545.95	157.32	13.57	568.16	163.93	503932.65	736453.20	N 32.23 1.66	W 103.42 4.54
	11475.00	24.18	344.73	11408.59	-526.22	-527.50	154.42	13.57	549.64	163.68	503950.99	736450.30	N 32.23 1.84	W 103.42 4.58
	11569.00	33.45	333.90	11490.91	-484.40	-485.55	137.90	11.28	504.75	164.14	503982.95	736433.79	N 32.23 2.26	W 103.42 4.77
	11664.00	46.77	340.07	11563.43	-428.27	-429.22	114.47	14.62	444.23	165.07	504049.27	736410.36	N 32.23 2.82	W 103.42 5.03
	11759.00	56.02	349.93	11622.73	-356.85	-357.64	95.72	12.65	370.23	165.02	504120.84	736391.61	N 32.23 3.53	W 103.42 5.25
	11853.00	68.19	1.62	11666.75	-274.37	-275.12	90.10	16.96	289.50	161.87	504203.37	736385.99	N 32.23 4.35	W 103.42 5.31
	11879.00	68.55	3.39	11676.33	-250.97	-251.72	91.16	6.48	267.02	160.04	504227.51	736387.05	N 32.23 4.58	W 103.42 5.29
100' FSL Crossing	11948.00	69.58	8.05	11701.00	-186.07	-186.87	97.59	6.48	210.82	152.43	504291.61	736393.48	N 32.23 5.22	W 103.42 4.87
	12043.00	76.64	6.28	11728.59	-95.85	-96.74	108.90	7.54	145.66	131.62	504381.73	736404.78	N 32.23 6.11	W 103.42 5.08
	12137.00	82.67	3.63	11745.46	-3.71	-4.66	116.86	6.99	116.95	92.29	504473.81	736412.74	N 32.23 7.02	W 103.42 4.98
	12231.00	86.73	359.92	11754.15	89.83	88.85	119.75	5.84	149.11	53.42	504567.32	736415.63	N 32.23 7.95	W 103.42 4.94
	12326.00	95.05	0.75	11752.67	184.74	183.76	120.30	8.80	219.63	33.21	504662.22	736416.18	N 32.23 8.88	W 103.42 4.92
	12421.00	91.43	1.39	11747.30	279.56	278.57	122.07	3.87	304.14	23.66	504757.03	736417.96	N 32.23 9.82	W 103.42 4.90
	12516.00	90.23	0.89	11745.93	374.54	373.54	123.96	1.37	393.57	18.36	504851.99	736419.94	N 32.23 10.76	W 103.42 4.87
	12611.00	89.56	359.06	11746.10	469.54	468.54	123.92	2.05	484.65	14.81	504946.98	736419.80	N 32.23 11.70	W 103.42 4.86
	12765.00	89.25	356.73	11747.70	623.36	622.41	118.26	1.53	633.55	10.76	505100.85	736414.15	N 32.23 13.22	W 103.42 4.92
	12860.00	89.27	356.83	11748.93	718.16	717.26	112.93	0.11	726.09	6.95	505195.69	736408.81	N 32.23 14.16	W 103.42 4.97
	12955.00	89.42	359.59	11750.01	813.07	812.19	109.96	2.91	819.60	7.71	505290.62	736405.85	N 32.23 15.10	W 103.42 5.00
	13049.00	89.35	359.32	11751.02	907.05	906.18	109.07	0.30	912.72	6.86	505384.61	736404.95	N 32.23 16.03	W 103.42 5.01
	13144.00	89.08	0.95	11752.33	1002.03	1001.17	109.29	1.74	1007.12	6.23	505479.59	736405.18	N 32.23 16.97	W 103.42 5.00
	13238.00	89.17	1.91	11753.76	1096.01	1095.13	111.84	1.03	1100.81	5.82	505573.55	736407.52	N 32.23 17.90	W 103.42 4.96
	13333.00	89.28	1.78	11754.22	1190.98	1190.08	114.70	1.14	1195.99	5.30	505668.49	736405.84	N 32.23 18.84	W 103.42 4.92
	13428.00	90.24	1.38	11753.79	1285.96	1285.04	117.31	0.42	1290.39	5.22	505763.45	736413.20	N 32.23 19.78	W 103.42 4.88
	13522.00	90.39	3.14	11753.27	1379.91	1378.96	121.02	1.88	1384.26	5.02	505857.37	736416.90	N 32.23 20.71	W 103.42 4.83
	13617.00	90.25	3.11	11752.74	1474.80	1473.82	126.20	1.15	1479.21	4.89	505952.22	736422.08	N 32.23 21.65	W 103.42 4.77
	13711.00	90.14	2.37	11752.42	1568.73	1567.71	130.69	0.80	1573.15	4.77	506046.10	736426.58	N 32.23 22.58	W 103.42 4.71
	13806.00	90.44	2.94	11751.94	1663.66	1662.61	135.09	0.68	1668.09	4.65	506141.00	736430.98	N 32.23 23.52	W 103.42 4.65
	13901.00	90.51	0.28	11751.15	1758.63	1757.56	137.76	2.80	1762.95	4.48	506235.94	736433.65	N 32.23 24.46	W 103.42 4.61
	13995.00	90.29	359.30	11750.49	1852.62	1851.55	137.42	1.07	1856.65	4.24	506329.93	736433.30	N 32.23 25.39	W 103.42 4.61
	14090.00	90.49	359.45	11749.85	1947.60	1946.55	136.38	0.26	1951.32	4.01	506424.92	736432.26	N 32.23 26.33	W 103.42 4.62
	14184.00	90.46	359.59	11749.07	2041.58	2040.54	135.59	0.15	2045.04	3.80	506518.91	736431.48	N 32.23 27.26	W 103.42 4.62
	14279.00	90.29	359.30	11748.45	2136.56	2135.53	134.67	0.35	2139.78	3.61	506613.90	736430.56	N 32.23 28.20	W 103.42 4.62
	14374.00	90.42	359.78	11747.86	2231.55	2230.53	133.91	0.52	2234.54	3.44	506708.89	736429.79	N 32.23 29.14	W 103.42 4.62
	14468.00	90.13	359.98	11747.41	2325.54	2324.53	133.71	0.37	2328.37	3.29	506802.88			

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
100' FNL Crossing	22241.00	89.96	359.85	11740.86	10097.33	10096.75	112.08	0.33	10097.38	0.64	514574.72	736407.97	N 32 24 46.97	W 103 42 4.34
Final MWD Survey	22255.00	90.13	359.79	11740.84	10111.33	10110.75	112.04	1.16	10111.37	0.63	514588.72	736407.92	N 32 24 47.11	W 103 42 4.34
Proj to TD	22276.00	90.36	359.71	11740.75	10132.33	10131.75	111.95	1.16	10132.37	0.63	514609.72	736407.83	N 32 24 47.32	W 103 42 4.34
	22309.00	90.36	359.71	11740.55	10165.33	10164.75	111.78	0.00	10165.37	0.63	514642.72	736407.66	N 32 24 47.64	W 103 42 4.34

Survey Type: Def Survey

Survey Error Model: ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	1	0.000	24.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Dr Pi Fed Unit 17_8 DA 311H / Oxy Dr Pi Fed Unit 17_8 DA 311H Gyro+MWD 0' to 22309MD
	1	24.000	24.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only	Dr Pi Fed Unit 17_8 DA 311H / Oxy Dr Pi Fed Unit 17_8 DA 311H Gyro+MWD 0' to 22309MD
	1	24.000	927.090	Act Stns	26.400	26.400	GYD_GC+DROP+OH	Dr Pi Fed Unit 17_8 DA 311H / Oxy Dr Pi Fed Unit 17_8 DA 311H
	1	927.090	22309.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS	Dr Pi Fed Unit 17_8 DA 311H / Oxy Dr Pi Fed Unit 17_8 DA 311H Gyro+MWD 0' to 22309MD

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

Well Name: Dr Pi Fed Unit 17_8 DA	Well Location: T22S / R32E / SEC 17 / SWSW /	County or Parish/State:
Well Number: 311H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM128362	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002549152	Well Status: Approved Application for Permit to Drill	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2707529

Type of Submission: Subsequent Report Type of Action: Workover Operations

Date Sundry Submitted: 12/14/2022 Time Sundry Submitted: 04:16

Date Operation Actually Began: 07/31/2022

Actual Procedure: RUPU 07/31/22, RIH & clean out to PBTD @ 22265', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 12155-22177' Total 1260 holes. Frac in 42 stages w/ 195768BBL Produced Water + 199751BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 26898780# sand, RD Liberty Oilfield Services 08/24/22. Well ready to produce 08/29/22. 11/09/22 RIH with 2-3/8" L80 tbg & gas lift set @ 11701', RD 11/10/22. Formation Tops for this completion are as follows: Rustler 905'M 905'V Salado 1255'M 1255'V Castile 3233'M 3233'V Lamar/Delaware 4728'M 4723'V Bell Canyon 4775'M 4771'V Cherry Canyon 5641'M 5637'V Brushy Canyon 6839'M 6835'V Bone Spring 8633'M 8617'V Ist Bone Springs 9689'M 9656'V 2nd Bone Springs 10400'M 10357'V 3rd Bone Springs 11447'M 11384'V

Well Name: Dr Pt Fed Unit 17_8 DA	Well Location: T22S / R32E / SEC 17 / SWSW /	County or Parish/State:
Well Number: 311H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM128362	Unit or CA Name:	Unit or CA Number:
US Well Number: 3002549152	Well Status: Approved Application for Permit to Drill	Operator: OXY USA INCORPORATED

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a


Operator Electronic Signature: JANA MENDIOLA	Signed on: DEC 14, 2022 04:15 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Coordinator	
Street Address: PO BOX 50250	
City: Midland	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: Jonathon W Shepard	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 12/15/2022
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG							1. WELL API NO. 30-025-49152			
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)							2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN			
							3. State Oil & Gas Lease No.			
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER							5. Lease Name or Unit Agreement Name DR PI FEDERAL UNIT 17-8 DA			
8. Name of Operator: OXY USA INC.							6. Well Number: 311H			
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710							11. Pool name or Wildcat BILBREY BASIN; BONE SPRING, SOUTH			
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	M	17	22S	32E		350	SOUTH	1105	WEST	LEA
BH:	D	8	22S	32E		45	NORTH	1289	WEST	LEA
13. Date Spudded 01/27/22	14. Date T.D. Reached 06/30/2022		15. Date Rig Released 07/02/2022		16. Date Completed (Ready to Produce) 08/29/2022		17. Elevations (DF and RKB, RT, GR, etc.) 3683' GL			
18. Total Measured Depth of Well 22309'M 11741'V			19. Plug Back Measured Depth 22265'M 11740'V		20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL			
22. Producing Interval(s), of this completion - Top, Bottom, Name 12155-22177' 3 rd Bone Spring										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
13.375" J55		54.5		940'		17.5"		1140sx-surf circ		
7.625" HCL80		26.4		11006'		9.875"		2048sx-surf		
5.5" P110		20		22287'		6.75"		866sx-TOC@10506'		
24. LINER RECORD										
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	25. TUBING RECORD					
					SIZE	DEPTH SET	PACKER SET			
					2-3/8"	11701'				
26. Perforation record (interval, size, and number) 12155-22177' Total 1260 holes, Hole Size=0.42					27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.					
					DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED			
					12155-22177'		195768BBL Produced Water + 199751BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 26898780# sand			
28. PRODUCTION										
Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)				Well Status (Prod. or Shut-in)				
09/3/2022		Gas Lift				Prod.				
Date of Test	Hours Tested	Choke Size	Prod'n For	Oil - Bbl	Gas - MCF	Water - Bbl.	Gas - Oil Ratio			
09/29/2022	24 hrs.	128/128	Test Period	4375	6968	7057	1593			
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)				
	988		4375	6968	7057					
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD							30. Test Witnessed By			
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.							33. Rig Release Date:			
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Printed										
Signature: 		Name: <u>Jana Mendiola</u>			Title: <u>Sr. Regulatory Analyst</u>			Date: <u>01/09/2023</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 905'	T. Bell Canyon 4775'	T. Ojo Alamo	T. Penn A"
T. Salado 1255'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 3233'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 4728'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 5641'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 6839'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Springs 8633'	T. Todilto	
T. Abo	T. 1 st Bone Springs 9689'	T. Entrada	
T. Wolfcamp	T. 2 nd Bone Springs 10400'	T. Wingate	
T. Penn	T. 3 rd Bone Springs 11447'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....


No. 4, from.....to.....

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

OXY USA Inc.
DR PI FEDERAL UNIT 17-8 DA 311H
API No. 30-025-49152

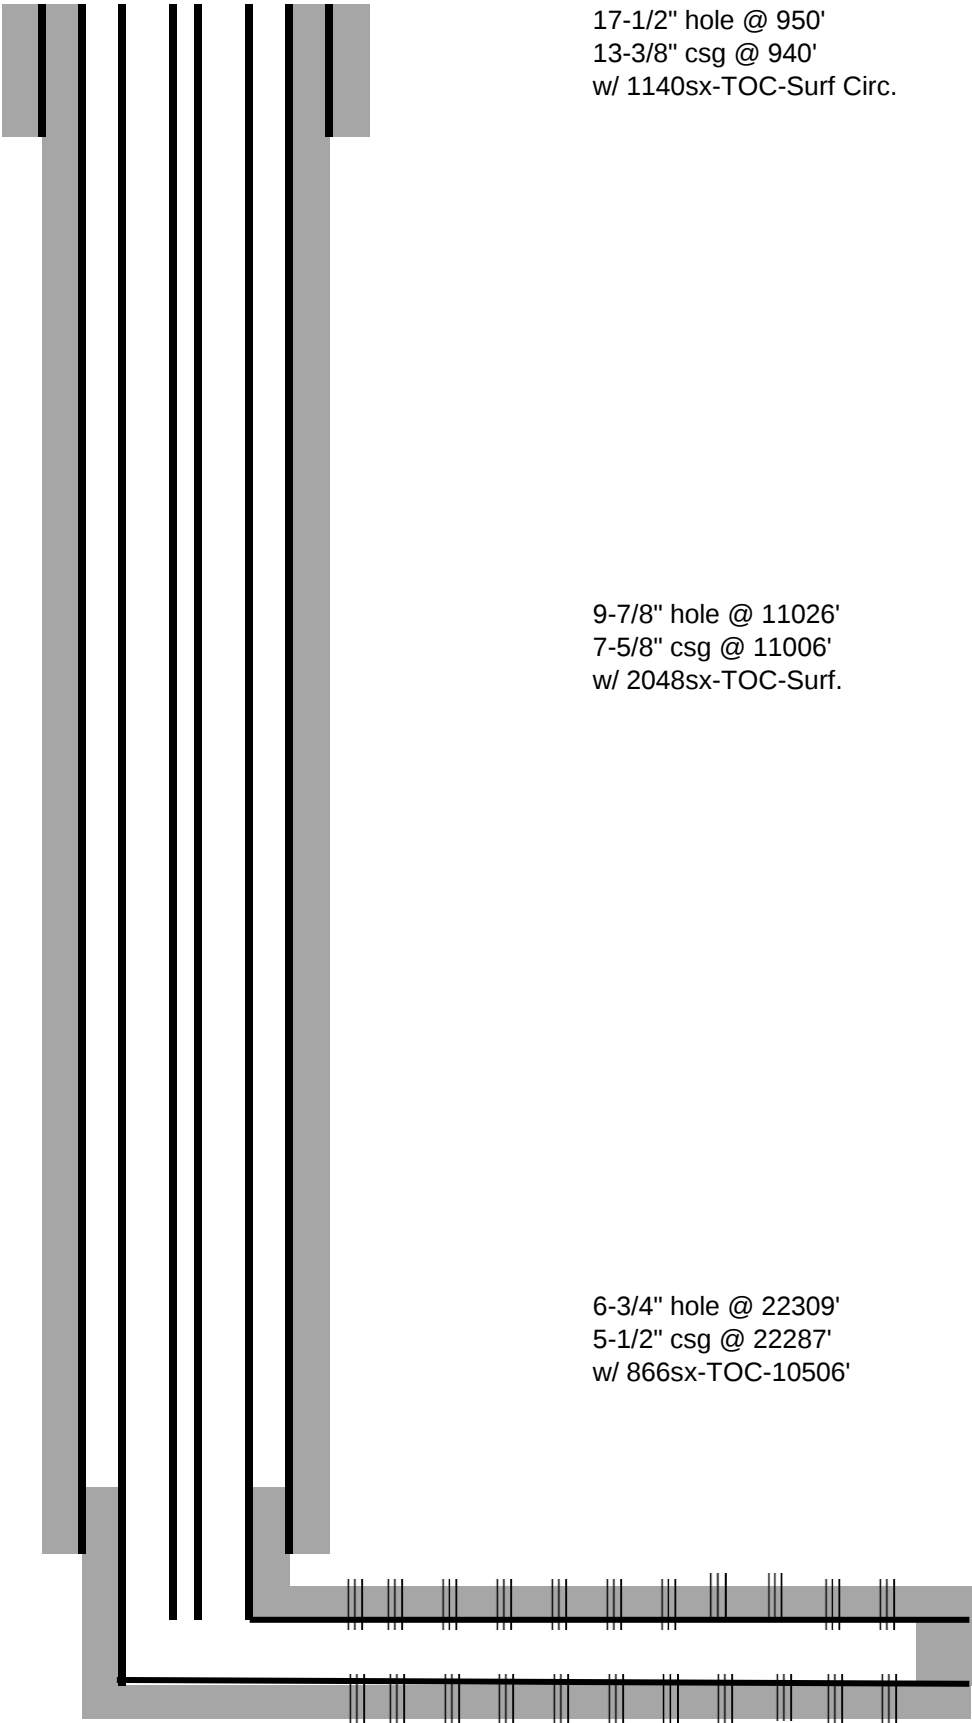

2-3/8" tbg & gas lift @ 11701'

Perfs @ 12155-22177' TD- 22309'M 11741'V

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 174344

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 174344
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 174344

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 174344
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 Completion Report within 10 days to NMOCD after BLM approval.	1/23/2023