

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy, Minerals & Natural ResourcesForm C-104
Revised August 1, 2011District I

811 S. First St., Artesia, NM 88210

District II

1000 Rio Brazos Rd., Aztec, NM 87410

District III

1220 S. St. Francis Dr., Santa Fe, NM 87505

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☒ AMENDED REPORT**I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT**

¹ Operator name and Address OXY USA INC. P.O. BOX 50250 MIDLAND, TX 79710		² OGRID Number: 16696
		³ Reason for Filing Code/ Effective Date: NW - 01/09/2023
⁴ API Number 30 - 015-46781	⁵ Pool Name PURPLE SAGE WOLFCAMP *NSL-7963	⁶ Pool Code 98220
⁷ Property Code: 327181	⁸ Property Name: DEPTH CC 6-7 FEDERAL COM	⁹ Well Number: 43H

II. ¹⁰ Surface Location

Ul or lot no. P	Section 31	Township 23S	Range 29E	Lot Idn	Feet from the 25	North/South Line SOUTH	Feet from the 1074	East/West line EAST	County EDDY
--------------------	---------------	-----------------	--------------	---------	---------------------	---------------------------	-----------------------	------------------------	----------------

¹¹ Bottom Hole Location

FTP- 268' FNL 1628' FEL LTP- 419' FSL 1654' FEL

UL or lot no. O	Section 7	Township 24S	Range 29E	Lot Idn	Feet from the 280	North/South line SOUTH	Feet from the 1654	East/West line EAST	County EDDY
¹² Lse Code F	¹³ Producing Method Code : F		¹⁴ Gas Connection Date: 1/15/23		¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date	

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
214754	LPC CRUDE OIL, INC.	O
151618	ENTERPRISE FIELD SERVICES LLC	G

IV. Well Completion Data

²¹ Spud Date 09/03/22	²² Ready Date 01/09/2023	²³ TD 20998'M 10879'V	²⁴ PBTD 20956'M 10878'V	²⁵ Perforations 10882-20858'	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size		²⁹ Depth Set		³⁰ Sacks Cement
17-1/2"	13-3/8"		459'		1145
12-1/4"	9-5/8"		10198'		3544
8-3/4" X 8-1/2"	7" X 5-1/2"		20976'		2404

V. Well Test Data

³¹ Date New Oil 1/15/23	³² Gas Delivery Date 1/15/23	³³ Test Date 2/10/23	³⁴ Test Length 24 HRS	³⁵ Tbg. Pressure	³⁶ Csg. Pressure 3530
³⁷ Choke Size 45/128	³⁸ Oil 2082	³⁹ Water 4223	⁴⁰ Gas 14147		⁴¹ Test Method F

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief.

Signature: 

Printed name: JANA MENDIOLA

Title: SR. REGULATORY ANALYST

E-mail Address:
Janalyn_mendiola@oxy.comDate: 04/10/2023
Phone: 422-695-5936

OIL CONSERVATION DIVISION

Approved by:

PATRICIA MARTINEZ

Title: PETROLEUM SPECIALIST

Approval Date: 4/21/2023

1625 N. French Dr., Hobbs, NM 88240
 Phone: (575) 393-6161 Fax: (575) 393-0720
District II
 811 S. First St., Artesia, NM 88210
 Phone: (505) 748-1283 Fax: (505) 748-9720
District III
 1000 Rio Brazos Road, Aztec, NM 87410
 Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505
 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
 Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Revised August 1, 2011
 Submit one copy to appropriate
 District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION AS-DRILLED PLAT

¹ API Number 30-015-46781		² Pool Code 98220		³ Pool Name PURPLE SAGE; WOLFCAMP	
⁴ Property Code 327181		Property Name DEPTH CC 6_7 FEDERAL COM			⁶ Well Number 43H
⁷ OGRID No. 16696		⁸ Operator Name OXY USA, INC			⁹ Elevation 2958'
¹⁰ Surface Location					
UL or lot no. P	Section 31	Township 23S	Range 29E	Lot Idn	Feet from the 25
					North/South line SOUTH
					Feet from the 1074
					East/West line EAST
					County EDDY
¹¹ Bottom Hole Location If Different From Surface					
UL or lot no. O	Section 7	Township 24S	Range 29E	Lot Idn	Feet from the 280
					North/South line SOUTH
					Feet from the 1654
					East/West line EAST
					County EDDY
¹² Dedicated Acres 639.88		¹³ Joint or Infill		¹⁴ Consolidation Code NSL-7963	
				¹⁵ Order No.	

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 639697.30' / Y: 451041.59' B - X: 639723.37' / Y: 445724.09' C - X: 637072.27' / Y: 445724.48' D - X: 637060.77' / Y: 448384.48' E - X: 637049.26' / Y: 451044.98' F - X: 637034.83' / Y: 453707.85' G - X: 637020.43' / Y: 456367.55' H - X: 639670.64' / Y: 456348.63'	CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 598513.67' / Y: 450982.59' B - X: 598539.62' / Y: 445665.19' C - X: 595888.56' / Y: 445665.61' D - X: 595877.12' / Y: 448325.57' E - X: 595865.68' / Y: 450986.01' F - X: 595851.32' / Y: 453648.83' G - X: 595836.98' / Y: 456308.47' H - X: 598487.14' / Y: 456289.52'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature _____ Date 1/9/23 JANA MENDIOLA Printed Name janalyn_mendiola@oxy.com E-mail Address
	SURFACE HOLE LOCATION 25' FSL 1074' FEL, SECTION 31 0' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 638595.78' / Y: 456381.12' LAT: 32.25427526N / LON: 104.01871418W NAD 27, SPCS NM EAST X: 597412.30' / Y: 456322.02' LAT: 32.25415321N / LON: 104.01822313W		
	KICK OFF POINT 44' FSL 1619' FEL, SECTION 31 10278' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 638049.74' / Y: 456404.63' LAT: 32.25434428N / LON: 104.02048031W NAD 27, SPCS NM EAST X: 596866.27' / Y: 456345.54' LAT: 32.25422225N / LON: 104.01998918W		
	FIRST TAKE POINT 268' FNL 1628' FEL, SECTION 6 10882' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 638044.35' / Y: 456091.99' LAT: 32.25348492N / LON: 104.02050070W NAD 27, SPCS NM EAST X: 596860.87' / Y: 456032.90' LAT: 32.25336288N / LON: 104.02000960W		
LAST TAKE POINT 419' FSL 1654' FEL, SECTION 7 20858' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 638067.61' / Y: 446143.18' LAT: 32.22613687N / LON: 104.02051920W NAD 27, SPCS NM EAST X: 596883.89' / Y: 446084.30' LAT: 32.22601451N / LON: 104.02002902W		18 SURVEYOR CERTIFICATION I hereby certify that the well surface location shown on this plat was plotted from field notes of the as-staked surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Data used for underground measurements were provided by others for reference only and does not constitute field measurements performed by R-Squared Global. JANUARY 6, 2023 Date of Survey Signature and Seal of Professional Surveyor: Certificate Number LLOYD P. SHORT 21653	
BOTTOM HOLE LOCATION 280' FSL 1654' FEL, SECTION 7 20998' MEASURED DEPTH IN FEET NAD 83, SPCS NM EAST X: 638068.02' / Y: 446004.04' LAT: 32.22575438N / LON: 104.02051917W NAD 27, SPCS NM EAST X: 596884.30' / Y: 445945.16' LAT: 32.22563201N / LON: 104.02002901W			

Distances/areas relative to NAD 83 Combined Scale Factor: 0.9997778 Convergence Angle: 00°08'28.5600"

Horizontal Spacing Unit

Schlumberger

OXY




Borehole:	Well:	Field:	Structure:
Depth CC 6_7 Federal Com 43H	Depth CC 6_7 Federal Com 43H	NM Eddy County (NAD 83)	Oxy Depth CC 6_7 Federal Com Pad

Gravity & Magnetic Parameters				Surface Location				Miscellaneous			
Model:	IFR1	Dip:	59.948°	Date:	24-Oct-2022	Lat:	N 32 15 15.39	Northing:	456381.12NUS	Grid Conv:	0.1679°
MagDec:	6.77°	FS:	47542.9nT	Gravity FS:	998.471mgN (9.80665 Based)	Lon:	W 104 1 7.37	Easting:	638595.78nUS	Scale Fact:	0.99991992
								Slot:	Depth CC 6_7 Federal Com 43H	TVD Ref:	RKB(2982.6ft above MSL)
								Plan:	Oxy Depth CC 6_7 Federal Com 43H Gyro+MWD 0' to 20998MD		

Critical Points

Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL	25.00	0.00	0.00	25.00	0.00	0.00	0.00	
First Gyro Survey	91.63	0.10	13.82	91.63	-0.06	0.06	0.01	0.15
Last Gyro Survey	445.30	1.72	82.76	445.26	-0.49	0.28	4.12	0.62
First SLB Survey	545.00	1.06	61.08	544.93	-1.23	0.91	6.41	0.84
Wolfcamp Intersection	9756.52	10.70	273.78	9716.60	-6.77	29.34	-450.60	0.07
Actual KOP	10277.70	12.02	238.36	10228.69	3.80	23.54	-545.98	5.04
100' FNL Crossing	10649.00	39.05	177.34	10565.62	144.87	-117.22	-555.78	8.15
330' FSL Crossing	20943.00	89.65	179.95	10878.43	10336.41	-10322.93	-527.72	0.79
Final MWD Survey	20967.00	89.60	180.13	10878.58	10360.38	-10346.93	-527.74	0.79
Proj to TD	20998.00	89.60	180.13	10878.80	10391.34	-10377.93	-527.81	0.00

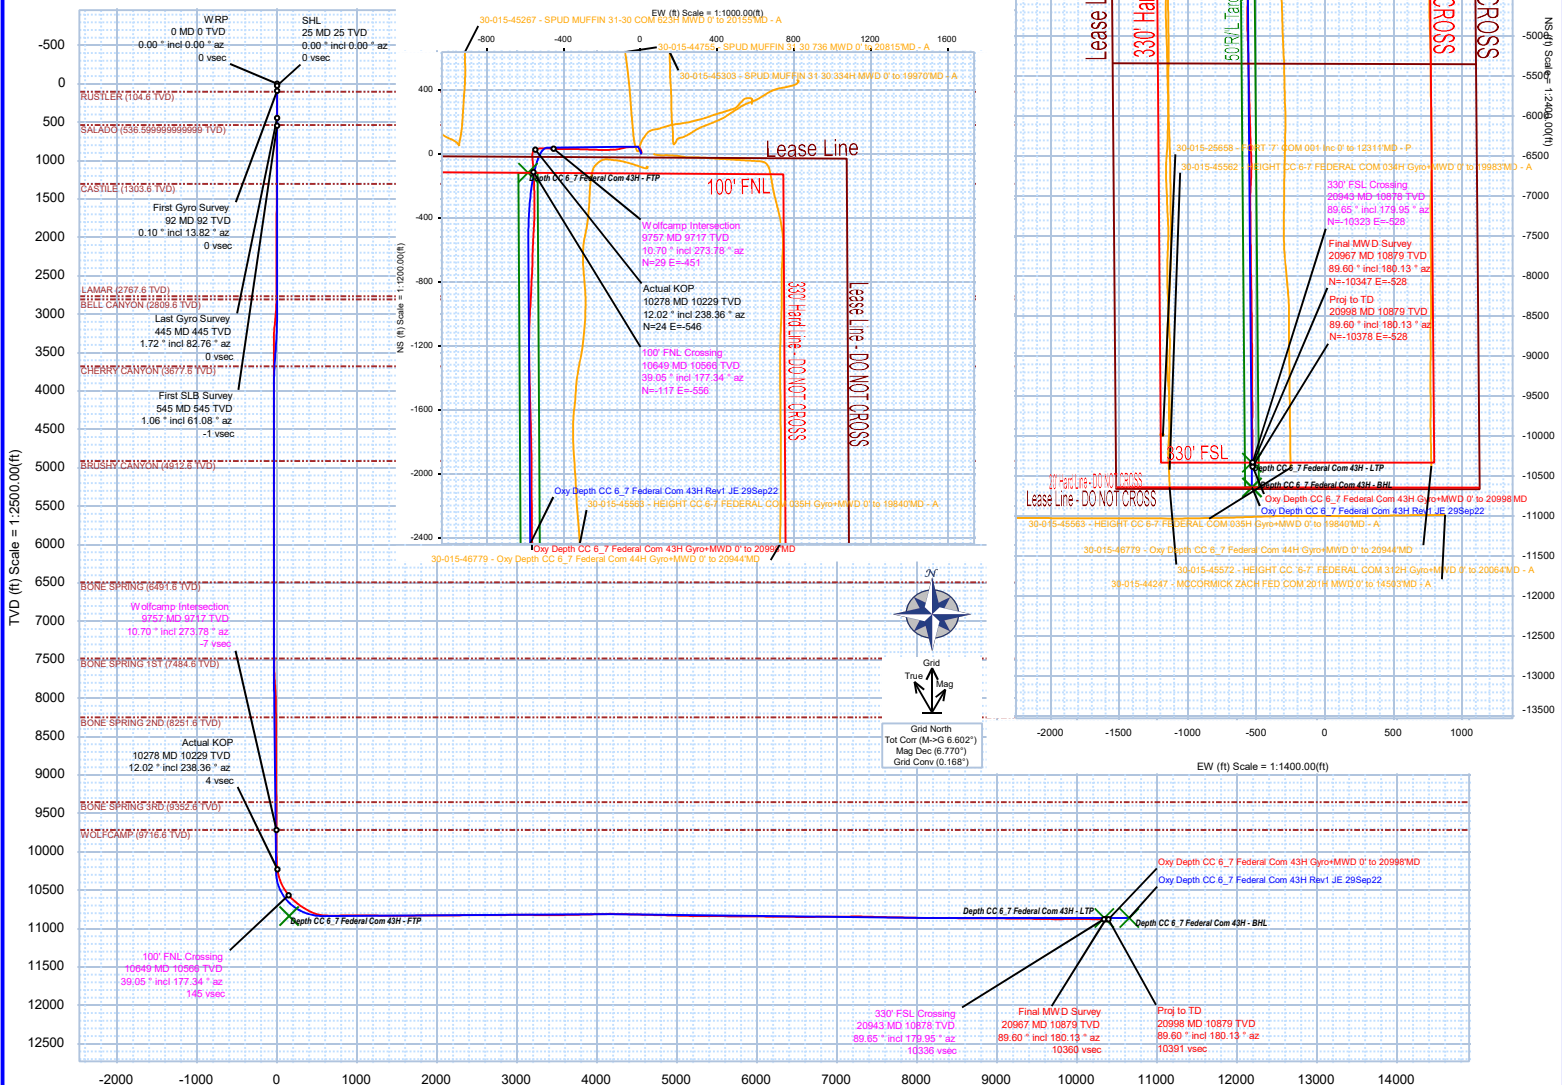

Schlumberger

Oxy Depth CC 6_7 Federal Com 43H Gyro+MWD 0' to 20998'MD Survey Geodetic Report (Def Survey)



Report Date: December 14, 2022 - 10:32 AM
Client: OXY
Field: NM Eddy County (NAD 83)
Structure / Slot: Oxy Depth CC 6_7 Federal Com Pad / Depth CC 6_7 Federal Com 43H
Well: Depth CC 6_7 Federal Com 43H
Borehole: Depth CC 6_7 Federal Com 43H
UWI / API#: Unknown / Unknown
Survey Name: Oxy Depth CC 6_7 Federal Com 43H Gyro+MWD 0' to 20998'MD
Survey Date: September 28, 2022
Tort / AHD / DDI / ERD Ratio: 254.476' / 11016.341 ft / 6.733 / 1.013
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 15' 15.39095", W 104° 1' 7.37106"
Location Grid N/E Y/X: N 456381.120 RUS, E 638595.780 RUS
CRS Grid Convergence Angle: 0.1679 °
Grid Scale Factor: 0.99991992
Version / Patch: 2.10.829.1

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 182.867 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 2982.600 ft above MSL
Seabed / Ground Elevation: 2957.600 ft above MSL
Magnetic Declination: 6.770 °
Total Gravity Field Strength: 998.4714mgn (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47542.900 nT
Magnetic Dip Angle: 59.948 °
Declination Date: October 24, 2022
Magnetic Declination Model: IFR1
North Reference: Grid North
Grid Convergence Used: 0.1706 °
Total Corr Mag North-Grid North: 6.6000 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (RUS)	Easting (RUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
WRP	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	0.00	0.00	456381.12	638595.78	N 32 15 15.39	W 104 1 7.37
SHL	25.00	0.00	0.00	25.00	0.00	0.00	0.00	0.00	0.00	0.00	456381.12	638595.78	N 32 15 15.39	W 104 1 7.37
First Gyro Survey	91.63	0.10	13.82	91.63	-0.06	0.06	0.01	0.15	0.06	13.82	456381.18	638595.79	N 32 15 15.39	W 104 1 7.37
	173.90	0.13	64.96	173.90	-0.17	0.17	0.12	0.13	0.20	34.90	456381.29	638595.90	N 32 15 15.39	W 104 1 7.37
	256.03	0.37	94.60	256.03	-0.21	0.18	0.46	0.32	0.50	68.40	456381.30	638596.24	N 32 15 15.39	W 104 1 7.37
	350.88	1.18	91.70	350.87	-0.22	0.13	1.75	0.85	1.75	85.73	456381.25	638597.53	N 32 15 15.39	W 104 1 7.35
	445.30	1.72	82.76	445.26	-0.49	0.28	4.12	0.62	4.13	86.11	456381.40	638599.90	N 32 15 15.39	W 104 1 7.32
Last Gyro Survey	545.00	1.06	61.08	544.93	-1.23	0.91	6.41	0.84	6.48	81.89	456382.03	638602.19	N 32 15 15.40	W 104 1 7.30
First SLB Survey	639.00	0.21	12.25	638.92	-1.86	1.50	7.21	0.99	7.37	78.23	456382.62	638602.99	N 32 15 15.41	W 104 1 7.29
	750.00	0.24	340.58	749.92	-2.28	1.92	7.18	0.11	7.43	75.01	456383.04	638602.96	N 32 15 15.41	W 104 1 7.29
	844.00	0.24	3.91	843.92	-2.66	2.30	7.13	0.10	7.49	72.09	456383.42	638602.91	N 32 15 15.41	W 104 1 7.29
	938.00	0.22	343.37	937.92	-3.02	2.67	7.09	0.09	7.58	69.34	456383.79	638602.87	N 32 15 15.42	W 104 1 7.29
	1032.00	0.25	325.38	1031.92	-3.36	3.01	6.92	0.08	7.55	66.46	456384.13	638602.70	N 32 15 15.42	W 104 1 7.29
	1126.00	0.25	347.51	1125.92	-3.72	3.38	6.76	0.10	7.56	63.41	456384.50	638602.54	N 32 15 15.42	W 104 1 7.29
	1220.00	0.18	346.45	1219.92	-4.06	3.73	6.68	0.07	7.65	60.84	456384.85	638602.46	N 32 15 15.43	W 104 1 7.29
	1314.00	0.22	43.89	1313.92	-4.33	4.00	6.77	0.21	7.86	59.42	456385.12	638602.55	N 32 15 15.43	W 104 1 7.29
	1408.00	0.27	15.59	1407.92	-4.69	4.34	6.96	0.14	8.20	58.01	456385.46	638602.73	N 32 15 15.43	W 104 1 7.29
	1503.00	0.24	26.30	1502.92	-5.09	4.74	7.10	0.06	8.54	56.30	456385.86	638602.88	N 32 15 15.44	W 104 1 7.29
	1597.00	0.27	17.43	1596.92	-5.48	5.13	7.26	0.05	8.89	54.76	456386.25	638603.04	N 32 15 15.44	W 104 1 7.29
	1692.00	0.24	351.78	1691.91	-5.89	5.54	7.30	0.12	9.16	52.81	456386.66	638603.08	N 32 15 15.45	W 104 1 7.29
	1787.00	0.15	87.53	1786.91	-6.10	5.74	7.39	0.31	9.36	52.17	456386.86	638603.17	N 32 15 15.45	W 104 1 7.28
	1882.00	0.20	350.11	1881.91	-6.27	5.91	7.49	0.28	9.54	51.73	456387.03	638603.27	N 32 15 15.45	W 104 1 7.28
	1976.00	0.29	349.07	1975.91	-6.67	6.30	7.41	0.10	9.73	49.63	456387.42	638603.19	N 32 15 15.45	W 104 1 7.28
	2071.00	0.38	46.48	2070.91	-7.13	6.76	7.60	0.35	10.17	48.35	456387.88	638603.38	N 32 15 15.46	W 104 1 7.28
	2165.00	0.24	41.54	2164.91	-7.51	7.12	7.95	0.15	10.67	48.17	456388.24	638603.73	N 32 15 15.46	W 104 1 7.28
	2260.00	0.41	72.41	2259.91	-7.78	7.37	8.41	0.25	11.18	48.77	456388.49	638604.19	N 32 15 15.46	W 104 1 7.27
	2354.00	0.19	131.20	2353.91	-7.80	7.37	8.85	0.37	11.51	50.21	456388.49	638604.63	N 32 15 15.46	W 104 1 7.27
	2449.00	0.32	2.73	2448.91	-7.97	7.53	8.98	0.49	11.72	50.02	456388.65	638604.76	N 32 15 15.47	W 104 1 7.27
	2544.00	0.28	261.77	2543.91	-8.19	7.76	8.76	0.49	11.70	48.46	456388.88	638604.54	N 32 15 15.47	W 104 1 7.27
	2638.00	0.24	211.16	2637.91	-7.97	7.56	8.43	0.24	11.33	48.12	456388.68	638604.21	N 32 15 15.47	W 104 1 7.27
	2733.00	0.13	225.70	2732.91	-7.72	7.31	8.25	0.12	11.03	48.45	456388.43	638604.03	N 32 15 15.46	W 104 1 7.27
	2828.00	1.22	335.44	2827.90	-8.54	8.16	7.75	1.34	11.26	43.54	456389.28	638603.53	N 32 15 15.47	W 104 1 7.28
	2923.00	3.19	342.08	2922.82	-11.91	11.59	6.52	2.09	13.30	29.35	456392.71	638602.30	N 32 15 15.51	W 104 1 7.29
	3018.00	4.96	341.77	3017.58	-18.23	18.03	4.41	1.89	18.57	13.76	456399.15	638600.19	N 32 15 15.57	W 104 1 7.32
	3112.00	6.80	339.88	3111.08	-27.17	27.14	1.22	1.94	2.58	456408.26	638597.00	N 32 15 15.66	W 104 1 7.36	
	3207.00	5.30	332.18	3205.55	-36.12	36.31	-2.76	1.79	36.41	355.65	456417.42	638593.02	N 32 15 15.75	W 104 1 7.40
	3302.00	1.69	308.47	3300.36	-40.71	41.06	-5.91	4.01	41.48	351.81	456422.18	638589.87	N 32 15 15.80	W 104 1 7.44
	3396.00	0.18	57.43	3394.34	-41.60	42.00	-6.87	1.87	42.56	350.71	456423.12	638588.91	N 32 15 15.81	W 104 1 7.45
	3491.00	0.39	112.86	3489.34	-41.58	41.96	-6.44	0.34	42.45	351.27	456423.07	638589.34	N 32 15 15.81	W 104 1 7.44
	3586.00	0.20	176.13	3584.34	-41.31	41.66	-6.13	0.37	42.11	351.62	456422.78	638589.65	N 32 15 15.80	W 104 1 7.44
	3680.00	0.22	284.27	3678.34	-41.18	41.53	-6.30	0.36	42.02	351.38	456422.66	638589.42	N 32 15 15.80	W 104 1 7.44
	3775.00	0.33	156.21	3773.34	-40.97	41.34	-6.37	0.52	41.83	351.25	456422.46	638589.42	N 32 15 15.80	W 104 1 7.44
	3870.00	0.33	113.00	3868.34	-40.63	40.98	-6.00	0.26	41.42	351.67	456422.10	638589.78	N 32 15 15.80	W 104 1 7.44
	3964.00	0.22	302.42	3962.34	-40.63	40.97	-5.91	0.58	41.40	351.80	456422.09	638589.87	N 32 15 15.80	W 104 1 7.44
	4059.00	0.39	350.68	4057.34	-41.03	41.39	-6.11	0.31	41.84	351.60	456422.51	638589.67	N 32 15 15.80	W 104 1 7.44
	4154.00	0.18	112.96	4152.34	-41.30	41.65	-6.03	0.54	42.09	351.77	456422.77	638589.75	N 32 15 15.80	W 104 1 7.44
	4249.00	0.34	173.24	4247.34	-40.97	41.32	-5.86	0.31	41.73	351.93	456422.43	638589.92	N 32 15 15.80	W 104 1 7.44
	4343.00	0.28	248.11	4341.34	-40.60	40.95	-6.04	0.40	41.39	351.61	456422.07	638589.74	N 32 15 15.80	W 104 1 7.44
	4437.00	0.28	90.01	4435.34	-40.51	40.86	-6.02	0.58	41.31	351.61	456421.98	638589.76	N 32 15 15.80	W 104 1 7.44
	4532.00	0.28	214.99	4530.33	-40.33	40.67	-5.93	0.52	41.10	351.71	456421.79	638589.86	N 32 15 15.79	W 104 1 7.44
	4627.00	0.26	250.42	4625.33	-40.05	40.41	-6.26	0.17	40.89	351.19	456421.53	638589.52	N 32 15 15.79	W 104 1 7.44
	4722.00	0.26	352.10	4720.33	-40.18	40.55	-6.49	0.42	41.07	350.90	456421.67	638589.29	N 32 15 15.79	W 104 1 7.45
	4816.00	0.22	209.12	4814.33	-40.23	40.61	-6.14	0.48	41.14	350.78	456421.72	638589.17	N 32 15 15.79	W 104 1 7.45
	4911.00	0.24	112.97	4909.33	-39.99	40.37	-6.52	0.36	40.89	350.83	456421.49	638589.26	N 32 15 15.79	W 104 1 7.45
	5006.00	0.23	271.93	5004.33	-39.92	40.30	-6.52	0.40	40.82	350.80	456421.42	638589.26	N 32 15 15.79	W 104 1 7.45
	5101.00	0.23	80.84	5099.33	-39.96	40.34	-6.53	0.48	40.86	350.81	456421.45	638589.25	N 32 15 15.79	W 104 1 7.45
	5195.00	0.15	306.88	5193.33	-40.07	40.44	-6.44	0.37	40.95	350.95	456421.56	638589.34	N 32 15 15.79	W 104 1 7.44
	5290.00	0.21	177.37	5288.33	-39.96	40.34	-6.53	0.34	40.87	350.80	456421.46	638589.25	N 32 15 15.79	W 104 1 7.45
	5385.00	0.18	117.74	5383.33	-39.76	40.14	-6.45	0.19	40.65	350.65	456421.25	638589.32	N 32 15 15.79	W 104 1 7.44
	5480.00	0.08	356.69	5478.33	-39.80	40.17	-6.53	0.15	40.68	350.64	456421.29	638589.37	N 32 15 15.79	W 104 1 7.44
	5574.00	0.11	335.09	5572.33	-39.95	40.32	-6.45	0.05	40.83	350.91	456421.44	638589.33	N 32 15 15.79	W 104 1 7.44
	5669.00	0.11	254.78	5667.33	-40.00	40.38	-6.58	0.15	40.91	350.75	456421.49	638589.20	N 32 15 15.79	W 104 1 7.45
	5764.00	0.09	187.91	5762.33	-39.90	40.28	-6.67	0.12	40.83	350.59	456421.40	638589.11	N 32 15 15.79	W 104 1 7.45
	5859.00	0.13	51.50	5857.33	-39.89	40.27	-6.60	0.22	40.81	350.69	456421.39	638589.18	N 32 15 15.79	W 104 1 7.45
	5953.00	0.15	36.61	5951.33	-40.06	40.44	-6.44	0.04	40.95	350.95	456421.55	638589.34	N 32 15 15.79	

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (NUS)	Easting (EUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Wolfcamp Intersection	9552.00	10.66	270.31	9515.63	-7.21	27.89	-412.68	0.47	413.62	273.87	456409.01	638163.13	N 32 15 15.68 W 104 1 12.16	
	9647.00	10.70	272.10	9608.98	-6.70	28.26	-430.28	0.35	431.21	273.76	456409.38	638165.53	N 32 15 15.68 W 104 1 12.38	
	9742.00	10.71	273.77	9702.33	-6.72	29.16	-447.90	0.33	448.85	273.73	456410.28	638147.91	N 32 15 15.69 W 104 1 12.59	
	9756.52	10.70	273.78	9716.60	-6.77	29.34	-450.60	0.07	451.55	273.73	456410.46	638145.22	N 32 15 15.69 W 104 1 12.62	
	9836.00	10.65	273.85	9794.70	-7.01	30.32	-465.29	0.07	466.27	273.73	456411.44	638130.53	N 32 15 15.70 W 104 1 12.79	
	9931.00	10.77	273.06	9888.05	-7.19	31.38	-482.91	0.20	483.93	273.72	456412.50	638112.91	N 32 15 15.72 W 104 1 12.99	
	10025.00	10.76	270.47	9980.39	-6.87	31.94	-501.49	0.49	501.49	273.65	456413.06	638096.37	N 32 15 15.72 W 104 1 13.06	
	10120.00	10.37	264.69	10073.78	-5.30	31.24	-517.83	1.21	518.78	273.45	456412.36	638077.99	N 32 15 15.72 W 104 1 13.40	
	10180.00	10.39	262.51	10132.80	-3.56	30.03	-528.58	0.66	529.43	273.25	456411.15	638067.25	N 32 15 15.70 W 104 1 13.53	
	10277.70	12.02	238.36	10228.69	3.80	23.54	-545.98	5.04	546.49	272.47	456404.66	638049.84	N 32 15 15.64 W 104 1 13.73	
Actual KOP	10308.00	12.87	232.46	10258.28	7.77	19.83	-551.35	5.04	551.70	272.06	456400.95	638044.48	N 32 15 15.60 W 104 1 13.79	
	10404.00	19.11	185.11	10350.88	30.52	-2.44	-561.27	14.52	561.28	269.75	456378.68	638034.55	N 32 15 15.38 W 104 1 13.91	
	10499.00	24.57	173.95	10439.07	65.81	-37.62	-560.58	7.20	561.84	266.16	456343.51	638035.25	N 32 15 15.03 W 104 1 13.90	
	10594.00	34.57	177.44	10521.60	112.07	-84.30	-557.28	10.68	563.62	261.40	456296.82	638036.54	N 32 15 14.57 W 104 1 13.86	
	10649.00	39.05	177.34	10565.62	144.87	-117.22	-555.78	8.15	568.01	258.09	456263.91	638040.04	N 32 15 14.25 W 104 1 13.85	
	10689.00	42.31	177.28	10595.95	170.82	-143.26	-554.56	8.15	572.76	255.52	456237.87	638041.27	N 32 15 13.99 W 104 1 13.83	
	10784.00	49.45	178.67	10662.05	238.72	-211.37	-552.20	7.59	591.27	249.05	456169.77	638043.63	N 32 15 13.32 W 104 1 13.81	
	10879.00	55.48	180.10	10719.90	313.88	-286.66	-551.43	6.46	621.49	242.53	456094.48	638044.40	N 32 15 12.57 W 104 1 13.80	
	10974.00	61.08	179.61	10769.83	394.55	-367.44	-551.21	5.91	662.45	236.31	456013.71	638044.61	N 32 15 11.77 W 104 1 13.80	
	11070.00	71.01	182.70	10808.77	482.12	-455.02	-553.07	10.75	716.19	230.56	455926.13	638042.75	N 32 15 10.90 W 104 1 13.83	
100' FNL Crossing	11165.00	85.36	182.59	10828.17	574.86	-547.67	-557.35	15.11	781.40	225.50	455833.50	638038.48	N 32 15 9.99 W 104 1 13.88	
	11230.00	88.01	181.79	10831.92	639.74	-612.51	-559.83	4.26	829.80	222.43	455768.66	638036.00	N 32 15 9.35 W 104 1 13.91	
	11291.00	90.38	180.75	10832.78	700.71	-673.48	-561.18	4.24	876.64	219.80	455707.70	638034.65	N 32 15 8.74 W 104 1 13.93	
	11387.00	91.29	182.68	10831.38	796.67	-769.42	-564.05	2.22	954.02	216.24	455611.76	638031.77	N 32 15 7.79 W 104 1 13.97	
	11483.00	89.51	182.56	10830.71	892.86	-865.32	-568.44	1.86	1035.32	213.30	455515.88	638027.39	N 32 15 6.85 W 104 1 14.02	
	11578.00	89.90	182.83	10831.20	987.66	-960.21	-572.91	1.00	1118.13	210.82	455420.99	638022.92	N 32 15 5.91 W 104 1 14.07	
	11673.00	89.77	181.40	10831.47	1082.65	-1055.14	-576.41	1.51	1202.32	208.65	455326.07	638019.42	N 32 15 4.97 W 104 1 14.12	
	11768.00	90.10	180.90	10831.58	1177.61	-1150.12	-578.32	0.63	1287.33	206.69	455231.09	638017.51	N 32 15 4.03 W 104 1 14.14	
	11863.00	89.64	178.88	10831.80	1272.47	-1245.12	-578.14	2.18	1372.79	204.91	455136.11	638017.69	N 32 15 3.09 W 104 1 14.15	
	11958.00	90.13	179.53	10831.99	1372.28	-1340.11	-576.82	0.86	1458.97	203.29	455041.12	638019.01	N 32 15 2.15 W 104 1 14.13	
330' FSL Crossing	12053.00	89.62	179.04	10832.20	1462.09	-1435.10	-575.63	0.74	1548.24	201.86	454946.14	638020.19	N 32 15 1.21 W 104 1 14.12	
	12148.00	90.04	178.75	10832.48	1556.08	-1530.08	-573.80	0.54	1634.13	200.56	454851.17	638022.03	N 32 15 0.27 W 104 1 14.10	
	12243.00	90.28	178.39	10832.21	1651.60	-1625.05	-571.43	0.46	1722.59	199.37	454756.20	638024.40	N 32 14 59.33 W 104 1 14.08	
	12338.00	90.58	178.88	10831.50	1746.33	-1720.02	-569.17	0.60	1811.74	198.31	454661.24	638026.66	N 32 14 58.39 W 104 1 14.06	
	12433.00	90.37	179.16	10830.71	1841.12	-1815.00	-567.54	0.37	1901.67	197.36	454566.27	638028.28	N 32 14 57.45 W 104 1 14.04	
	12529.00	90.59	179.60	10829.91	1936.94	-1910.99	-566.50	0.51	1993.19	196.51	454470.28	638029.32	N 32 14 55.50 W 104 1 14.03	
	12624.00	90.54	179.81	10828.97	2031.79	-2005.99	-566.01	0.23	2084.31	195.76	454375.03	638029.81	N 32 14 55.56 W 104 1 14.03	
	12719.00	90.30	179.59	10828.27	2126.64	-2100.98	-565.52	0.34	2175.76	195.07	454280.31	638030.31	N 32 14 54.62 W 104 1 14.03	
	12814.00	90.10	179.55	10827.94	2221.49	-2195.98	-564.81	0.21	2267.45	194.43	454185.32	638031.01	N 32 14 53.68 W 104 1 14.02	
	12909.00	90.36	179.83	10827.56	2316.33	-2290.38	-564.31	0.39	2359.45	193.84	454090.33	638031.52	N 32 14 52.74 W 104 1 14.02	
Final MWD Survey	13004.00	90.64	179.38	10826.73	2411.18	-2385.97	-563.65	0.56	2451.64	193.29	453995.35	638032.17	N 32 14 51.80 W 104 1 14.02	
	13099.00	90.59	179.45	10825.71	2506.00	-2480.96	-562.68	0.09	2543.97	192.78	453900.36	638033.14	N 32 14 50.86 W 104 1 14.01	
	13194.00	89.91	179.38	10825.30	2600.82	-2575.95	-561.71	0.72	2636.49	192.30	453805.38	638034.11	N 32 14 49.92 W 104 1 14.00	
	13289.00	90.18	179.06	10825.22	2695.63	-2670.94	-560.42	0.44	2729.10	191.85	453710.39	638035.41	N 32 14 48.98 W 104 1 13.99	
	13384.00	90.90	180.13	10824.37	2790.47	-2765.94	-559.75	1.36	2821.01	191.44	453615.41	638036.08	N 32 14 48.04 W 104 1 13.98	
	13480.00	90.57	180.42	10823.10	2886.36	-2861.93	-560.21	0.46	2916.24	191.08	453519.43	638035.62	N 32 14 47.09 W 104 1 13.99	
	13575.00	90.42	179.55	10822.28	2981.24	-2956.92	-560.18	0.93	3009.52	190.73	453424.44	638035.64	N 32 14 46.15 W 104 1 13.99	
	13670.00	90.63	179.30	10821.41	3076.06	-3051.91	-559.23	0.34	3102.73	190.38	453329.46	638036.60	N 32 14 45.21 W 104 1 13.99	
	13765.00	87.92	177.94	10822.61	3170.79	-3146.87	-556.94	3.19	3195.77	190.04	453234.51	638038.88	N 32 14 44.27 W 104 1 13.96	
	13860.00	89.51	178.50	10824.74	3265.45	-3241.79	-553.99	1.77	3288.79	189.70	453139.59	638041.83	N 32 14 43.33 W 104 1 13.93	
Pre to TD	13955.00	89.42	178.47	10825.62	3360.16	-3336.76	-551.48	1.01	3382.02	189.38	453044.64	638044.34	N 32 14 42.39 W 104 1 13.91	
	14050.00	89.92	178.92	10826.17	3454.91	-3431.73	-549.32	0.71	3475.42	189.09	452949.67	638046.51	N 32 14 41.45 W 104 1 13.88	
	14145.00	91.77	180.49	10824.77	3549.75	-3526.71	-548.83	2.55	3569.16	188.85	452854.70	638047.00	N 32 14 40.51 W 104 1 13.88	
	14240.00	90.90	180.66	10822.56	3644.65	-3621.68	-549.78	0.93	3663.17	188.63	452759.74	638046.04	N 32 14 39.57 W 104 1 13.90	
	14335.00	91.34	181.22	10820.70	3739.57	-3716.65	-551.34	0.75	3757.32	188.44	452664.78	638044.49	N 32 14 38.63 W 104 1 13.92	
	14430.00	91.88	180.37	10818.03	3834.47	-3811.60	-552.66	1.06	3851.46	188.25	452569.83	638043.17	N 32 14 37.69 W 104 1 13.94	
	14526.00	91.41	181.76	10815.28	3930.38	-3907.54	-554.44	1.53	39					

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Closure (ft)	Closure Azimuth (°)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Survey Error Model:	ISCWSA Rev 3 *** 3-D 95.000% Confidence 2.7955 sigma													
Survey Program:														
Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type		Borehole / Survey					
	1	0.000	25.000	1/98.425	26.400	26.400	GYD_GC+DROP+OH-Depth Only		Depth CC 6.7 Federal Com 43H / Oxy Depth CC 6.7 Federal Com 43H Gyro+MWD 0' to 20998MD					
	1	25.000	25.000	Act Stns	26.400	26.400	GYD_GC+DROP+OH-Depth Only		Depth CC 6.7 Federal Com 43H / Oxy Depth CC 6.7 Federal Com 43H Gyro+MWD 0' to 20998MD					
	1	25.000	445.300	Act Stns	26.400	26.400	GYD_GC+DROP+OH		Depth CC 6.7 Federal Com 43H / Oxy Depth CC 6.7 Federal Com Depth CC 6.7 Federal Com 43H /					
	1	445.300	20998.000	Act Stns	26.400	26.400	A010Mb_MWD+IFR1+SAG+MS		Oxy Depth CC 6.7 Federal Com 43H Gyro+MWD 0' to 20998MD					

Well Name: DEPTH CC 6-7 FEDERAL COM	Well Location: T23S / R29E / SEC 31 / SESE / 32.2542753 / -104.0187142	County or Parish/State: EDDY / NM
Well Number: 43H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM13996, NMNM77018	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001546781	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Subsequent Report

Sundry ID: 2723071

Type of Submission: Subsequent Report

Date Sundry Submitted: 03/28/2023

Date Operation Actually Began: 12/21/2022

Type of Action: Workover Operations

Time Sundry Submitted: 01:35

Actual Procedure: RUPU 12/21/22, RIH & clean out to PBTD @ 20956', pressure test casing to 6000# for 30 min, good test. RIH & perf @ 10882-20858' Total 1200 holes. Frac in 40 stages w/ 141806BBL Produced Water + 275196BBL Brackish Water (> 1,000 mg/I TDS and 10,000 mg/I TDS) w/ 24986320# sand, RD NexTier 1/4/23. Well ready to produce 1/9/23. OXY USA Inc. requests a tubing exception while continuing to flow back this well. The estimated date of tubing install is 09/30/2023. Formation Tops for this completion are as follows: TOP MD TVD RUSTLER 106 106 SALADO 402 402 CASTILE 1270 1270 DELAWARE 2795 2795 BELL CANYON 2826 2826 CHERRY CANYON 3718 3716 BRUSHY CANYON 4947 4945 BONE SPRING 6500 6499 1ST BONE SPRING 7516 7512 2ND BONE SPRING 8264 8249 3RD BONE SPRING 9416 9382 WOLFCAMP 9779 9739

Received by OCD: 4/12/2023 2:43:41 PM

Page 8 of 14

Well Name: DEPTH CC 6-7 FEDERAL COM	Well Location: T23S / R29E / SEC 31 / SESE / 32.2542753 / -104.0187142	County or Parish/State: EDDY / NM
Well Number: 43H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM13996, NMNM77018	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001546781	Well Status: Drilling Well	Operator: OXY USA INCORPORATED

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a


Operator Electronic Signature: JANA MENDIOLA	Signed on: MAR 28, 2023 01:34 PM
Name: OXY USA INCORPORATED	
Title: Regulatory Coordinator	
Street Address: PO BOX 50250	
City: Midland	State: TX
Phone: (432) 685-5936	
Email address: Janalyn_mendiola@oxy.com	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752345972	BLM POC Email Address: jshepard@blm.gov
Disposition: Accepted	Disposition Date: 04/06/2023
Signature: Jonathon Shepard	

Submit To Appropriate District Office Two Copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505		State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505			Form C-105 Revised April 3, 2017					
WELL COMPLETION OR RECOMPLETION REPORT AND LOG								1. WELL API NO. 30-015-46781		
4. Reason for filing: ☒ COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only) ☐ C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC)								2. Type of Lease ☐ STATE ☐ FEE ☒ FED/INDIAN		
								3. State Oil & Gas Lease No.		
7. Type of Completion: ☒ NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OTHER								5. Lease Name or Unit Agreement Name DEPTH CC 6-7 FEDERAL COM		
8. Name of Operator: OXY USA INC.								6. Well Number: 43H		
10. Address of Operator: P.O. BOX 50250 MIDLAND, TX 79710								11. Pool name or Wildcat PURPLE SAGE WOLFCAMP		
12. Location	Unit Ltr	Section	Township	Range	Lot	Feet from the	N/S Line	Feet from the	E/W Line	County
Surface:	P	31	23S	29E		25	SOUTH	1074	EAST	EDDY
BH:	O	7	24S	29E		280	SOUTH	1654	EAST	EDDY
13. Date Spudded 09/03/2022	14. Date T.D. Reached 12/10/2022		15. Date Rig Released 12/15/2022			16. Date Completed (Ready to Produce) 01/09/2023		17. Elevations (DF and RKB, RT, GR, etc.) 2958' GL		
18. Total Measured Depth of Well 20998'M 10879'V			19. Plug Back Measured Depth 20956'M 10878'V			20. Was Directional Survey Made? YES		21. Type Electric and Other Logs Run CBL		
22. Producing Interval(s), of this completion - Top, Bottom, Name 10882-20858' WOLFCAMP										
23. CASING RECORD (Report all strings set in well)										
CASING SIZE		WEIGHT LB./FT.		DEPTH SET		HOLE SIZE		CEMENTING RECORD		AMOUNT PULLED
13.375" J55		54.5		459'		17.5"		1145sx-surf circ		
9.625" HCL80		40		10198'		12.25"		3544sx-surf circ		
7" x 5.5" P110		32#, 20#		20976'		8.75" x 8.5"		2404sx-TOC@9698'		
24. LINER RECORD										
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN		25. TUBING RECORD		SIZE		DEPTH SET
26. Perforation record (interval, size, and number) Perf @ 10882-20858' Total 1200 holes, Hole Size=0.42						27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.				
						DEPTH INTERVAL		AMOUNT AND KIND MATERIAL USED		
						10882-20858'		141806BBL Produced Water + 275196BBL Brackish Water (> 1,000 mg/l TDS and 10,000 mg/l TDS) w/ 24986320# sand		
28. PRODUCTION										
Date First Production 01/15/2023		Production Method (Flowing, gas lift, pumping - Size and type pump) Flowing				Well Status (Prod. or Shut-in) Prod.				
Date of Test 02/10/2023	Hours Tested 24 hrs.	Choke Size 45/128	Prod'n For Test Period	Oil - Bbl 2082	Gas - MCF 14147	Water - Bbl. 4223	Gas - Oil Ratio 6795			
Flow Tubing Press.	Casing Pressure 3530	Calculated 24-Hour Rate	Oil - Bbl. 2082	Gas - MCF 14147	Water - Bbl. 4223	Oil Gravity - API - (Corr.)				
29. Disposition of Gas (Sold, used for fuel, vented, etc.) SOLD								30. Test Witnessed By		
31. List Attachments WBD										
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit.								33. Rig Release Date:		
34. If an on-site burial was used at the well, report the exact location of the on-site burial:										
Latitude _____ Longitude _____ NAD83										
I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief										
Signature:  Printed										
Name: <u>Jana Mendiola</u>				Title: <u>Sr. Regulatory Analyst</u>				Date: <u>04/12/2023</u>		
E-mail Address: <u>janalyn_mendiola@oxy.com</u>										

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well and not later than 60 days after completion of closure. When submitted as a completion report, this shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 11, 12 and 26-31 shall be reported for each zone.

Southeastern New Mexico		Northwestern New Mexico	
T. Rustler 106'	T. Bell Canyon 2826'	T. Ojo Alamo	T. Penn A "
T. Salado 402'	T. Strawn	T. Kirtland	T. Penn. "B"
T. Castile 1270'	T. Atoka	T. Fruitland	T. Penn. "C"
T. Delaware 2795'	T. Miss	T. Pictured Cliffs	T. Penn. "D"
T. Cherry Canyon 3718'	T. Devonian	T. Cliff House	T. Leadville
T. Brushy Canyon 4947'	T. Silurian	T. Menefee	T. Madison
T. Grayburg	T. Montoya	T. Point Lookout	T. Elbert
T. San Andres	T. Simpson	T. Mancos	T. McCracken
T. Glorieta	T. McKee	T. Gallup	T. Ignacio Otzte
T. Paddock	T. Ellenburger	Base Greenhorn	T. Granite
T. Blinebry	T. Gr. Wash	T. Dakota	
T. Tubb	T. Delaware Sand	T. Morrison	
T. Drinkard	T. Bone Spring 6500'	T. Todilto	
T. Abo	T. 1 st Bone Spring 7516'	T. Entrada	
T. Wolfcamp 9779'	T. 2 nd Bone Spring 8264'	T. Wingate	
T. Penn	T. 3 rd Bone Spring 9416'	T. Chinle	
T. Cisco (Bough C)	T.	T. Permian	

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

No. 4, from.....to.....


Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

From	To	Thickness In Feet	Lithology

From	To	Thickness In Feet	Lithology

OXY USA Inc.
Depth CC 6-7 Federal Com 43H
API No. 30-015-46781

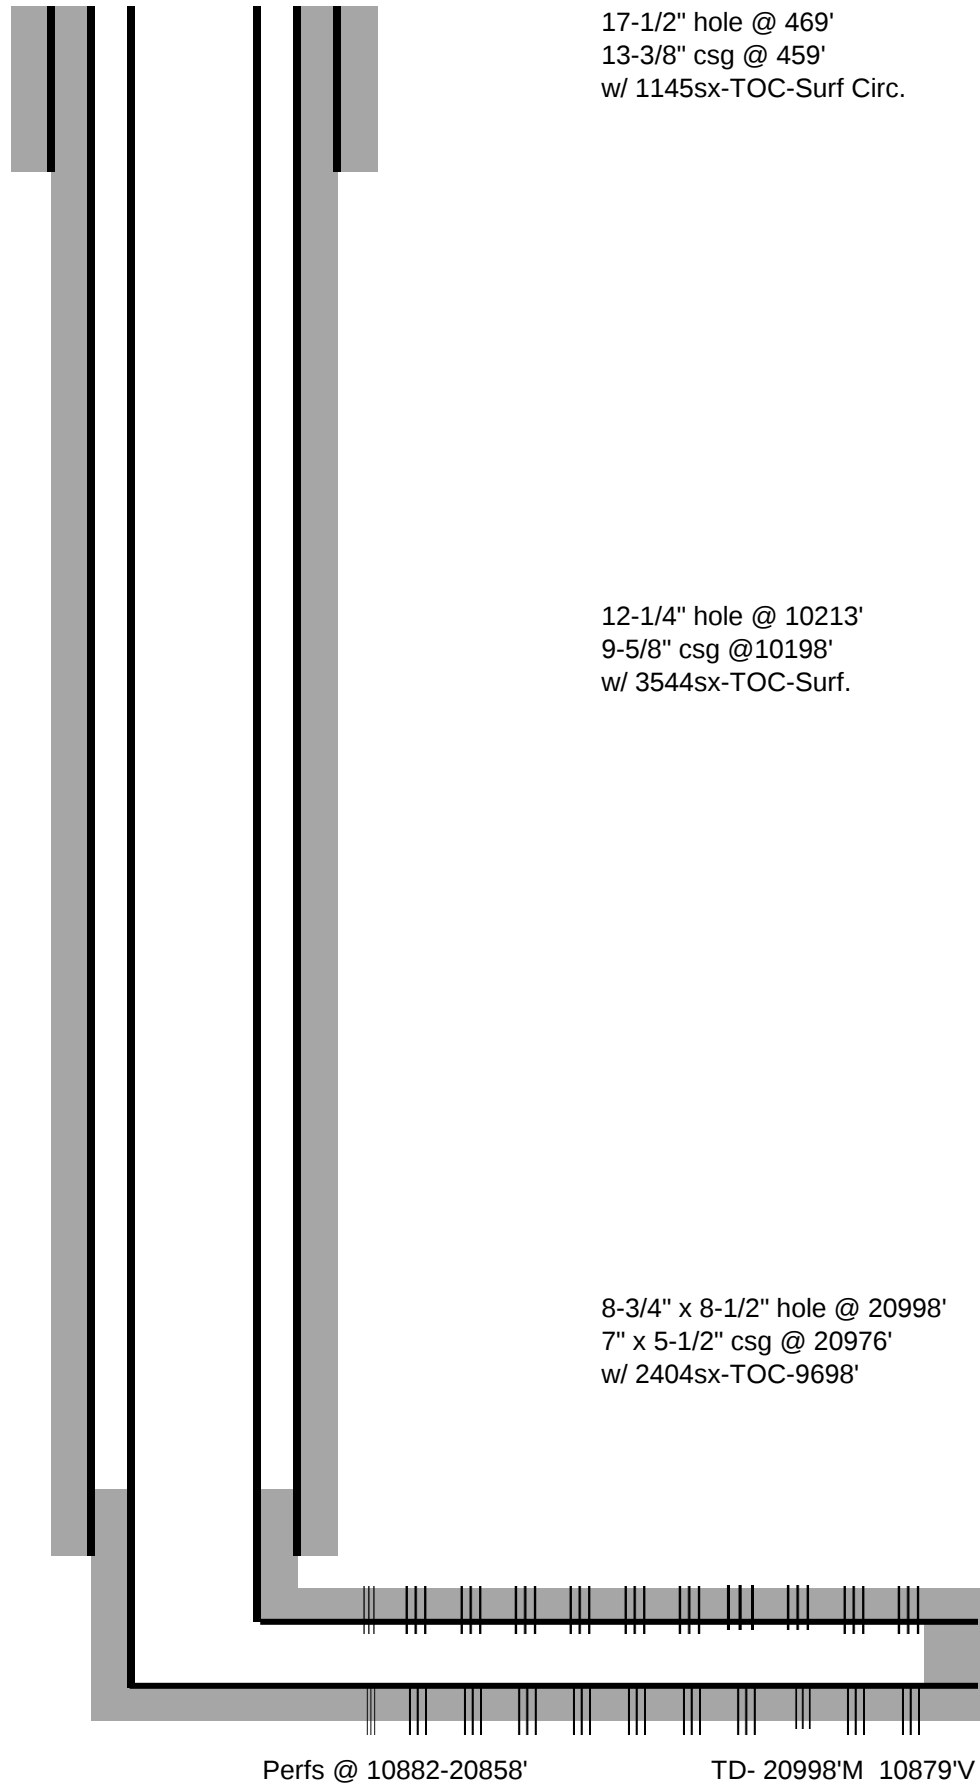

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 206951

ACKNOWLEDGMENTS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 206951
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 206951

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 206951
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	File 3160-4 Completion Report within 10 days to NMOCD after BLM approval.	4/21/2023