

Submit 1 Copy To Appropriate District Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO.
1. Type of Well: Oil Well ☐ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☐ FEE ☐
2. Name of Operator		6. State Oil & Gas Lease No.
3. Address of Operator		7. Lease Name or Unit Agreement Name
4. Well Location Unit Letter _____: _____ feet from the _____ line and _____ feet from the _____ line Section _____ Township _____ Range _____ NMPM _____ County _____		8. Well Number
11. Elevation (Show whether DR, RKB, RT, GR, etc.)		9. OGRID Number
		10. Pool name or Wildcat

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Set CIBP @ 4000' & DB 35' cmt. - WOC & tag - Comingled zones

TA status may be granted after a successful MIT test is performed. Contact the OCD to schedule the test so it may be witnessed.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE alicia fulton TITLE _____ DATE _____

Type or print name _____ E-mail address: _____ PHONE: _____

For State Use Only

APPROVED BY: [Signature] TITLE Staff Manager DATE 8/8/23
 Conditions of Approval (if any):



WBD Current

Well Name: D STATE #022 (GRAYBURG/SAN ANDRES)

Reference Datum: KB

API/Surface Loc 3001531966	Surface Legal Location P-25-17S-28E 840 FSL 330 FEL	Field Name Crow Flats (BP)	State/Province New Mexico	Well Purpose Production
Spud Date 10/10/2001 20:30	Original KB Elevation (ft) 3,684.0	Ground Elevation (ft) 3,666.0	KB-Ground Distance (ft) 18.0	
PBTD (All) (ftKB) Original Hole - 4,543		Total Depth All (TVD) (ftKB) Original Hole - 4,557.5		

Production, D STATE #22 (GRAYBURG/SAN ANDRES) - Original Hole, 7/25/2023 2:41:56 PM		Wellbore Sections						
MD (ftKB)	Vertical schematic (actual)	Section Description Surface		Size (in) 12 1/4	Act Top (ftKB) 18.0	Act Btm (ftKB) 472.0	Start Date 10/10/2001	
		Section Description Prod 1		Size (in) 7 7/8	Act Top (ftKB) 472.0	Act Btm (ftKB) 4,560.0	Start Date 10/13/2001	
Casing Strings								
		Csg Des	OD (in)	Wt/Len (lb/ft)	Grade	Set Depth (ftKB)		
		Surface	8 5/8	24.00	J-55	470.00		
		Prod 1	5 1/2	17.00	J-55	4,543.00		
Cement Stages								
		String Surface, 470.00ftKB, 8 5/8				Top Depth (ftKB) 74.00	Bottom Depth (ftKB) 472.00	
		String Surface, 470.00ftKB, 8 5/8				Top Depth (ftKB) 18.00	Bottom Depth (ftKB) 74.00	
		String Prod 1, 4,543.00ftKB, 5 1/2				Top Depth (ftKB) 18.00	Bottom Depth (ftKB) 4,560.00	
Tubing Strings								
		Tubing Description Tubing - Production	Run Date 4/10/2017	String Length (ft) 4,360.98		Set Depth (ftKB) 4,379.0		
		Item Des	Jts	Make/Manufacturer	Model	OD (in)	Wt (lb/ft)	Grade Len (ft)
		Tubing	91		T&C Upset	2 7/8	6.50	J-55 2,875.61
		Anchor/catcher	1		Baker	5 1/2	23.00	N-80 2.75
		Tubing	45		T&C Upset	2 7/8	6.50	J-55 1,449.25
		Tubing	1	EnduraAlloy	T&C Upset	2 7/8	6.50	J-55 32.27
		Seat Nipple	1		SN	2 7/8	7.20	N-80 1.10
Rod Strings								
		Rod Description Rod	Run Date 4/10/2017	String Length (ft) 4,361.6		Set Depth (ftKB) 4,363.6		
		Item Des	Jts	Make/Mfg.	Model	OD (in)	Wt (lb/ft)	Grade Len (ft)
		Polished Rod	1		Sprayloy	1 1/2	6.10	PRS 26.00
		Pony Rod	1		Full	7/8	2.90	HS 4.00
		Pony Rod	1		Full	7/8	2.90	HS 6.00
		Sucker Rod	16 0		S88 W/SM CPLG/FULL	7/8	2.15	HS 4,000.00
		Sinker Bar	12		K-Bars	1 1/2	6.01	K 300.00
		Rod Centralizer	1		Stab Bar	3/4	2.88	KD 4.00
		Right Hand Release	1		RHR	3/4	2.88	N/A 0.60
		Rod Insert Pump	1		Rod Pump	2	0.00	N/A 20.00
		Strainer Nipple	1		Strainer	1 3/4	0.00	N/A 1.00
Other In Hole								
		Description		OD (in)	Top (ftKB)	Btm (ftKB)	Run Date	
Perforations								
		Date	Type	Top (ftKB)	Btm (ftKB)	Prop?	Shot Dens (shots/ft)	Entered Shot Total
		3/25/2013	PERFORATED	2,959	3,163	No	1.0	20
		11/2/2001	PERFORATED	4,060	4,303	No	1.0	21
Plug Back Total Depths								
		Date	Type	Depth (ftKB)			Depth (TVD) (ftKB)	
		3/25/2013	Cement Plug	4,543			4,541	
Comments								
		Comment HOBBS (CARNES)						
		Comment 2010-MARBOB						
		Comment 43538-1						
		Comment EUNICE (MILLS)						

2.0

18.0

27.9

32.2

38.1

74.1

470.1

472.1

823.2

1,698.2

2,434.1

2,893.7

2,896.3

2,959.0

3,163.1

3,932.1

4,038.1

4,060.0

4,303.1

4,337.9

4,341.9

4,342.5

4,345.5

4,362.5

4,363.5

4,378.0

4,378.9

4,543.0

4,560.0

Remedial Cement;
18.00-74.00 ftKB
Surface; 8 5/8 in;
18.00-470.00 ftKB; J-
55; 24.00 lb/ft
Primary Cement;
74.00-472.00 ftKB

Prod 1; 5 1/2 in;
18.00-4,543.00 ftKB;
J-55; 17.00 lb/ft
Primary Cement;
18.00-4,560.00 ftKB

Yates (final)

Queen (final)

San_Andres (fi...

Glorieta (final)

Plug Back Total
Depth; 4,543.00;
3/25/2013

Primary Cement
(plug); 4,543.00-
4,560.00 ftKB



WBD Current

Well Name: D STATE #022 (GRAYBURG/SAN ANDRES)

Reference Datum: KB

API/Surface Loc 3001531966	Surface Legal Location P-25-17S-28E 840 FSL 330 FEL	Field Name Crow Flats (BP)	State/Province New Mexico	Well Purpose Production
Spud Date 10/10/2001 20:30	Original KB Elevation (ft) 3,684.0	Ground Elevation (ft) 3,666.0	KB-Ground Distance (ft) 18.0	
PBTD (All) (ftKB) Original Hole - 4,543		Total Depth All (TVD) (ftKB) Original Hole - 4,557.5		

Production, D STATE #22 (GRAYBURG/SAN ANDRES) - Original Hole, 7/25/2023 2:41:57 PM		Comments
MD (ftKB)		Comment Bad pump. Pulled 3-2013 tbq leak & 9-2014 tbq leak. Both pulls found hole in blast jt.
Vertical schematic (actual)		Failure Analysis the pull tube was broken, sand in the pump with worn seats. It was the initial completion.
<		

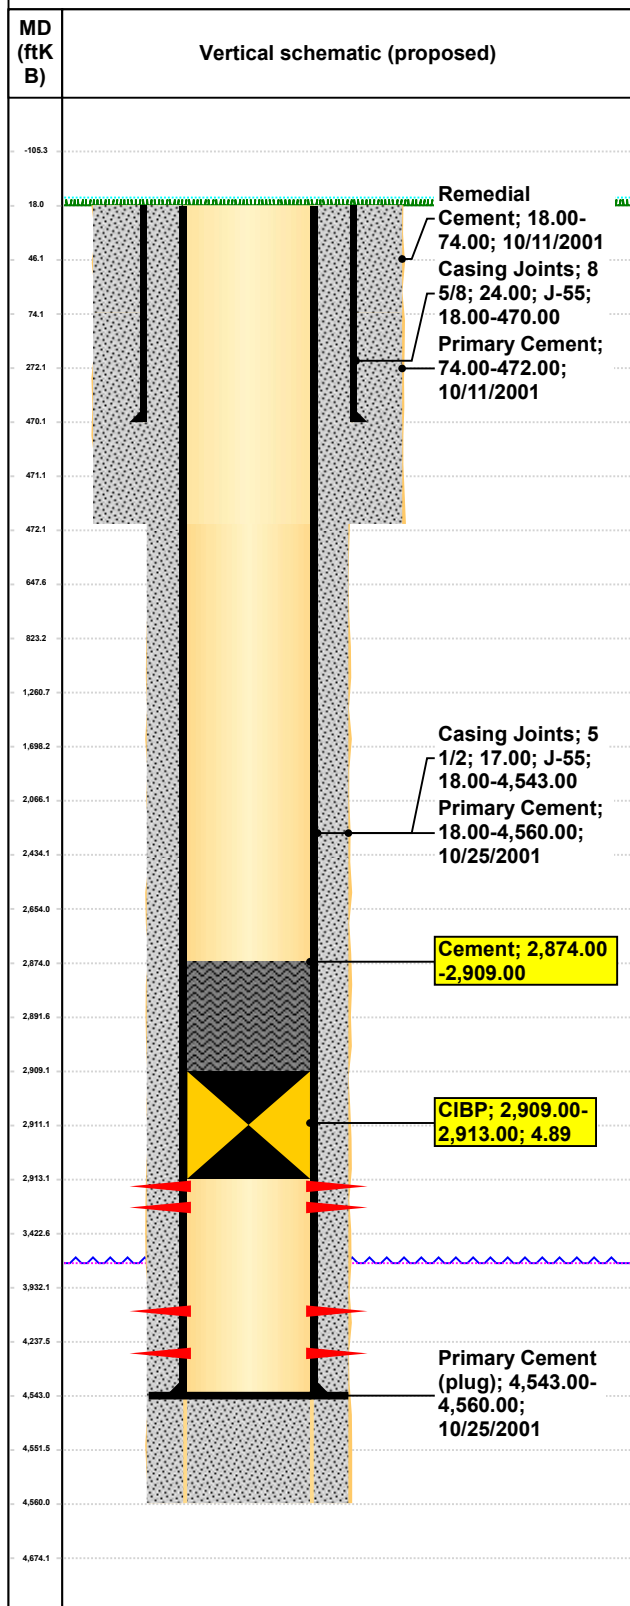


WBD Proposed - TA

Well Name: D STATE #022 (GRAYBURG/SAN ANDRES)

Reference Datum: KB

API/Surface Loc 3001531966	Surface Legal Location P-25-17S-28E 840 FSL 330 FEL	Field Name Crow Flats (BP)	State/Province New Mexico	Well Purpose Production
Spud Date 10/10/2001 20:30	Original KB Elevation (ft) 3,684.0	Ground Elevation (ft) 3,666.0	KB-Ground Distance (ft) 18.0	
PBTD (All) (ftKB) Original Hole - 4,543		Total Depth All (TVD) (ftKB) Original Hole - 4,557.5		

Production, D STATE #22 (GRAYBURG/SAN ANDRES) -
Original Hole, 7/25/2023 2:56:55 PM

Wellbore Sections

Section Des	Size (in)	Act Top (ftKB)	Act Btm (ftKB)	Start Date
Surface	12 1/4	18.0	472.0	10/10/2001
Prod 1	7 7/8	472.0	4,560.0	10/13/2001

Casing Strings

Csg Des	OD (in)	Wt/Len (lb/ft)	Grade	Set Depth (ftKB)
Surface	8 5/8	24.00	J-55	470.00
Prod 1	5 1/2	17.00	J-55	4,543.00

Cement Stages

Des	String	Top (ftKB)	Btm (ftKB)	Start Date
Primary Cement	Surface, 470.00ftKB, 8 5/8	74.00	472.00	10/11/2001
Remedial Cement	Surface, 470.00ftKB, 8 5/8	18.00	74.00	10/11/2001
Primary Cement	Prod 1, 4,543.00ftKB, 5 1/2	18.00	4,560.00	10/25/2001
	Prod 1, 4,543.00ftKB, 5 1/2	2,874.00	2,909.00	

Tubing Strings

Tubing Description		Run Date		String Length (ft)	Set Depth (ftKB)		
Item Des	Jts	Make/Manufacturer	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)

Rod Strings

Rod Strings							
Rod Description	Run Date		String Length (ft)	Set Depth (ftKB)			
Item Des	Jts	Make/Mfg.	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)

Other In Hole

Des	Icon	OD (in)	Top (ftKB)	Btm (ftKB)	Run Date
CIBP		4.89	2,909	2,913	7/25/2023

Perforations

Date	Type	Top (ftKB)	Btm (ftKB)	Prop?	Shot Dens (shots/ft)	Entered Shot Total
3/25/2013	PERFORATED	2,959	3,163	No	1.0	20
11/2/2001	PERFORATED	4,060	4,303	No	1.0	21

Plug Back Total Depths

Date	Type	Depth (ftKB)	Depth (TVD) (ftKB)
3/25/2013	Cement Plug	4,543	4,541

Schematic Annotations

Start Date	Depth (ftKB)	Annotation
------------	--------------	------------

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 248151

CONDITIONS

Operator: APACHE CORPORATION 303 Veterans Airpark Ln Midland, TX 79705	OGRID: 873
	Action Number: 248151
	Action Type: [C-103] NOI Temporary Abandonment (C-103I)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	8/8/2023