

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Form C-104
Revised August 1, 2011

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit one copy to appropriate District Office

☒ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address DJR Operating, LLC 1 Road 3263 Aztec, NM 87410		² OGRID Number 371838	
		³ Reason for Filing Code/ Effective Date NW	
⁴ API Number 30 – 043 – 21482	⁵ Pool Name Counselors Gallup-Dakota		⁶ Pool Code 13379
⁷ Property Code 325207	⁸ Property Name Gallo Canyon Unit		⁹ Well Number 309H

II. ¹⁰ Surface Location

Ul or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
M	26	23N	6W		881	South	481	West	Sandoval

¹¹ Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	36	23N	6W		351	South	1969	West	Sandoval
¹² Lse Code F	¹³ Producing Method Code F	¹⁴ Gas Connection Date 10/31/2023	¹⁵ C-129 Permit Number	¹⁶ C-129 Effective Date	¹⁷ C-129 Expiration Date				

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address	²⁰ O/G/W
248440	Western Refining Company, LP	O
	15 Smith Road, Suite 1000, Midland, TX 79705	
151618	Enterprise Field Services, LLC	G
	Post Office Box 4324, Houston, TX 77210	

IV. Well Completion Data

²¹ Spud Date 04/12/2022	²² Ready Date 10/08/2023	²³ TD 14,524’ MD 4,990’ TVD	²⁴ PBDT 14,508’ MD 4,990’ TVD	²⁵ Perforations 5,679’ – 14,450’ MD 4,992’ – 5,077’ TVD Frac Sleeve @ 14,483’	²⁶ DHC, MC
²⁷ Hole Size	²⁸ Casing & Tubing Size	²⁹ Depth Set	³⁰ Sacks Cement		
12.25	9.625” 36# J55	378’	109		
8.75	7” 26# J55	5,456’	602		
6.125	4.5” 11.6# P110	TOL: 5,210’ BOL: 14,519’	809		
	Tubing: 2.875” 6.5# L80	5,404’			

V. Well Test Data

³¹ Date New Oil 10/08/2023	³² Gas Delivery Date 10/31/2023	³³ Test Date 10/10/2023	³⁴ Test Length 24	³⁵ Tbg. Pressure 615	³⁶ Csg. Pressure 1022
³⁷ Choke Size 48/64	³⁸ Oil 244	³⁹ Water 1732	⁴⁰ Gas 817		⁴¹ Test Method Flowing

⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: <i>Shaw-Marie Ford</i>		OIL CONSERVATION DIVISION Approved by: <i>PATRICIA MARTINEZ</i>	
Printed name: Shaw-Marie Ford		Title: <i>PETROLEUM SPECIALIST</i>	
Title: Regulatory Specialist		Approval Date: <i>1/24/2024</i>	
E-mail Address: sford@djrlle.com			
Date: 12/18/2023	Phone: 505-716-3297		

DISTRICT I1625 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-6161 Fax: (575) 393-0720**DISTRICT II**811 S. First St., Artesia, N.M. 88210
Phone: (505) 748-1283 Fax: (575) 748-9720**DISTRICT III**1000 Rio Brazos Rd., Aztec, N.M. 87410
Phone: (505) 334-6178 Fax: (505) 334-6170**DISTRICT IV**1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462State of New Mexico
Energy, Minerals & Natural Resources DepartmentForm C-102
Revised August 1, 2011OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505Submit one copy to appropriate
District Office☐ AMENDED REPORT
☒ AS-DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-043-21482	² Pool Code 13379	³ Pool Name COUNSELORS GALLUP - DAKOTA POOL
⁴ Property Code 325207	⁵ Property Name GALLO CANYON UNIT	⁶ Well Number 309H
⁷ GRID No. 371838	⁸ Operator Name DJR OPERATING, LLC	⁹ Elevation 6954'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	26	23N	6W		881'	SOUTH	481'	WEST	SANDOVAL

¹¹ Bottom Hole Location If Different From Surface


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	36	23N	6W		351'	SOUTH	1969'	WEST	SANDOVAL

¹² Dedicated Acres
PENETRATED SPACING UNIT;
SEC 26: SW/4 & SW/SE (200 AC.); SEC 35:
NE/NW, NE/4 & NE/SE (240 AC.); SEC 36:
SW/NW & SW/4 (200 AC.) = 640 ACRES¹³ Joint or Infill¹⁴ Consolidation Code¹⁵ Order No.

R-13718A

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16

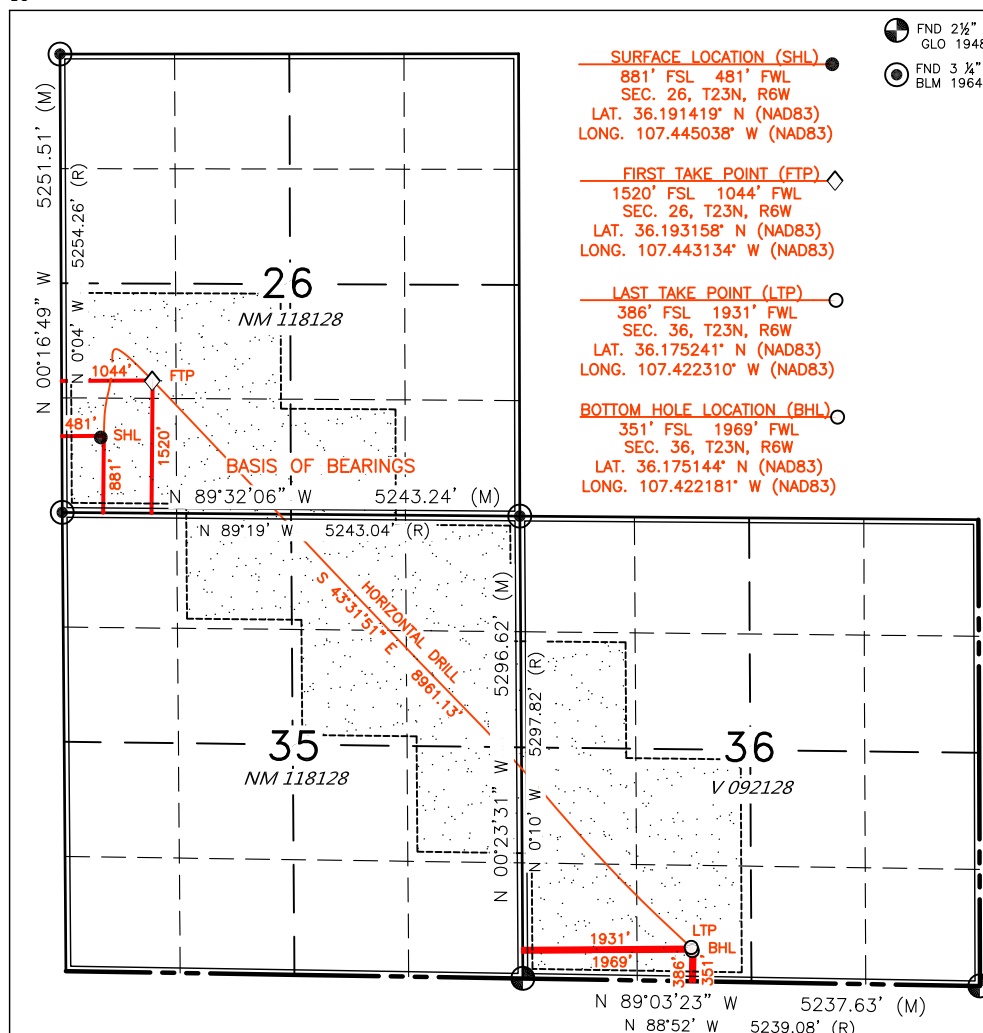FND 2 1/2" BC
GLO 1948
FND 3 1/4" BC
BLM 1964

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Shaw-Marie Ford 08/21/23
Signature DateShaw-Marie Ford
Printed Namesford@djrlc.com
E-mail Address

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

AUGUST 26, 2022

Date of Survey
Signature and Seal of Professional Surveyor:

Certificate Number 11393



DJR

Gallo Canyon

M26A 2306

309H

End of Well Report



www.scientificdrilling.com





Company Name: DJR Operating
Project: Gallo Canyon Unit
Site: M26A 2306 Pad
Well: Gallo Canyon #309H
Wellbore: Original Drilling



WELL DETAILS: Gallo Canyon #309H

GL 6954' & RKB 26' @ 6980ft (H&P 443) 6954						
+N/-S	+E/-W	North	East	Lat	Long	
0	0	1889203.04	2837666.59	36.19141900	-107.44503800	5

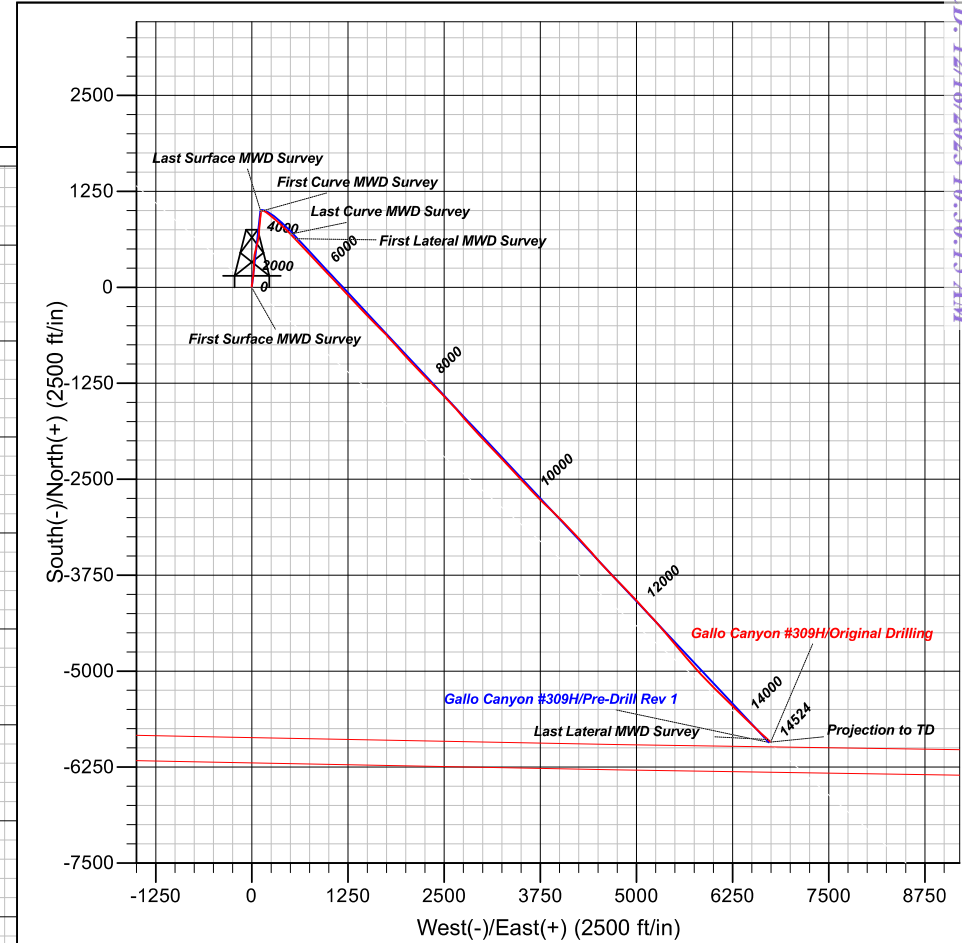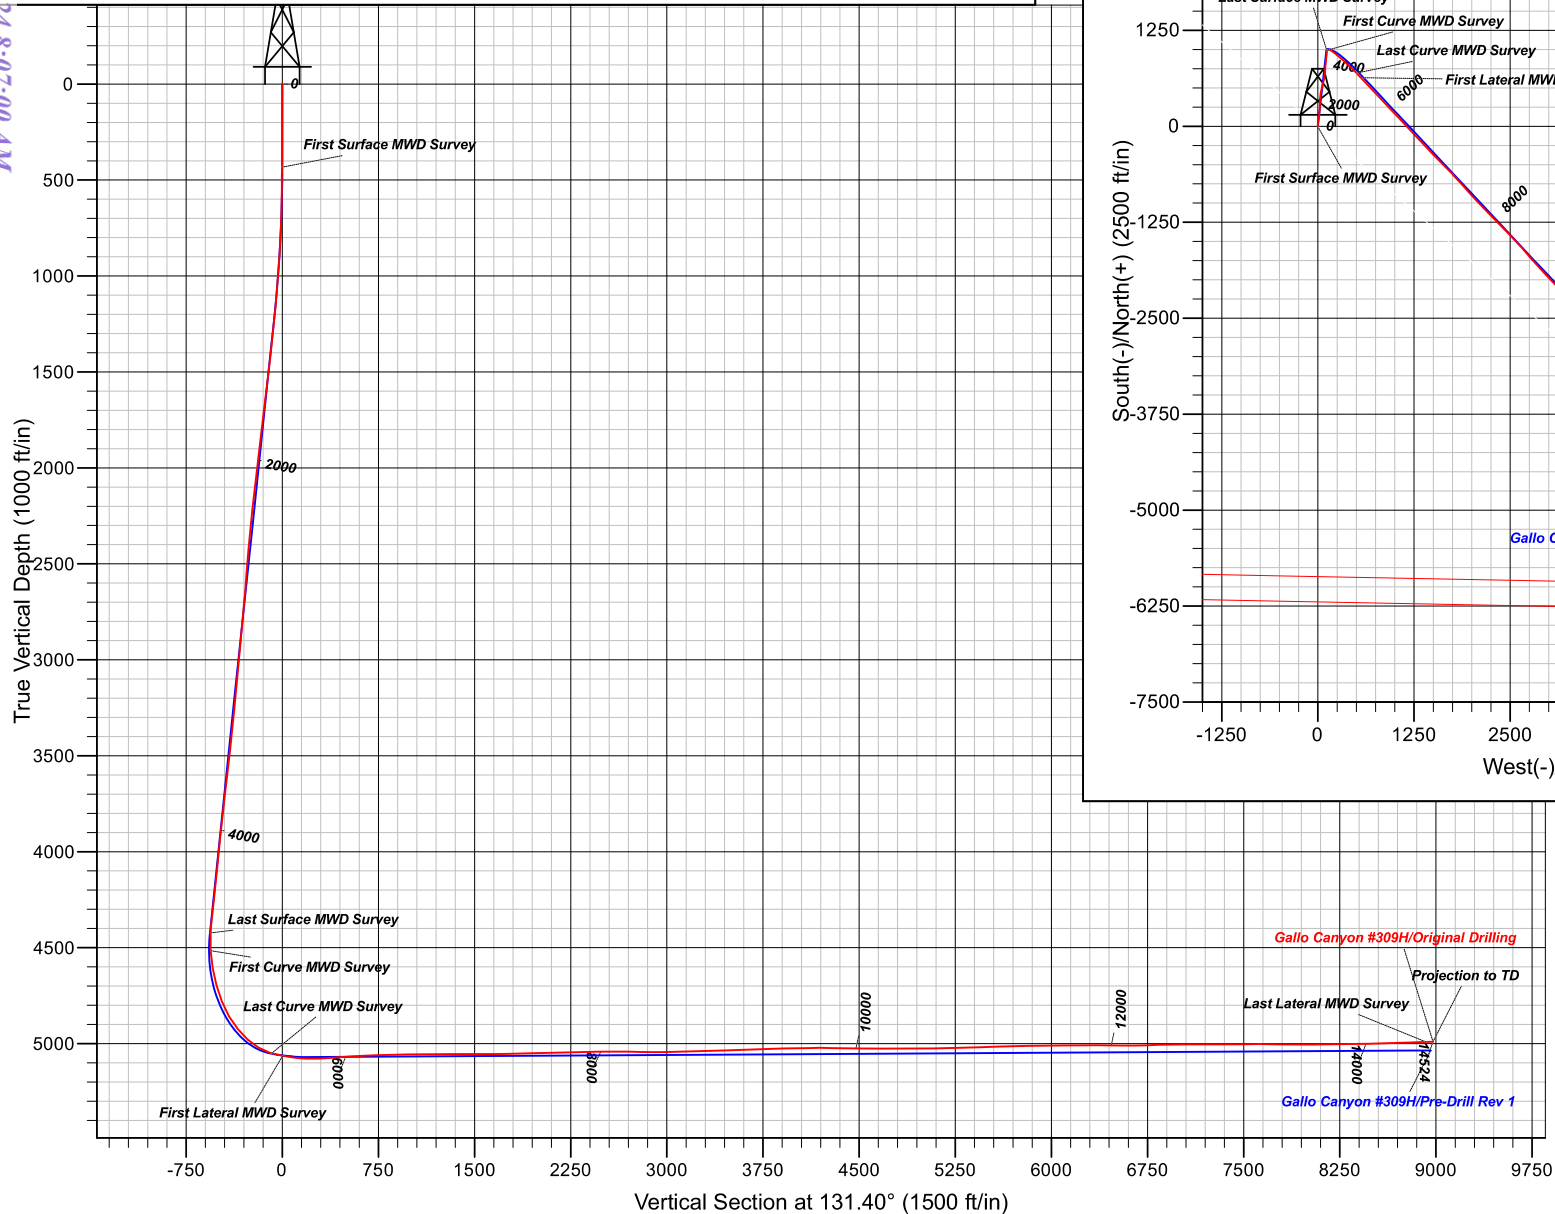

Design: Original Drilling (Gallo Canyon #309H/Original Drilling)

Created By: Janie Collins Date: 14:35, August 25 2022

PROJECT DETAILS: Gallo Canyon Unit

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Western Zone

System Datum: Mean Sea Level
Local North: True



DJR Operating

Gallo Canyon Unit

M26A 2306 Pad

Gallo Canyon #309H - Slot 5

Original Drilling

Design: Original Drilling

Standard Survey Report

25 August, 2022



www.scientificdrilling.com





Scientific Drilling Survey Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Gallo Canyon #309H - Slot 5
Project:	Gallo Canyon Unit	TVD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Site:	M26A 2306 Pad	MD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Well:	Gallo Canyon #309H	North Reference:	True
Wellbore:	Original Drilling	Survey Calculation Method:	Minimum Curvature
Design:	Original Drilling	Database:	Grand Junction

Project	Gallo Canyon Unit, Sandoval County, NM		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	M26A 2306 Pad		
Site Position:		Northing:	1,889,165.63 usft
From:	Lat/Long	Easting:	2,837,595.93 usft
Position Uncertainty:	0 ft	Slot Radius:	13.20 in
		Latitude:	36.19131700
		Longitude:	-107.44527800
		Grid Convergence:	0.23 °

Well	Gallo Canyon #309H - Slot 5		
Well Position	+N/-S	0 ft	Northing:
	+E/-W	0 ft	Easting:
Position Uncertainty	0 ft	Wellhead Elevation:	ft
		Latitude:	36.19141900
		Longitude:	-107.44503800
		Ground Level:	6954 ft

Wellbore	Original Drilling		
Magnetics	Model Name	Sample Date	Declination
			(°)
	HDGM2022	8/18/2022	8.47
			Dip Angle (°)
			62.67
			Field Strength (nT)
			49,003.70000000

Design	Original Drilling		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
		Tie On Depth:	0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(ft)	(ft)	(ft)
	0	0	0
			Direction (°)
			131.40

Survey Program	Date	8/25/2022		
From	To	Survey (Wellbore)	Tool Name	Description
(ft)	(ft)			
433	4553	Survey #1 - Surface MWD Survey (Original)	MWD+HDGM	OWSG MWD + HDGM
4648	5418	Survey #2 - Curve MWD Survey (Original)	MWD+HDGM	OWSG MWD + HDGM
5505	14,524	Survey #3 - Lateral MWD Survey (Original)	MWD+HDGM	OWSG MWD + HDGM

Survey										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Vertical	Dogleg	Build	Turn	
Depth	(°)	(°)	Depth	(ft)	(ft)	Section	Rate	Rate	Rate	
(ft)			(ft)			(ft)	(°/100usft)	(°/100usft)	(°/100usft)	
0	0.00	0.00	0	0	0	0	0.00	0.00	0.00	
433	0.53	317.67	433	1	-1	-2	0.12	0.12	0.00	
524	1.64	358.98	524	3	-2	-3	1.42	1.22	45.40	
615	3.04	9.29	615	7	-1	-5	1.60	1.54	11.33	
706	4.59	8.68	706	13	0	-9	1.70	1.70	-0.67	
798	6.24	6.42	797	21	1	-14	1.81	1.79	-2.46	
889	8.42	5.88	888	33	2	-20	2.40	2.40	-0.59	
979	11.31	7.27	976	48	4	-29	3.22	3.21	1.54	
1070	13.61	6.65	1065	68	6	-40	2.53	2.53	-0.68	



Scientific Drilling

Survey Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Gallo Canyon #309H - Slot 5
Project:	Gallo Canyon Unit	TVD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Site:	M26A 2306 Pad	MD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Well:	Gallo Canyon #309H	North Reference:	True
Wellbore:	Original Drilling	Survey Calculation Method:	Minimum Curvature
Design:	Original Drilling	Database:	Grand Junction

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
1160	13.76	7.11	1152	89	9	-52	0.21	0.17	0.51	
1250	14.64	8.62	1240	111	12	-64	1.06	0.98	1.68	
1342	16.13	8.50	1328	135	15	-78	1.62	1.62	-0.13	
1433	16.87	7.13	1416	160	19	-92	0.92	0.81	-1.51	
1524	17.13	4.65	1503	187	22	-107	0.85	0.29	-2.73	
1616	16.86	3.61	1591	214	24	-124	0.44	-0.29	-1.13	
1709	16.63	3.27	1680	240	25	-140	0.27	-0.25	-0.37	
1800	15.18	1.53	1767	265	26	-156	1.68	-1.59	-1.91	
1895	15.78	3.59	1859	291	27	-172	0.86	0.63	2.17	
1989	15.03	2.50	1949	316	29	-187	0.86	-0.80	-1.16	
2084	15.48	1.42	2041	341	30	-203	0.56	0.47	-1.14	
2179	14.05	358.03	2133	365	29	-219	1.76	-1.51	-3.57	
2274	14.33	3.15	2225	388	30	-234	1.35	0.29	5.39	
2369	14.29	13.65	2317	411	33	-247	2.73	-0.04	11.05	
2464	15.50	13.25	2409	435	39	-259	1.28	1.27	-0.42	
2559	16.34	12.59	2500	460	45	-271	0.90	0.88	-0.69	
2654	13.63	10.98	2592	484	50	-283	2.89	-2.85	-1.69	
2749	16.26	14.96	2684	508	55	-295	2.97	2.77	4.19	
2844	17.26	13.72	2775	535	62	-307	1.12	1.05	-1.31	
2939	16.99	12.65	2866	562	68	-320	0.44	-0.28	-1.13	
3034	14.84	11.04	2957	588	74	-333	2.31	-2.26	-1.69	
3129	15.53	14.51	3049	612	79	-345	1.20	0.73	3.65	
3224	16.53	12.91	3140	637	85	-357	1.15	1.05	-1.68	
3318	15.03	6.50	3230	662	90	-371	2.44	-1.60	-6.82	
3413	13.51	3.60	3322	686	92	-385	1.77	-1.60	-3.05	
3508	14.61	3.18	3415	709	93	-399	1.16	1.16	-0.44	
3603	14.37	1.96	3507	733	94	-414	0.41	-0.25	-1.28	
3698	16.66	5.48	3598	758	96	-429	2.61	2.41	3.71	
3792	15.73	4.41	3688	784	98	-445	1.04	-0.99	-1.14	
3887	14.71	4.18	3780	809	100	-460	1.08	-1.07	-0.24	
3982	16.27	6.67	3872	834	103	-475	1.78	1.64	2.62	
4077	15.65	6.21	3963	860	106	-490	0.67	-0.65	-0.48	
4172	13.82	6.02	4055	884	108	-504	1.93	-1.93	-0.20	
4267	15.08	7.93	4147	908	111	-517	1.42	1.33	2.01	
4362	15.69	5.32	4238	933	114	-531	0.97	0.64	-2.75	
4457	15.67	5.03	4330	958	116	-546	0.09	-0.02	-0.31	
4488	14.94	5.22	4360	966	117	-551	2.36	-2.35	0.61	
4553	12.20	11.51	4423	981	119	-560	4.78	-4.22	9.68	
4648	13.54	71.28	4516	995	132	-559	13.47	1.41	62.92	
4742	15.91	105.14	4607	995	155	-542	9.35	2.52	36.02	
4837	21.25	125.57	4697	982	181	-513	8.78	5.62	21.51	
4932	31.06	126.81	4782	957	215	-472	10.34	10.33	1.31	
5027	41.98	126.82	4859	923	260	-415	11.49	11.49	0.01	



Scientific Drilling

Survey Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Gallo Canyon #309H - Slot 5
Project:	Gallo Canyon Unit	TVD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Site:	M26A 2306 Pad	MD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Well:	Gallo Canyon #309H	North Reference:	True
Wellbore:	Original Drilling	Survey Calculation Method:	Minimum Curvature
Design:	Original Drilling	Database:	Grand Junction

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5122	50.37	131.22	4924	880	313	-347	9.44	8.83	4.63
5217	59.18	134.50	4979	827	370	-269	9.69	9.27	3.45
5309	68.16	135.87	5020	769	428	-187	9.85	9.76	1.49
5407	78.50	134.59	5048	702	494	-94	10.62	10.55	-1.31
5418	80.07	135.33	5050	694	502	-83	15.73	14.27	6.73
5505	82.61	135.75	5063	633	562	3	2.96	2.92	0.48
5568	83.88	136.23	5070	588	605	65	2.15	2.02	0.76
5662	87.79	136.84	5077	520	670	159	4.21	4.16	0.65
5756	90.90	136.99	5078	451	734	252	3.31	3.31	0.16
5851	91.58	136.87	5076	382	799	347	0.73	0.72	-0.13
5945	94.06	137.24	5072	313	863	440	2.67	2.64	0.39
6039	91.98	136.92	5067	244	927	534	2.24	-2.21	-0.34
6134	91.91	136.33	5063	175	992	628	0.63	-0.07	-0.62
6228	91.44	136.87	5061	107	1057	722	0.76	-0.50	0.57
6322	91.51	136.11	5058	39	1121	815	0.81	0.07	-0.81
6417	90.07	136.92	5057	-30	1187	910	1.74	-1.52	0.85
6511	90.27	137.39	5057	-99	1251	1003	0.54	0.21	0.50
6606	90.81	137.89	5056	-169	1315	1098	0.77	0.57	0.53
6701	90.94	137.54	5054	-239	1378	1192	0.39	0.14	-0.37
6795	89.77	135.82	5054	-308	1443	1286	2.21	-1.24	-1.83
6890	89.43	135.38	5054	-376	1509	1381	0.59	-0.36	-0.46
6984	90.20	134.93	5055	-442	1576	1474	0.95	0.82	-0.48
7078	90.13	135.54	5054	-509	1642	1568	0.65	-0.07	0.65
7173	89.87	135.82	5054	-577	1708	1663	0.40	-0.27	0.29
7267	91.17	138.16	5054	-646	1772	1756	2.85	1.38	2.49
7361	91.21	138.15	5052	-716	1835	1850	0.04	0.04	-0.01
7456	91.21	138.26	5050	-786	1898	1944	0.12	0.00	0.12
7550	90.74	137.38	5048	-856	1961	2037	1.06	-0.50	-0.94
7644	90.64	136.70	5047	-925	2025	2131	0.73	-0.11	-0.72
7738	90.87	137.18	5046	-994	2090	2225	0.57	0.24	0.51
7833	90.91	136.63	5044	-1063	2155	2319	0.58	0.04	-0.58
7928	90.84	135.92	5043	-1132	2220	2414	0.75	-0.07	-0.75
8022	90.34	134.81	5042	-1198	2286	2507	1.30	-0.53	-1.18
8117	89.97	135.54	5042	-1266	2353	2602	0.86	-0.39	0.77
8211	89.50	136.42	5042	-1333	2419	2696	1.06	-0.50	0.94
8305	89.09	135.81	5043	-1401	2484	2790	0.78	-0.44	-0.65
8399	89.56	137.42	5044	-1469	2548	2883	1.78	0.50	1.71
8493	90.00	135.96	5045	-1538	2613	2977	1.62	0.47	-1.55
8588	91.74	138.17	5043	-1607	2677	3071	2.96	1.83	2.33
8682	91.94	139.19	5040	-1678	2739	3165	1.11	0.21	1.09
8776	89.80	139.43	5039	-1749	2801	3258	2.29	-2.28	0.26
8870	91.44	138.70	5038	-1820	2862	3351	1.91	1.74	-0.78
8965	91.41	137.74	5035	-1891	2926	3445	1.01	-0.03	-1.01



Scientific Drilling

Survey Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Gallo Canyon #309H - Slot 5
Project:	Gallo Canyon Unit	TVD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Site:	M26A 2306 Pad	MD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Well:	Gallo Canyon #309H	North Reference:	True
Wellbore:	Original Drilling	Survey Calculation Method:	Minimum Curvature
Design:	Original Drilling	Database:	Grand Junction

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9059	90.84	136.49	5033	-1960	2990	3539	1.46	-0.61	-1.33
9153	91.38	136.25	5032	-2028	3054	3632	0.63	0.57	-0.26
9247	91.91	136.08	5029	-2096	3119	3726	0.59	0.56	-0.18
9342	90.91	136.55	5027	-2164	3185	3820	1.16	-1.05	0.49
9436	90.40	137.00	5026	-2233	3249	3914	0.72	-0.54	0.48
9531	90.77	137.23	5025	-2302	3314	4009	0.46	0.39	0.24
9625	91.04	136.68	5023	-2371	3378	4102	0.65	0.29	-0.59
9719	89.93	137.40	5022	-2440	3442	4196	1.41	-1.18	0.77
9814	89.19	137.24	5023	-2510	3507	4290	0.80	-0.78	-0.17
9909	89.53	137.28	5024	-2580	3571	4385	0.36	0.36	0.04
9999	89.30	136.42	5025	-2645	3633	4474	0.99	-0.26	-0.96
10,090	88.93	135.91	5026	-2711	3696	4565	0.69	-0.41	-0.56
10,180	90.37	135.23	5027	-2775	3759	4655	1.77	1.60	-0.76
10,271	90.84	135.02	5026	-2840	3823	4745	0.57	0.52	-0.23
10,361	90.27	133.17	5025	-2902	3888	4835	2.15	-0.63	-2.06
10,451	90.27	133.92	5025	-2964	3953	4925	0.83	0.00	0.83
10,542	89.46	134.03	5025	-3027	4018	5016	0.90	-0.89	0.12
10,633	90.00	135.75	5025	-3092	4083	5107	1.98	0.59	1.89
10,722	90.97	136.85	5025	-3156	4144	5196	1.65	1.09	1.24
10,812	91.71	138.18	5023	-3222	4205	5285	1.69	0.82	1.48
10,902	91.21	136.94	5020	-3289	4266	5375	1.49	-0.56	-1.38
10,994	91.44	137.22	5018	-3356	4328	5466	0.39	0.25	0.30
11,085	91.78	137.98	5016	-3423	4390	5557	0.91	0.37	0.84
11,175	90.17	139.00	5014	-3491	4449	5646	2.12	-1.79	1.13
11,265	90.54	138.71	5013	-3558	4509	5735	0.52	0.41	-0.32
11,355	90.81	138.50	5012	-3626	4568	5824	0.38	0.30	-0.23
11,447	90.77	137.42	5011	-3694	4630	5916	1.17	-0.04	-1.17
11,538	90.37	136.15	5010	-3761	4692	6006	1.46	-0.44	-1.40
11,629	90.37	135.08	5010	-3826	4756	6097	1.18	0.00	-1.18
11,719	90.40	134.81	5009	-3889	4819	6187	0.30	0.03	-0.30
11,810	90.37	136.54	5008	-3954	4883	6278	1.90	-0.03	1.90
11,900	89.56	136.97	5008	-4020	4945	6367	1.02	-0.90	0.48
11,990	89.70	136.93	5009	-4086	5006	6457	0.16	0.16	-0.04
12,080	89.09	137.51	5010	-4152	5067	6546	0.94	-0.68	0.64
12,170	90.54	138.45	5010	-4218	5127	6636	1.92	1.61	1.04
12,260	90.67	137.27	5009	-4285	5188	6725	1.32	0.14	-1.31
12,351	92.08	138.42	5007	-4353	5249	6816	2.00	1.55	1.26
12,441	91.11	139.04	5005	-4420	5308	6905	1.28	-1.08	0.69
12,532	89.73	140.11	5004	-4490	5367	6995	1.92	-1.52	1.18
12,623	89.87	139.71	5004	-4559	5426	7085	0.47	0.15	-0.44
12,714	89.80	139.55	5005	-4628	5485	7175	0.19	-0.08	-0.18
12,804	90.47	139.58	5004	-4697	5543	7264	0.75	0.74	0.03
12,895	89.63	139.93	5004	-4766	5602	7354	1.00	-0.92	0.38
12,985	91.54	140.85	5003	-4836	5659	7443	2.36	2.12	1.02



Scientific Drilling

Survey Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Gallo Canyon #309H - Slot 5
Project:	Gallo Canyon Unit	TVD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Site:	M26A 2306 Pad	MD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Well:	Gallo Canyon #309H	North Reference:	True
Wellbore:	Original Drilling	Survey Calculation Method:	Minimum Curvature
Design:	Original Drilling	Database:	Grand Junction

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
13,076	90.07	138.91	5002	-4905	5718	7533	2.67	-1.62	-2.13	
13,167	89.87	138.56	5002	-4974	5778	7623	0.44	-0.22	-0.38	
13,258	88.96	136.03	5003	-5041	5840	7714	2.95	-1.00	-2.78	
13,347	89.73	136.44	5004	-5105	5901	7802	0.98	0.87	0.46	
13,438	89.30	135.56	5005	-5170	5964	7893	1.08	-0.47	-0.97	
13,529	90.23	135.32	5005	-5235	6028	7984	1.06	1.02	-0.26	
13,620	90.64	135.07	5005	-5300	6092	8075	0.53	0.45	-0.27	
13,711	90.54	134.64	5004	-5364	6157	8166	0.49	-0.11	-0.47	
13,802	90.37	133.72	5003	-5427	6222	8256	1.03	-0.19	-1.01	
13,894	90.44	133.07	5002	-5491	6289	8348	0.71	0.08	-0.71	
13,986	90.50	134.06	5001	-5554	6356	8440	1.08	0.07	1.08	
14,077	91.34	134.97	5000	-5618	6420	8531	1.36	0.92	1.00	
14,166	91.31	134.27	4998	-5680	6484	8620	0.79	-0.03	-0.79	
14,257	91.48	134.35	4996	-5744	6549	8711	0.21	0.19	0.09	
14,346	90.60	131.34	4994	-5804	6614	8800	3.52	-0.99	-3.38	
14,436	91.27	132.24	4993	-5864	6681	8890	1.25	0.74	1.00	
14,472	91.51	132.78	4992	-5889	6708	8926	1.64	0.67	1.50	
14,524	91.51	132.78	4990	-5924	6746	8978	0.00	0.00	0.00	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
309H Toe Rev 1	0.00	0.00	5036	-5925	6720	1,883,304.96	2,844,410.60	36.17514040	-107.42226770	
- hit/miss target										
- Shape										
- actual wellpath misses target center by 49ft at 14505ft MD (4991 TVD, -5911 N, 6732 E)										
- Circle (radius 100)										
309H Casing Rev 1	0.00	0.00	5055	702	532	1,889,906.78	2,838,195.80	36.19334636	-107.44323499	
- actual wellpath misses target center by 27ft at 5435ft MD (5053 TVD, 683 N, 513 E)										
- Point										
309H Heel Rev 1	0.00	0.00	5070	539	698	1,889,744.38	2,838,362.57	36.19289840	-107.44267200	
- actual wellpath misses target center by 34ft at 5668ft MD (5077 TVD, 516 N, 674 E)										
- Circle (radius 50)										



Scientific Drilling
Survey Report



Company:	DJR Operating	Local Co-ordinate Reference:	Well Gallo Canyon #309H - Slot 5
Project:	Gallo Canyon Unit	TVD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Site:	M26A 2306 Pad	MD Reference:	GL 6954' & RKB 26' @ 6980ft (H&P 443)
Well:	Gallo Canyon #309H	North Reference:	True
Wellbore:	Original Drilling	Survey Calculation Method:	Minimum Curvature
Design:	Original Drilling	Database:	Grand Junction

Design Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
433	433	1	-1	First Surface MWD Survey
4553	4423	981	119	Last Surface MWD Survey
4648	4516	995	132	First Curve MWD Survey
5418	5050	694	502	Last Curve MWD Survey
5505	5063	633	562	First Lateral MWD Survey
14,472	4992	-5889	6708	Last Lateral MWD Survey
14,524	4990	-5924	6746	Projection to TD

Checked By: _____ Approved By: _____ Date: _____

**Directional Survey Certification**

7237 Barton Drive
Casper, WY 82604
(307) 472-6621

Operator	DJR Operating
Well Name & No.	Gallo Canyon M26A 2306 309H
County & State	Sandoval, NM
SDI Job No.	OP.034946
Rig	H&P 443

I, Janie Collins, having personal knowledge of all the facts, hereby certify that the attached directional survey run from a measured depth of 433 feet to a measured depth of 14,524 feet is true and correct as determined from all available records.

A handwritten signature in blue ink, appearing to read 'Janie Collins', written over a horizontal line.

Signature

25-Aug-22

Date

Janie Collins

Colorado District Well Planner
Scientific Drilling International

Well Name: GALLO CANYON UNIT	Well Location: T23N / R6W / SEC 26 / SWSW / 36.191419 / -107.445038	County or Parish/State: SANDOVAL / NM
Well Number: 309H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM118128	Unit or CA Name: GalloCanyonUnit	Unit or CA Number: NMNM131017A
US Well Number: 3004321482	Well Status: Drilling Well	Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2757076

Type of Submission: Subsequent Report

Date Sundry Submitted: 10/18/2023

Date Operation Actually Began: 09/09/2023

Type of Action: Hydraulic Fracturing

Time Sundry Submitted: 02:16

Actual Procedure: Completion Sundry 8/16/23: Full function PT 4.5" x 7" casing L750 H9800 (30min) test good & recorded on chart. 9/9/23: Open well, increase pressure, AlphaSleeve opened. 9/19/23: Perf Plug & Frac 44 stages: 3 spf. 0.35" diameter from 5679' – 14450' MD (4992' – 5077' TVD). Total of 1100 open holes. As pumped: 68,569 bbls of fluid. 13,519,547 lbs of proppant. 114,588,904 scf of N2. 9/29/23: MIRU AWS 812. NU BOPE. Full function PT L300 H5000 (30min) test good & recorded on chart. TIH. Drill out plugs. TOH. 10/8/23: Change over tubing tools. PT 2k (15min) test good & recorded on chart. RIH with production string. Land 163 jts of 2.875" 6.5# L80 STC tubing. EOT: 5404'. Six GLVs set at 1638' – 2364' – 2991' – 3619' – 4246' – 4874'. TOH. ND BOPE. NU production tree & PT L400 H5000 (30min) test good & recorded on chart. Turn well over to production. Rig released on 10/9/23.

Well Name: GALLO CANYON UNIT	Well Location: T23N / R6W / SEC 26 / SWSW / 36.191419 / -107.445038	County or Parish/State: SANDOVAL / NM
Well Number: 309H	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMNM118128	Unit or CA Name: GalloCanyonUnit	Unit or CA Number: NMNM131017A
US Well Number: 3004321482	Well Status: Drilling Well	Operator: DJR OPERATING LLC

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAW-MARIE FORD	Signed on: OCT 18, 2023 02:16 PM
Name: DJR OPERATING LLC	
Title: Regulatory Specialist	
Street Address: 1 ROAD 3263	
City: AZTEC	State: NM
Phone: (505) 632-3476	
Email address: SFORD@DJRLLC.COM	

Field

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: MATTHEW H KADE	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647736	BLM POC Email Address: MKADE@BLM.GOV
Disposition: Accepted	Disposition Date: 10/18/2023
Signature: Matthew Kade	



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Well Completion Print

12/18/2023

Operator Name DJR OPERATING LLC	Well Name GALLO CANYON UNIT	Well Number 309H	US Well Number 3004321482
SHL SWSW Sec 26 23N 6W	County SANDOVAL	State NM	Lease Number(s) NMNM118128
Well Type OIL WELL	Well Status Drilling Well	Agreement Name GalloCanyonUnit	Agreement Number(s) NMNM131017A
Allottee/Tribe Name	Well Pad Name GALLO CANYON UNIT	Well Pad Number 303H, 304H, 305H, 307H, 308H, 309H	APD ID 10400066972

Section 1 - General

Well Completion Report Id: 90020**Submission Date:** 11-03-2023**BLM Office:** Farmington Field Office**User:** SHAW-MARIE FORD**Title:** Regulatory Specialist**Federal/Indian:** FEDERAL**Lease Number:** NMNM118128**Lease Acres:****Agreement in place?:** YES**Federal or Indian Agreement:****Agreement Number:****Agreement Name:** GalloCanyonUnit**Additional Information****Keep this Well Completion Report confidential?:****APD Operator:** DJR OPERATING LLC

Section 2 - Well

Field/Pool or Exploratory:**Pool Name:** COUNSELORS GALLUP**Field Name:** BASIN MANCOS**Well Type:** OIL WELL**Spud Date:** 04-12-2022**Date Total Measured Depth Reached:** 08-23-2022**Drill & Abandon or Ready To Produce:** READY TO**Well Class:** HORIZONTAL

Operator Name DJR OPERATING LLC	Well Name GALLO CANYON UNIT	Well Number 309H	US Well Number 3004321482
SHL SWSW Sec 26 23N 6W	County SANDOVAL	State NM	Lease Number(s) NMNM118128
Well Type OIL WELL	Well Status Drilling Well	Agreement Name GalloCanyonUnit	Agreement Number(s) NMNM131017A
Allottee/Tribe Name	Well Pad Name GALLO CANYON UNIT	Well Pad Number 303H, 304H, 305H, 307H, 308H, 309H	APD ID 10400066972

Section 3 - Geologic

Formation Name	Lithology	Describe Lithology	Elevation	TVD	MD	Mineral Resources	Describe Mineral
OJO ALAMAO	SANDSTONE		0	1403	1420	USEABLE WATER	
KIRTLAND	SHALE		-1508	1508	1528	NONE	
FRUITLAND	COAL		-1719	1719	1746	NATURAL GAS	
PICTURED CLIFFS	SANDSTONE		-1941	1941	1975	USEABLE WATER	
LEWIS	SHALE		-2044	2044	2081	NONE	
CHACRA	SANDSTONE		-2807	2807	2869	NONE	
MENEFEE	COAL, SANDSTONE		-3475	3475	3558	NATURAL GAS	
POINT LOOKOUT	SANDSTONE		-4178	4178	4283	NONE	
MANCOS	SANDSTONE, SHALE		-4373	4373	4485	NONE	

Completion and Completed

Completion Data

Wellbore Code	Completion Code	Interval Number	Case Number	Lease Number	Well Completion Type	Describe Well Completion Type	Completion Status	Date Completed	Date First Produced	Formation	Interval Top (MD)	Interval Bottom (MD)	Interval Perforated?	Perforation Size	Number of Holes	Status of Interval
00	S1	1	NMNM131017A	NMNM118128	NEW		POW	10-08-2023	10-08-2023	MANCOS	5679	14450	Y	.35	1100	OPEN

Operator Name DJR OPERATING LLC	Well Name GALLO CANYON UNIT	Well Number 309H	US Well Number 3004321482
SHL SWSW Sec 26 23N 6W	County SANDOVAL	State NM	Lease Number(s) NMNM118128
Well Type OIL WELL	Well Status Drilling Well	Agreement Name GalloCanyonUnit	Agreement Number(s) NMNM131017A
Allottee/Tribe Name	Well Pad Name GALLO CANYON UNIT	Well Pad Number 303H, 304H, 305H, 307H, 308H, 309H	APD ID 10400066972

Treatment Data

Wellbore Code	Completion Code	Interval Number	Interval Treated?	Treatment Type	Tottle Fluid (bbls)	Total Proppant (lbs)	Treatment Remarks
00	S1	1	Y	FRAC	68569	13519547	Chemical Disclosure uploaded to FracFocus on 10/16/23.

Production Data

Wellbore Code	Completion Code	Interval Number	API Oil Gravity	Gas Gravity	Production Method	Describe Production	Disposition of Gas	Describe Disposition
00	S1	1			GAS LIFT		SOLD	

Test Data

Wellbore Code	Completion Code	Interval Number	Test Date	Hours Tested	24-Hour Rate Oil (bbls)	24-Hour Rate Gas (MCF)	24-Hour Rate Water(BWPD)	Gas-Oil Ratio (SCF/Bbl)	Choke Size	Tubing Pressure	Tubing Pressure Shut-In (psi)	Casing Pressure (psi)
00	S1	1	10/10/2023	24	244	817	1732	3348	48/64	615		1022

Operator Name DJR OPERATING LLC	Well Name GALLO CANYON UNIT	Well Number 309H	US Well Number 3004321482
SHL SWSW Sec 26 23N 6W	County SANDOVAL	State NM	Lease Number(s) NMNM118128
Well Type OIL WELL	Well Status Drilling Well	Agreement Name GalloCanyonUnit	Agreement Number(s) NMNM131017A
Allottee/Tribe Name	Well Pad Name GALLO CANYON UNIT	Well Pad Number 303H, 304H, 305H, 307H, 308H, 309H	APD ID 10400066972

Well Location

Survey Type: RECTANGULAR

Survey Number:

Datum: NAD83

Vertical Datum: NAVD88

Reference Datum: GL

	State	Meridian	County	Latitude	Longitude	Elevation (MSL)	MD (ft)	TVD (ft)	Lease Type	Lease Number	Plug TVD (ft)	Plug MD (ft)	Plug Type	NS-Foot	NS-Indicator	EW-Foot	EW-Indicator	Township	Range	Section	Aliquot/Lot/Tract
SHL	NEW MEXICO	NEW MEXICO PRINCIPAL	SANDOVAL	36.191419	-107.445038	6954	N/A	N/A	FEDERAL	NMNM118128				881	FSL	481	FWL	23N	6W	26	SWSW
KOP Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SANDOVAL	36.191419	-107.445038	6576	378	378	FEDERAL	NMNM118128				881	FSL	481	FWL	23N	6W	26	SWSW
PPP Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SANDOVAL	36.180902	-107.428873	1877	14450	5077	STATE	STATE				2407	FSL	1	FWL	23N	6W	36	NWSW
PPP Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SANDOVAL	36.188933	-107.438242	1877	14450	5077	FEDERAL	NMNM118128				1	FNL	2486	FWL	23N	6W	35	NENW
PPP Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SANDOVAL	36.193158	-107.443134	1962	5679	4992	FEDERAL	NMNM118128				1520	FSL	1044	FWL	23N	6W	26	NWSW
EXIT Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SANDOVAL	36.175241	-107.42231	1877	14450	5077	STATE	STATE				386	FSL	1931	FWL	23N	6W	36	SESW
BHL Well bore 00	NEW MEXICO	NEW MEXICO PRINCIPAL	SANDOVAL	36.175144	-107.422181	1964	14524	4990	STATE	STATE	4990	14508		351	FSL	1969	FWL	23N	6W	36	SESW

Operator Name DJR OPERATING LLC	Well Name GALLO CANYON UNIT	Well Number 309H	US Well Number 3004321482
SHL SWSW Sec 26 23N 6W	County SANDOVAL	State NM	Lease Number(s) NMNM118128
Well Type OIL WELL	Well Status Drilling Well	Agreement Name GalloCanyonUnit	Agreement Number(s) NMNM131017A
Allottee/Tribe Name	Well Pad Name GALLO CANYON UNIT	Well Pad Number 303H, 304H, 305H, 307H, 308H, 309H	APD ID 10400066972

Casing, Liner and Tubing

Casing and Liner

Wellbore Code	Casing String Type	Hole Size	Top Setting Depth (MD)	Bottom Setting Depth (MD)	Casing Size	Wt(lbs/ft)	Casing Grade	Describe Other Casing Grade	Joint	Other Joint	Amount Pulled (ft)
00	SURFACE	12.25	0	378	9.625	36	J-55		ST&C		
00	INTERMEDIATE	8.75	0	5456	7.0	26	J-55		LT&C		
00	LINER	6.125	5210	14519	4.5	11.6	P-110		BUTT		

Cementing

Wellbore Code	Casing String Type	Stage Tool Depth	Cement Lead Type	Cement Lead Qty (sks)	Cement Lead Yield (cu.ft/sks)	Cement Lead Top (MD)	Cement Tail Type	Cement Tail Qty (sks)	Cement Tail Yield (cu.ft/sks)	Cement Tail Top (MD)	Total (Lead + Tail) Cement Slurry Volume
00	SURFACE		I-II	109	1.61	0					31.3
00	INTERMEDIATE		III	500	2.34	0	Poz/G	102	1.5	4513	235.6
00	LINER		Poz/G	809	1.56	5210					224.8

Operator Name DJR OPERATING LLC	Well Name GALLO CANYON UNIT	Well Number 309H	US Well Number 3004321482
SHL SWSW Sec 26 23N 6W	County SANDOVAL	State NM	Lease Number(s) NMNM118128
Well Type OIL WELL	Well Status Drilling Well	Agreement Name GalloCanyonUnit	Agreement Number(s) NMNM131017A
Allottee/Tribe Name	Well Pad Name GALLO CANYON UNIT	Well Pad Number 303H, 304H, 305H, 307H, 308H, 309H	APD ID 10400066972

Tubing

Wellbore Code	Tubing Size	Describe Other	Tubing Setting Depth (MD/ft)	Packer Depth (MD/ft)	Tubing Weight	Tubing Grade	Describe Other	Tubing Coupling	Describe Other
00	2.875		5404	5232	6	L-80		ST&C	

Logs

Wellbore Code	Log Upload	Was Well Cored?	Was DST Run?	Directional Survey?	Geologic Report	Wellbore Diagram
00	YES	NO	NO	NO	NO	YES

Operator Name DJR OPERATING LLC	Well Name GALLO CANYON UNIT	Well Number 309H	US Well Number 3004321482
SHL SWSW Sec 26 23N 6W	County SANDOVAL	State NM	Lease Number(s) NMNM118128
Well Type OIL WELL	Well Status Drilling Well	Agreement Name GalloCanyonUnit	Agreement Number(s) NMNM131017A
Allottee/Tribe Name	Well Pad Name GALLO CANYON UNIT	Well Pad Number 303H, 304H, 305H, 307H, 308H, 309H	APD ID 10400066972

Operator

I hereby certify that the foregoing and attached information is complete and correct as determined from all available records. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Well Completion Reports through this system satisfies regulations requiring a submission of Form 3160-4 or a Well Completion Report.

Name: DJR OPERATING LLC

Signed By: SHAW-MARIE FORD

Title: Regulatory Specialist

Signed on: 11/03/2023

Street Address: 1 ROAD 3263

City: AZTEC

State: NM

Zip: 87410

Phone: (505)632-3476

Email address: SFORD@DJRLLC.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Extension:

Email address:

[BLM Engineer Review & Acceptance by Kenneth Rennick on 11/06/2023](#)

Attachments

309H_Certified_AsDrilled_DD_Survey_20231103103128.pdf


309H_AsDrilled_Plat_WBD_20231103103346.pdf

GALLO CANYON UNIT 309H

API: 30-043-21482
 SHL: SWSW M-26-23N-06W
 351' FSL x 1969' FWL

Page 22 of 24
 Elevation: 6954' GL
 Spud Date: 04/12/2022
 Completed Date: 10/08/2023

FORMATION	MD	TVD
Ojo Alamo	1420'	1403'
Kirtland	1528'	1508'
Fruitland	1746'	1719'
Pictured Cliffs	1975'	1941'
Lewis	2081'	2044'
Chacra	2869'	2807'
Menefee	3558'	3475'
Point Lookout	4283'	4178'
Mancos	4485'	4373'
KOP~	4546'	4416'
Target	5560'	5068'

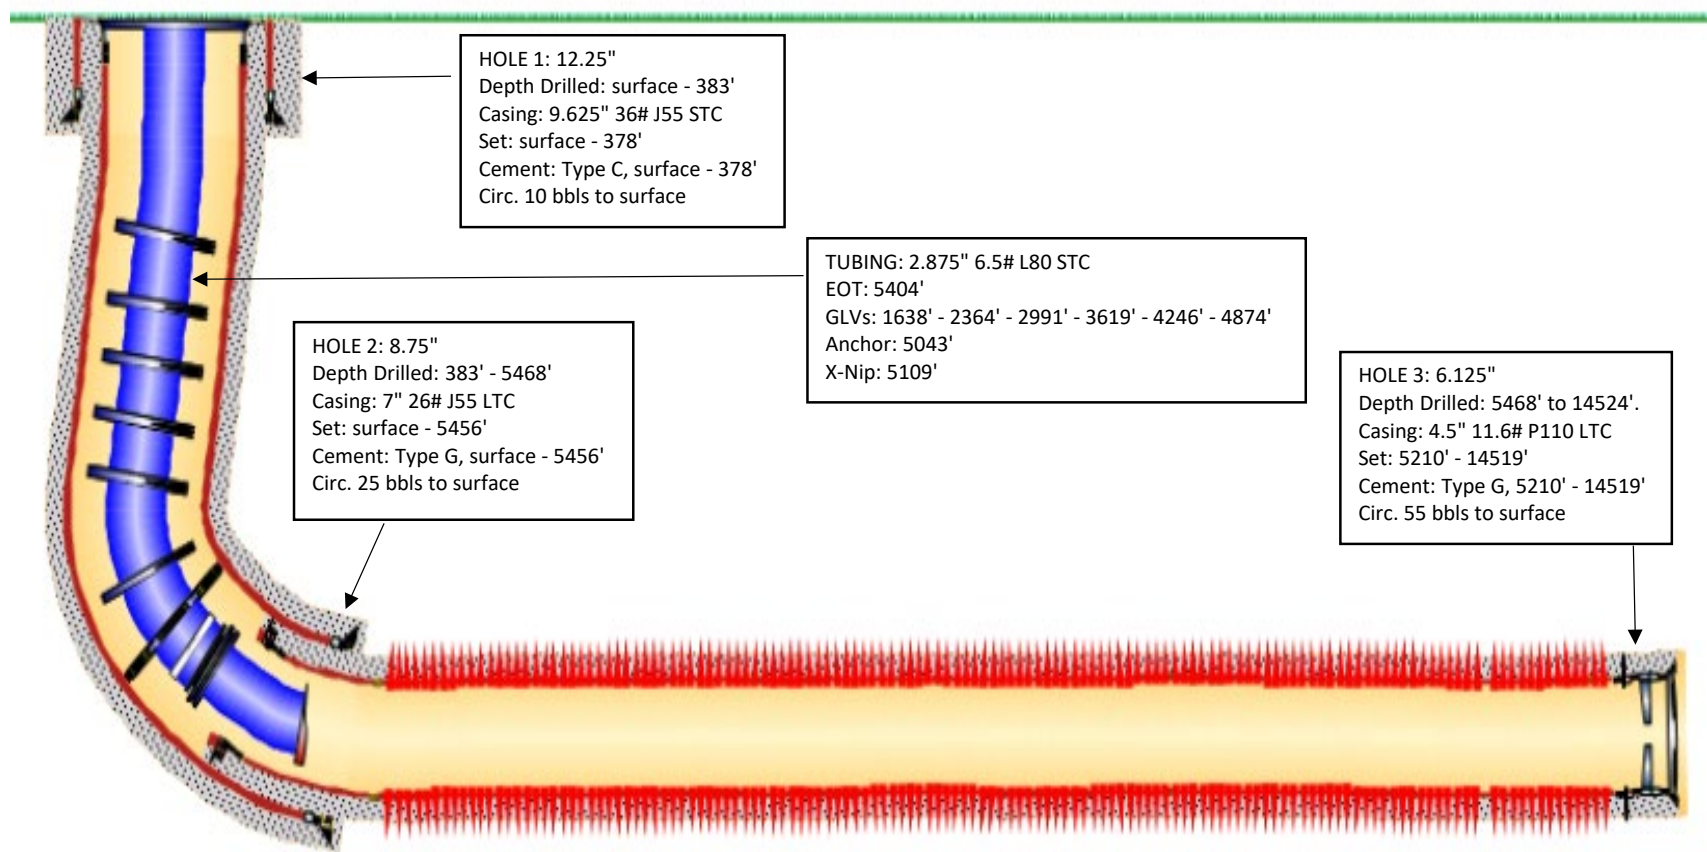

Perf:	44 Stages	Frac:	44 Stages
Depth:	5679' - 14450' MD	68,569	bbls of fluid
	4992' - 5077' TVD	13,519,547	lbs of proppant
		114,588,904	scf of N2
Total of 1100 Open Holes			

(NAD83)	LAT.	LONG.
SHL:	36.191419	-107.445038
FTP:	36.193158	-107.443134
LTP:	36.175241	-107.42231
BHL:	36.175144	-107.422181

BHL: SESW N-36-23N-06W
 351' FSL x 1969' FWL

14,524' TD
 4,990' TVD
 14,508' PBTD
 14,483' FracSleeve

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

ACKNOWLEDGMENTS

Action 295660

ACKNOWLEDGMENTS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 295660
	Action Type: [C-104] Completion Packet (C-104C)

ACKNOWLEDGMENTS

☒	I hereby certify that the required Water Use Report has been, or will be, submitted for this wells completion.
☒	I hereby certify that the required FracFocus disclosure has been, or will be, submitted for this wells completion.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 295660

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 295660
	Action Type: [C-104] Completion Packet (C-104C)

CONDITIONS

Created By	Condition	Condition Date
plmartinez	None	1/24/2024